


CS35L-5

Week 3 Lec1

Compilation Process

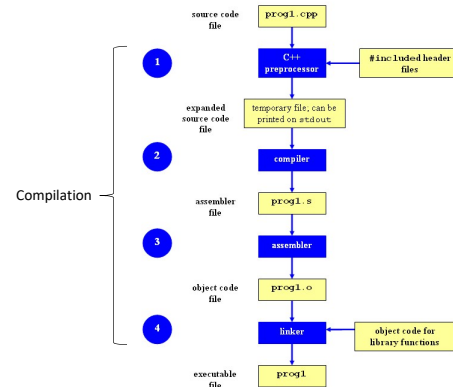

Command-Line Compilation

- `shop.cpp`
 - `#includes shoppingList.h` and `item.h`
- `shoppingList.cpp`
 - `#includes shoppingList.h`
- `item.cpp`
 - `#includes item.h`
- How to compile?
 - `g++ -Wall shoppingList.cpp item.cpp shop.cpp -o shop`

What if...

- **We change one of the header or source files?**
 - Rerun command to generate new executable
 - **We only made a small change to `item.cpp`?**
 - not efficient to recompile `shoppingList.cpp` and `shop.cpp`
- ®Solution: avoid waste by producing a separate object code file for each source file
- `g++ -Wall -c item.cpp...` (for each source file)
 - `g++ item.o shoppingList.o shop.o -o shop` (combine)
 - Less work for compiler, saves time but more commands

What if...

- **We change item.h?**
 - Need to recompile every source file that includes it & every source file that includes a header that includes it. Here: item.cpp and shop.cpp
 - Difficult to keep track of files when project is large
 - Windows 7 ~40 million lines of code
 - Google ~2 billion lines of code
- => Make

Make

- Utility for managing large software projects
- Compiles files and keeps them up-to-date
- Efficient Compilation (only files that need to be recompiled)
- Need a Makefile to tell make what to do

Makefile Example

```
# Makefile - A Basic Example
all : shop #usually first
shop : item.o shoppingList.o shop.o
    g++ -g -Wall -o shop item.o shoppingList.o shop.o
item.o : item.cpp item.h
    g++ -g -Wall -c item.cpp
shoppingList.o : shoppingList.cpp item.h shoppingList.h
    g++ -g -Wall -c shoppingList.cpp
shop.o : shop.cpp item.h shoppingList.h
    g++ -g -Wall -c shop.cpp
clean :
    rm -f item.o shoppingList.o shop.o shop
```

Rule

Dependency Line

Comments
Targets
Prerequisites
Commands


Build Process

- **configure**
 - Script that checks details about the machine before installation
 - Dependency between packages
 - Creates 'Makefile'
- **make**
 - Requires 'Makefile' to run
 - Compiles all the program code and creates executables in current temporary directory
- **make install**
 - make utility searches for a label named install within the Makefile, and executes only that section of it
 - executables are copied into the final directories (system directories)

Patching

- A patch is a piece of software designed to fix problems with or update a computer program
- It's a diff file that includes the changes made to a file
- A person who has the original (buggy) file can use the patch command with the diff file to add the changes to their original file

Applying a Patch

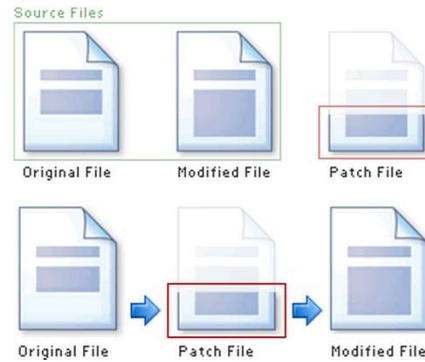

diff Unified Format

- `diff -u original_file modified_file`
- `--- path/to/original_file`
- `+++ path/to/modified_file`
- `@@ -l,s +l,s @@`
 - `@@`: beginning of a hunk
 - `l`: beginning line number
 - `s`: number of lines the change hunk applies to for each file
 - A line with a:
 - `-` sign was deleted from the original
 - `+` sign was added to the original
 - stayed the same

```

--- /path/to/original.timestamp
+++ /path/to/new.timestamp
@@ -1,3 +1,9 @@
+This is an important
+notice! It should
+therefore be located at
+the beginning of this
+document!
+
+This part of the
+document has stayed the
+same from version to
@@ -5,16 +11,10 @@
+be shown if it doesn't
+change. Otherwise, that
+would not be helping to
+compress the size of the
+-changes.
-
-This paragraph contains
-text that is outdated.
-It will be deleted in the
-near future.
+compress anything.
+
+It is important to spell
+check this document. On
+check this document. On
+the other hand, a
+misspelled word isn't
+the end of the world.
@@ -22,3 +22,7 @@
+this paragraph needs to
+be changed. Things can
+be added after it.
+
+This paragraph contains
+important new additions
+to this document.

```

Lab 3

- Coreutils 7.6 has a problem
 - Different users see different date formats
 - \$ ls -l /bin/bash
 - -rwxr-xr-x 1 root root 729040 **2009-03-02 06:22** /bin/bash
 - -rwxr-xr-x 1 root root 729040 **Mar 2 2009** /bin/bash
- Want the traditional Unix format for all users
- Fix the ls program

Getting Set Up (Step 1)

- Download coreutils-7.6 to your home directory
 - Use 'wget'
- Untar and Unzip it
 - tar -xzf coreutils-7.6.tar.gz
- Make a directory ~/coreutilsInstall in your home directory (this is where you'll be installing coreutils)
 - mkdir coreutilsInstall

Building coreutils (Step 2)

- Go into coreutils-7.6 directory. This is what you just unzipped.
- Read the INSTALL file on how to configure "make"
- Run the configure script using the prefix flag so that when everything is done, coreutils will be installed in the directory ~/coreutilsInstall
- Compile it: make
- Install it: make install

Reproduce Bug (Step 3)

- Reproduce the bug by running the version of 'ls' in coreutils 7.6
- If you just type \$ ls at CLI it won't run 'ls' in coreutils 7.6
 - Why? Shell looks for /bin/ls
 - To use coreutils 7.6: \$./ls
 - This manually runs the executable in this directory

Patching and Building (Steps 4 & 5)

- `cd coreutils-7.6`
- `vim` or `emacs` `patch_file`: copy and paste the patch content
- `patch -p# < patch_file`
 - `'man patch'` to find out what `p#` does and how to use it
- `cd` into the `coreutils-7.6` directory and type `make` to rebuild patched `ls.c`.

Testing Fix (Step 6)

- Test the following:
 - Modified `ls` works
 - Installed unmodified `ls` does NOT work
- Test on:
 - 1) a file that has been recently modified
 - Make a change to an existing file or create a new file
 - 2) a file that is at least a year old
 - `touch -t 201401210959.30 test_file`
- Answer Q1 and Q2