


## CS35L

Week 7 Lec2


### Secret Key (symmetric) Cryptography

- A single key is used to both encrypt and decrypt a message

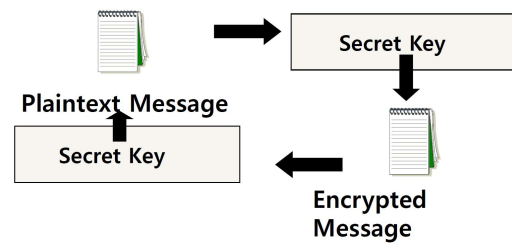

### Public Key (asymmetric) Cryptography

- Two keys are used: a public and a private key. If a message is encrypted with one key, it has to be decrypted with the other.

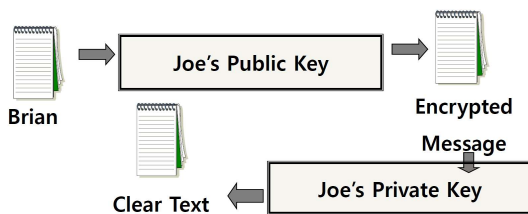

### Digital Signature

- An electronic stamp or seal
  - almost exactly like a written signature, except more guarantees!
- Is appended to a document
  - Or sent separately (detached signature)
- Ensures data integrity
  - document was not changed during transmission

## Steps for Generating a Digital Signature

### SENDER:


- 1) Generate a *Message Digest*
  - The message digest is generated using a set of hashing algorithms
  - A message digest is a 'summary' of the message we are going to transmit
  - Even the slightest change in the message produces a different digest
- 2) Create a Digital Signature
  - The message digest is encrypted using the sender's *private* key. The resulting encrypted message digest is the *digital signature*
- 3) Attach digital signature to message and send to receiver

## Steps for Generating a Digital Signature

### RECEIVER:

- 1) Recover the *Message Digest*
  - Decrypt the digital signature using the sender's public key to obtain the message digest generated by the sender
- 2) Generate the Message Digest
  - Use the same message digest algorithm used by the sender to generate a message digest of the received message
- 3) Compare digests (the one sent by the sender as a digital signature, and the one generated by the receiver)
  - If they are not *exactly the same* => the message has been tampered with by a third party
  - We can be sure that the digital signature was sent by the sender (and not by a malicious user) because *only* the sender's public key can decrypt the digital signature and that public key is proven to be the sender's through the certificate. If decrypting using the public key renders a faulty message digest, this means that either the message or the message digest are not exactly what the sender sent.

## Digital Signature

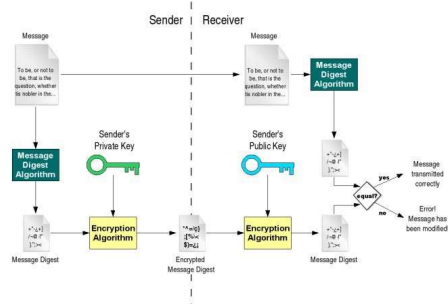

## Detached Signature

- Digital signatures can either be *attached* to the message or *detached*
- A detached signature is stored and transmitted separately from the message it signs
- Commonly used to validate software distributed in compressed tar files
- You can't sign such a file internally without altering its contents, so the signature is created in a separate file

## Homework 7

- Answer 2 questions in the file **hw.txt**
- Generate a key pair with the GNU Privacy Guard's commands
  - `$ gpg --gen-key` (choose default options)
- Export public key, in ASCII format, into **hw-pubkey.asc**
  - `$ gpg --armor --output hw-pubkey.asc --export 'Your Name'`
- Make a tarball of the above files + **log.txt** and zip it with **gzip** to produce **hw.tar.gz**
  - `$ tar -cf hw.tar <files>`
  - `$ gzip hw.tar -> creates hw.tar.gz`
- Use the private key you created to make a detached clear signature **hw.tar.gz.sig** for **hw.tar.gz**
  - `$ gpg --armor --output hw.tar.gz.sig --detach-sign hw.tar.gz`
- Use given commands to verify signature and file formatting
  - These can be found at the end of the assignment spec