

STAT S4240 002, Homework 2

Brian Weinstein (bmw2148)

July 23, 2015

Problem 1: PCA

(a) Column means

```
> apply(rawData, 2, mean)
      x1      x2      x3      x4      x5
6.049104 -8.277221  4.665532  7.914270 62.138753
```

Row means

```
> apply(rawData, 1, mean)
[1] -0.1277116  20.8162864 -8.8984358  25.5999204 -9.7472153
[6] 64.0626702  22.0392371  23.3914888  31.7598224 -13.8680290
...
[91]  1.2105932  21.2145724 -8.4896595  19.0639963  20.9767512
[96]  3.5962333  22.3461063  0.7145014   6.3080005  64.8829556
```

The nonzero column means indicate that each variable isn't centered. In this context the row means are just the average of the coordinates for each observation.

(b) Empirical covariance matrix

	x1	x2	x3	x4	x5
x1	72.96417	-83.90858	53.23708	120.1162	568.4105
x2	-83.90858	110.89101	-63.89570	-115.9430	-817.3388
x3	53.23708	-63.89570	39.60282	83.7386	445.2511
x4	120.11620	-115.94304	83.73860	232.1333	683.5587
x5	568.41046	-817.33884	445.25112	683.5587	6288.8569

The diagonal values tell us the variance of the variable indicated in the column (or equivalently, the row). The off-diagonal elements indicate the covariance between the two variables that intersect at that element.

(c) The eigenvalues and eigenvectors of the empirical covariance matrix `sig`:

```
> eigen(sig)
$values
[1] 6.557348e+03 1.868951e+02 2.038354e-01 9.775594e-04 9.373658e-05


$vectors
      [,1]      [,2]      [,3]      [,4]      [,5]
[1,] 0.09009603 -0.3247102 -0.383470773 0.82286709 0.24957150
[2,] -0.12797842 0.1364755 0.227047683 -0.11412319 0.94890526
[3,] 0.07028767 -0.1941349 0.894987159 0.37278501 -0.13191135
[4,] 0.11077853 -0.9008231 -0.019718518 -0.40719485 0.10024632
[5,] 0.97892389 0.1636064 0.002946326 -0.07133967 0.09921159
```

Since it's a symmetric matrix, **sig** has the same left eigenvectors as right eigenvectors.

(d) The loadings are the eigenvectors (see part c). The scores are:

```
> data%*%t(evecs)
      [,1]      [,2]      [,3]      [,4]      [,5]
[1,] -25.9233299 -50.96254603 -4.06557021 -8.91350845 -10.7755359
[2,] 13.3064897 13.56908728 6.16049505 0.82185440 4.8621981
[3,] -37.6872799 -93.30323983 -1.02562352 -18.15040050 -16.3848300
...
[98,] -27.0931525 -38.88284377 -8.26671502 -5.26069573 -10.6527232
[99,] -13.1627026 -31.46409161 -1.20277265 -5.83681744 -5.6197025
[100,] 85.7232563 184.73133084 10.16179165 33.54024954 36.1560703
```

(e) Proportion of variance explained

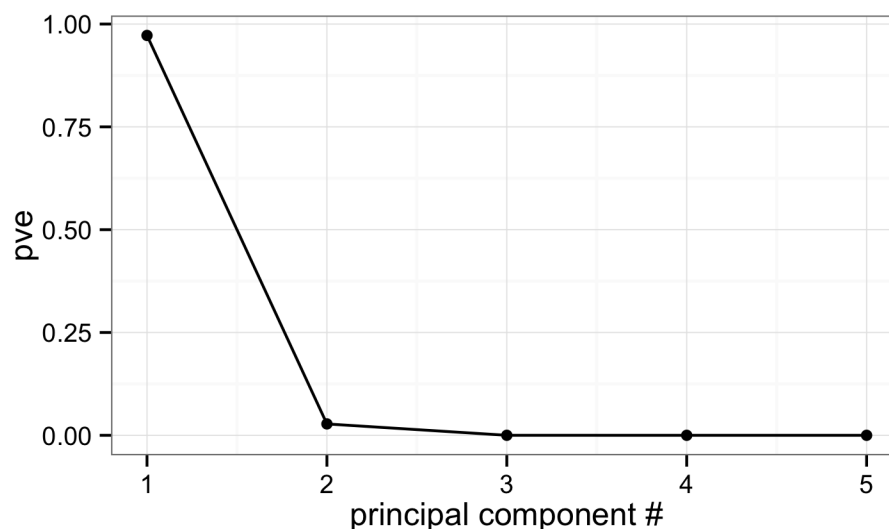

We only need one principal component. PC #1 accounts for 97% of the variance on its own, and including any additional PCs introduces more complexity than it's worth.

(f) The scores for the new observations:

```
> data2%*%t(evecs2)
      [,1]      [,2]      [,3]      [,4]      [,5]
[1,] -6.0639533 -65.32443 16.218208 -20.96720620 -9.5868019
[2,]  0.6933977 25.72910 -7.634907  8.55181447  3.0468391
[3,]  2.0721371  1.97324  1.575201  0.03853202  0.9148939
[4,] -19.8318245 -61.16333  1.351568 -15.86750900 -14.2082956
[5,] -8.6663467 -16.36235 -2.214696 -3.63623397 -5.2164795
```

where `data2` has been column centered.

- (g) Coordinates of the projections in the original space:

```
      [,1]      [,2]      [,3]      [,4]      [,5]
[1,] 19.784390 -23.98670 -4.490318  2.926516  62.37239
[2,]  8.929318 -13.05966 15.636393 19.583344 148.49230
[3,] 12.023796 -16.96235  8.788414 17.696985 126.33419
[4,] 18.112666 -18.77458  3.584542 -7.331764  64.91650
[5,] 13.426490 -16.02315  9.502113  7.001699 108.06507
```

Euclidean distance from the original data points.

```
[1] 28.18795
[1] 11.86206
[1] 1.822025
[1] 21.34198
[1] 6.733404
```

- (h) The error vectors are more or less orthogonal to the direction of the first principal component. This is because the error vectors are defined as the direction from the original points to their *orthogonal projections* onto the reduced-dimension space, which, in this case, is primarily captured by the first PC.


Problem 2: PCA with Yale Faces B

- (a) The matrix is 152 rows by 32,256 columns. Each row of the matrix is one photograph (38 subjects with 4 views each), and each column is a pixel in each image (originally 192 x 168).
- (b) Mean face:


code
isn't
working.
loadings
are cor-
rect.
errors
start at
or after
calculat-
ing the
scores



(c) Proportion of variance explained

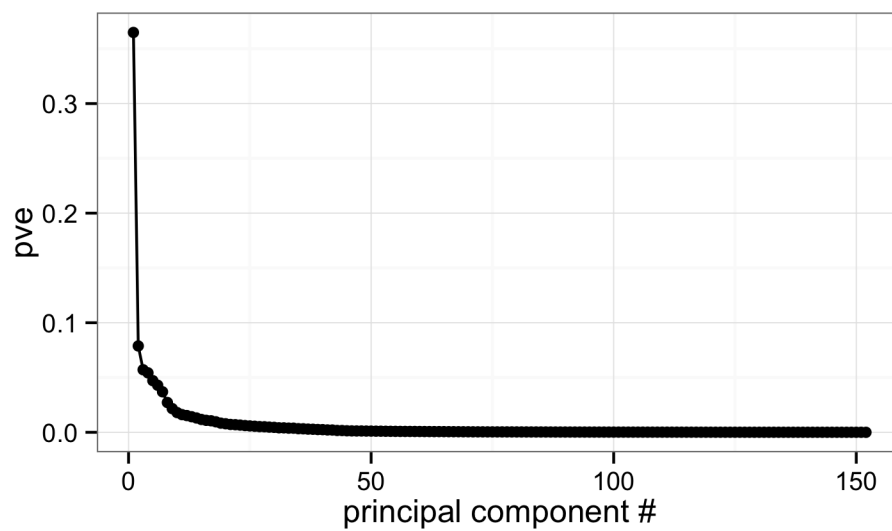

- (d) The first 9 eigenfaces are the (constructed) images that capture the most variable aspects of the faces in the dataset. The first image amplifies the most variable pixels in the original images, the second image amplifies the most variable pixels in a direction orthogonal to the first principal component, the third the most variable pixels in a direction orthogonal to the first two principal components, etc.

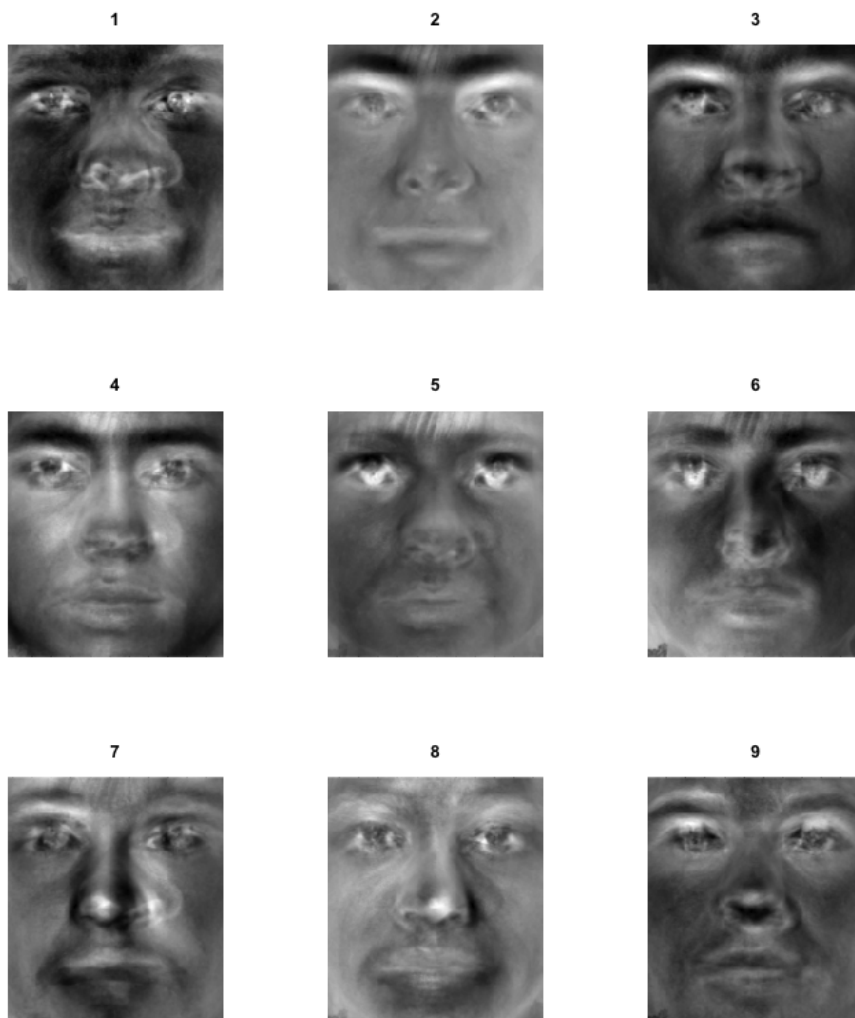

Problem 3: [James 3.7.3](#)

(a) asdfasdf

Problem 4: [James 3.7.4](#)

(a) asdfasdf

Problem 5: question

Todo list

code isn't working. loadings are correct. errors start at or after calculating the scores [3](#)