Reset DC-ROMA Pad II Guide-Using the Titan Flasher

This document shows you how to refresh and reset the pad using the titanflasher tool

Titan Flasher User Guide

Step 1 Download Titan Flasher to your Laptop

- Titan Flasher FOR WINDOWS (X86|X64) (INSTALLER)
https://cloud.spacemit.com/prod-api/release/download/tools?token=titantools_for_windows_X86_X64

- Titan Flasher FOR LINUX X64 (64-BIT) (APPIMAGE)
https://cloud.spacemit.com/prod-api/release/download/tools?token=titantools_for_linux_64BIT_APPIMAGE

- Open the Titan Flasher after downloading.

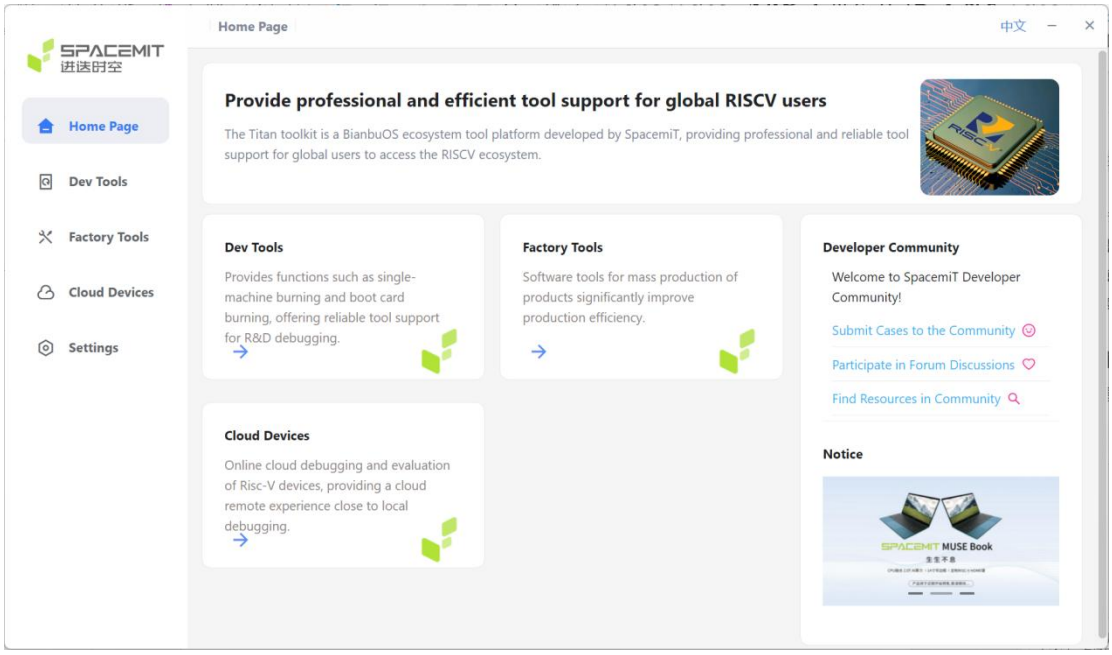

Step 2 Connect the Pad and the Laptop

- Use a multi-functional Type-C cable to connect the pad and the laptop.

Step 3 Titan Flasher Setup

- In Titan Flasher, go to Dev Tools → USB Download.

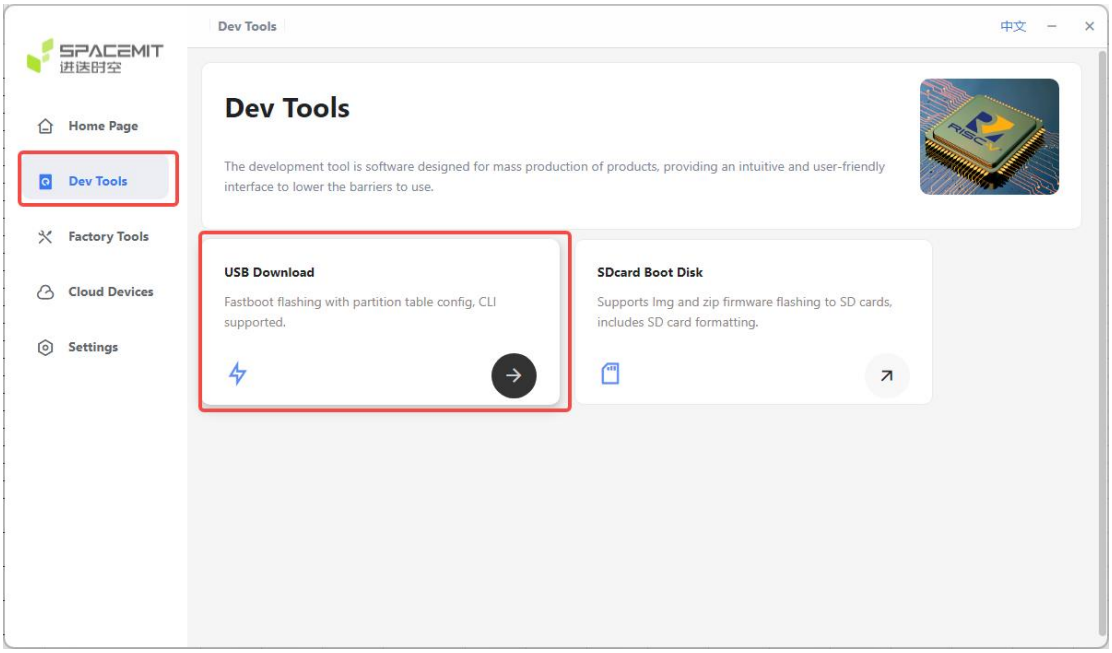

Step 4 Select the appropriate image package for flashing.

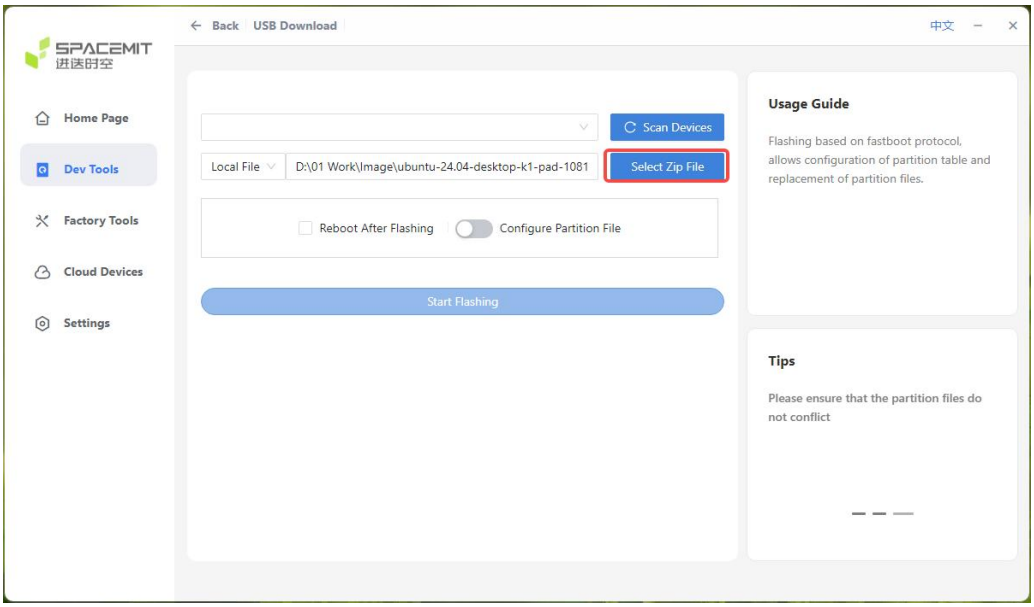

Step 5 Enter the Flash Mode:

- Use a SIM Card needle to press the download key (next to the volum button), and press the power button to turn on the Pad.

Step 6 Start Flashing:

- Click the Start Flashing button.

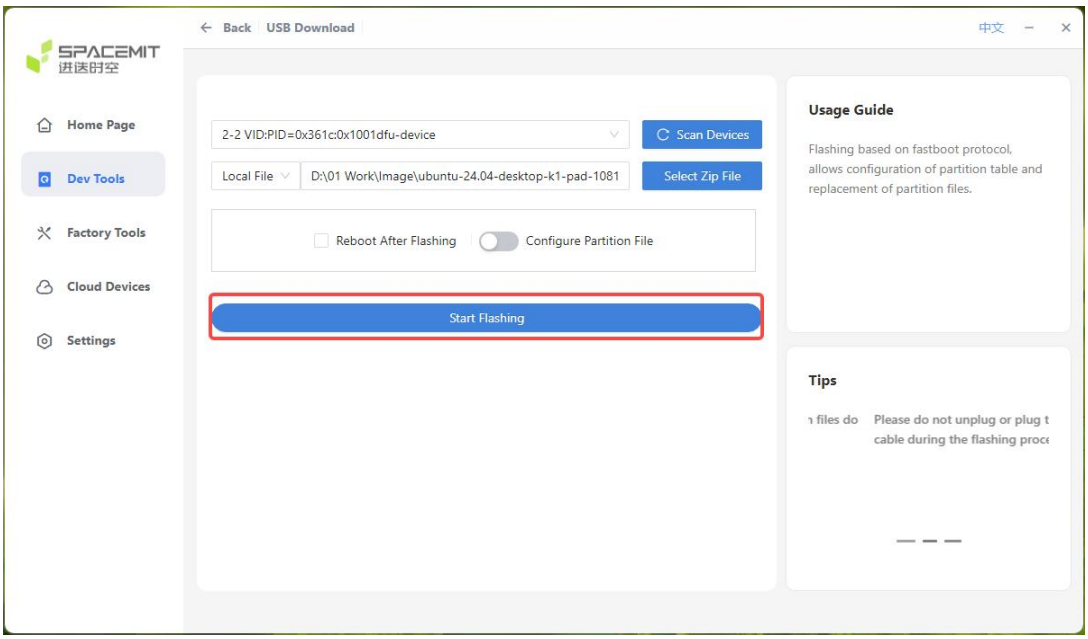

Step 7 Complete the flashing process:

- Once the flashing process is complete, power on the device to enter the system.

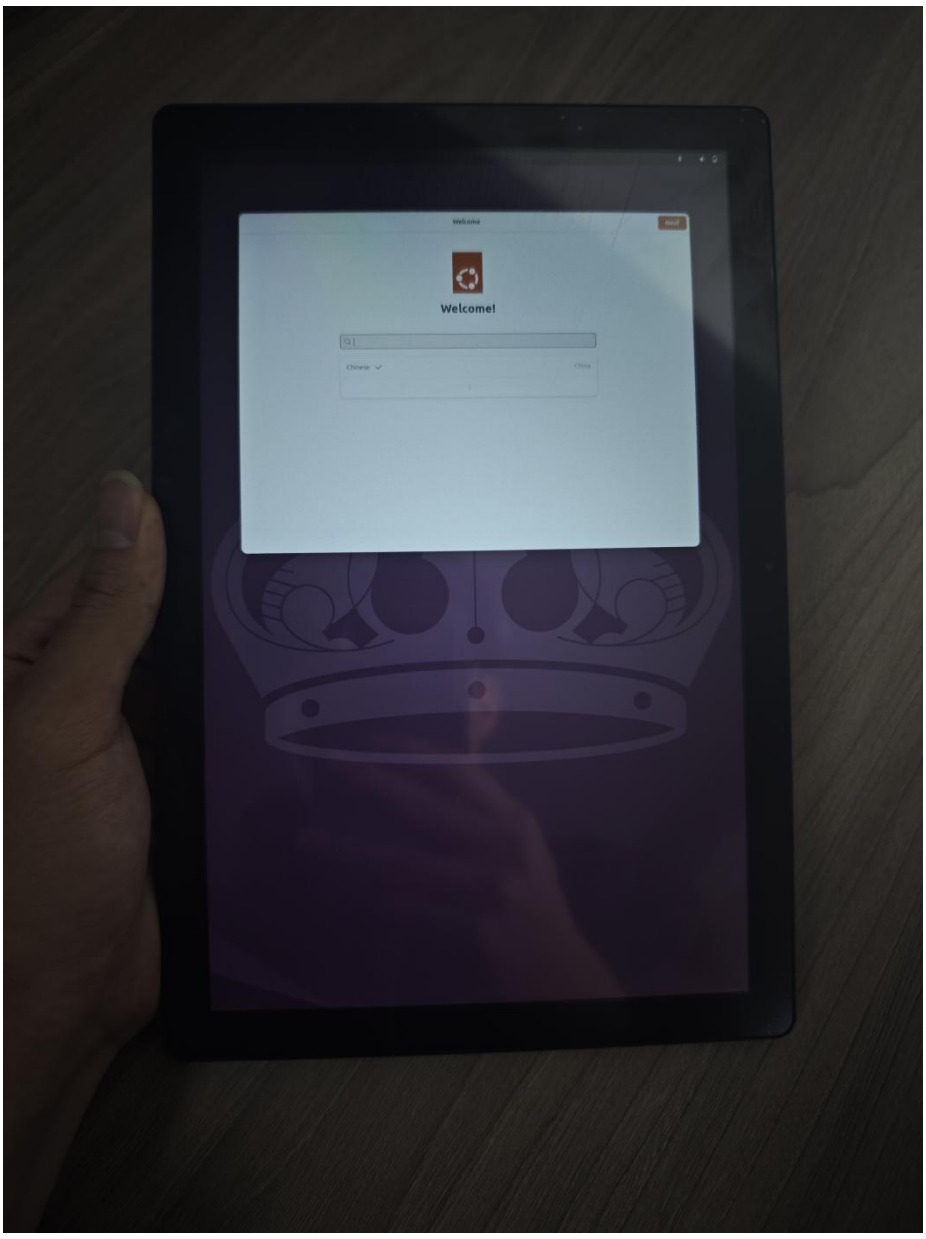
Welcome
Next
Welcome!
Chinese
China