

2020 DDJ-1000 v7.0.0 - Mapping for Traktor Pro 3+2 with Jog Screens - DJ Estrela

TO DOWNLOAD: you NEED to register and verify your email in the DJTT site to download this mapping. If it still fails, clear your cookies and use another browser. 4.5K persons downloaded this mapping since Feb 2019, so check your environment first.

FREE AND PAID VERSIONS: V6.3.3 is free, and doesn't require BOME. V6.8 is also free, but requires a 60 Eur bome license **AFTER TESTING**. V7.0 is paid, and costs 30 Eur + bome license. Please see file "README_FIRST.txt" for contact and more details.

TO INSTALL WITH BOME: Please see this [VIDEO](#) and this [PDF FILE](#) for instructions; download a demo trial of BOME [here](#).
TO INSTALL WITHOUT BOME: Please install this as a normal Traktor mapping.

DDJ-1000 LINKS:

- **MAPPING DOWNLOADS:** <https://maps.djtechttools.com/mappings/9279>
- **V7.0 MIXING VIDEO (15min):** <https://www.youtube.com/watch?v=KiTMkNoSwR4>
- **V7.0 WALKTROUGH VIDEO (90min):** <https://www.youtube.com/watch?v=p3L21hdQbzY>
- **BOME INSTALLATION VIDEO (20min):** https://www.youtube.com/watch?v=MbGP_ECnWiQ
- **USER MANUALS (61+21 pages):** <https://bit.ly/37Q34ak>
- **INSTALLATION MANUALS (54+4 pages):** <https://bit.ly/3cYiBak>

DDJ-1000 ABOUT THIS MAPPING:

- This is the only TP mapping in the world for the DDJ-1000 that supports Jog Screens. It works on both Traktor 3 and 2. It requires the 3rd-party BOME Pro MIDI translator. Free trial versions are available to test everything
- V7 is a paid version where the mapping was redone by scratch. New features are 16x SuperKnobs, all 9x MixerFX, Resonant Filter, STEMS, Remix decks recorder, Tempo enlarger , Loop backwards adjust, Turntable FX
- V6 is a free version that is already the most complete by far. Supported is MixerFX, MacroFX, JogFX chains, padFX, Keyboard mode, Rolls, Preview Player. V6.8 added CDJ-emulation, Loops adjust and Beatjump shortcuts
- Mapping comes with hundreds of pages of pdf documentation and hours of helper videos. Covered are step-by-step installation, quick usage and full reference manual of every function (total hundreds of functions)

V7.0 SPECIFIC NEW FEATURES:

- 16x Filter SuperKnobs
- Access all 9x MixerFX in MIDI
- Resonant Filter
- Turntable FX, Vinyl Stop
- Remix decks recorder
- STEMS
- Tempo enlarger

- Loop Backwards adjust
- 4x Echo out
- Classic / Parallel layouts
- Optimized: loads in 3 seconds instead of 18 seconds
- Plus a lot of bugfixes, speedups and stability improvements

V6.X FEATURES LIST:

- Jog Screens
- 7x Jogwheel FX chains
- Turntable FX, Vinyl Stop
- 21x padFX (“instant gratification”)
- 3x tone play modes (“keyboard mode”)
- 4x echoOut, 8x Rolls
- Slicer
- Dedicated preview player
- Manual adjust of Loops (via jogs)
- Beatjump and Loops pages
- Reverse Flux
- End of track warning blinks / other CDJ emulation features

DDJ-1000 COMPATIBILITY:

- **DDJ-1000:** As good as it gets. This is where the mapping was developed.
- **DDJ-800:** Pretty good, but not perfect. The screens are locked by Pioneer
- **Traktor Pro 2:** This mapping works perfectly in both Traktor Pro 3 and Traktor Pro 2.
- **DDJ-1000SRT:** see <https://maps.djtechtools.com/mappings/9222>

BOME mappings installation: https://youtu.be/MbGP_ECnWiQ

- 00:00 Introduction
- 00:27 How to download the mappings
- 01:50 Zip file contents, Documentation overview
- 03:45 Step #0: confirm Rekordbox Performance mode
- 04:25 Step #1: How to install BOME trial
- 07:00 Step #2: How to install the BOME-side mapping
- 09:00 Step #3: VERIFY the BOME-side mapping
- 10:40 Step #4: How to install the Traktor-side mapping
- 13:50 Step #5: VERIFY the Traktor-side mapping
- 18:36 Tips (if it still doesn't work)

DDJ-1000 v7.0.0 quick demo "the redone from scratch edition": <https://youtu.be/KiTMkNoSwR4>

Youtube Chapters:

- 00:00 - Stems Control
- 01:18 - Remix Decks Recorder
- 03:30 - 16x Superknobs / Resonant Filter
- 07:30 - 7x Jog Fx Chains
- 09:19 - Backwards Loops In Adjust
- 09:52 - Turntable Fx On Pause
- 10:20 - 4x Echo-out
- 11:25 - Tempo Enlarger And Soft Takeover
- 12:27 - 3x Toneplay and 3x Slicer

Detailed: V7 New Features:

- 00:09 - Stems Control
- 01:18 - Remix Decks Recorder
- 03:16 - Phase Meter (Zoomed)
- 03:30 - 16x Superknobs
- 04:15 - Resonant Filter!!!
- 07:30 - 7x Jog Fx Chains
- 08:02 - 11x Macrofx (Superknobs)
- 09:19 - Backwards Loops In Adjust
- 09:52 - Turntable Fx On Pause
- 10:20 - 4x Echoout
- 11:25 - Tempo Enlarger And Soft Takeover

Detailed: V6 Features / Bug Fixes:

- 02:00 - Loop/Move Sizes

- 02:54 - Midi Scratch Quality
- 05:17 - Elapsed / Remain Time
- 05:10 - Beatjump
- 05:45 - Per Channel Beatfx
- 08:46 - Cdj Loops (Forward)
- 10:43 - Censor
- 10:54 - Preview Player
- 11:21 - Track Length
- 12:27 - 3x Toneplay (Keyboard)
- 12:56 - Beatjump And Adv. Move
- 13:54 - 3x Slicer

DDJ-1000 v7.0.0 quick demo "the redone-edition": <https://youtu.be/p3L21hdQbzY>

Youtube Chapters:

- 0:00 V7.0 Summary
- 4:20 Overviews
- 15:50 Transport
- 35:00 FX sections (inc 16x Superknobs)
- 51:08 All Pad modes
- 1:02:05 Remix decks Recorder
- 1:09:50 Stem Control
- 1:17:44 Configuration and Summary

Detailed: Every single feature of V7:

- 1:00 About Bome Requirement
- 1:50 Overview Of V7 New Features, Bugfixes And V6 Features
- 4:20 Overview: 2x Shifts
- 4:50 Overview: Decks
- 5:00 Overview: Mixer
- 5:07 Overview: Jogring (Scratching, Jogfx, Etc)
- 7:00 Overview: Fx Units
- 11:30 Overview: Jog Screens
- 15:10 Overview: Leds
- 15:50 Turntable Fx
- 17:23 Sync
- 18:26 Sync Aids
- 20:10 Auto Tempo Enlarger
- 22:36 Loops (Regular)
- 23:20 Loops (Long Press)

- 25:50 Backwards Loops
- 26:26 Loops In Adjust
- 27:23 Beatjumps / Loop Shifts
- 28:34 Move By 1 Beat
- 29:55 Track Serach (Like Cdjs)

- 30:35 2/4 Decks Layout
- 31:10 Classic/Parallel Layouts
- 32:05 Disable Deck Layouts
- 32:45 Browser
- 33:15 Preview Player
- 35:00 Beat Fx (Per Channel)
- 36:30 Pioneer Fx Only On Mst Channel!

- 38:15 16x Filter Superknobs - Mixerfx
- 40:05 Different Mixerfx To Different Channels
- 41:00 Access Lpf With Shift
- 42:15 16x Filter Superknobs - Macrofx
- 44:20 Resonant Filter !!!
- 45:20 Deck 3&4 Mixerfx
- 46:14 9x Mixerfx Is Windows Only
- 47:05 Jogfx Chains
- 48:35 Echo Out, Censor And Reverse
- 49:43 Echo Out Favorites

- 51:08 Pad 1: Hotcues
- 51:45 Use Map To Move Hotcues!
- 53:30 Overview: Pad Modes
- 53:45 Pad 2: 4x+4x Rolls
- 54:30 Pad 2: 21x Padfx
- 56:11 Pad 3: Superknobs
- 56:27 Pad 4: Jogfx Chains
- 57:21 Use Fxs Wisely!!
- 58:35 Pad 5: 3x Tone Play

- 59:30 Pad 6: Beatjump
- 1:00:25 Pad 6: Advanced Move
- 1:01:15 Pad 7: 3x Slicer
- 1:02:05 Pad 8: Pattern Recorder
- 1:03:35 Recording A Pattern
- 1:04:50 Mute Slots
- 1:05:05 Delete Slots

- 1:05:45 Slot Adjust: Select Sample, Volume, Filter, Fx
- 1:08:25 Swing / Pattern Length / Keylock / 1-Shot Vs Loops
- 1:09:50 Stem Control
- 1:13:20 Crossfader Curve
- 1:13:55 Beatgrid
- 1:16:46 Reset And Faders Startup
- 1:17:44 Summary: Long Presses
- 1:18:55 Summary: Double Click
- 1:19:50 Summary: Warning Blinks
- 1:21:40 Config: Sync Aids
- 1:22:50 Config: Disable Superknobs
- 1:23:15 Config: Disable Layouts
- 1:24:20 Release Notes V7.0.0
- 1:24:40 Please Report Firmware Issues Yourself!!
- 1:25:20 9x Mixerfx Needs Settings Page Open!!
- 1:26:40 Macos Misses 9x Mixerfx; Could Be Done With Applescript
- 1:27:00 Table Of Contents
- 1:27:39 Final Comments And Tips

DDJ-1000 v6.6.0 DEMO the "CDJ-edition": <https://youtu.be/NmO9673pHo0>

- 0:50 Overview of the new functions
- 1:45 Jog screens bug fixes
- 3:00 CDJ-like loops
- 5:20 Beatjump / loop move
- 6:15 Tone play 3x modes
- 8:10 Beatjump / loop mode pages
- 9:14 Configurable beatsync
- 11:14 Jog ring features

DDJ-1000 v6.5.0 DEMO Jog Screens using BOME: <https://youtu.be/h9tQZEhr8hk>


- 0:35 Needle position, BPM, Tempo percentage, Time elapsed/Remain, Key Variation
- 1:45 Loop/Beatjump sizes are displayed on the main display
- 2:25 Shift layers shows Base BPM, Tempo range, Loop sizes and Beatjump Sizes
- 4:00 Scratching quality was improved; shift+vinyl disables scratching
- 4:47 shift+quantize resets the jog screens
- 6:04 Quick demo of the previous features: JogFX, Rolls, PadFx, MixerFX, MacroFx
- 8:08 Pioneer BeatFX are in MST channel; TK effects are in channel 1..4

DDJ-1000 v6.3.3 DEMO Update: https://www.youtube.com/watch?v=2QKGQ_JUNXo

- 0:15 JogRing now shows the active deck; Blinks in jogfx mode
- 1:25 Backspins are now possible
- 1:35 Sync is now "toggle"
- 1:50 Fixes to cue monitor
-
- 3:00 Putting the screens to work
- 3:50 Files on the archive (including installation help)
- 4:50 USER REQUEST: traktor effects list suggestions

DDJ-1000 v6.3.0 DEMO / FEATURES: <https://www.youtube.com/watch?v=EkSJ9Ug9Zuk>

- 0:30 5-minute overview of the most important features (Jogfx, MixerFx, Loops, Shift2, PreviewPlayer, ...)
- 5:50 The most-used pad modes are now accessible without any shifts (padFX, MacroFx, JogFX). Pressing "mode" twice cycles 2x top pages; pressing "left" cycles all 4x pages
- 8:40 Only the secondary pad modes now requires shift (keyboard, slicer, remix decks)
- 9:15 Memory button = second shift button
- 10:10 Vinyl long stop / vinyl break
- 10:30 Browser: preview player / browser / waveform zoom
- 11:50 Loops / BeatJump
- 15:00 How to correct loops by +1 beat
- 15:40 Beatgrid slide / adjust / lock analysis
- 17:30 TP3 mixer FX: flanger / time gater / crush / noise
- 18:41 How to change mixerfx list in preferences
-
- 19:30 MacroFX page1: wormhole, polarwind, flighttest, laserslicer
- 20:30 BeatFX shortcuts: T3 delay / flanger / reverb
- 20:51 MacroFX page2 (seven more macroFX)
- 21:20 Manual FX (non-automated). Use MST for pioneer effects!
- 23:00 Mobius FXs (=forever rising)
- 23:50 CAUTION: beware that USB selector does NOT stop USB mixer
- 24:35 JogFX in detail (combo of 3x FX on the jogwheels)
- 26:40 MacroFX in detail
- 27:20 PadFX in detail: quantized roll / Non-quantize roll / 3x padFX pages
- 29:30 Keyboard mode
- 30:30 Slicer mode
- 31:30 Slip reverse / reverse
- 31:40 2-deck and 4-deck automatic layout

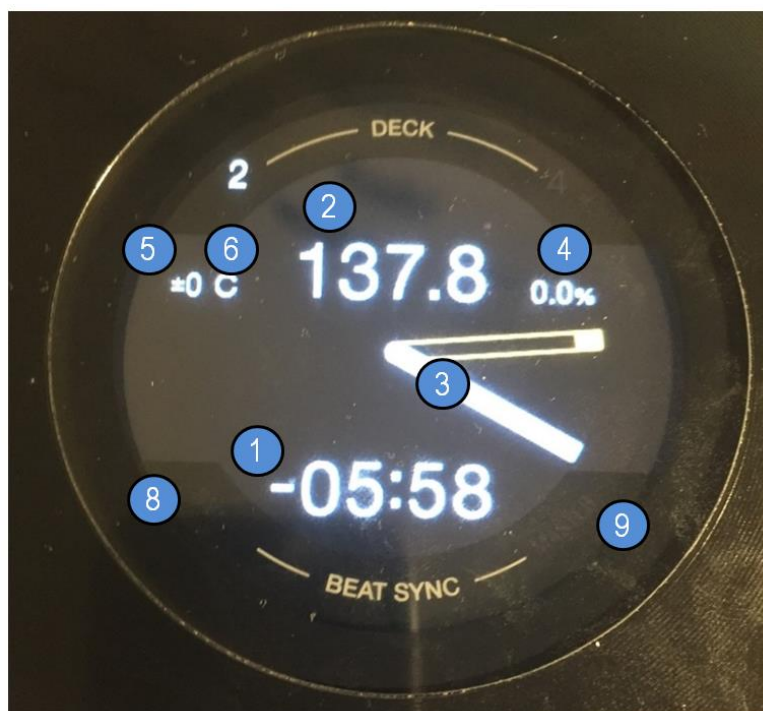

		Section JOG DISPLAYS		
#	DDJ-1000	Main Function	+Shift	+Memory Shift
	BUTTON: LOOPS	Show Loop / Move size (for 2s)	<i>Move size</i>	<i>BeatJump</i>
	BUTTON: MASTER TEMPO	<i>KeyLock Toggle</i>	<i>Tempo Range (6/10/16/100)</i>	Toggle Elapsed/Remain
	BUTTON: QUANTIZE		<u>RESET SCREENS</u>	
	BUTTON: SLIP		Vinyl On/Off	
	BUTTON: Memory	Double tap: Elapsed/Remain		
1	DISPLAY: TIME	Time Elapsed / Remain	Length	Loop Size / Move size
2	DISPLAY: BPM	Current BPM	Original BPM	
3	DISPLAY: NEEDLE	Current Position		
4	DISPLAY: PERCENTAGE	BPM Percentage	Tempo Range	
5	DISPLAY: KEY VALUE	<i>Not Available yet</i>		
6	DISPLAY: KEY VARIATION	Key Variation		
7	JOG RING LED	On-Air Deck / JogFX enabled		
8	DISPLAY: SYNC	Sync		
9	DISPLAY: MASTER	Master		



		Section MIXER	
	DDJ-1000	Main Function	+Shift
1	CROSSFADER	Crossfader	Crossfader Curve
2	CROSS FADER ASSIGN	CrossFader Assign	
3	CHANNEL FADER	Channel Fader	CH Fader Start
4	CUE MONITORING	Cue Monitor	Echo Out Type (1/2/3/4)
	<i>Note: use shift3 on cue 1 to toggle Internal and external monitor</i>		
5	FILTER (KNOB)	MixerFX / MacroFX	
6	LOW	Low	
7	MID	Mid	
8	HI	Hi	
9	TRIM	Gain	
10	FADER VU	Pre-fader Level	
11	INPUT SELECT	Input select	
12	MASTER LEVEL	Volume Master Out	
13	MASTER VUMETER	Master Level	
14	BOOTH LEVEL	Volume Booth Out	
15	MASTER CUE	MASTER CUE	
16	HEADPHONES VOLUME	(hardware operation)	
17	HEADPHONES MIXING	(hardware operation)	
18	SAMPLER VOLUME	Macro FX Wet / STEM Volume	
19	SAMPLER CUE	Pattern Recorder	Stop Pattern
20	DUB ECHO	MixerFX: Flanger	MixerFX: Noise
20	PITCH	MixerFX: TimeGater	
20	NOISE	MixerFX: Crush	
20	FILTER	Filter	
21	MIC LOW EQ	(hardware operation)	
22	MIC HI EQ	(hardware operation)	
23	MIC 2 VOLUME	STEM FX	
24	MIC 1 VOLUME	Filter	
25	MIC CONTROL	(hardware operation)	

		section BEAT FX		
	DDJ-1000	Main Function	+Shift	+Memory Shift
26	BEATFX SCREEN	NOT MAPPABLE IN MIDI MODE!		
27	BEAT <	Parameter #3 Left	Single/Group mode	Select FX up
27	BEAT >	Parameter #3 Right		Select FX down
28	LOW CUT	Delay T3		
28	ECHO	Delay		
28	MT DELAY	Ramp Delay		
28	SPIRAL	Auto Bouncer		
28	REVERB	Reverb T3		
28	TRANS	Gater		
28	ENIGMA JET			
28	FLANGER	Flanger		
28	PHASER	Phaser		
28	PITCH	Reverse Grain		
28	SLIP ROLL	BeatSlicer		
28	ROLL	BeatMasher 2		
28	MOBIUS SAW			
28	MOBIUS TRI			
29	SELECT 1/2/3/4	Select FX4		
		note: Use MST for Pioneer FX!		
30	LEVEL/DEPTH	Dry/Wet FX4		
31	ON/OFF	On/OFF FX3	Vinyl Break (Release FX)	Toggle button blinking



		Section DECK		
#	DDJ-1000	Main Function	+Shift	+Memory Shift
S	SHIFT	Main Shift		
35	MEMORY	Second Shift		
32	PLAY	Play/Pause	Vinyl Long Stop	
33	CUE	Cue	Track Begin	
34	SEARCH <<	move left (beat / loop jump)	move -1 beat	Size Move Half
34	SEARCH >>	move right (beat / loop jump)	move +1 beat	Size Move Double
36	DECK SELECT (1/2/3/4)	Select Deck 1-4	Deck Flavor	
37	SLIP REVERSE	Tap: Echo Out / Long: Censor	TP3 Reverse	
38	IN	Tap: Loop In / Long: Reloop	Loop double (Backwards)	Loop half (Normal)
		Tap: Half loop / Long: Edit Loop		
39	OUT	Tap: Loop Out / Long: Reloop	Loop half (Backwards)	Loop double (Normal)
		Tap: Double loop / Long: Edit out		
40	4 BEAT LOOP	Tap: 4-Beat loop / Long: Activate Loop	4-Beat (Backwards)	Loop set (Selected size)
		Tap: Loop Exit		
41	QUANTIZE / WAKE UP	Quantize + Snap Toggle	Reset mapping	
42	SLIP / VINYL	Flux Mode On/Off	Scratch On/Off	
43	JOG (platter)	Scratch / Pitch Bend	Quick Search	
43	JOG (wheel side)	Pitch Bend		
44	JOG ADJUST	Jog Sensitivity (hardware)		
45	BEAT SYNC (Traktor mode)	Toggle Sync	Set tempo Master	Sync Off
45	(Elastic beatgrid mode)	Jog = Sync off; Cue = Sync Off		
45		Note: use "+memory+shift" to select sync modes		
46	TEMPO	Tempo Control	Tempo Control (Sync off)	
47	MASTER TEMPO	KeyLock Toggle	Tempo Range (6/10/16/100)	Time Elapsed / Remain
48	KEY SYNC	(see grid section)	(see grid section)	

49	KEY RESET	(see grid section)	(see grid section)	
50	PAD MODES	Change Mode 1..4; Twice=cycle page	Change Mode 5..8; Twice=cycle	
51	PAD PAGE LEFT	Cycle pad Pages		
51	PAD PAGE RIGHT	Direct select pad pages		
52	PADS	(see detailed section)	(see detailed section)	
53	TURN BROWSER	Scroll List	Scroll Tree	WaveForm Zoom Adjust
53	PUSH BROWSER	Load Track	Open / close Folder	WaveForm Zoom Auto
54	BACK	Preview Player (Hold)	Scroll Favorites	
55	VIEW	Browser Only (Toggle)	Goto Collection	

		Section BEATGRID		
	DDJ-1000	+ KEY SYNC	+ KEY RESET	+Shift
48	KEY SYNC			Set Grid Marker
49	KEY RESET			Delete Grid Marker
	KEY SYNC+KEY RESET	Track ON/OFF LOCK	Auto Grid Marker	
43	Turn Jog Wheel	Move Grid	BPM +/-	
53	Turn BROWSER	Move Grid [FINE]	BPM +/- [FINE]	
53	Push BROWSER	RESET BPM	BPM AUTO	



		mode #1: HOTCUE	
	DDJ-1000	Main Function	+Shift
	PAD 1	Hotcue 1	Delete Hotcue
	PAD 2	Hotcue 2	Delete Hotcue
	PAD 3	Hotcue 3	Delete Hotcue
	PAD 4	Hotcue 4	Delete Hotcue
	PAD 5	Hotcue 5	Delete Hotcue
	PAD 6	Hotcue 6	Delete Hotcue
	PAD 7	Hotcue 7	Delete Hotcue
	PAD 8	Hotcue 8	Delete Hotcue
	HOTCUE [Long Press]	Quantize	
	PARAMETER <		PITCH -0,01
	PARAMETER >		PITCH +0,01

		mode #2: PADFX / ROLL	
	DDJ-1000	Main Function	+Shift
	PAD 1	Gater #1	PAD FX page 1
	PAD 2	Gater #2	PAD FX page 2
	PAD 3	Gater #3	PAD FX page 3
	PAD 4	Peak Filter	ROLL

	PAD 5	Beatmasher #1	
	PAD 6	Beatmasher #2	
	PAD 7	Zzzurp	
	PAD 8	Release FX (toggle)	
	PAD 1	Delay #1	PAD FX page 1
	PAD 2	Delay #2	PAD FX page 2
	PAD 3	Delay / BeatSlicer	PAD FX page 3
	PAD 4	Flanger Flux	ROLL
	PAD 5	DigitalLofi / BeatSlicer #1	
	PAD 6	DigitalLofi / BeatSlicer #2	
	PAD 7	BeatSlicer	
	PAD 8	Release FX (toggle)	
	PAD 1	Filter Pulse	PAD FX page 1
	PAD 2	LaserSlicer	PAD FX page 2
	PAD 3	Bass-O-Matic #1	PAD FX page 3
	PAD 4	Bass-O-Matic #2	ROLL
	PAD 5	Bouncer / EventHorizon	
	PAD 6	Bouncer	
	PAD 7	EventHorizon	
	PAD 8	Release FX (toggle)	
	PAD 1	Roll "1/8 (quantize)	PAD FX page 1
	PAD 2	Roll "1/4 (quantize)	PAD FX page 2
	PAD 3	Roll "1/2 (quantize)	PAD FX page 3
	PAD 4	Roll "1 (quantize)	ROLL
	PAD 5	Roll "1/8 (non-quantize)	
	PAD 6	Roll "1/4 (non-quantize)	
	PAD 7	Roll "1/2 (non-quantize)	
	PAD 8	Roll "1 (non-quantize)	
	PARAMETER <	Next PFX page	
	PARAMETER >	Choose PFX pages	

		mode #3: MACROFX	
		/ MIXER FX	

	DDJ-1000	Main Function	+Shift
	PAD 1	Echo: Wormhole	
		Flanger: PolarWind	
		Echo: Dot delay	
		Flanger: Barber Pole	
	PAD 2	FlightTest	
		Filter: EventHorizon	
		Echo: Dual Delay	
		Flanger: BarberPole	
	PAD 3	Masher: LaserSlicer	
		Masher: Zzuurp	
		Echo: Reverb	
		White: Noise	
	PAD 4	Resonant Filter	
		Bit Crush	
		Time Gater	
	PAD 5	Noise: DarkMatter	
		Masher: BassOMatic	
		Echo: Dot delay	
		Flanger: Barber Pole	
	PAD 6	Streetch slow	
		Streetch fast	
		Echo: Dot delay	
		Flanger: Barber Pole	
	PAD 7	Echo: Wormhole	
		Flanger: PolarWind	
		Echo: Dot delay	
		Flanger: Barber Pole	

	PAD 8	Echo Out	
--	-------	----------	--

		mode #4: JOG FX	
	DDJ-1000	Main Function	+Shift
	PAD 1	Beatmasher / Digital filter / Gater	
	PAD 2	Beatmasher / Filter / Reverb	
	PAD 3	Eventhorizon / Gater	
	PAD 4	Gater / Beatmasher / Reverb	
	PAD 5	Flanger / Gater	
	PAD 6	Beatmasher / Peak filter / Gater	
	PAD 7	FormatFilter / Peak filter / Flightest	
	PAD 8	Echo Out	
	PARAMETER <		
	PARAMETER >		

		mode #5: TONE PLAY	
	DDJ-1000	Page 1	Page 2
	PAD 1	Key +4	Key +12
	PAD 2	Key +5	Key 0
	PAD 3	Key +6	Key Inc
	PAD 4	Key +7	Key Dec
	PAD 5	Key 0	Key +8
	PAD 6	Key +1	Key +9
	PAD 7	Key +2	Key +10
	PAD 8	Key +3	Key +11
	PARAMETER <	Next PFX page	
	PARAMETER >	Choose PFX pages	

		mode #6: BEATJUMP / LOOP	
	DDJ-1000	Page 1	Page 2
	PAD 1	Jump -1	Move: Beatjump
	PAD 2	Jump +1	Move: Loop

	PAD 3	Jump -4	Move: Loop In
	PAD 4	Jump +4	Move: Loop Out
	PAD 5	Jump -8	Left
	PAD 6	Jump +8	Size --
	PAD 7	Jump -16	Size ++
	PAD 8	Jump +16	Right
	PARAMETER <	BeatJump mode	
	PARAMETER >	Loop mode	

		mode #7: SLICER	
	DDJ-1000	Main Function	+Shift
	PAD 1	Slicer #1	8 beats
	PAD 2	Slicer #2	16 beats odd
	PAD 3	Slicer #3	16 beats even
	PAD 4	Slicer #4	
	PAD 5	Slicer #5	
	PAD 6	Slicer #6	
	PAD 7	Slicer #7	
	PAD 8	Slicer #8	
	PARAMETER <		
	PARAMETER >		

		mode #8: SAMPLER	
	DDJ-1000	Page 1	+Shift
	PAD 1	Trigger #1	Mute #1
	PAD 2	Trigger #2	Mute #2
	PAD 3	Trigger #3	Mute #3
	PAD 4	Trigger #4	Mute #4
	PAD 5	Adjust #1	Delete #1
	PAD 6	Adjust #2	Delete #2
	PAD 7	Adjust #3	Delete #3
	PAD 8	Adjust #4	Delete #4
	PARAMETER <		
	PARAMETER >		

		mode #8: SAMPLER	
--	--	------------------	--

	DDJ-1000	Main Function	+Shift
	PAD 1	Swing = 0	Len 4
	PAD 2	Swing = 0.2	Len 8
	PAD 3	Swing = 0.5	Len 12
	PAD 4	Swing = 0.8	Len 16
	PAD 5	Key lock #1	1-shot / Loop #1
	PAD 6	Key lock #2	1-shot / Loop #2
	PAD 7	Key lock #3	1-shot / Loop #3
	PAD 8	Key lock #4	1-shot / Loop #4
	PARAMETER <		
	PARAMETER >		

		Section MIXERFX	
	DDJ-1000	Main Function	+Shift
20	DUB ECHO	Set #1	
20	PITCH	Set #2	
20	NOISE	Set #3	
20	FILTER	Set #4 (Filter)	
5	FILTER (KNOB)	Macro FX / Mixer FX	
18	SAMPLER VOLUME	Macro FX Wet	