









SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See page 10.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10m Ω max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 M Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.


MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless steel.

SWITCH SUPPORT: Brass, tin plated.

CONTACT / TERMINALS: Brass, Silver or gold plated.(See Page 10)

HOW TO ORDER

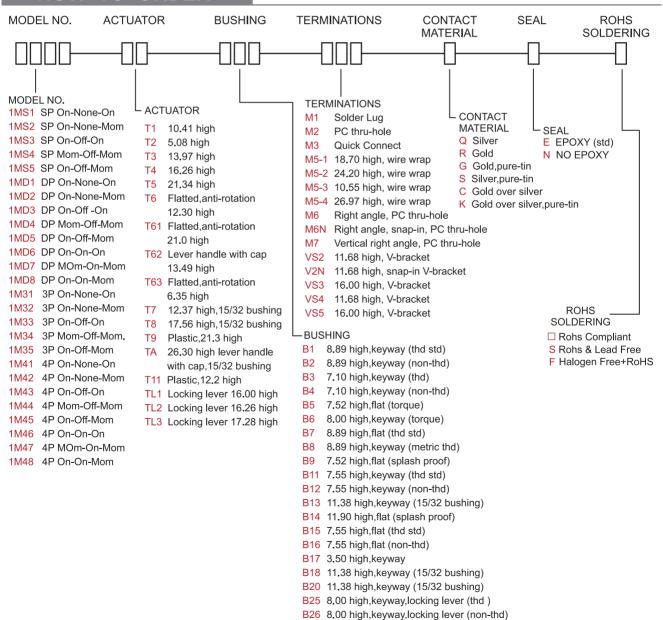

Toggle Switche

SWITCH FUNCTION

| | | | SWIT | CH FUN | CTION | CONNECTE | ED TERMINALS / S | CHEMATIC |
|--------------|-------|-------|-------|--------|-------|---------------------------------|-------------------|---|
| NO. POLES | MODEL | MODEL | POS.1 | POS.2 | POS.3 | POS.1 | POS.2 | POS.3 |
| I OLLO | NO. | NO. | 1 | | 4 | À | . | 4 |
| SP | Q1111 | 1MS1 | ON | NONE | ON | | N1/A | |
| | Q1112 | 1MS2 | ON | NONE | MOM | 2-3 | N/A | 2-1 |
| | Q1113 | 1MS3 | ON | OFF | ON | | | |
| | Q1114 | 1MS4 | MOM | OFF | MOM | 2 (COMM) | OPEN | 2 (COMM) 1 • 3 |
| | Q1115 | 1MS5 | ON | OFF | MOM | | | |
| DP | Q1121 | 1MD1 | ON | NONE | ON | | NI/A | |
| | Q1122 | 1MD2 | ON | NONE | MOM | 2-3,5-6 | N/A | 2-1,5-4 |
| | Q1123 | 1MD3 | ON | OFF | ON | | | |
| | Q1124 | 1MD4 | MOM | OFF | MOM | 1 • 2 (COMM) 5 • 6 | OPEN | 1 2 (COMM) 5 6 |
| | Q1125 | 1MD5 | ON | OFF | MOM | | | |
| | Q1126 | 1MD6 | ON | ON | ON | | | |
| A | Q1127 | 1MD7 | MOM | ON | MOM | 2-3,5-6 | 2-3,5-4 | 2-1,5-4 |
| A | Q1128 | 1MD8 | ON | ON | МОМ | | | |
| 3P | Q1131 | 1M31 | ON | NONE | ON | | N/A | |
| | Q1132 | 1M32 | ON | NONE | MOM | 2-3,5-6,8-9 | IV/A | 2-1,5-4,8-7 |
| | Q1133 | 1M33 | ON | OFF | ON | -0 | | -0 |
| | Q1134 | 1M34 | MOM | OFF | MOM | 1 • 2 3 4 • 6 7 • 9 | OPEN | 5 (COMM) 8 9 6 7 9 |
| | Q1135 | 1M35 | ON | OFF | МОМ | | | |
| 4P | Q1141 | 1M41 | ON | NONE | ON | | 21/2 | |
| | Q1142 | 1M42 | ON | NONE | МОМ | 2-3,5-6,8-9,11-12 | N/A | 2-1,5-4,8-7,11-10 |
| | Q1143 | 1M43 | ON | OFF | ON | 1 | | 2 5(COMM) 8 11 11 11 11 11 11 11 11 11 11 11 11 1 |
| | Q1144 | 1M44 | MOM | OFF | MOM | 1 • • 3 4 • • 6 7 • • 9 10 • 12 | OPEN | 16 • 3 46 • 6 76 • 9 10 • 12 |
| | Q1145 | 1M45 | ON | OFF | MOM | | | |
| | Q1146 | 1M46 | ON | ON | ON | | | |
| _ | Q1147 | 1M47 | MOM | ON | MOM | 2-3,5-6,8-9,11-12 | 2-3,5-4,8-9,11-10 | 2-1,5-4,8-7,11-10 |
| _ | Q1148 | 1M48 | ON | ON | MOM | | | |

MOM=MOMENTARY

▲ Please check the availability in advance before order





1M Toggle Switches


OPTIONS POI F

SPDT












Part No. Shown: 1MS1T1B1M1QE

DPDT












Part No. Shown: 1MD1T1B1M1QE

3PDT












Part No. Shown: 1M31T1B1M1QE

4PDT





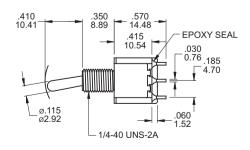



Part No. Shown: 1M41T1B1M1QE


SWITCHS


3-WAY WIRING DIAGRAM SCHEMATICS




SINGLE POLE, 3 POSITION

| Model | POS 1 | POS 2 | POS 3 |
|----------------|---------|---------|-------|
| No. | ON | ON | ON |
| Term. Comm. | 2-3,5-6 | 2-3,5-4 | |







| DOUBLE | POLE, | 3 | POSITION |
|--------|-------|---|-----------------|

| Model No. | POS 1 | POS 2 | POS 3 |
|----------------|----------------------|----------------------|----------------------|
| 1M46 | ON | ON | ON |
| Term. Comm. | 2-3,5-6 8-9,11-12 | 2-3,5-4 8-9,11-10 | 2-1,5-4 8-7,11-10 |



40



POS. 1



POS. 2


POS. 3

POS. 3


ACTUATOR OPTIONS

T2


T1 STD



Т3



T4




ø.130 ø3.30 .840 21.34

NOTE T1 ~ T5 Actuator shown with standard B1 Bushing :

Add .070 (1.78) for B3 Bushing;

Subtract .020 (0.51) for B6 Bushing;


Std for M1 , M2 Terminal sub .016 (0.40) for M6 , M7 , VSX

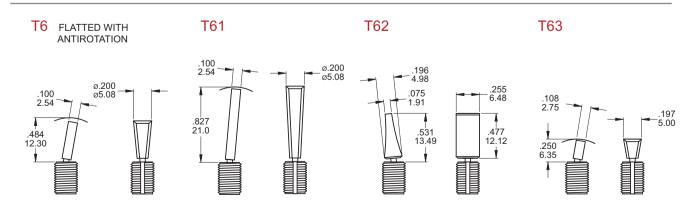

NOTE T6,T6-1,T6-2,T63 use with B11, B12, B15, B16 bushing only.

Miniature Toggle Switches






Use with B13 bushing Use with B18,B20 the lever is antirotation andthe size of lever is 13.00mm


T8 ø.240 ø6.09 17.56 15/32-32 UNS-2A .448 .020 0.51 11.38

Use with B13 bushing Use with B18.B20 the lever is antirotation and the size of lever is 18.00mm




B1 / B2 bushing std with black and red color only (std.)

TA PLASTIC BLACK



Use with B18 bushing only

T11




NOTE T11Actuator shown with standard B1 Bushing; Add .070 (1.78) for B3 Bushing; Subtract .020 (0.51) for B6 Bushing. Std for M1.M2 Terminal sub .016 (0.40) for M6.M7.VSX

Plastic No.Color:


| ITEM NO | COLOR |
|---------|-------------|
| 1 | White |
| 2 | Black (Std) |
| 3 | Red |
| 4 | Orange |
| 5 | Yellow |
| 6 | Green |
| 7 | Blue |
| 8 | Brown |
| 9 | Gray |
| | |

T6-2, TA, T9, T11 **ACTUATOR ONLY**


TL1B25



TL2B25




TL3B25






OPTIONS


B1 THD STD B2 NON-THD



B3 THD **B4 NON-THD**




B5 HIGH TORQUE



1M SERIES








B7 THD STD




1/4-40 UNS-2A 350 8.89

B8 METRIC THD





B9 SPLASH PROOF




0.80


CP-1TEB



B11 THD STD B12 NON-THD




B15 THD STD B16 NON-THD



Use with T6 actuators only

B17




B13



Use with T7,T8 actuators only
B13 Bear strength from top of actuator
up to 10kg aside up to 15kg


POM

B14 SPLASH PROOF




Use with T7 , T8 actuators only $\,$

B18



Use with T7,T8 and T10 actuators only with Plastic (POM) Insert

B20



Use with T7,T8 and T10 actuators only with Plastic (POM) Insert

B18, B20 Bear strength from top of actuator up to 20kg aside up to 15kg


ø.250 ø6.35




1M Toggle Switches

PANEL MOUNTING






METRIC BUSHING




15/32IN BUSHING




_____ 1/4 IN BUSHING -






METRIC BUSHING




15/32IN BUSHING




TERMINATION OPTIONS

M1 SOLDER LUG




.030(0.76) THK.

M2 PC THRU-HOLE




.030(0.76) THK.

M3 QUICK CONNECT



THK .030(0.76)

M5 WIRE WRAP



THK .030(0.76)

OTHER TERMINATION OPTIONS

M6 RIGHT ANGLE P.C. MOUNT

M7 RIGHT ANGLE P.C. MOUNT


VS2 VERTICAL BRACKET P.C. MOUNT


VS3 VERTICAL BRACKET P.C. MOUNT

VS5 VERTICAL BRACKET P.C. MOUNT

| OPTION CODE | DIM. 'A' |
|----------------|---------------|
| M5-1 | .736 (18.70) |
| M5-2 | .953 (24.20) |
| M5-3 | .415 (10.55) |
| M5-4 | 1.062 (26.97) |



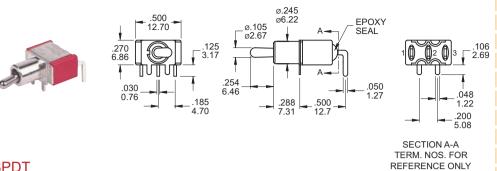



P.C. MOUNTING


.185 4.70

3.81

SPDT

Part No. Shown: 1MS1T2B4M6QE

M6

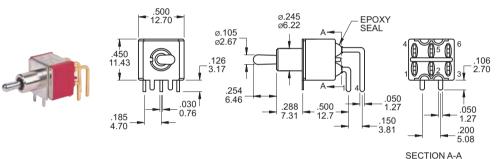


SECTION A-A TERM. NOS. FOR REFERENCE ONLY

DPDT

Part No. Shown: 1MD1T2B4M6RE

M7

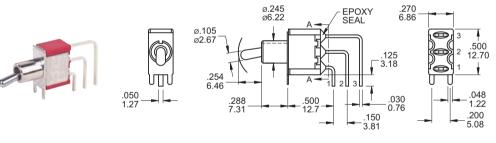

SECTION A-A TERM. NOS. FOR REFERENCE ONLY

TERM. NOS. FOR REFERENCE ONLY


.500 ø.073 ø1.85 .200 5.08

P.C. MOUNTING

SPDT

Part No. Shown: 1MS1T2B4M7QE

M7

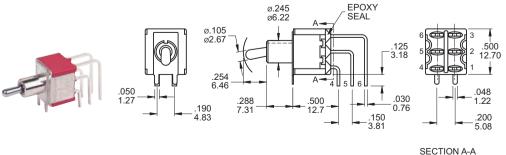

DPDT

Part No. Shown: 1MD1T2B4M7QE


P.C. MOUNTING .500 12.70 ø.073 ø1.85

1M SERIES




1M Toggle Switches



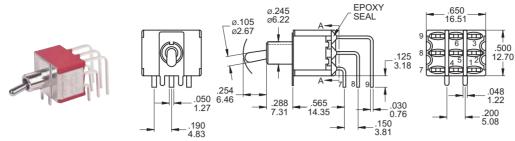


Part No. Shown: 1M31T2B4M7QE

SECTION A-A TERM. NOS. FOR REFERENCE ONLY



M7

3PDT

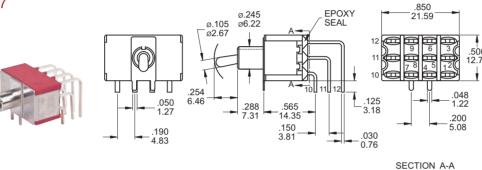


4PDT Part No. Shown: 1M41T2B4M7QE

P.C. MOUNTING .150 .565 14.35 ø.073 ø1.85 .200 5.08


VS2 - VS3



SPDT




Part No. Shown: 1MS1T2B4VS2QE



| OPTION CODE | DIM. 'A' |
|----------------|---------------|
| VS2 | .460 11.68 |
| VS3 | .630 16.00 |


TERM, NOS, FOR


REFERENCE ONLY




VS2 - VS3







| OPTION CODE | DIM. 'A' |
|----------------|---------------|
| VS2 | .460 11.68 |
| VS3 | .630 16.00 |





DPDT

Part No. Shown: 1MD1T2B4VS3QE










| OPTION CODE | DIM. 'A' |
|----------------|---------------|
| VS4 | .460 11.68 |
| VS5 | .630 16.00 |




DPDT


Part No. Shown: 1MD1T2B4VS5QE


M₆N






V2N






HARDWARE

1/4 NUTS HDW2




Supplied standard with B1, B3, B5, B6 and B9 options

DRESS NUT HDW3




METRIC NUT HDW6




Supplied standard with B8 metric bushing

LOCK WASHER HDW11




Supplied standard with B1 / B3 bushing

OPTIONAL RUBBER HOOD **SEALING**




K1=Metric E1=Inch (Std.) for actuator T1, T2 and B1, B3, B5, B6 Bushing only

15/32 NUTS HDW4



Supplied standard with B13 bushing


LOCK WASHER HDW12





1.0


Supplied standard with B13 bushing

















OPTIONAL TOGGLE CAP

CP-T1XX



Use with T1

CAP Color:

| ITEM NO | COLOR |
|---------|-------------|
| 1 | White |
| 2 | Black (Std) |
| 3 | Red |
| 5 | Yellow |
| 6 | Green |
| 7 | Blue |
| 9 | Grav |

CONTACT **MATERIAL OPTIONS**

| | CONTACT PLATING | TERMINAL PLATING | RATINGS |
|---|------------------|---------------------------------|--|
| Q | Silver | Q = Silver | |
| S | Silvei | S = Silver,pure - tin | 5 Amps with resistant load @ 120VAC or 28VDC |
| С | Gold over Silver | C = Gold over silver | 2 Amps with resistant load @ 250VAC |
| K | Oold Over Silver | K = Gold over silver,pure - tin | |
| R | Gold | R = Gold | 0.4 Volt - Amps(VA)max. @ 20V max.(AC or DC) |
| G | Joid | G = Gold,pure - tin | 0.4 VOIL - AITIPS (VA) THAX. (@ 20V HIAX. (AC 01 DC) |

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C

approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: 260 ± 5°C

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)

SOLDERING: Vapor phase