


■ CHARGING SYSTEM

1. General

- Instead of the conventional type generator, a compact and lightweight segment conductor type generator is used. This type of generator generates a high amperage output in a highly efficient manner.
- This generator uses a joined segment conductor system, in which multiple segment conductors are welded together to the stator. Compared to the conventional winding system, the electrical resistance is reduced due to the shape of the segment conductors, and their arrangement helps to make the generator more compact.

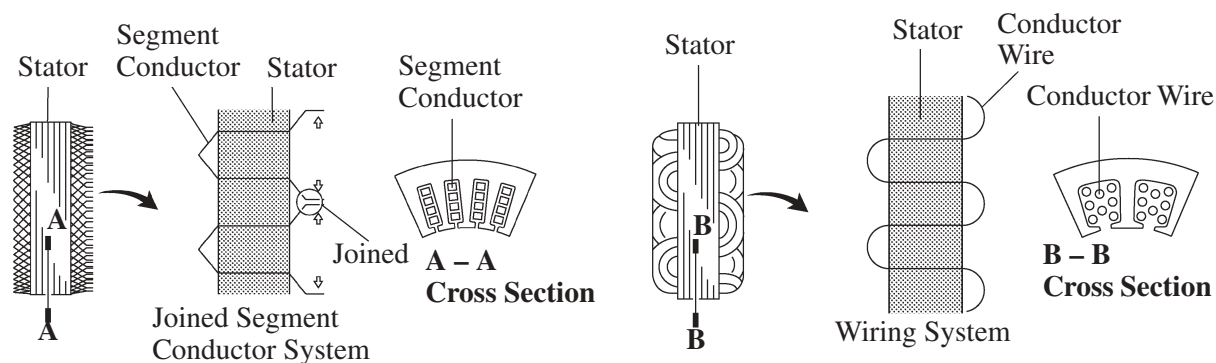


206EG40

206EG41

Segment Conductor Type Generator

Conventional Type Generator

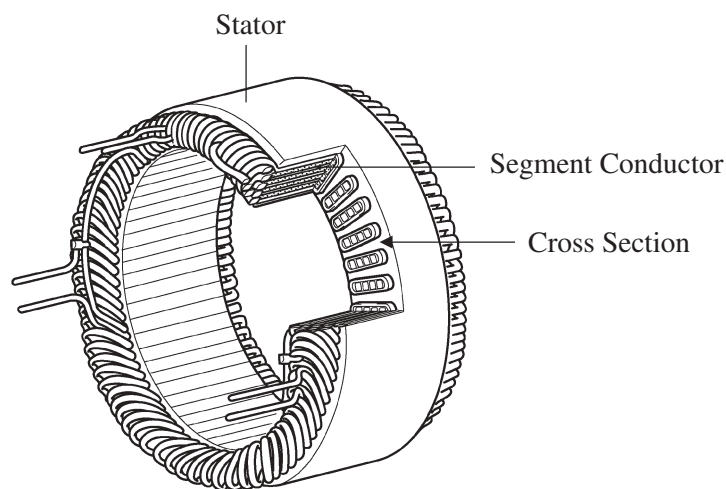


Stator of Segment Conductor Type Generator

206EG42

► Specifications ◀

Type	SE0
Rated Voltage	12 V
Output Rated	100 A

► Wiring Diagram ◀

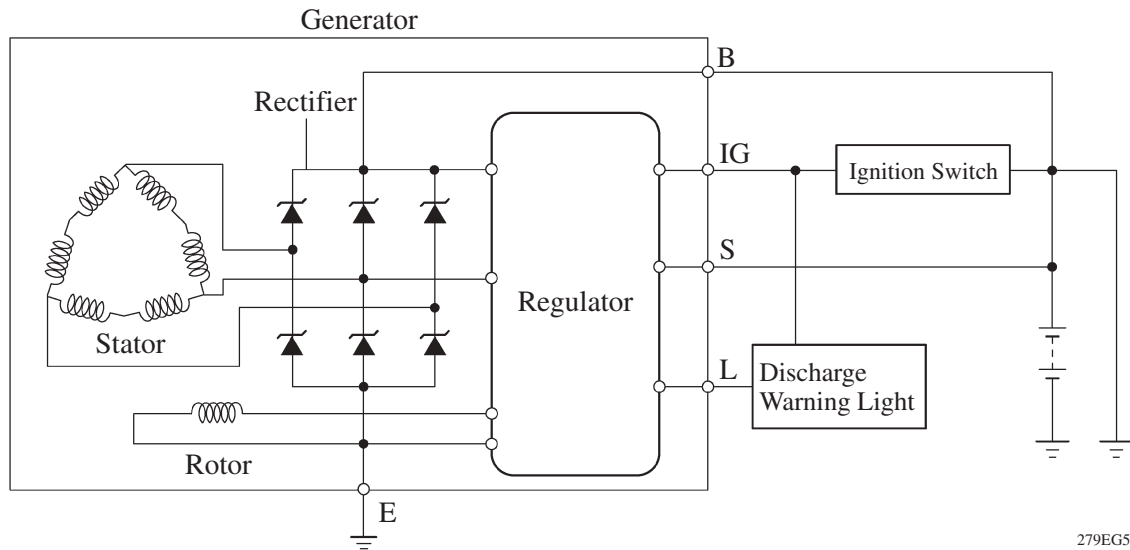**Service Tip**

Although the charging circuit of a conventional generator is checked through the F terminal, this check cannot be performed on the Segment Conductor type generator through the use of the F terminal because the F terminal has been eliminated. For details, refer to the 2007 Camry Repair Manual (Pub. No. RM0250U).

2. Generator Pulley

A one-way clutch is set to the generator pulley. Operation of the one-way clutch cancels generator pulley inertia and helps to prevent slipping of the V-ribbed belt. This realizes a low tension V-ribbed belt that achieves reduced friction.

