## HOW TO TALK

- **Listen first.** Never talk over anyone.
- **Press, pause, speak, release.** Hold the side button, wait a second, talk under 30 seconds, let go. Leave gaps so an emergency can get in.
- **Use callsigns, not names or addresses.** Anyone can listen to any channel.
- **Start on low power.** Switch to high only if no one hears you.
- **Say your FCC callsign if you hold a license:**
  Ham: every 10 minutes and when you finish.
  GMRS: every 15 minutes and when you finish.
  FRS: not needed.

```
Maverick: "Iceman, this is Maverick, over."
Iceman: "Maverick, go ahead, over."
Maverick: "At the north lot, all OK, no needs, over."
Iceman: "Roger. Iceman out."
```

| | |
|---|---|
| **OVER** | I'm done talking. Your turn. |
| **OUT** | Conversation over. Never "over and out." |
| **ROGER / WILCO** | Understood. / Understood and will comply. |
| **SAY AGAIN** | Please repeat that. |
| **STAND BY** | Wait. I'll come back to you. |
| **RADIO CHECK** | How do you hear me? Answer "loud and clear," "readable" or "weak." |
| **BREAK BREAK** | I must interrupt with something urgent. |
| **EMERGENCY** | Said 3 times: a life is in danger. Everyone else stops and listens. |

**When you check in, say in this order:**
callsign, where you are, how you are, what you need.

## PHONETIC ALPHABET AND MORSE CODE

| | | | | | |
|---|---|---|---|---|---|
| **A** | Alfa | • – | **N** | November | – • |
| **B** | Bravo | – • • • | **O** | Oscar | – – – |
| **C** | Charlie | – • – • | **P** | Papa | • – – • |
| **D** | Delta | – • • | **Q** | Quebec | – – • – |
| **E** | Echo | • | **R** | Romeo | • – • |
| **F** | Foxtrot | • • – • | **S** | Sierra | • • • |
| **G** | Golf | – – • | **T** | Tango | – |
| **H** | Hotel | • • • • | **U** | Uniform | • • – |
| **I** | India | • • | **V** | Victor | • • • – |
| **J** | Juliett | • – – – | **W** | Whiskey | • – – |
| **K** | Kilo | – • – | **X** | X-ray | – • • – |
| **L** | Lima | • – • • | **Y** | Yankee | – • – – |
| **M** | Mike | – – | **Z** | Zulu | – – • • |

**Numbers: say one digit at a time.**

| | | | | |
|---|---|---|---|---|
| **0** zero | **1** wun | **2** too | **3** tree | **4** fower |
| **5** fife | **6** six | **7** seven | **8** ait | **9** niner |

Example: 146.760 is said
"wun fower six decimal seven six zero."

**Why these words?** Letters like B, D, E and P sound alike through static. Each phonetic word stays distinct even when half of it is lost, and it's used worldwide. The numbers follow the same idea: "niner" keeps 9 from sounding like 5, "tree" survives when the "th" drops out, and "fower" isn't heard as "for."

## TODAY'S PLAN

| | | | |
|---|---|---|---|
| **P** | Primary | ch _____ | _____ |
| **A** | Alternate | ch _____ | _____ |
| **C** | Contingency | ch _____ | _____ |
| **E** | Emergency | | _____ |

## BUILD A PACE PLAN FOR EACH OPERATION

Four ways to reach each other, each by a different path, so one failure can't cut the group off.

1. **Size it up:** who, how far apart, how long, which licenses.
2. **Primary:** the shortest reach that covers everyone.
   Same site: a Trumpet channel (31–36) every radio there can use. All use tone 210.7 (privacy code 33).
   Across town: 38 (ham) or 39 (GMRS).
3. **Alternate:** a different path, like the other repeater.
4. **Contingency:** usually 3, which every radio has.
   Lost contact? 3-3-3: listen on 3 for 3 minutes at the top of every 3rd hour (12, 3, 6, 9).
5. **Emergency:** no radio needed: a rally point and time, or a runner. Last resort on the radio: 20.
6. **Assign:** callsigns, a net control (who runs the channel) and check-in times. Write them in Notes, brief everyone, test before splitting up.

## NOTES

Callsign _____ Ham _____ GMRS _____
Radio model _____
Transmits on FRS/GMRS: ☐ Yes ☐ No, listen only
Programmed on _____ by _____

# Trumpet Net

Version 14

*In what place therefore ye hear the sound of the trumpet, resort ye thither unto us: our God shall fight for us.*
Nehemiah 4:20

## WHAT THIS IS


Every Trumpet Net radio has the same channel list, so a channel number means the same thing on every radio. Keep this sheet with your radio.

## YOUR FIRST FIVE MINUTES

1. Turn the radio on and set the volume about halfway.
2. Go to channel 0 (or 108). It should read VER 14 (version 14).
3. Go to channel 3 and listen.
4. Ask someone nearby for a radio check.

## PICK THE CHANNEL BY THE JOB

| | |
|---|---|
| **Local event** | 3, or a Trumpet channel (31–36), tone 210.7 / code 33 |
| **Household** | An FRS/GMRS channel your family picks |
| **Across town** | 38, the ham repeater<br>39, the GMRS repeater, for GMRS only |
| **Severe weather** | Listen on 40 (county emergency net).<br>Keep group talk on 38. |
| **Out of the area** | Listen to that region's main repeater.<br>Call on 100 or 20. |

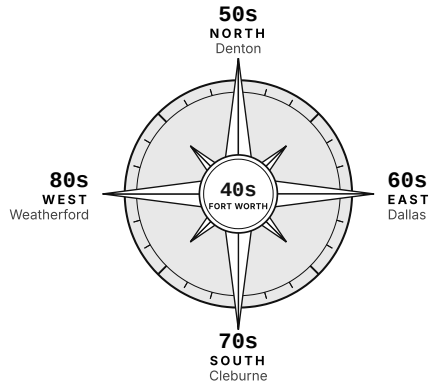


**How far will a handheld radio reach?**
Radio to radio: about 1 mile in town, 2–3 in the open.
Through a repeater: 20–40 miles, but only if you're close enough to reach the repeater. A handheld usually needs to be within about 10–20 miles of it, less among buildings.
Height matters most. Get up high and away from buildings.

Ham and GMRS channels need the matching license to transmit. FRS (1–22) and MURS need none. Anyone may use any channel when a life is in danger.
Repeaters belong to local clubs, and their nets come first. Don't talk on 40 unless you're part of its emergency net or a life is in danger.
Repeater data: RepeaterBook, October 2026.

# Trumpet Net Master Channel Guide

List version 14 · Oct 18, 2026 · channels 0 and 108 show the version

**TX, who may transmit:** F anyone · M MURS radio
G GMRS license · H ham license · L listen only · E emergency use only
† county emergency channel · **TA** talkaround
**SHIFT** repeater offset, MHz · **TONE** in Hz (D = digital code)
**Names:** city + end of frequency (FW 940 = Fort Worth 146.940)
**Scan list:** 3, 20, 23, 38, 39, 40, 50, 60, 70, 80, 90, 100

| CH | NAME | FREQ | SHIFT | TONE | TX | NOTES |
|---|---|---|---|---|---|---|
| **VER · VERSION CHECK** | | | | | | |
| **0** | VER 14 | 146.520 | | | **H** | List version (= 100) |
| **FRS · FAMILY RADIO SERVICE** | | | | | | |
| **1** | FRS 1 | 462.5625 | | | **F** | |
| **2** | FRS 2 | 462.5875 | | | **F** | |
| **3** | FRS 3 | 462.6125 | | | **F** | Everyone, local |
| **4** | FRS 4 | 462.6375 | | | **F** | |
| **5** | FRS 5 | 462.6625 | | | **F** | |
| **6** | FRS 6 | 462.6875 | | | **F** | |
| **7** | FRS 7 | 462.7125 | | | **F** | |
| **8** | FRS 8 | 467.5625 | | | **F** | Low power (0.5 W) |
| **9** | FRS 9 | 467.5875 | | | **F** | Low power (0.5 W) |
| **10** | FRS 10 | 467.6125 | | | **F** | Low power (0.5 W) |
| **11** | FRS 11 | 467.6375 | | | **F** | Low power (0.5 W) |
| **12** | FRS 12 | 467.6625 | | | **F** | Low power (0.5 W) |
| **13** | FRS 13 | 467.6875 | | | **F** | Low power (0.5 W) |
| **14** | FRS 14 | 467.7125 | | | **F** | Low power (0.5 W) |
| **15** | FRS 15 | 462.550 | | | **F** | Repeater 115 output |
| **16** | FRS 16 | 462.575 | | | **F** | Repeater 116 output |
| **17** | FRS 17 | 462.600 | | | **F** | Repeater 117 output |
| **18** | FRS 18 | 462.625 | | | **F** | Repeater 118 output |
| **19** | FRS 19 | 462.650 | | | **F** | Repeater 119 output |
| **20** | FRS 20 | 462.675 | | | **F** | Travel / calling |
| **21** | FRS 21 | 462.700 | | | **F** | Repeater 121 output |
| **22** | FRS 22 | 462.725 | | | **F** | Repeater 122 output |
| **EMERGENCY · SEA MARINE, SAR RESCUE** | | | | | | |
| **23** | SEA 16 | 156.800 | | | **E** | Distress & calling |
| **24** | SEA 09 | 156.450 | | | **E** | Boater hailing |
| **25** | SEA 22 | 157.100 | | | **E** | Coast Guard |
| **26** | SEA 68 | 156.425 | | | **E** | Boats, working |
| **27** | SAR 16 | 155.160 | | | **E** | Search & rescue |
| **28** | VCALL | 155.7525 | | | **E** | Public safety calling |
| **29** | UCALL | 453.2125 | | | **E** | Public safety calling |
| ***30*** | | | | | | *empty* |
| **TRUMPET NET (TPT) · TONE 210.7** | | | | | | |
| **31** | **TPT 1** | 462.6625 | | 210.7 | **F** | FRS 5 + code 33 |
| **32** | **TPT 2** | 462.6875 | | 210.7 | **F** | FRS 6 + code 33 |
| **33** | **TPT 3** | 151.880 | | 210.7 | **M** | MURS 2 + code 33 |
| **34** | **TPT 4** | 151.940 | | 210.7 | **M** | MURS 3 + code 33 |
| **35** | **TPT 5** | 146.430 | | 210.7 | **H** | 2m simplex + tone |
| **36** | **TPT 6** | 147.510 | | 210.7 | **H** | 2m simplex + tone |
| **37** | **ASPC** | 146.445 | | 233.6 | **H** | 2m simplex · ham |
| **38** | **TPT RP** | 146.760 | −0.6 | 110.9 | **H** | Ham repeater (= 41) |
| **39** | **TPT GR** | 462.725 | +5 | 141.3 | **G** | GMRS repeater (= 122) |

**No channel is private.** Tones only filter what *your* radio plays. Just because you don't hear others doesn't mean they can't hear you.

| CH | NAME | FREQ | SHIFT | TONE | TX | NOTES |
|---|---|---|---|---|---|---|
| **40S · FORT WORTH & ARLINGTON** | | | | | | |
| **40** | FW 940 | 146.940 | −0.6 | 110.9 | **H†** | K5FTW Fort Worth |
| **41** | FW 760 | 146.760 | −0.6 | 110.9 | **H** | K5FTW Fort Worth |
| **42** | FW UHF | 444.100 | +5 | 110.9 | **H** | K5FTW Fort Worth |
| **43** | FW 200 | 147.200 | +0.6 | 110.9 | **H** | WZ5TX Fort Worth |
| **44** | COW280 | 147.280 | +0.6 | 110.9 | **H** | K5COW Fort Worth |
| **45** | COW442 | 442.200 | +5 | 110.9 | **H** | K5COW Benbrook |
| **46** | FW 840 | 146.840 | −0.6 | 110.9 | **H** | W5SH Fort Worth |
| **47** | FW 125 | 442.125 | +5 | 156.7 | **H** | KA5GFH Fort Worth |
| **48** | FW 680 | 146.680 | −0.6 | 110.9 | **H** | K5FTW Fort Worth |
| **49** | FW TA | 146.940 | | 110.9 | **H** | Talkaround for 40 |
| **50S · NORTH** | | | | | | |
| **50** | DEN920 | 146.920 | −0.6 | 110.9 | **H†** | W5NGU Denton |
| **51** | DEN170 | 145.170 | −0.6 | 110.9 | **H** | W5NGU Denton |
| **52** | DEN444 | 444.050 | +5 | 110.9 | **H** | W5NGU Denton |
| **53** | DEC780 | 146.780 | −0.6 | 131.8 | **H†** | W5KMC Decatur |
| **54** | DEC442 | 442.600 | +5 | 131.8 | **H** | W5WFR Decatur |
| **55** | SHR000 | 147.000 | +0.6 | 100.0 | **H†** | W5RVT Sherman |
| **56** | SHR280 | 147.280 | +0.6 | 107.2 | **H** | W5COP Sherman |
| **57** | SHR444 | 444.750 | +5 | 100.0 | **H** | W5RVT Sherman |
| **58** | ROSSTN | 145.490 | −0.6 | 85.4 | **H†** | WD5U Rosston |
| **59** | DEN TA | 146.920 | | 110.9 | **H** | Talkaround for 50 |
| **60S · EAST: DALLAS & COLLIN** | | | | | | |
| **60** | DAL880 | 146.880 | −0.6 | 110.9 | **H†** | W5FC Dallas |
| **61** | DALNET | 146.880 | −0.6 | 114.8 | **H** | W5FC Dallas, net |
| **62** | DAL442 | 442.425 | +5 | 110.9 | **H** | W5FC Dallas |
| **63** | DAL640 | 146.640 | −0.6 | 118.8 | **H** | K5AHT Dallas |
| **64** | DAL700 | 146.700 | −0.6 | 110.9 | **H** | W5EBQ Dallas |
| **65** | ARL140 | 147.140 | +0.6 | 110.9 | **H** | K5SLD Arlington |
| **66** | MCK740 | 146.740 | −0.6 | 110.9 | **H†** | W5MRC McKinney |
| ***67*** | | | | | | *empty* |
| ***68*** | | | | | | *empty* |
| **69** | DAL TA | 146.880 | | 110.9 | **H** | Talkaround for 60 |
| **70S · SOUTH** | | | | | | |
| **70** | CLB490 | 145.490 | −0.6 | 88.5 | **H†** | KB5YBI Cleburne |
| **71** | CLB444 | 444.000 | +5 | 136.5 | **H** | N5OAN Cleburne |
| **72** | GRN080 | 147.080 | +0.6 | 88.5 | **H†** | WD5GIC Granbury |
| **73** | HIL780 | 146.780 | −0.6 | 123.0 | **H†** | WB5YFX Hillsboro |
| **74** | WAC660 | 146.660 | −0.6 | 123.0 | **H†** | K5AB Waco |
| **75** | WAC360 | 147.360 | +0.6 | 123.0 | **H** | AA5RT Waco |
| **76** | BEL140 | 147.140 | +0.6 | 123.0 | **H** | W5BEC Belton |
| ***77*** | | | | | | *empty* |
| ***78*** | | | | | | *empty* |
| **79** | CLB TA | 145.490 | | 88.5 | **H** | Talkaround for 70 |
| **80S · WEST & FAR** | | | | | | |
| **80** | WTH040 | 147.040 | +0.6 | 110.9 | **H†** | WB5IDM Weatherford |
| **81** | WTH443 | 443.800 | +5 | 110.9 | **H** | WB5IDM Weatherford |
| **82** | WTH900 | 146.900 | −0.6 | 110.9 | **H** | KG5CW Weatherford * |
| **83** | MW 470 | 145.470 | −0.6 | 85.4 | **H†** | KC5IUR Min. Wells * |
| **84** | MW 640 | 146.640 | −0.6 | 85.4 | **H** | W5ABF Mineral Wells |
| **85** | BRAZOS | 146.860 | −0.6 | 156.7 | **H** | W5PPC Brazos |
| **86** | WF 940 | 146.940 | −0.6 | 192.8 | **H†** | W5US Wichita Falls |
| **87** | WF 140 | 147.140 | +0.6 | 192.8 | **H** | N5WF Wichita Falls |
| **88** | ABL760 | 146.760 | −0.6 | 146.2 | **H†** | KC5OLO Abilene |
| **89** | WTH TA | 147.040 | | 110.9 | **H** | Talkaround for 80 |

| CH | NAME | FREQ | SHIFT | TONE | TX | NOTES |
|---|---|---|---|---|---|---|
| **WX WEATHER (NOAA) · DOT BUSINESS** | | | | | | |
| **90** | WX 1 | 162.550 | | | **L** | Fort Worth KEC55 |
| **91** | WX 2 | 162.400 | | | **L** | Dallas, Abilene |
| **92** | WX 3 | 162.475 | | | **L** | Sherman, Waco |
| **93** | WX 4 | 162.425 | | | **L** | Not local |
| **94** | WX 5 | 162.450 | | | **L** | Not local |
| **95** | WX 6 | 162.500 | | | **L** | Not local |
| **96** | WX 7 | 162.525 | | | **L** | Corsicana, Min. Wells |
| **97** | REDDOT | 151.625 | | | **L** | Business · events |
| **98** | PURDOT | 151.955 | | | **L** | Business |
| **99** | YELDOT | 464.550 | | | **L** | Business |
| **2M SIMPLEX · S2 = 2-METER** | | | | | | |
| **100** | CALL2M | 146.520 | | | **H** | Calling |
| **101** | S2 550 | 146.550 | | | **H** | |
| **102** | S2 580 | 146.580 | | | **H** | Dallas RACES |
| **103** | S2 400 | 146.400 | | | **H** | |
| **104** | S2 420 | 147.420 | | | **H** | |
| **105** | S2 555 | 147.555 | | | **H** | Rockwall ARES |
| **106** | S2 540 | 147.540 | | | **H** | |
| **107** | GADFAM | 147.435 | | 241.8 | **H** | 2m simplex · ham |
| **108** | VER 14 | 147.570 | | | **H** | Version backup |
| **70CM SIMPLEX · S7 = 70-CENTIMETER** | | | | | | |
| **109** | CALL70 | 446.000 | | | **H** | Calling |
| **110** | S7 025 | 446.025 | | | **H** | |
| **111** | S7 500 | 446.500 | | | **H** | |
| **RPT · GMRS REPEATERS (GENERAL MOBILE RADIO SERVICE)** | | | | | | |
| **115** | RPT 15 | 462.550 | +5 | 141.3 | **G** | WQUM597 Dallas |
| **116** | RPT 16 | 462.575 | +5 | 141.3 | **G** | |
| **117** | RPT 17 | 462.600 | +5 | 141.3 | **G** | |
| **118** | RPT 18 | 462.625 | +5 | 141.3 | **G** | |
| **119** | RPT 19 | 462.650 | +5 | 141.3 | **G** | |
| **120** | RPT 20 | 462.675 | +5 | 141.3 | **G** | |
| **121** | RPT 21 | 462.700 | +5 | 141.3 | **G** | |
| **122** | RPT 22 | 462.725 | +5 | 141.3 | **G** | WRPL432 Haltom City |
| **MURS · MULTI-USE RADIO SERVICE** | | | | | | |
| **123** | MURS 1 | 151.820 | | | **M** | |
| **124** | MURS 2 | 151.880 | | | **M** | |
| **125** | MURS 3 | 151.940 | | | **M** | |
| **126** | BLUDOT | 154.570 | | | **M** | MURS 4 |
| **127** | GRNDOT | 154.600 | | | **M** | MURS 5 |

## HOW THE LIST WORKS

| | |
|---|---|
| **1–22** | FRS, radio to radio |
| **23–29** | Emergency: listen anytime, talk only in an emergency |
| **31–39** | Trumpet Net. TPT 1–2: any FRS radio. 3–4: a MURS radio. 5–6: ham license. All six use tone 210.7 (code 33). 38 ham and 39 GMRS repeaters. |
| **40–89** | Ham repeaters by region (compass on the cover). Ending in 0: main repeater. Ending in 9: talkaround, for when it's down. |
| **90–99** | Weather and business (listen only) |
| **100–127** | Simplex, GMRS repeaters (FRS 15–22 + 100), MURS |

* A star means we couldn't confirm that repeater was still on the air as of version 14 (October 18, 2026). Test it before you count on it.