


TIP35C



TIP36C



BD139



TIP35C




BD139



TIP36C



BD140


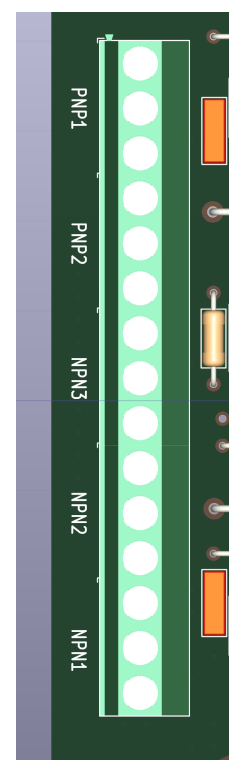


PSU
PCB


AMPLIFIER
PCB



BD139/140



TIP35/36C



Notes

- ① Positive (red) connection of a fan should be connected to pin 1 on XH connector
- ② Pictures are mirrored (look at connection names carefully)

Bill of Materials

Id	Type	Part Number	Quantity
1	Wire	Silicone 18AWG black	≥ 72,8 cm
2	Wire	Silicone 18AWG red	≥ 72,8 cm
3	Wire	Silicone 18AWG yellow	≥ 72,8 cm
4	Ferrule	Yellow 18AWG	7
5	Ferrule	Red 18AWG	7
6	Ferrule	Black 18AWG	7
7	Connector	XHP-2	2
8	Cable	12V fan cable	60 cm
9	Label	Yellow label	9

Heatsink assembly

Title:	----
Part Number:	Heatsink assembly
Description:	

Rev.	Date	Author	Description

Title:	----
Part Number:	Heatsink assembly
Description:	

Flag	Quantity	Note
①	1	Positive (red) connection of a fan should be connected to pin 1 on XH connector
②	2	Pictures are mirrored (look at connection names carefully)

Title:	----
Part Number:	Heatsink assembly
Description:	

Id	Type	Manufacturer	Part Number	Description	Quantity	Usage
1	Wire		Silicone 18AWG black	Silicone 18AWG black	≥ 72,8 cm	W1, W6, W9, W12, W13, W16, W19
2	Wire		Silicone 18AWG red	Silicone 18AWG red	≥ 72,8 cm	W2, W5, W8, W11, W14, W17, W20
3	Wire		Silicone 18AWG yellow	Silicone 18AWG yellow	≥ 72,8 cm	W3, W4, W7, W10, W15, W18, W21
4	Ferrule		Yellow 18AWG		7	NPN1_B, NPN2_B, NPN3_B, NPN4_B, PNP1_B, PNP2_B, PNP3_B
5	Ferrule		Red 18AWG		7	NPN1_C, NPN2_C, NPN3_C, NPN4_C, PNP1_C, PNP2_C, PNP3_C
6	Ferrule		Black 18AWG		7	NPN1_E, NPN2_E, NPN3_E, NPN4_E, PNP1_E, PNP2_E, PNP3_E
7	Connector	JST	XHP-2	Connector Housing, XH Series, 2 Positions, 2.50mm, 250V, 30-22 AWG, Crimp, In-Line, Natural	2	FAN1_C, FAN2_C
8	Cable		12V fan cable		60 cm	CBL1, CBL2
9	Label		Yellow label		9	See Drawing

Title:	----
Part Number:	Heatsink assembly
Description:	

From	To	Conductor	Conductor PN	Twisted With	Size	Length	From Contact PN	Notes
FAN1.1	FAN1_C.1	 CBL1.Red	12V fan cable		26 AWG	30 cm		
FAN1.2	FAN1_C.2	 CBL1.Black	12V fan cable		26 AWG	30 cm		
FAN2.1	FAN2_C.1	 CBL2.Red	12V fan cable		26 AWG	30 cm		
FAN2.2	FAN2_C.2	 CBL2.Black	12V fan cable		26 AWG	30 cm		
NPN1.1	NPN1_E	 W13.Black	Silicone 18AWG black	W14, W15	18 AWG	≥ 10,4 cm		
NPN1.2	NPN1_C	 W14.Red	Silicone 18AWG red	W13, W15	18 AWG	≥ 10,4 cm		
NPN1.3	NPN1_B	 W15.Yellow	Silicone 18AWG yellow	W13, W14	18 AWG	≥ 10,4 cm		
NPN2.1	NPN2_B	 W7.Yellow	Silicone 18AWG yellow	W8, W9	18 AWG	≥ 10,4 cm		
NPN2.2	NPN2_C	 W8.Red	Silicone 18AWG red	W7, W9	18 AWG	≥ 10,4 cm		
NPN2.3	NPN2_E	 W9.Black	Silicone 18AWG black	W7, W8	18 AWG	≥ 10,4 cm		
NPN3.1	NPN3_E	 W16.Black	Silicone 18AWG black	W17, W18	18 AWG	≥ 10,4 cm		
NPN3.2	NPN3_C	 W17.Red	Silicone 18AWG red	W16, W18	18 AWG	≥ 10,4 cm		
NPN3.3	NPN3_B	 W18.Yellow	Silicone 18AWG yellow	W16, W17	18 AWG	≥ 10,4 cm		
NPN4.1	NPN4_B	 W3.Yellow	Silicone 18AWG yellow	W1, W2	18 AWG	≥ 10,4 cm		
NPN4.2	NPN4_C	 W2.Red	Silicone 18AWG red	W1, W3	18 AWG	≥ 10,4 cm		
NPN4.3	NPN4_E	 W1.Black	Silicone 18AWG black	W2, W3	18 AWG	≥ 10,4 cm		
PNP1.1	PNP1_E	 W19.Black	Silicone 18AWG black	W20, W21	18 AWG	≥ 10,4 cm		
PNP1.2	PNP1_C	 W20.Red	Silicone 18AWG red	W19, W21	18 AWG	≥ 10,4 cm		
PNP1.3	PNP1_B	 W21.Yellow	Silicone 18AWG yellow	W19, W20	18 AWG	≥ 10,4 cm		
PNP2.1	PNP2_B	 W10.Yellow	Silicone 18AWG yellow	W11, W12	18 AWG	≥ 10,4 cm		
PNP2.2	PNP2_C	 W11.Red	Silicone 18AWG red	W10, W12	18 AWG	≥ 10,4 cm		
PNP2.3	PNP2_E	 W12.Black	Silicone 18AWG black	W10, W11	18 AWG	≥ 10,4 cm		
PNP3.1	PNP3_B	 W4.Yellow	Silicone 18AWG yellow	W5, W6	18 AWG	≥ 10,4 cm		
PNP3.2	PNP3_C	 W5.Red	Silicone 18AWG red	W4, W6	18 AWG	≥ 10,4 cm		
PNP3.3	PNP3_E	 W6.Black	Silicone 18AWG black	W4, W5	18 AWG	≥ 10,4 cm		

Title:	----
Part Number:	Heatsink assembly
Description:	

#	Type	Reference Designator	Manufacturer	Part Number	Color	Size	From Strip	To Strip	Length	Twisted With	Notes
1	Cable	CBL1		12V fan cable	 Unspecified				30 cm		
2	Cable	CBL2		12V fan cable	 Unspecified				30 cm		
3	Wire	W1		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W2, W3	
4	Wire	W2		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W1, W3	
5	Wire	W3		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W1, W2	
6	Wire	W4		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W5, W6	
7	Wire	W5		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W4, W6	
8	Wire	W6		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W4, W5	
9	Wire	W7		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W8, W9	
10	Wire	W8		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W7, W9	
11	Wire	W9		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W7, W8	
12	Wire	W10		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W11, W12	
13	Wire	W11		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W10, W12	
14	Wire	W12		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W10, W11	
15	Wire	W13		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W14, W15	
16	Wire	W14		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W13, W15	
17	Wire	W15		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W13, W14	
18	Wire	W16		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W17, W18	
19	Wire	W17		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W16, W18	
20	Wire	W18		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W16, W17	
21	Wire	W19		Silicone 18AWG black	 Black	18 AWG		4 mm	≥ 10,4 cm	W20, W21	
22	Wire	W20		Silicone 18AWG red	 Red	18 AWG		4 mm	≥ 10,4 cm	W19, W21	
23	Wire	W21		Silicone 18AWG yellow	 Yellow	18 AWG		4 mm	≥ 10,4 cm	W19, W20	

Title:	----
Part Number:	Heatsink assembly
Description:	

#	Manufacturer	Part Number	Description	Label Text
1		Yellow label		FAN
2		Yellow label		FAN
3		Yellow label		NPN1
4		Yellow label		NPN2
5		Yellow label		NPN3
6		Yellow label		NPN4
7		Yellow label		PNP1
8		Yellow label		PNP2
9		Yellow label		PNP3