Mining

Time Limit

7min

Assembling Rebar

Watch the video



Job Category	Mining	Subject	Assembling Rebar

Ⅰ Requirements

– Perform the rebar fixing within the given time according to the diagram.

Ⅱ Diagram & Requirements

1) Diagram

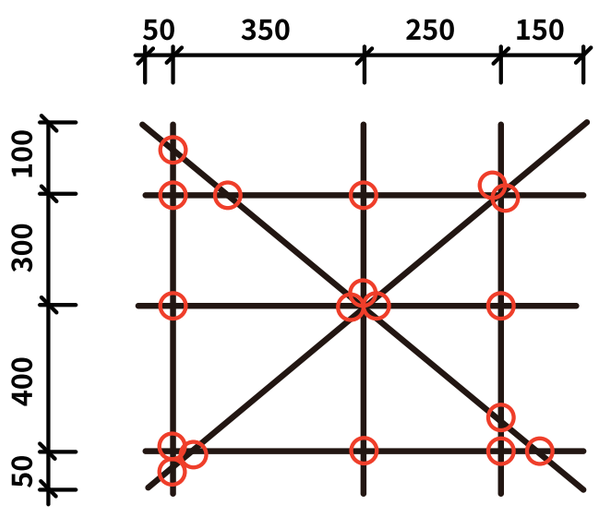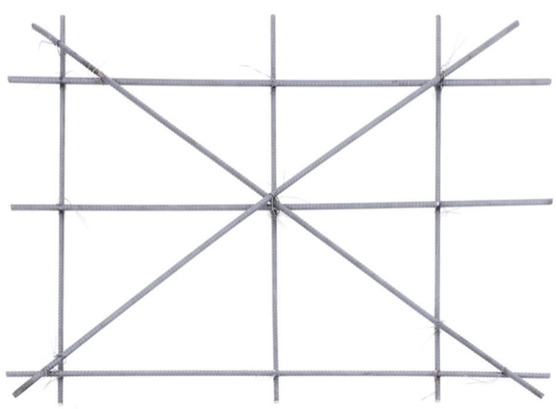단위 : mmUnit : mm	Setting Example
	

Job Category	Mining	Subject	Assembling Rebar

2) Requirements

① Each task involving a tying wire or handle must be performed accurately.

② Make sure that the tying location and the number of ties are in accordance with the requirements.

③ Bind the every binding point.

④ Make sure that your work is in accordance with the specification on the diagram.

⑤ After the evaluation, disassemble wour works.

❖ Failure to wear safety equipment, such as gloves, or removing it during work will result in the lowest score.

Job Category	Mining	Subject	Assembling Rebar

Ⅲ Equipment & Materials

Equipment & Materials		Spec.	Unit	QTY	Remakrs
-	Distinctiron bar	· D10 X 800mm	PCS	3	For 1 person
		· D10 X 1,000mm		3	
		· D10 X 1,000mm		2	
	Wire for fixing	· The length of number 20(350mm)	PCS	40	For 1 person
	Fixing tool	· For iron bar fastening	PCS	1	For 1 person
	Ruler	· 1M or more	PCS	1	For 1 person
	Writing tool	· For indicating the binding position (chalk or white marker)	PCS	1	For 1 person
	Nipper	· For cutting Wire for fixing	PCS	1	For 1 person
	Safety Equipment	· Safety helmet, safety gloves	PCS	1	For 1 person

Time Limit

7min

Pipe Volting

Watch the video


Job Category	Mining	Subject	Pipe Volting

Ⅰ Requirements

– Use the tool to join the piping flanges.

Ⅱ Diagram & Requirements

1) Diagram

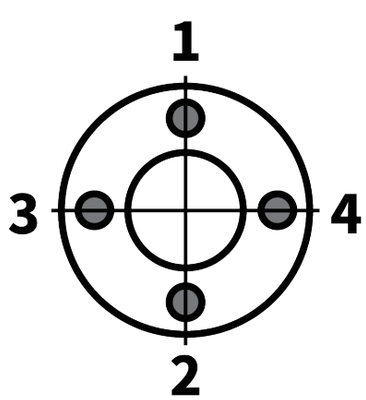Assemble Sequence	Example
	
Result	**Result (Side)**
	

Job Category	Mining	Subject	Pipe Volting

2) Requirements

① Assemble the flange using the provided materials and tools, and obtain confirmation from the supervising officer.

<order of assembly>

1. Insert the gasket between the flanges and align it.
2. Lightly tighten the bolts, then check the offset between the two flanges.
3. Using a spanner, tighten the bolts and nuts in a diagonal sequence.
4. During the final tightening, confirm that there is no offset on the flange to complete the task.

② After the supervisor's confirmation, disassemble the assembled flange and gasket within the time limit according toinstructions.

Job Category	Mining	Subject	Pipe Volting

Ⅲ Equipment & Materials

Equipment & Materials		Spec.	Unit	QTY	Remakrs
	Flange	· 5K 50A	PCS	2	For 1 person
	Gasket	· 5K 50A	PCS	1	For 1 person
	Hex Bolt	· M12, 45mm	PCS	4	For 1 person
	Hexagon Nut	· M12	PCS	4	For 1 person
	Washer	· M12	PCS	8	For 1 person
	Spanner	· 19mm	PCS	2	For 1 person
	Vernier Calipers	· Digital Vernier Calipers · Replace with a ruler if local supply is not available	PCS	1	For 1 person

Time Limit

2min

Wire Connection

Watch the video


Job Category	Mining	Subject	Wire Connection

I Requirements

– Peeled off the sheath of the wire and connect to wires of the same color.

II Diagram & Requirements

1) Diagram

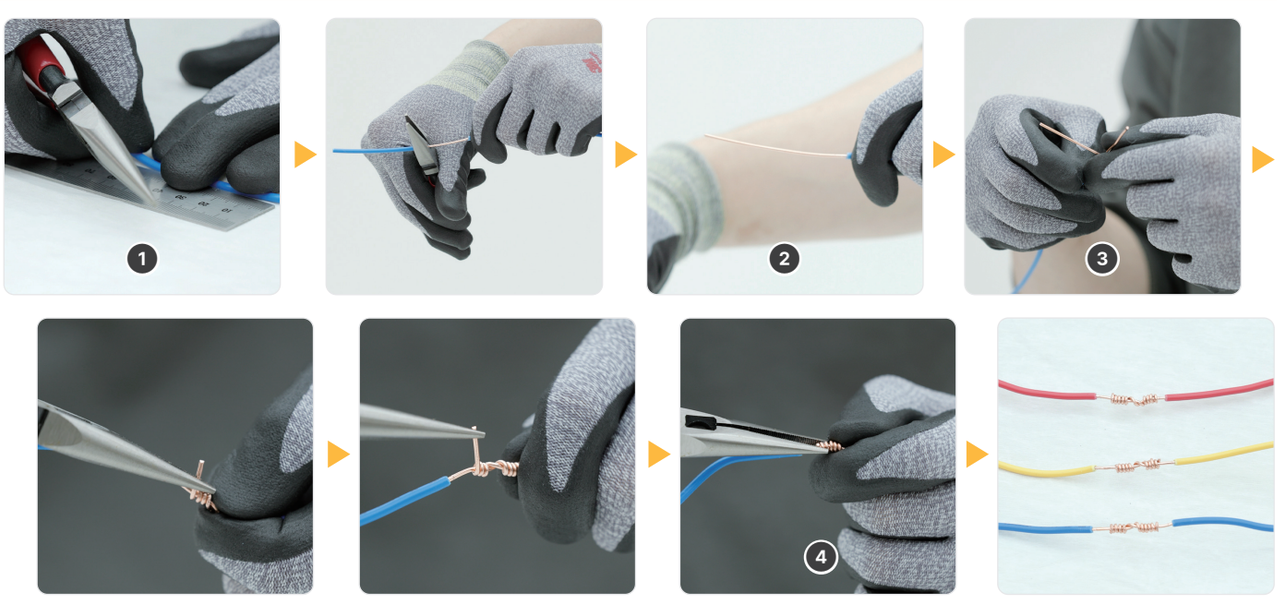

Job Category	Mining	Subject	Wire Connection


2) Requirements


① Using long-nose pliers, peel off the sheath of the given wire about 6 cm.

② Other wires too.

③ Using long-nose pliers, twist the two copper wires together. (Wires of same color must be tied)

Ex)

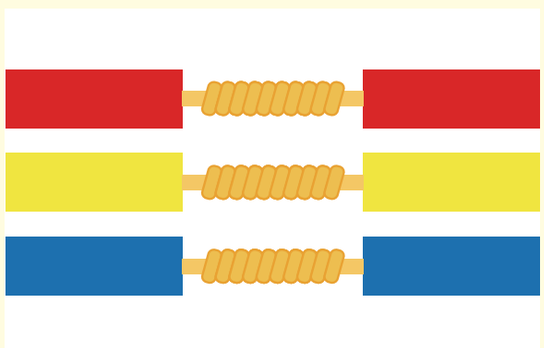

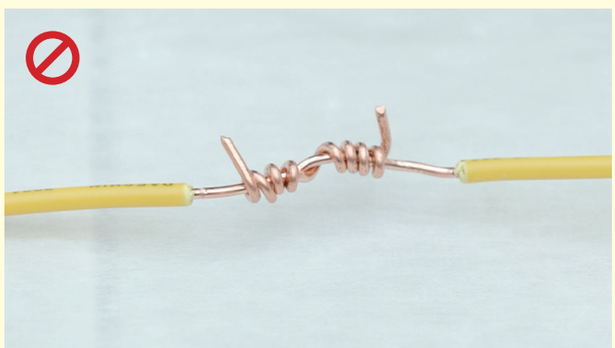

④ Secure the ends of the twisted copper wires using long-nose pliers.

❖ A total of six wires are provided, consisting of two red, two yellow, and two blue wires.

Job Category	Mining	Subject	Wire Connection

Ⅲ Equipment & Materials

Equipment & Materials		Spec.	Unit	QTY	Remakrs
	Long-nose Pliers	· Standard	PCS	1	For 1 person
	HIV HIV wire	· 2.5 SQ, 6 per person (2 per color) · Colors: red, yellow, blue · Min 30 cm or more, 1.5 to 2 mm thick	PCS	6	For 1 person
	Ruler	· 30cm or more	PCS	1	For 1 person
	Safety Gloves	· Standard	PCS	1	For 1 person