



D20&D60&D70 DRIVER AND FLASH TOOL



V1.0.0


Catalogue

1. USB Serial Port Driver Installation2
2. Update the D20&D60&D70 ROM.....5


1. USB Serial Port Driver Installation

1. Install serial port driver: [Driver_Auto_Installer_exe_v5.1632.00.zip](#)
2. Open the Setup program by clicking on the DriverInstall.exe.

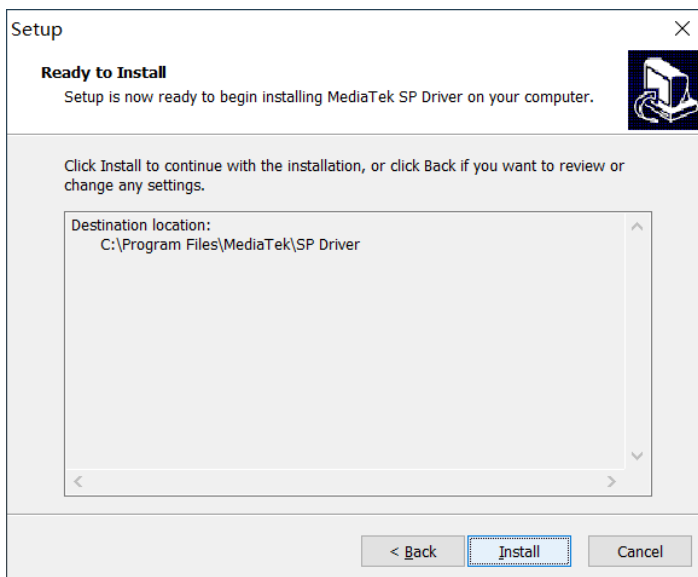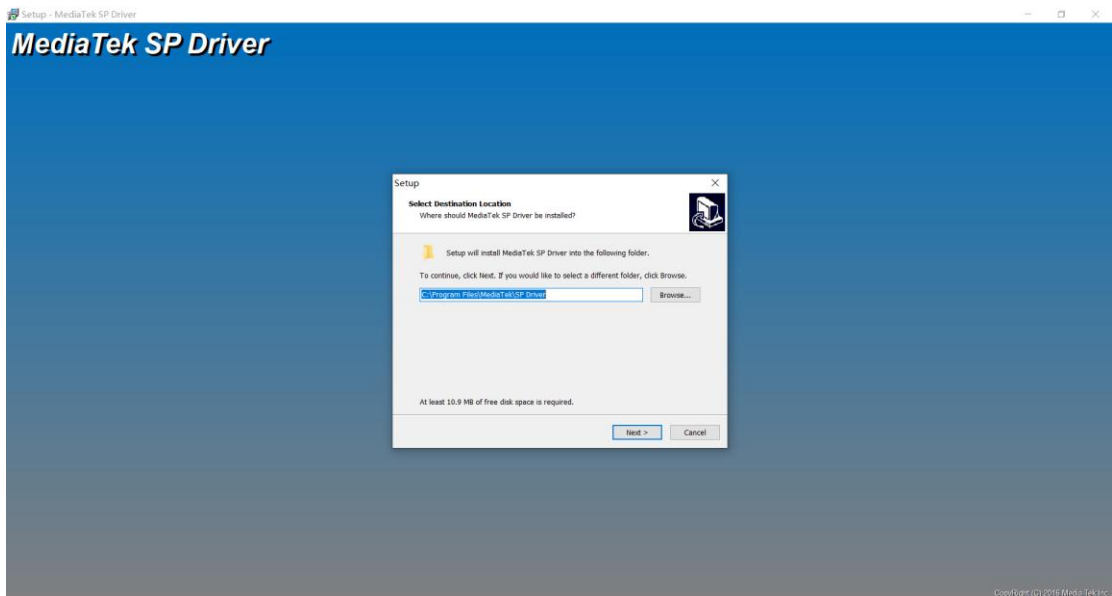


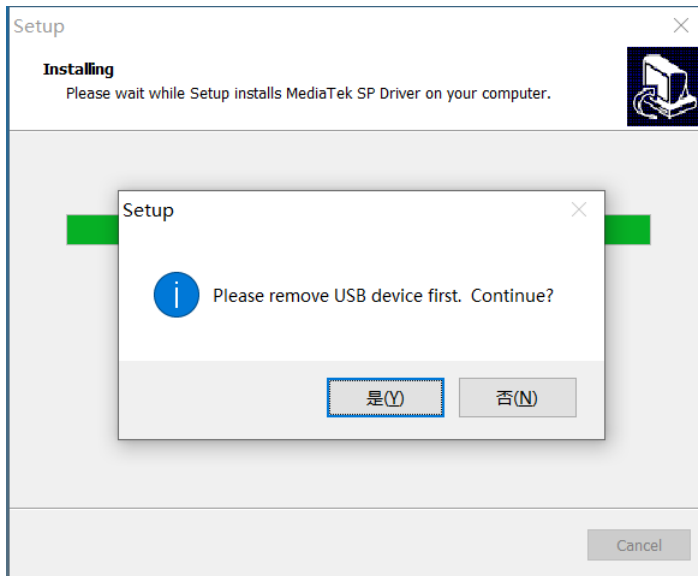

3. Remove USB and click Next.

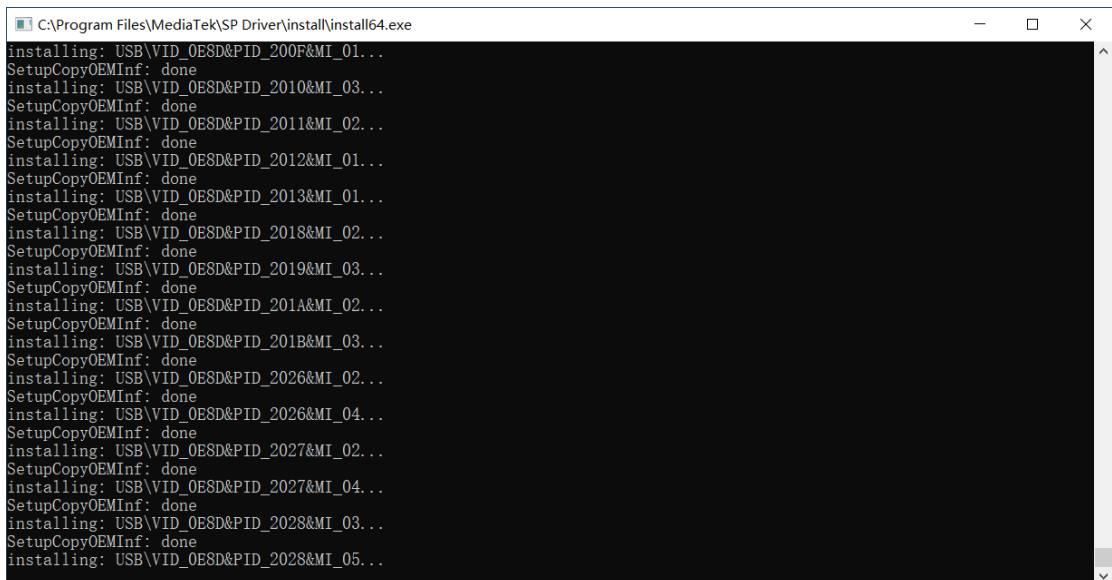


4. Waiting for update to succeed. After the installation finished, restart the computer to initiate the driver.

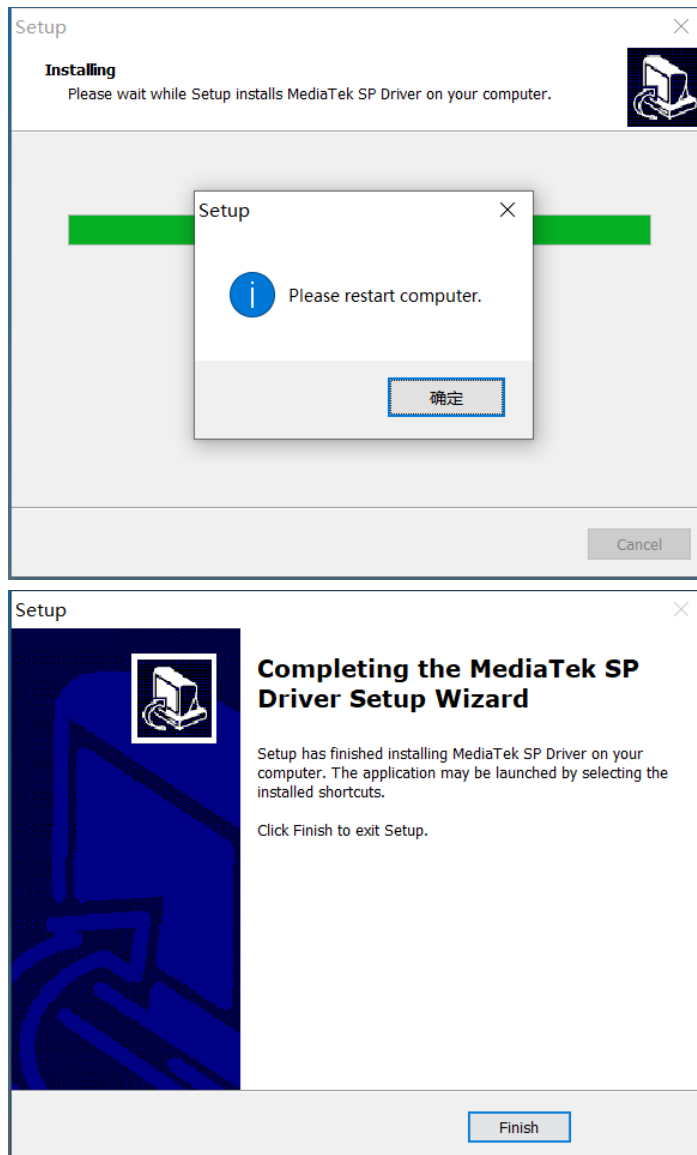



2. Update the D20&D60&D70 ROM


1. Download [SP_Flash_Tool_exe_Windows_v5.1944.00.000 tool](#)
2. Shut down the D20&D60&D70 device.
3. Extraction the “SP_Flash_Tool_exe_Windows_v5.1944.00.000” folder, then click the “flash_tool.exe” file.

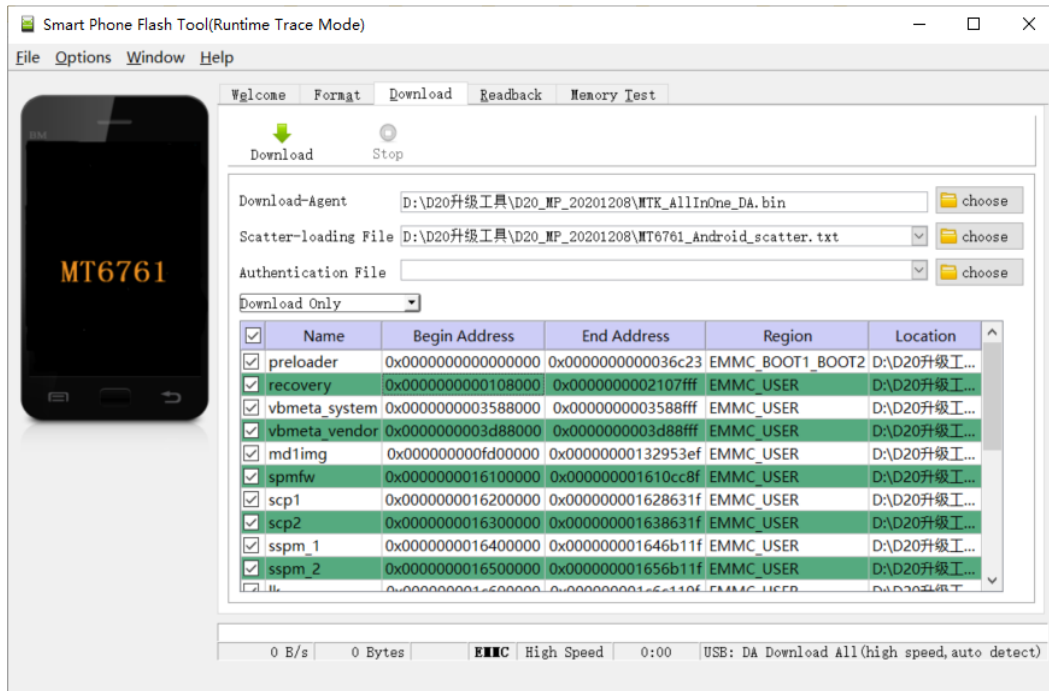

4. Select Download-Agent.


Choose the file “MTK_AllnOne_DA.bin” file in the
“D20_Customer_debug/release_yyyymmdd” folder, as follows:

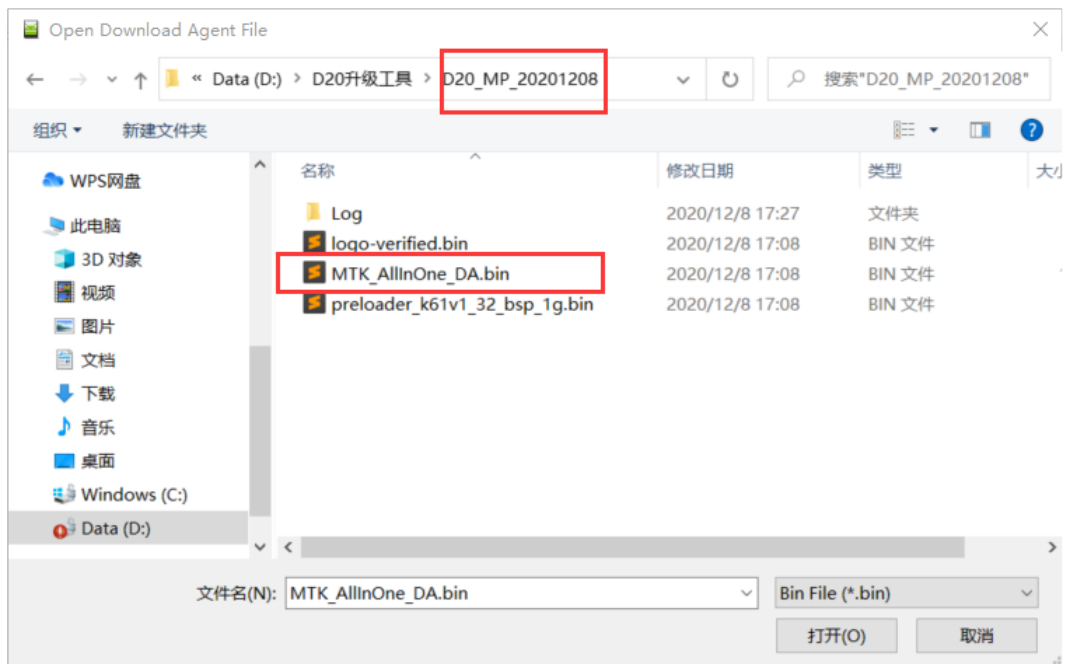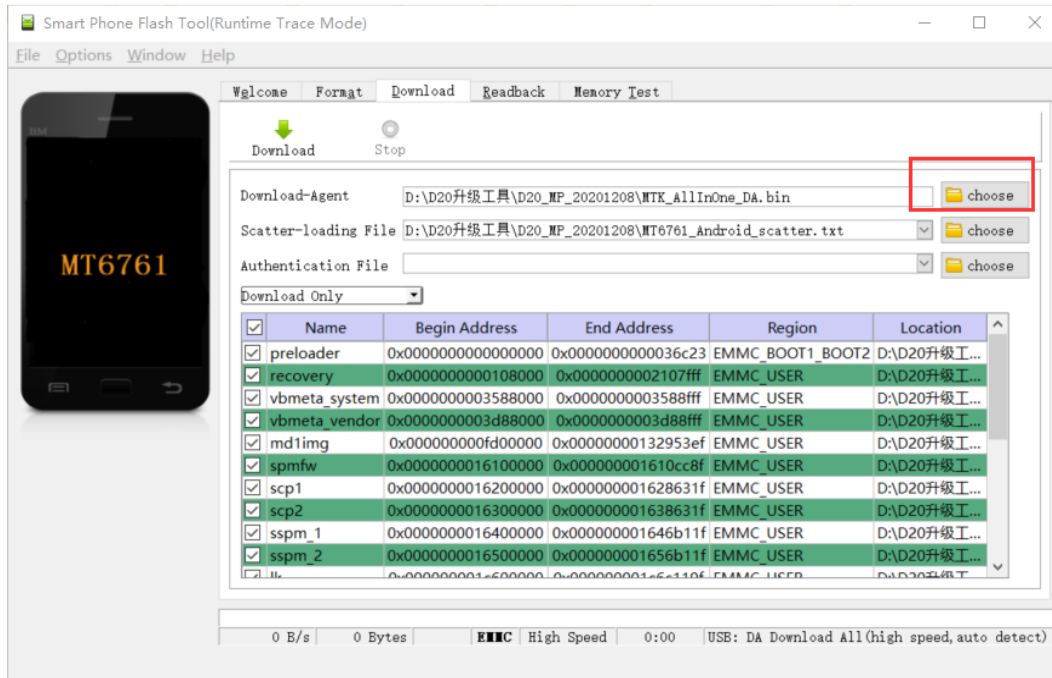

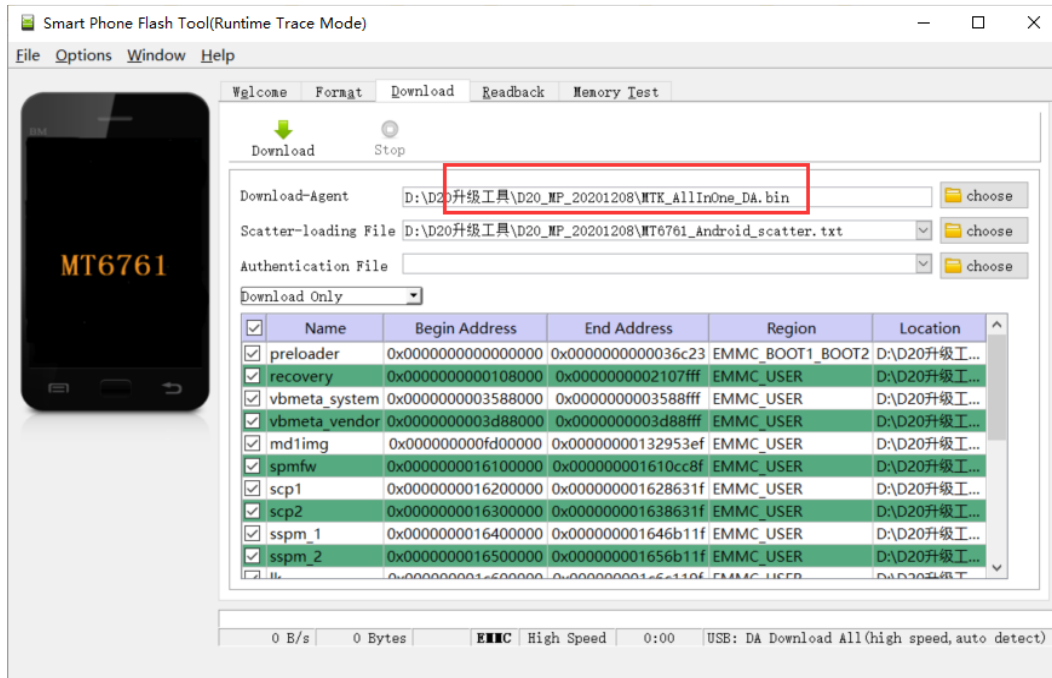


5. Select Scatter-loading File.

Choose the “MT6761_Android_scatter.txt” file in the
“D20_Customer_debug/release_yyyymmdd” folder, as follows:

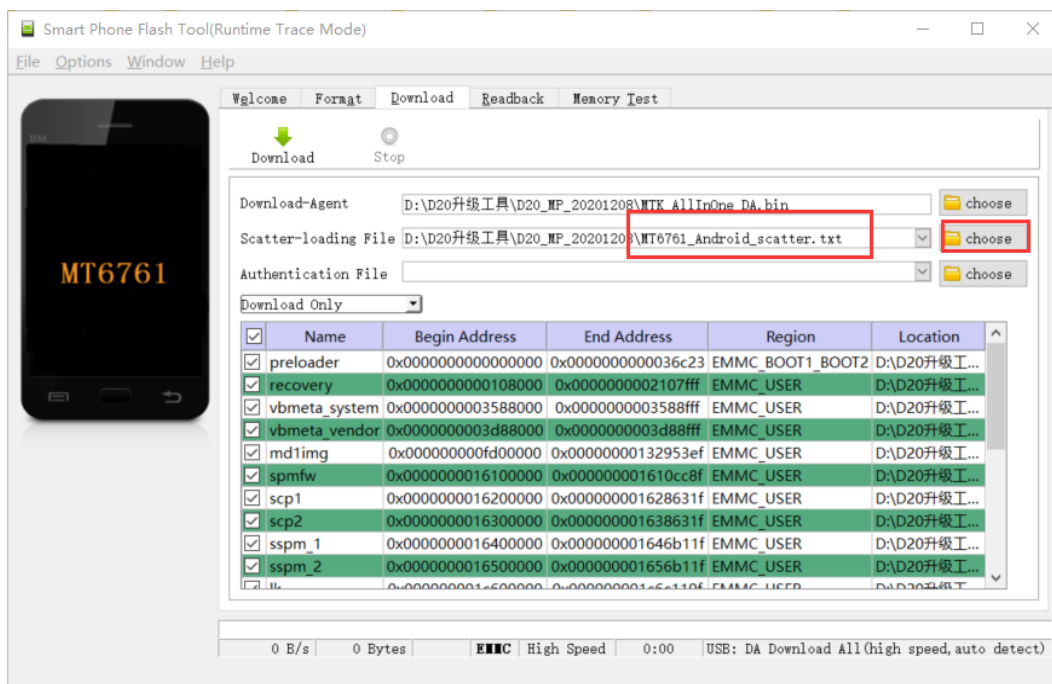

- Click "Download" button to begin update. Then connect the device with PC via USB.

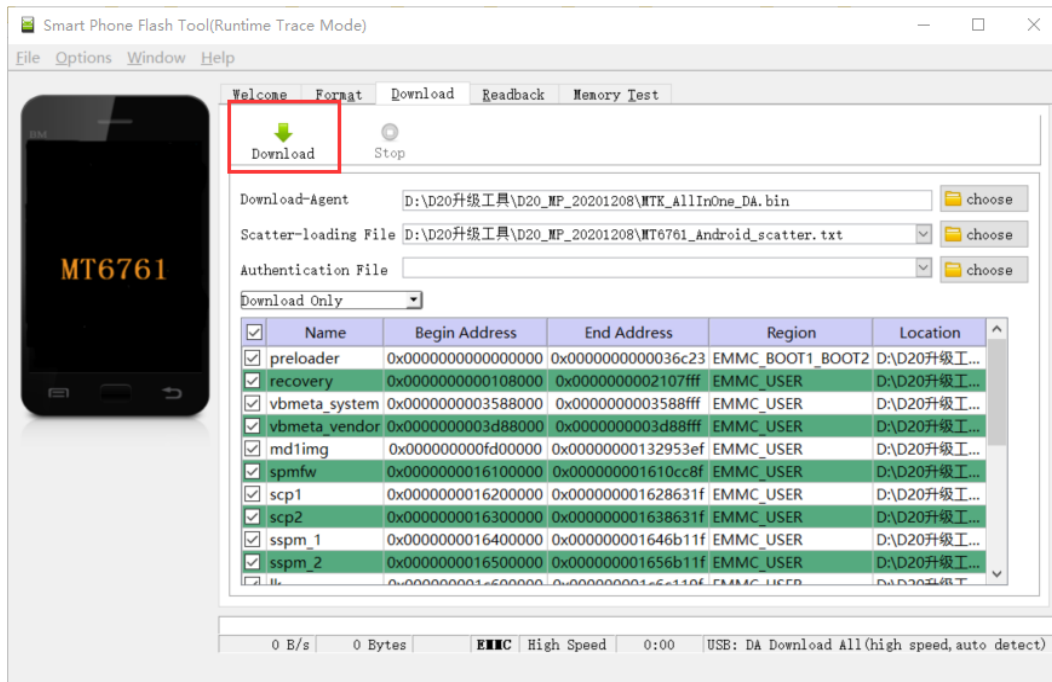

- Waiting for update to succeed.

