
Your controls inside Home Assistant

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

The Festavia Studio custom card lives on a Home Assistant dashboard. Choose colors, an animation, direction, brightness and speed in one place. The Studio switch starts or stops playback; the preview shows the selected pattern.

This desktop example has a three-color background and a separate two-color snake. The screenshots use the released integration, not a design mockup.

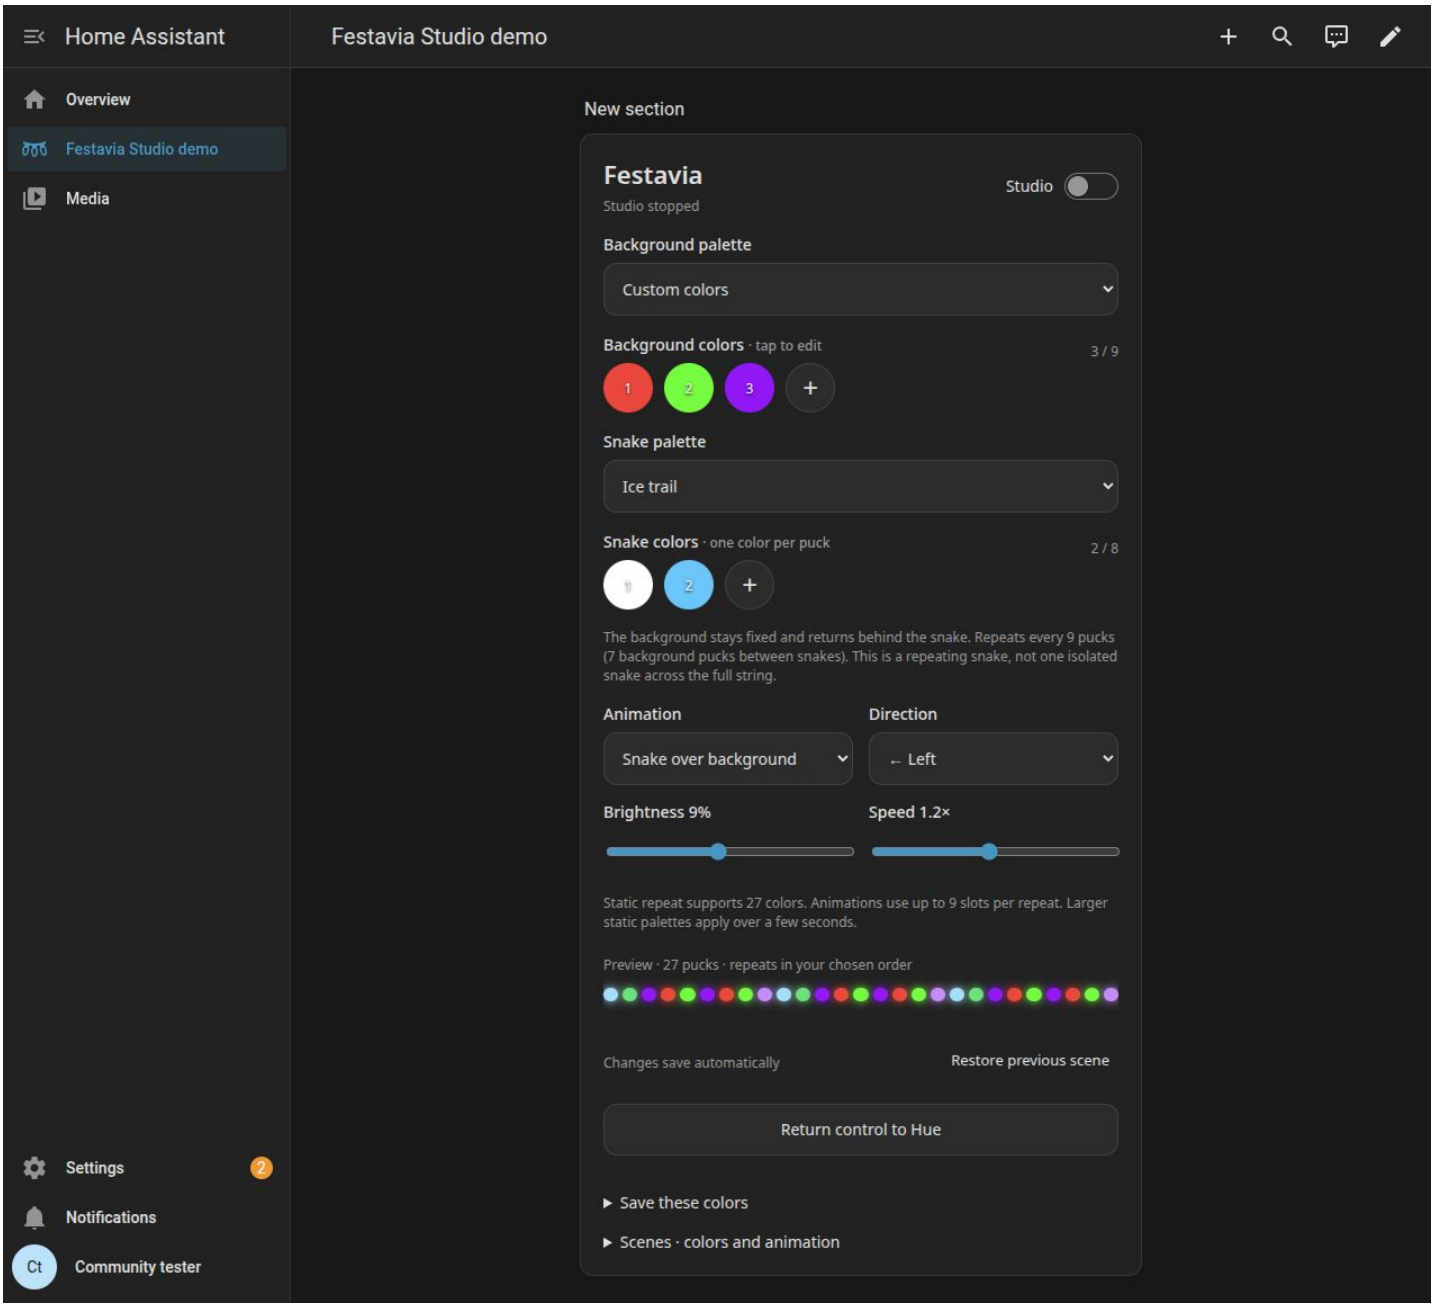


Choose colors in puck order

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Tap a numbered color to edit it, or tap + to add another. Static repeat places one chosen color on each puck in order, then repeats the list. Here red, green and purple repeat across 27 demo pucks.

The displayed color capacity follows the configured light quantity. This example shows 27; it is not a universal 27-puck requirement. Larger static palettes apply over a few seconds.

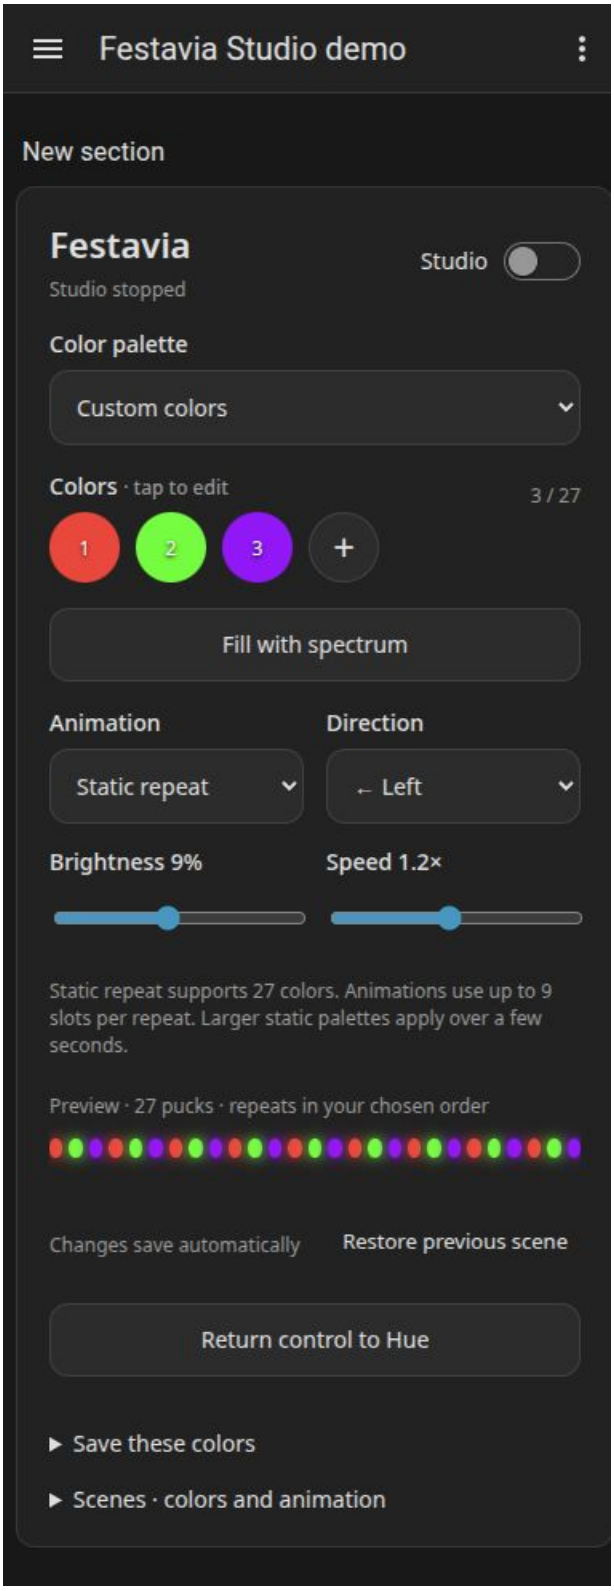


Edit a color directly

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Tap the wheel or a quick swatch, then refine hue and saturation. Expand Advanced color to enter a precise #RRGGBB value. Move the selected color left or right to change its position, or remove it.

Done closes the editor. Shared palette tone affects the palette; the main Brightness control sets light output. This screenshot is a crop of the actual editor.

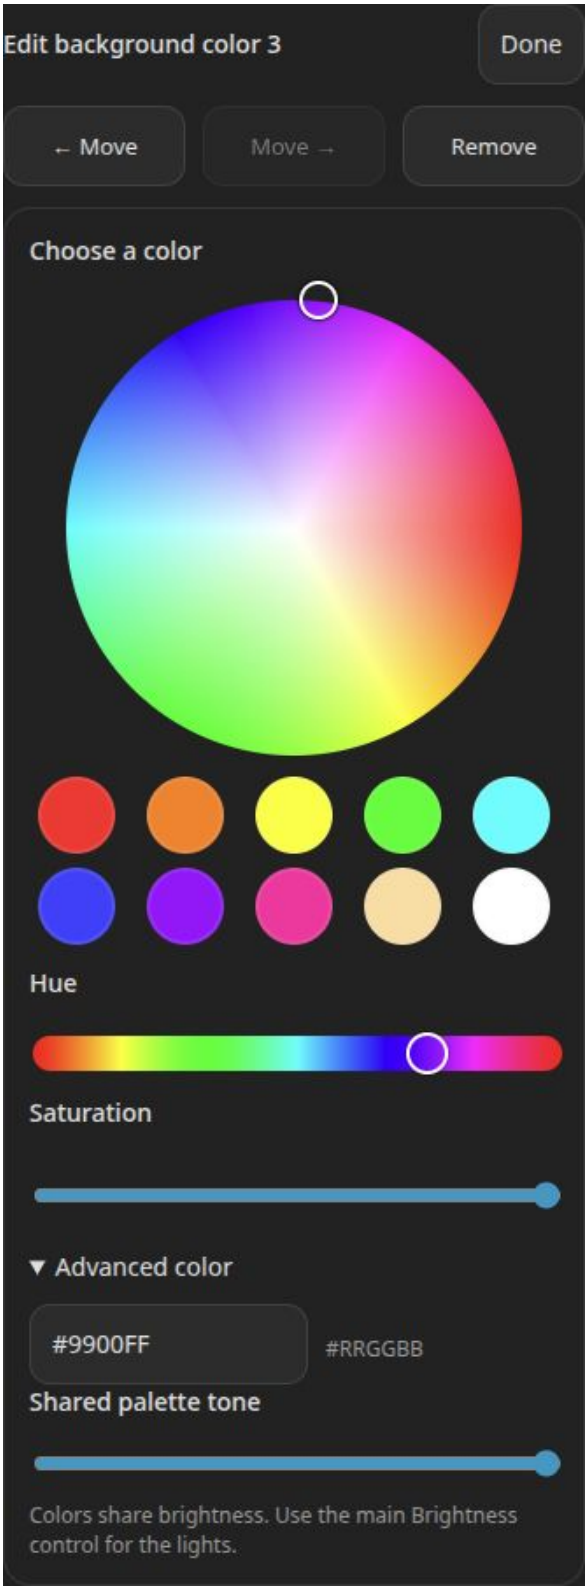


Save colors or save the whole look

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Save these colors stores a palette: colors only. Selecting that palette keeps the current animation. Scenes stores colors together with animation, speed, direction and brightness.

Use a palette when you want the same colors in different effects. Use a scene when you want to recall the whole configuration. Both save controls are part of the same card.

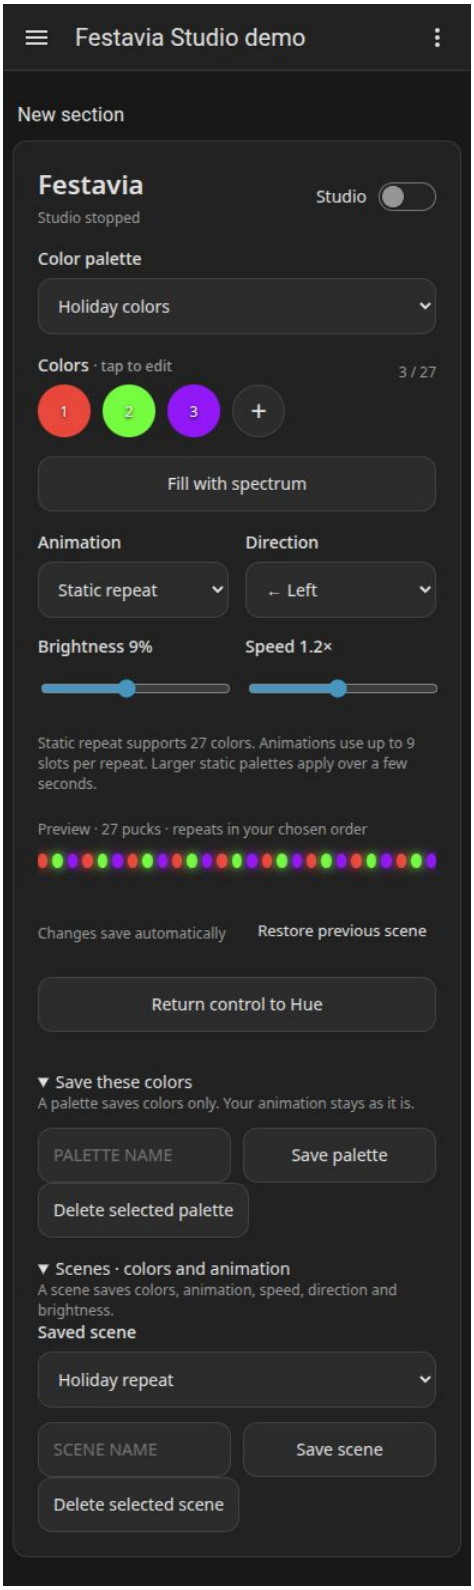


Keep a background behind the moving snake

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Choose Snake over background. Background palette sets the stationary colors; Snake palette sets the moving colors. After the snake passes, the background returns. Direction and Speed control its travel.

This released mode repeats every 9 pucks, with up to 9 animation slots per repeat. It is a repeating snake, not one isolated trail across the entire string. The companion GIF records this actual on-screen preview, not physical light performance.

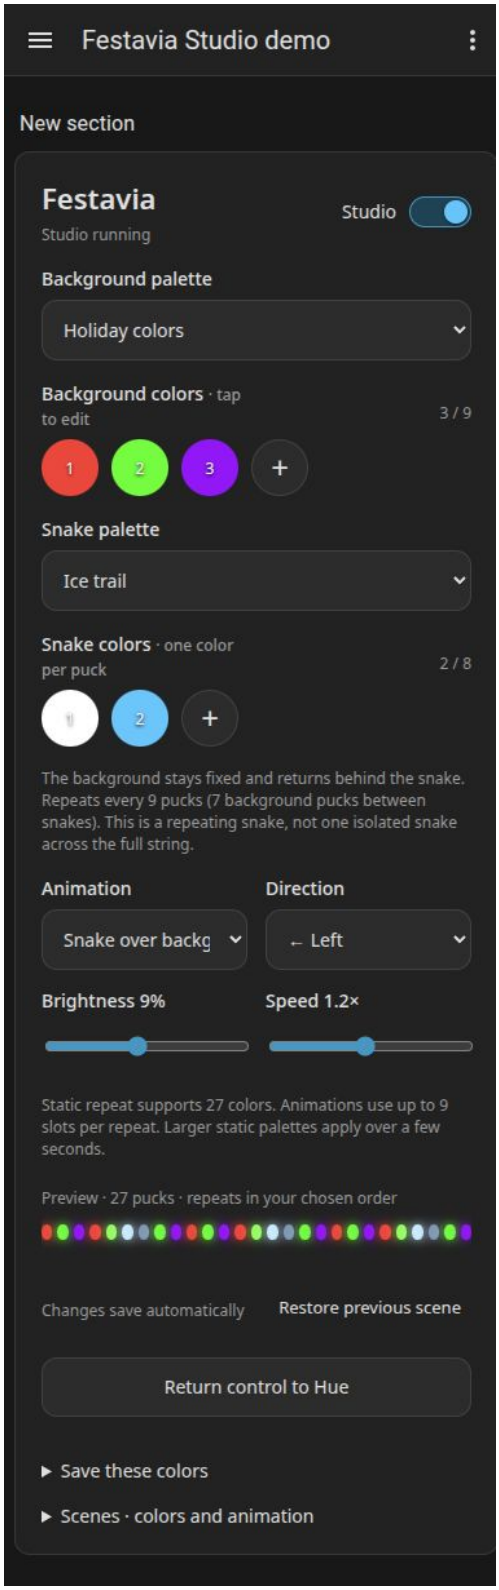


Select an animation

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

The effect menu offers Static repeat, Smooth flow, Step chase, Bounce, Color fade, Color wave, Breathing, Heartbeat and Snake over background. The menu screenshot shows its visible portion; Snake is below the fold.

Choose the effect in the card or through the native Home Assistant Effect entity. Static repeat supports the configured puck count; animations use up to 9 slots per repeat in this release.

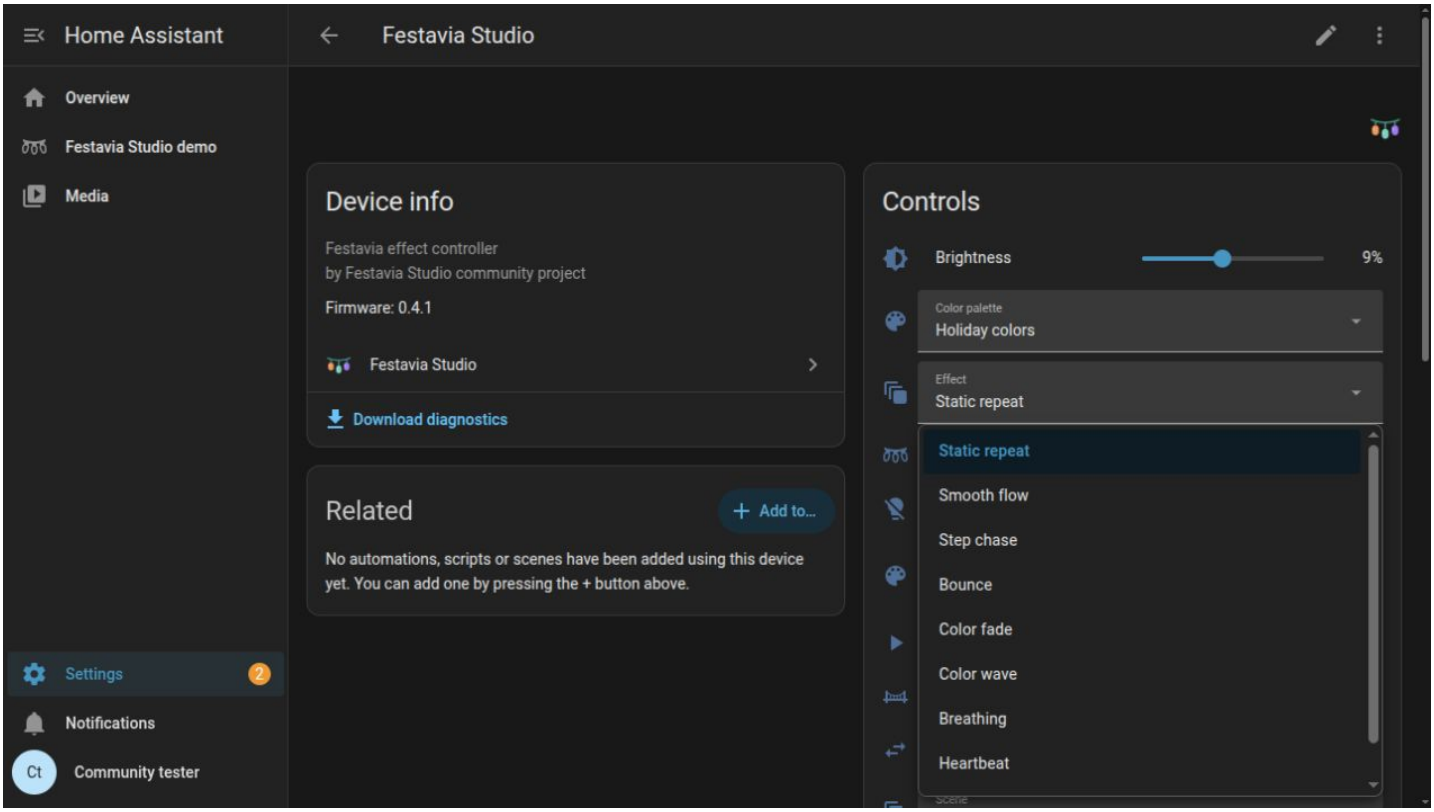


Find the integration in HA settings

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Open Settings > Devices & services > Festavia Studio to reach the integration. The demonstrated release is 0.13.0. The controller exposes standard Home Assistant entities as well as the custom card.

This demo contains one controller device and 17 entities. No separate product web app is required to adjust the Home Assistant edition.

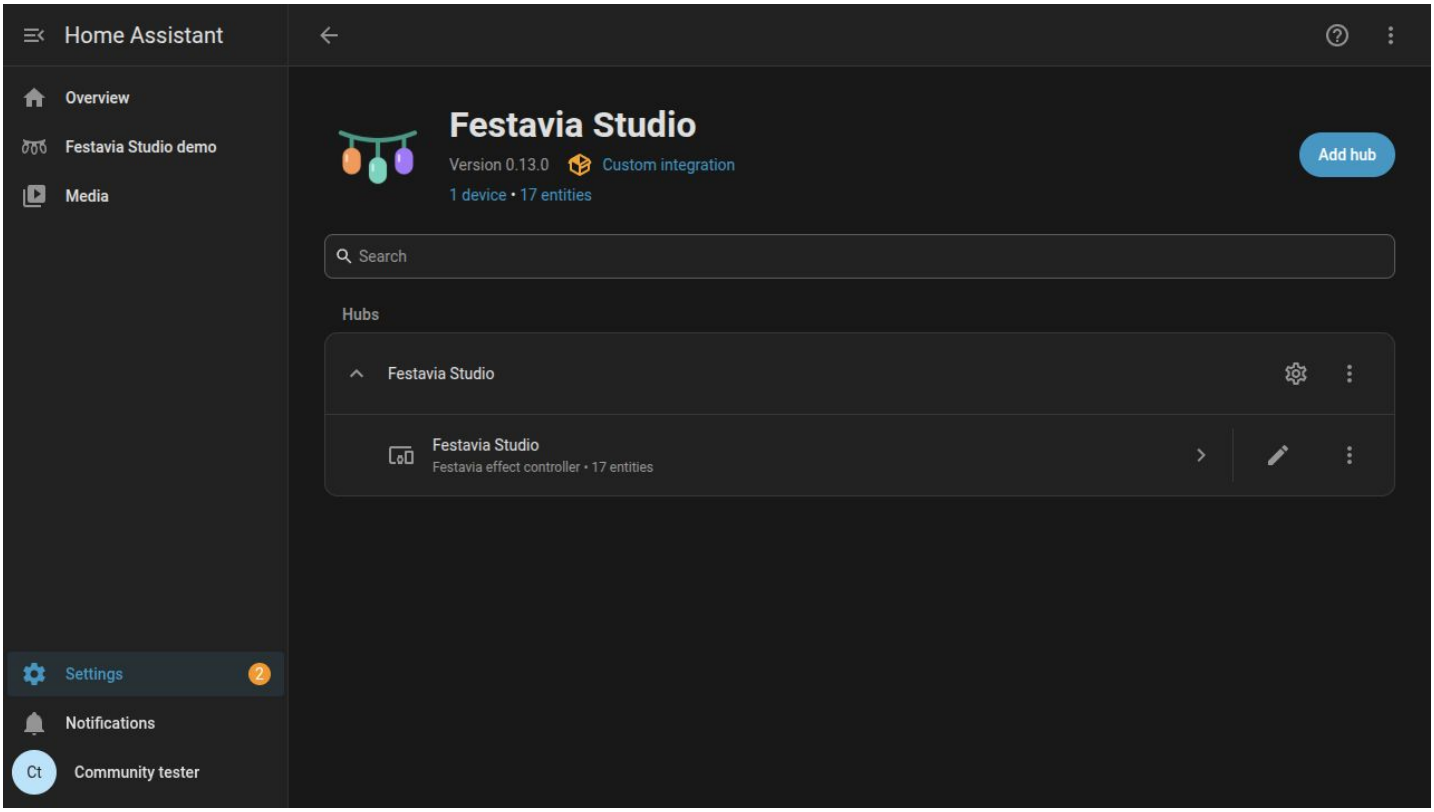


Use native controls and Hue takeover

Actual released UI · Demo devices · Integration 0.13.0 · Captured November 11, 2026

Open the controller device to find brightness, palette, effect, scene, speed, play, stop/restore and return-to-Hue controls. Configuration includes Allow Hue takeover, a brightness limit and firmware status.

Allow Hue takeover lets supported bridge commands stop Studio playback so Hue can take over. Return control to Hue releases it manually. The demo shows a 19% limit and 9% brightness; no real lights were commanded.

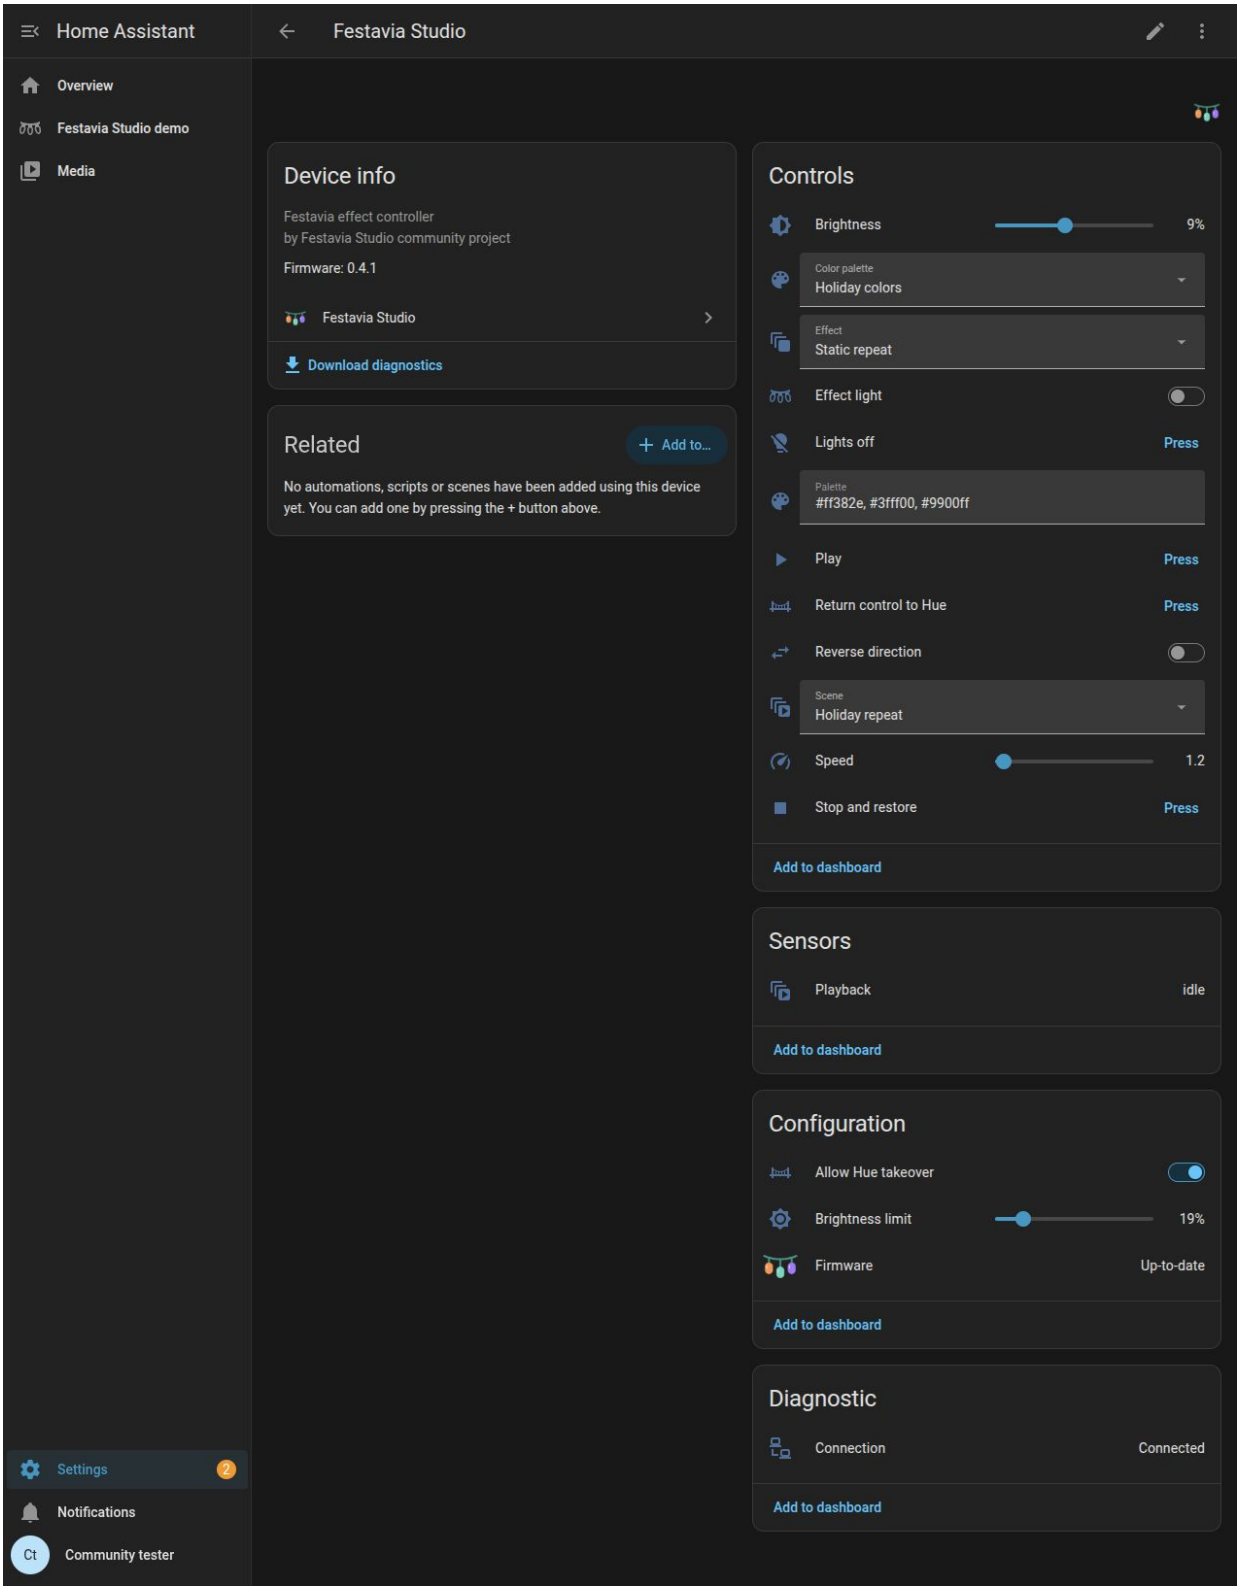


Open Festavia Direct in the Hue app

Actual Hue-app screenshot supplied by the project owner · November 11, 2026

The Hue-only edition uses the normal Hue app. Open the Festavia Direct zone to find its preset scene and virtual controller light. Festavia preset 1 recalls a complete saved program. The physical Festavia remains in its original room.

The virtual lights represent settings, not individual pucks. Hue may display the generic name Extended color light 1; use the smaller Festavia role label to identify each control. This and the next three screenshots were supplied by the project owner.

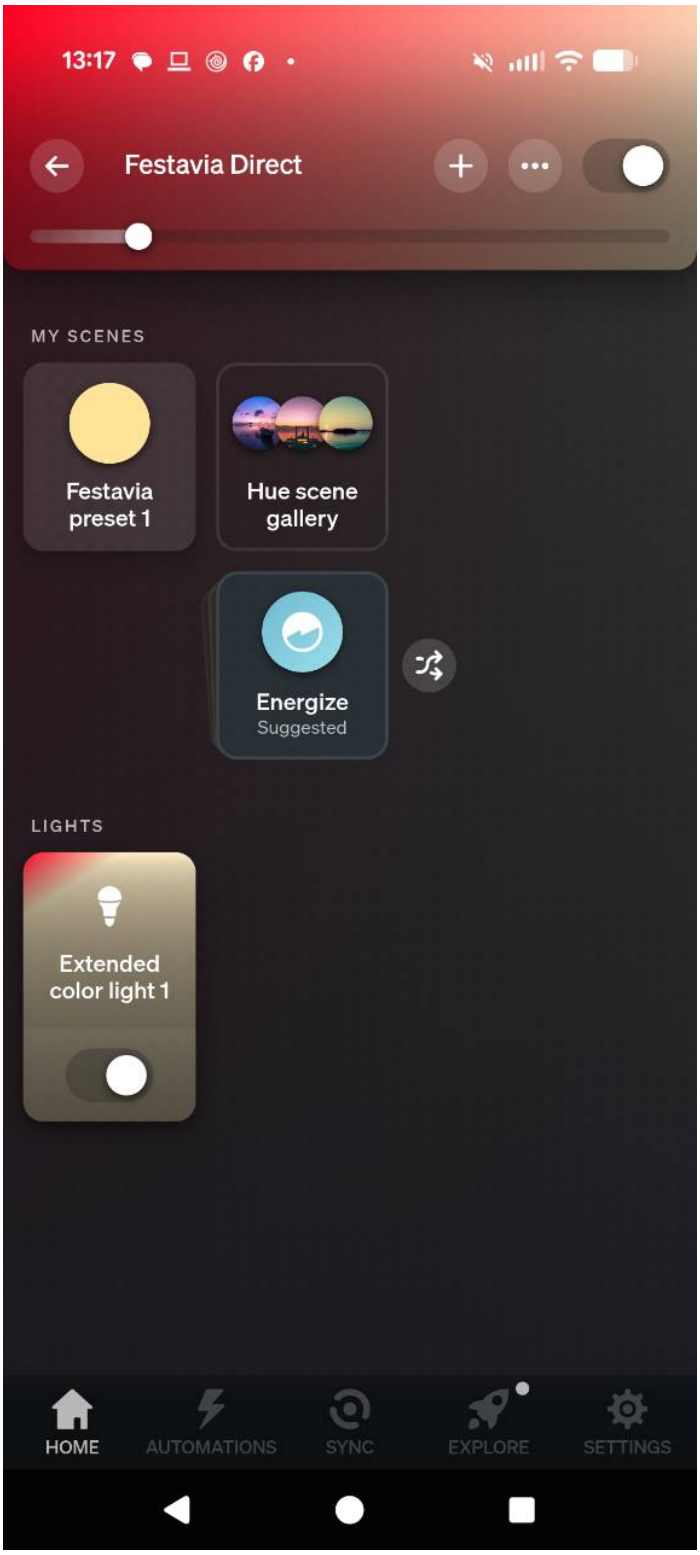


Edit a color at the chosen position

Actual Hue-app screenshot supplied by the project owner · November 11, 2026

Use the bottom row to select a controller role. Master starts or stops output and sets actual brightness. Position uses its brightness slider as an index: 1% means position 1, 2% means position 2. Colour uses the ordinary Hue color wheel to edit that selected position.

Choose a Palette layer first, then edit its positions in order. Keep Master off while building a layout. Leave the parameter controls on so Hue enables their sliders. Brightness on parameter controls is a setting value, not the brightness of the real lights.

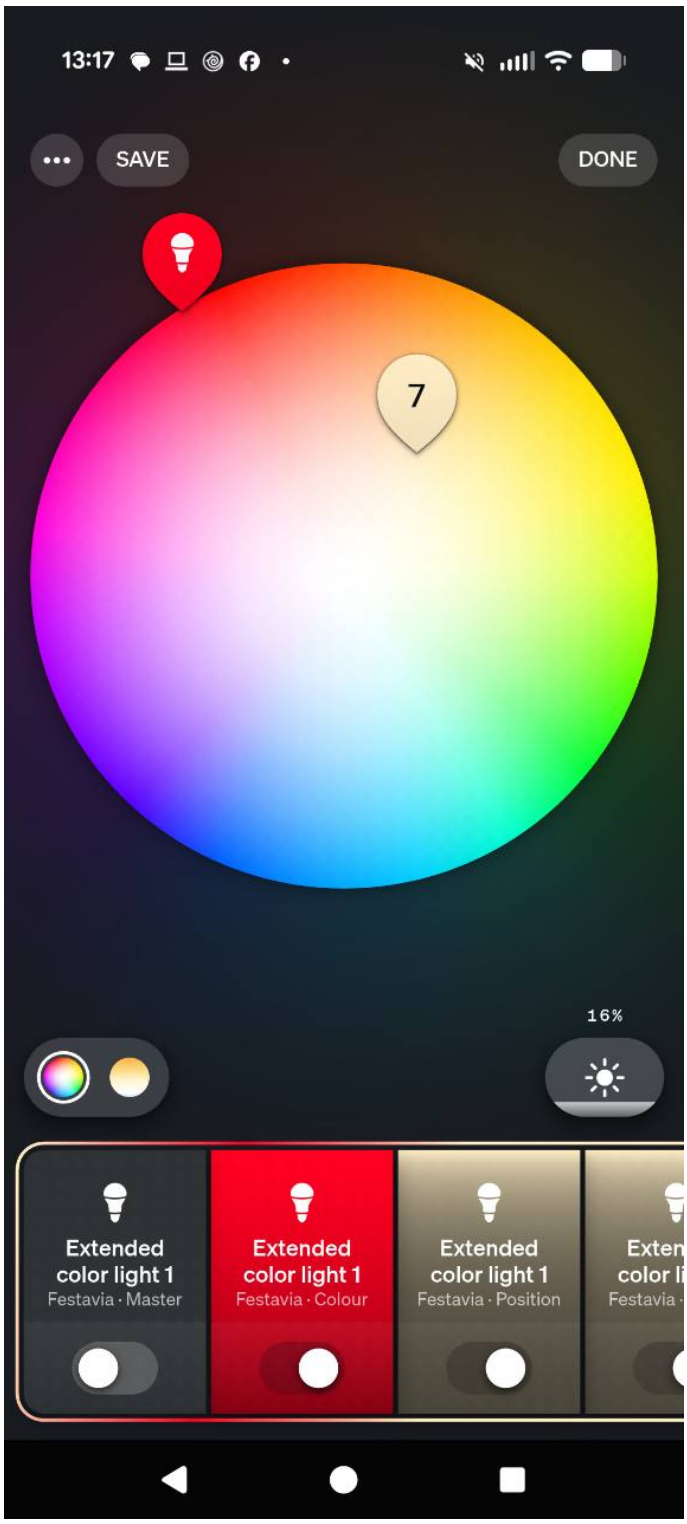


Set the layer, motion and direction

Actual Hue-app screenshot supplied by the project owner · November 11, 2026

Scroll the bottom row horizontally to reach Palette, Motion and Direction. Palette uses white temperature to choose background (cold), snake (middle) or individual pucks (warm). Its brightness sets the number of background or snake colors. Then edit those colors with Position and Colour.

Motion uses white temperature to select the effect; its brightness sets speed (5% = 1x, 10% = 2x). Direction brightness below 50% means left; 50% or above means right. The screenshot shows the control tiles; open the individual role to reach its sliders. The reference guide lists all mode positions.

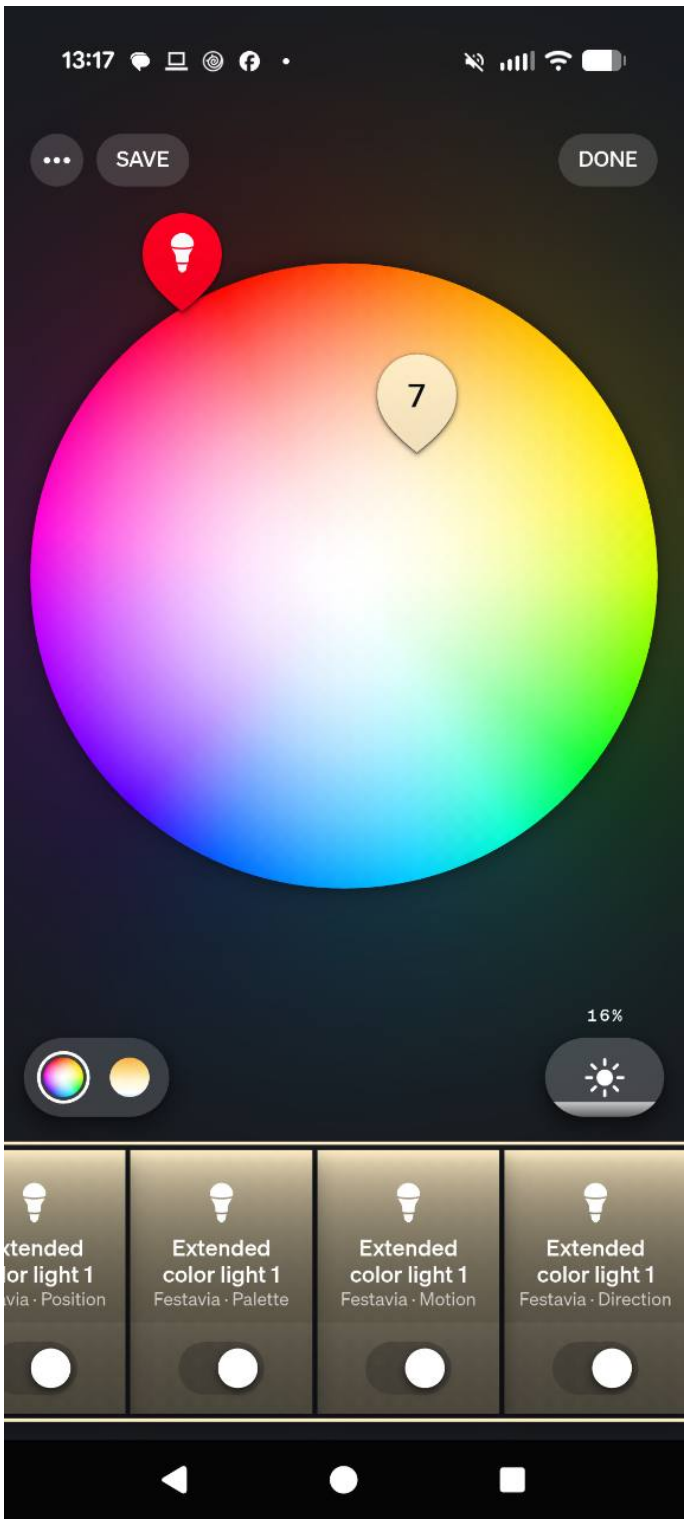

Adjust shape and recall saved programs

Actual Hue-app screenshot supplied by the project owner · November 11, 2026

Shape uses white temperature to select width, span, phase, brightness cap, smoothing or Hue takeover. Its brightness sets the selected value. Preset / Apply uses 1-16% to recall a preset slot; 25% applies edits, 50% saves, 75% loads, and 100% saves and applies.

Let the command slider settle and return to its preset-slot value before saving a Hue scene. The Hue SAVE button saves a Hue scene; it is separate from saving a controller preset. Keep dynamic Hue scene playback off for these control scenes: the ESP32 supplies the animation.

