Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Noell Crane Systems
(China) Limited

China Merchants
Zhangzhou Development Zone
Zhangzhou 363105, Fujian, China

Phone: +86 596 685 1888
Fax: +86 596 685 1889

Electrical drawings

RTG 50/26.50/5+1/AC

78.5692.60.00

AMPT Egypt

Job No.: 1255

Costumer: AMPT Egypt

Year of manufacturing: 2012

Revision:

Designer: XU HR

Checked: LIU KP

Drawings approved:

City, Date

Signature NOELL's job manager

City, Date

Signature Costumer

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Function:

=00	General technical informations
=10	power input set
=11	feeding
=12	lighting
=17	operator's cab
=18	Communikation systems
=20	Main drives
=21	Hoisting unit
=31	Trolley travelling unit
=34	Skew/Trim system
=41	Gantry travelling unit
=42	Wheel turning unit
=50	Anti sway unit
=51	Spreader
=60	Cms&Rcms unit
=61	PLC system
=71	Control Desk

Location:

+ASC	Ascent e-house side to cabin
+ASD	Ascent to diesel-platform
+CAB	Operator's cabin
+CAJ	Junction box in Operator's cabin
+CON	Operator's control desk
+DGS	Main diesel-generator-set
+DS	Sillbeam diesel side
+DSJ	Junction box on Sillbeam diesel side
+DSP	Platform diesel side
+EH	E-House
+EH1 (2...7)	E-House mounting panel 1 (2...7)
+EHR	Roof e-house
+EHS	Sillbeam e-house side
+ESJ	Junction box on Sillbeam e-house side
+GR1	Girder 1 (right hand side)
+GR2	Girder 2 (left hand side)
+GRJ	Junction box on Girder 1
+HB	Headblock
+HBJ	Junction box on Headblock
+SPR	Spreader
+TR	Trolley
+TRJ	Junction box on Trolley
+GCJ	Junction box ground control station

				Date		Costumer	AMPT Egypt	NOELL	Functions/locations	Type RTG 50/26.50/5+1/AC =00
				Designer	XU HR					
				Checked	LIU KP					Job No. 1255 Drawing No. 78.5692.60.00 Sheet 2 5 Sh.
Ind.	Revision	Date	Name	Standard		Source:			Allgemeines / General	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Revision	drawings	desinger	check	approved
A	11/11, 18/3 ,34/4 ,61/93 ,42/6	XU HR	LIU KP	LI JB
B	11/9,11/18,11/14,34/2,34/3,42/1 50/9	XU HR	LIU KP	Stefano
C	42/17	XU HR	LIU KP	Stefano
D	42/6 42/10 42/4 42/8	XU HR	LIU KP	Stefano
E	12/22 18/3 42/8 42/10	XU HR	LIU KP	Stefano
F	=11/11.1 =11/17 =17/1 =42/17 =51/1 =51/2 =51/3 =61/85	XU HR	LIU KP	Stefano
G	=11/4.1 =11/5 =11/6 =11/27 =51/1 =51/3 =61/1 =61/11 =61/17 =61/72 =61/74 =61/85 =71/11	XU HR	LIU KP	Stefano
H	=11/8,=11/26,=12/4.1, =20/20, =12/2, =61/47	XU HR	LIU KP	Stefano
I	=10/1,=61/57.1,=42/10,=11/5	XU HR	LIU KP	Stefano

				Date		Costumer	Terminal stripes & boxes	Type RTG 50/26.50/5+1/AC =00
				Designer	XU HR	AMPT Egypt		
				Checked	LIU KP			Job No. 1255 Drawing No. 78.5692.60.00 Sheet 3 5 Sh.
Ind.	Revision	Date	Name	Standard		Source:	Allgemeines / General	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.


Terminal stripes & boxes:

=10	+DGS	-X10	cabinet power input set	=42	+EHS	-X42	terminal box corner 2
=11	+EH1	-X11	mounting panel feeding	=42	+DS	-X43	terminal box corner 3
=20	+EH2	-X12	mounting panel drives	=42	+DS	-X44	terminal box corner 4
=61	+EH5	-X15	mounting panel CMS	=42	+EHS	-X45	terminal box hydraulic unit e-house side
=11	+ESJ	-X18	terminal box sillbeam e-house side	=42	+DS	-X46	terminal box hydraulic unit dieselside
=11	+GCJ	-X19	ground control junctionbox e-house side	=11	+DSP	-X49	terminal box diesel platform
=31	+GRJ	-X20	cabinet girder	=50	+HBJ	-X50	terminal box head block
=31	+TRJ	-X30	cabinet trolley	=51	+SPR	-X51	terminal box spreader
=34	+TR	-X34	terminal box hydraulic unit trolley	=71	+CAJ	-X71	mounting panel operator's cab
=41	+DSJ	-X40	cabinet sillbeam dieselside	=71	+CON	-X73	control desk operator's cab
=42	+EHS	-X41	terminal box corner 1				

				Date		Costumer		Terminal stripes & boxes	Type	RTG 50/26.50/5+1/AC	=00
				Designer	XU HR		AMPT Egypt				
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 4
Ind.	Revision	Date	Name	Standard		Source:		Allgemeines / General			5 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

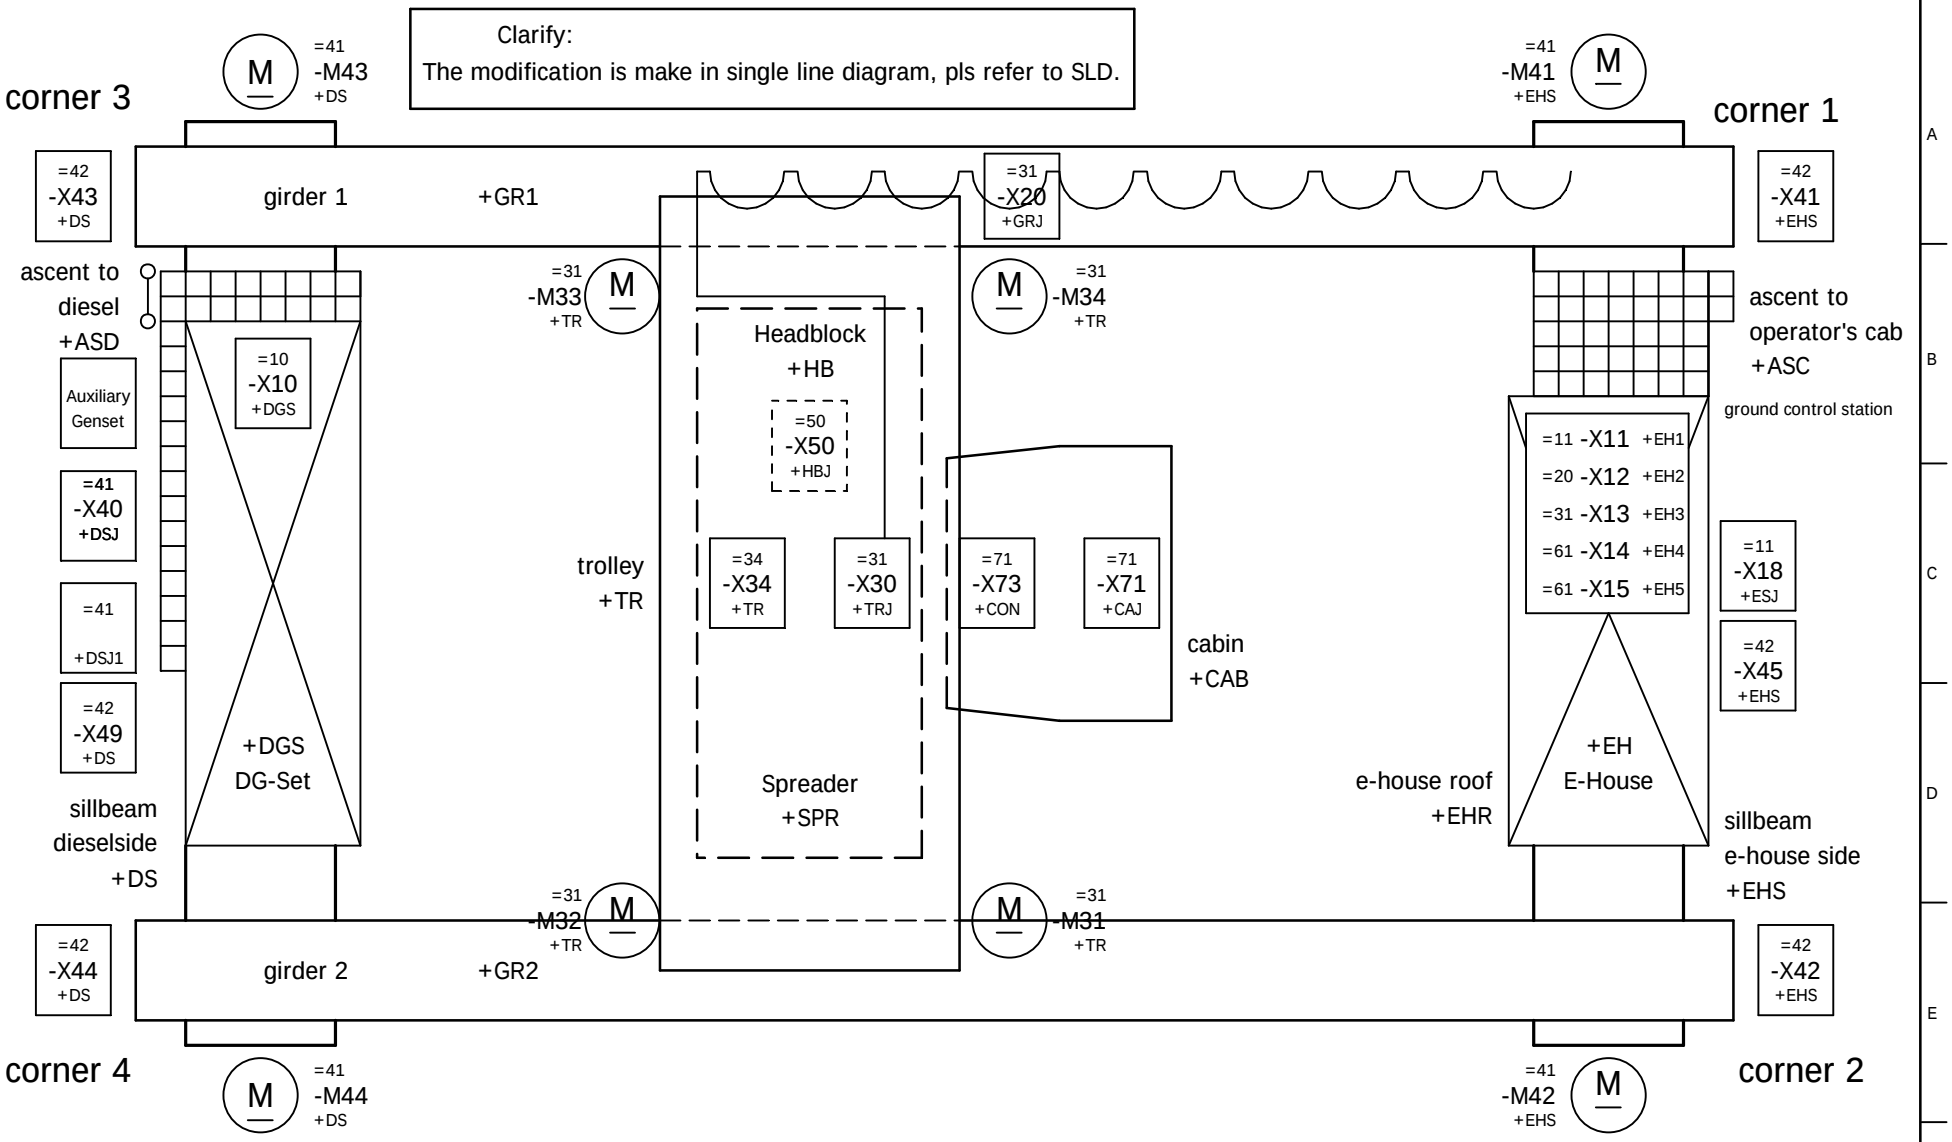


				Date		Costumer	AMPT Egypt	layout terminals + boxes	Type RTG 50/26.50/5+1/AC =00
				Designer	XU HR				
				Checked	LIU KP				Job No. 1255 Drawing No. 78.5692.60.00 Sheet 5 5 Sh.
Ind.	Revision	Date	Name	Standard		Source:		Allgemeines / General	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

main
diesel-generator set


NOTE:
1)the wire connection with plug/socket will be shown in genset drawing.

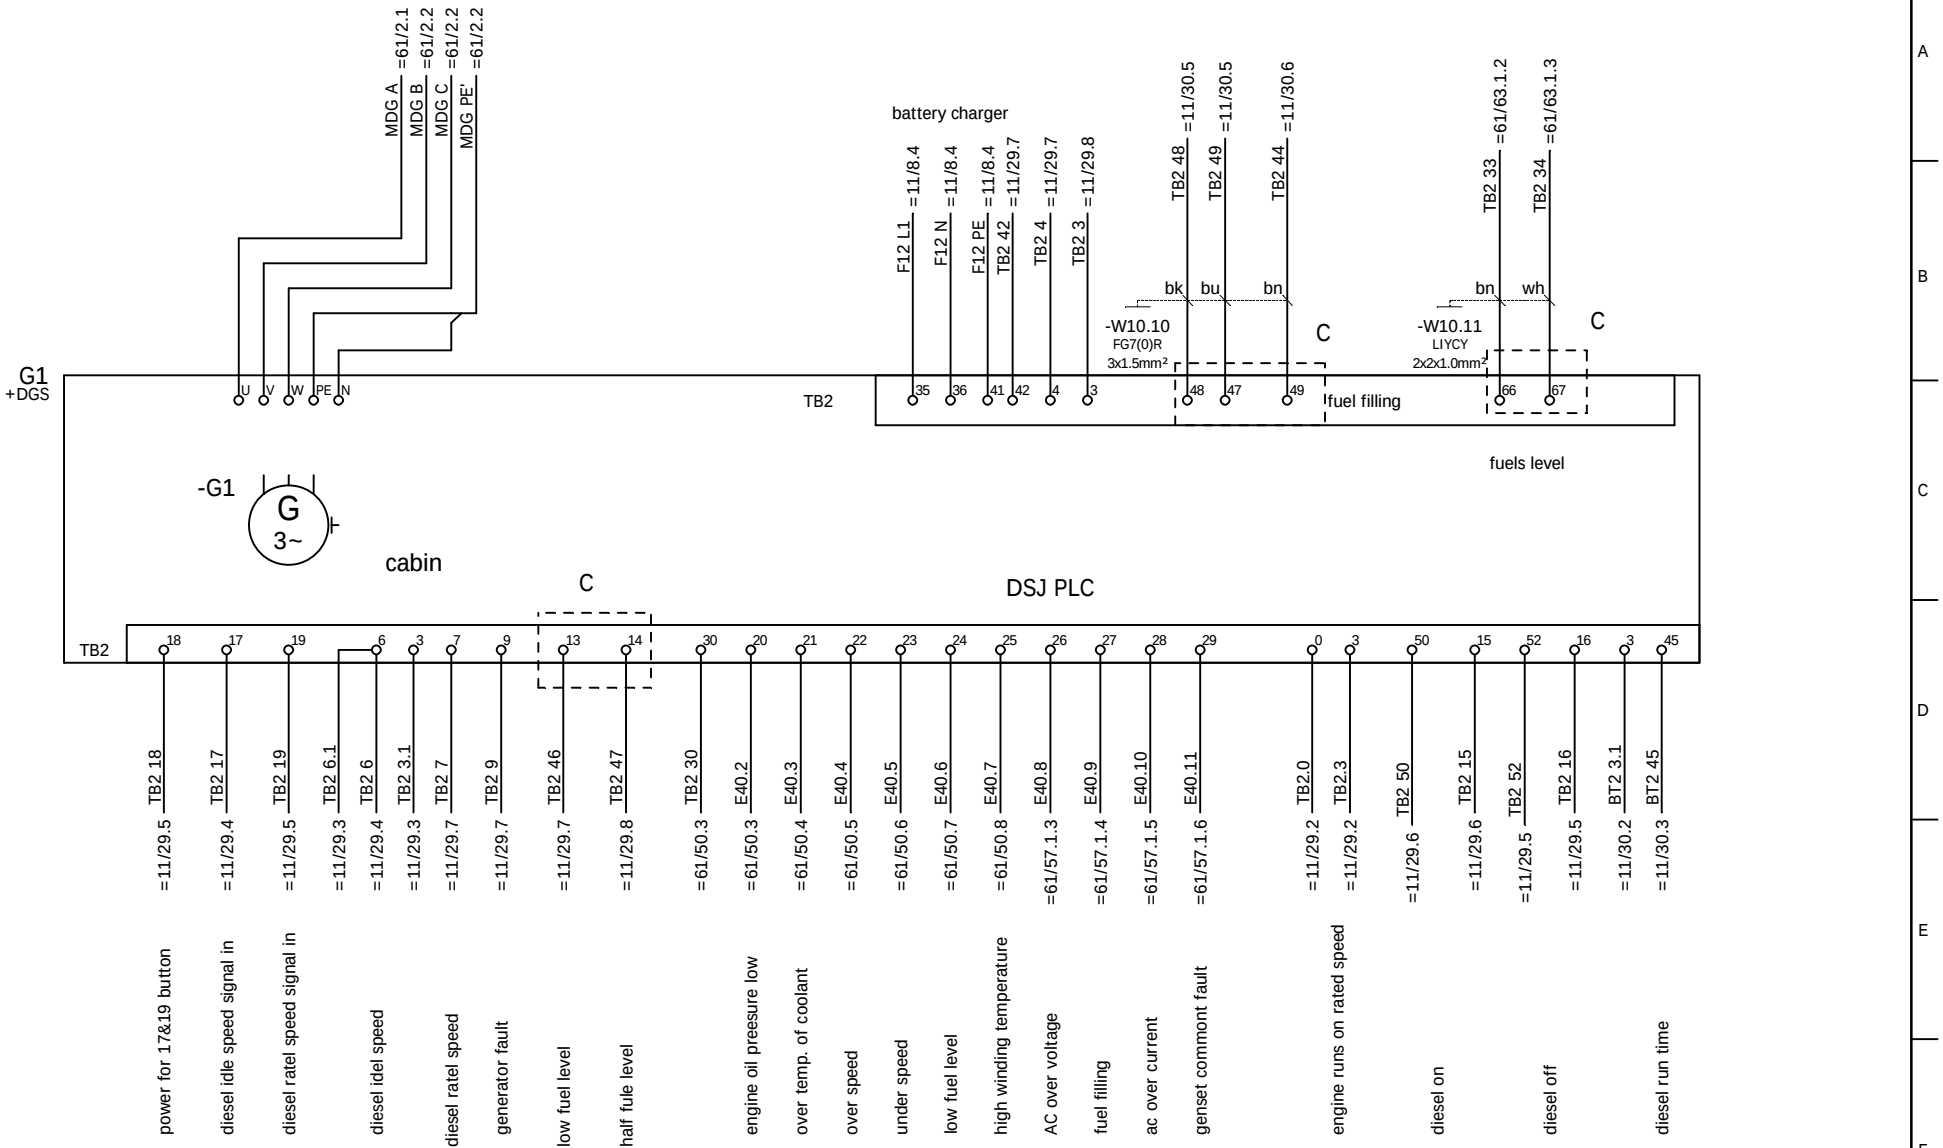

				Date		Costumer	NOELL	Type	RTG 50/26.50/5+1/AC	=10
				Designer	XU HR	AMPT Egypt				+DGS
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1
Ind.	Revision	Date	Name	Standard		Source:	Stromlaufplan / Circuit Diagram			1 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

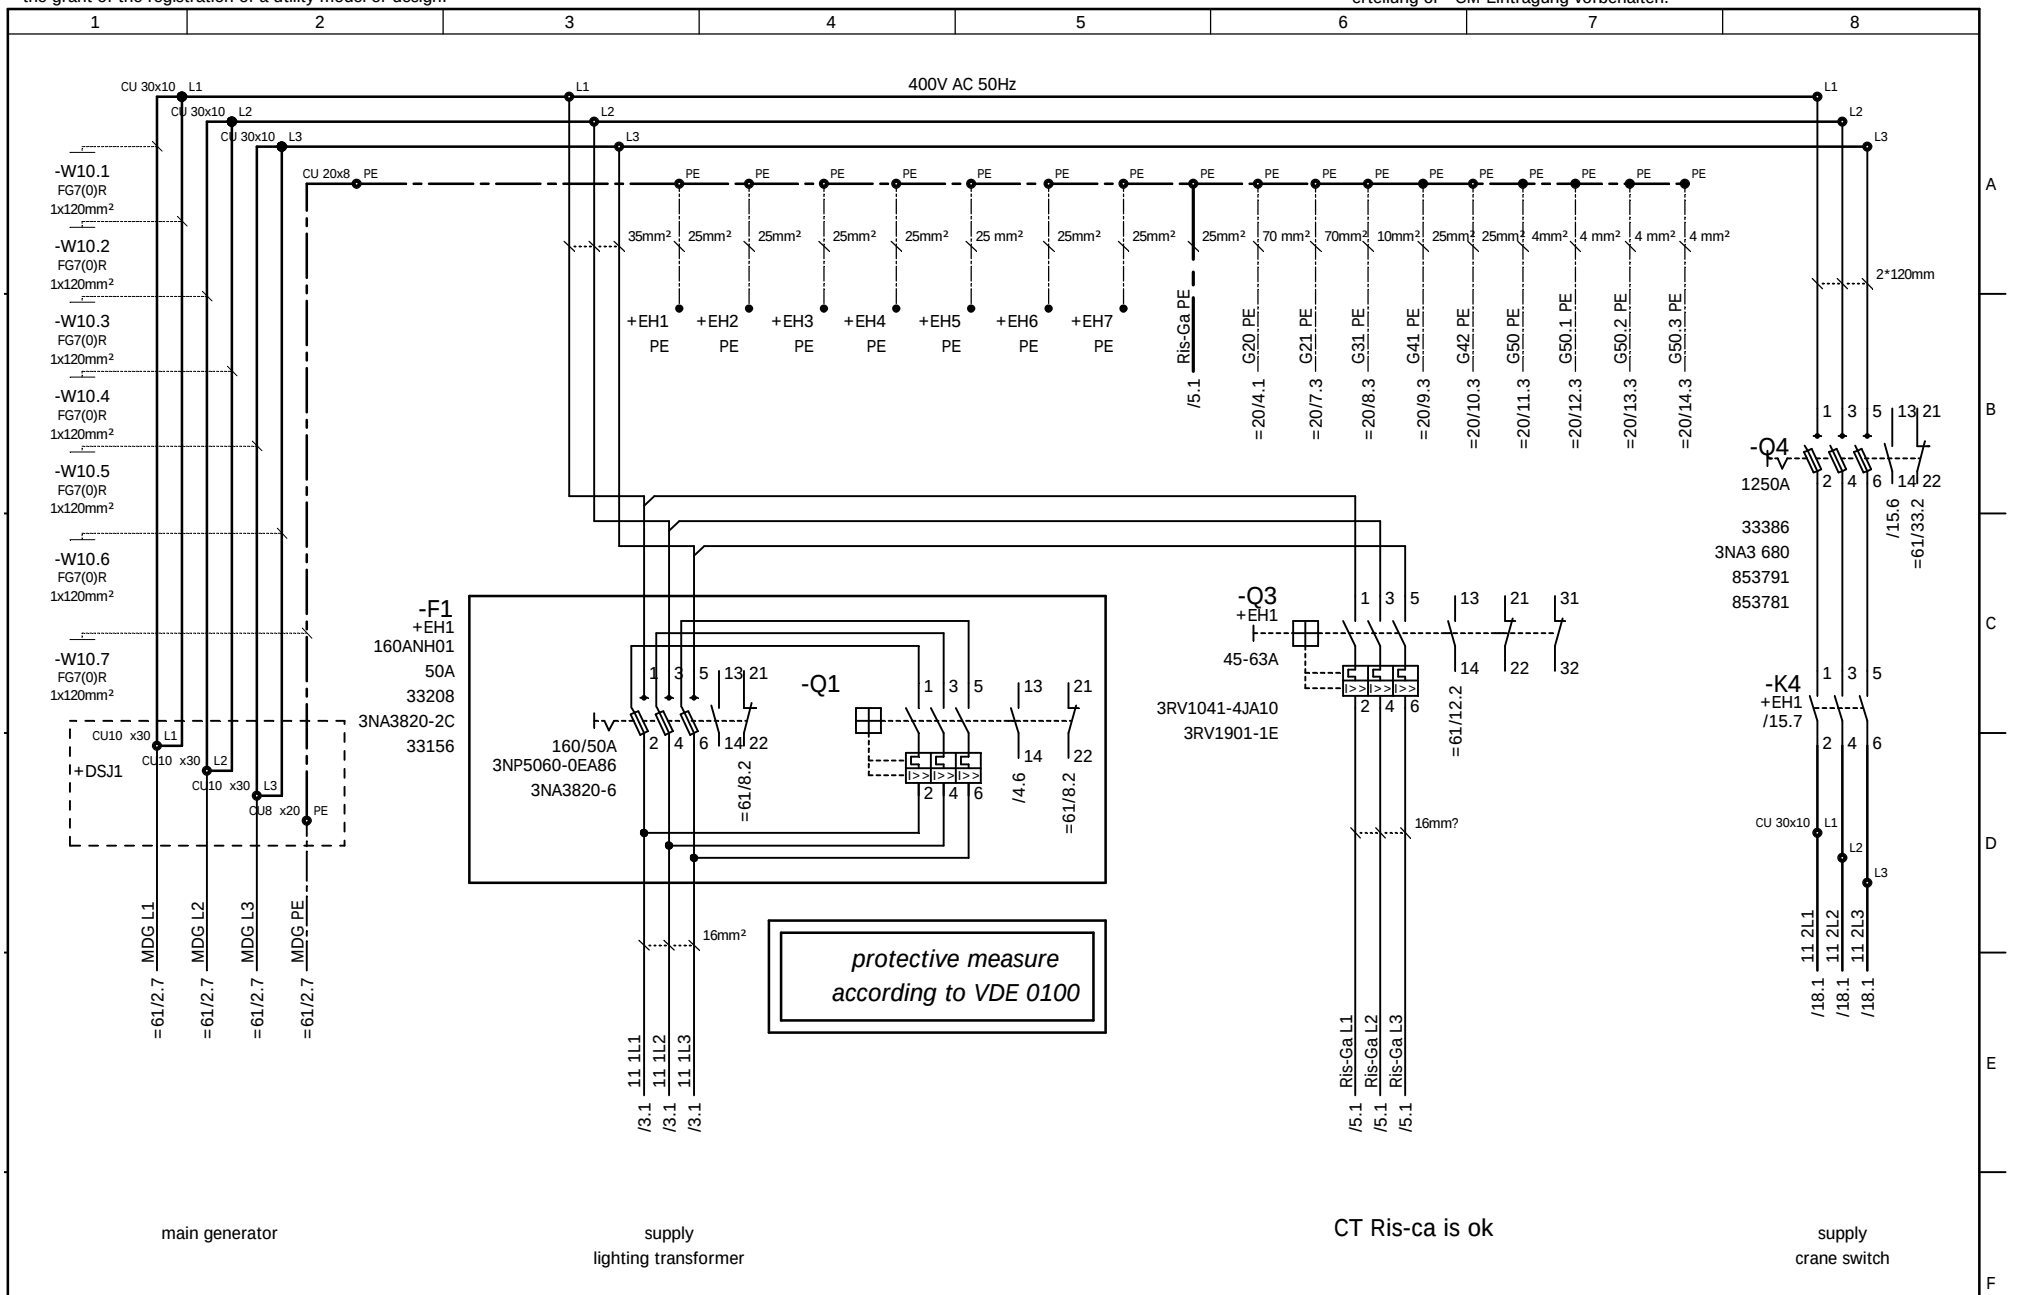

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		


NOELL

Feeding, generator
Stromlaufplan/ / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=11	
		+EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	1
			32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

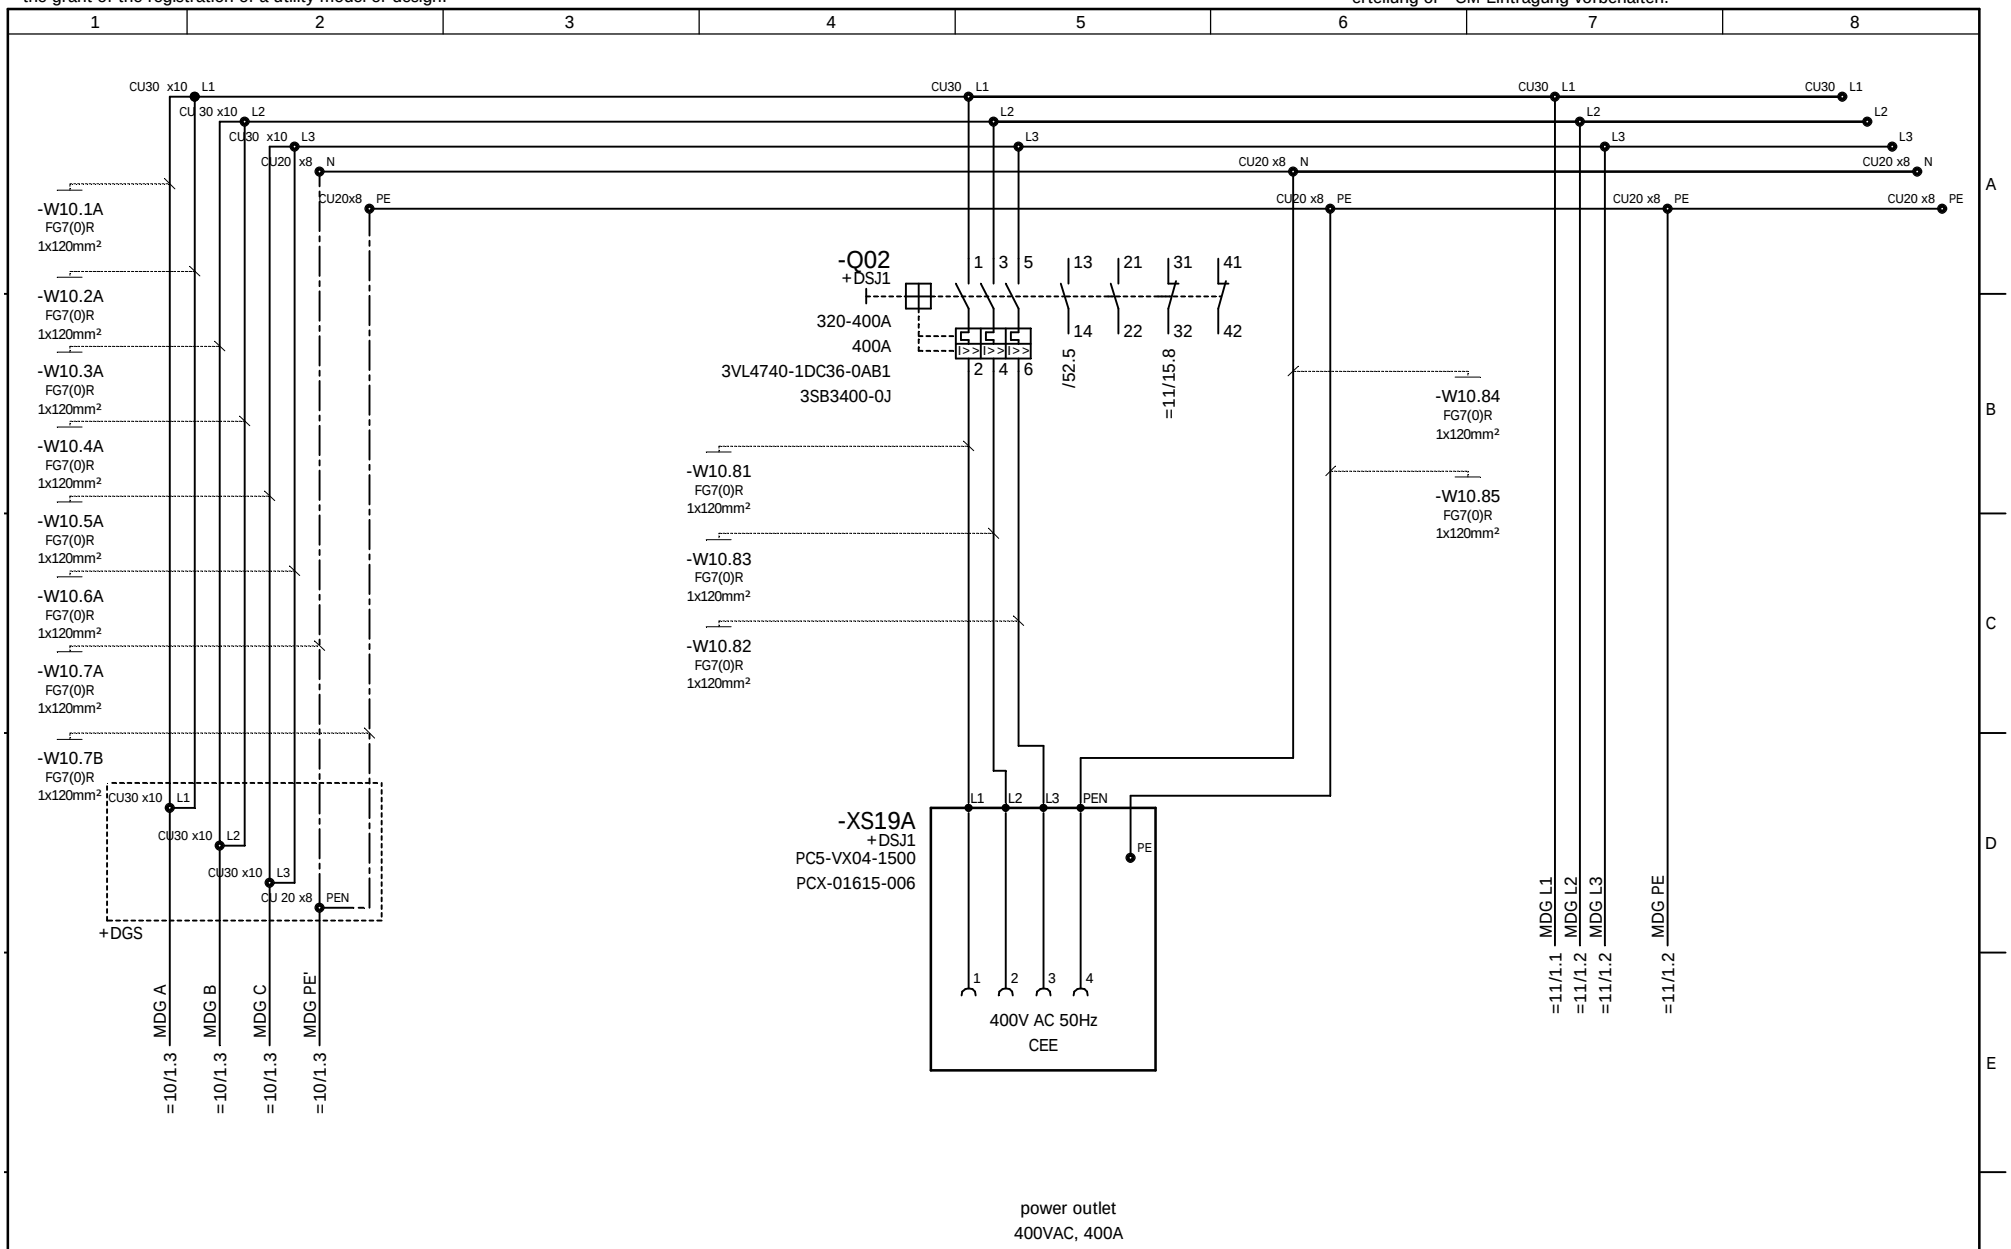

power outlet
400VAC, 400A

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		


NOELL

trolley controll station
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	2		
	32 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

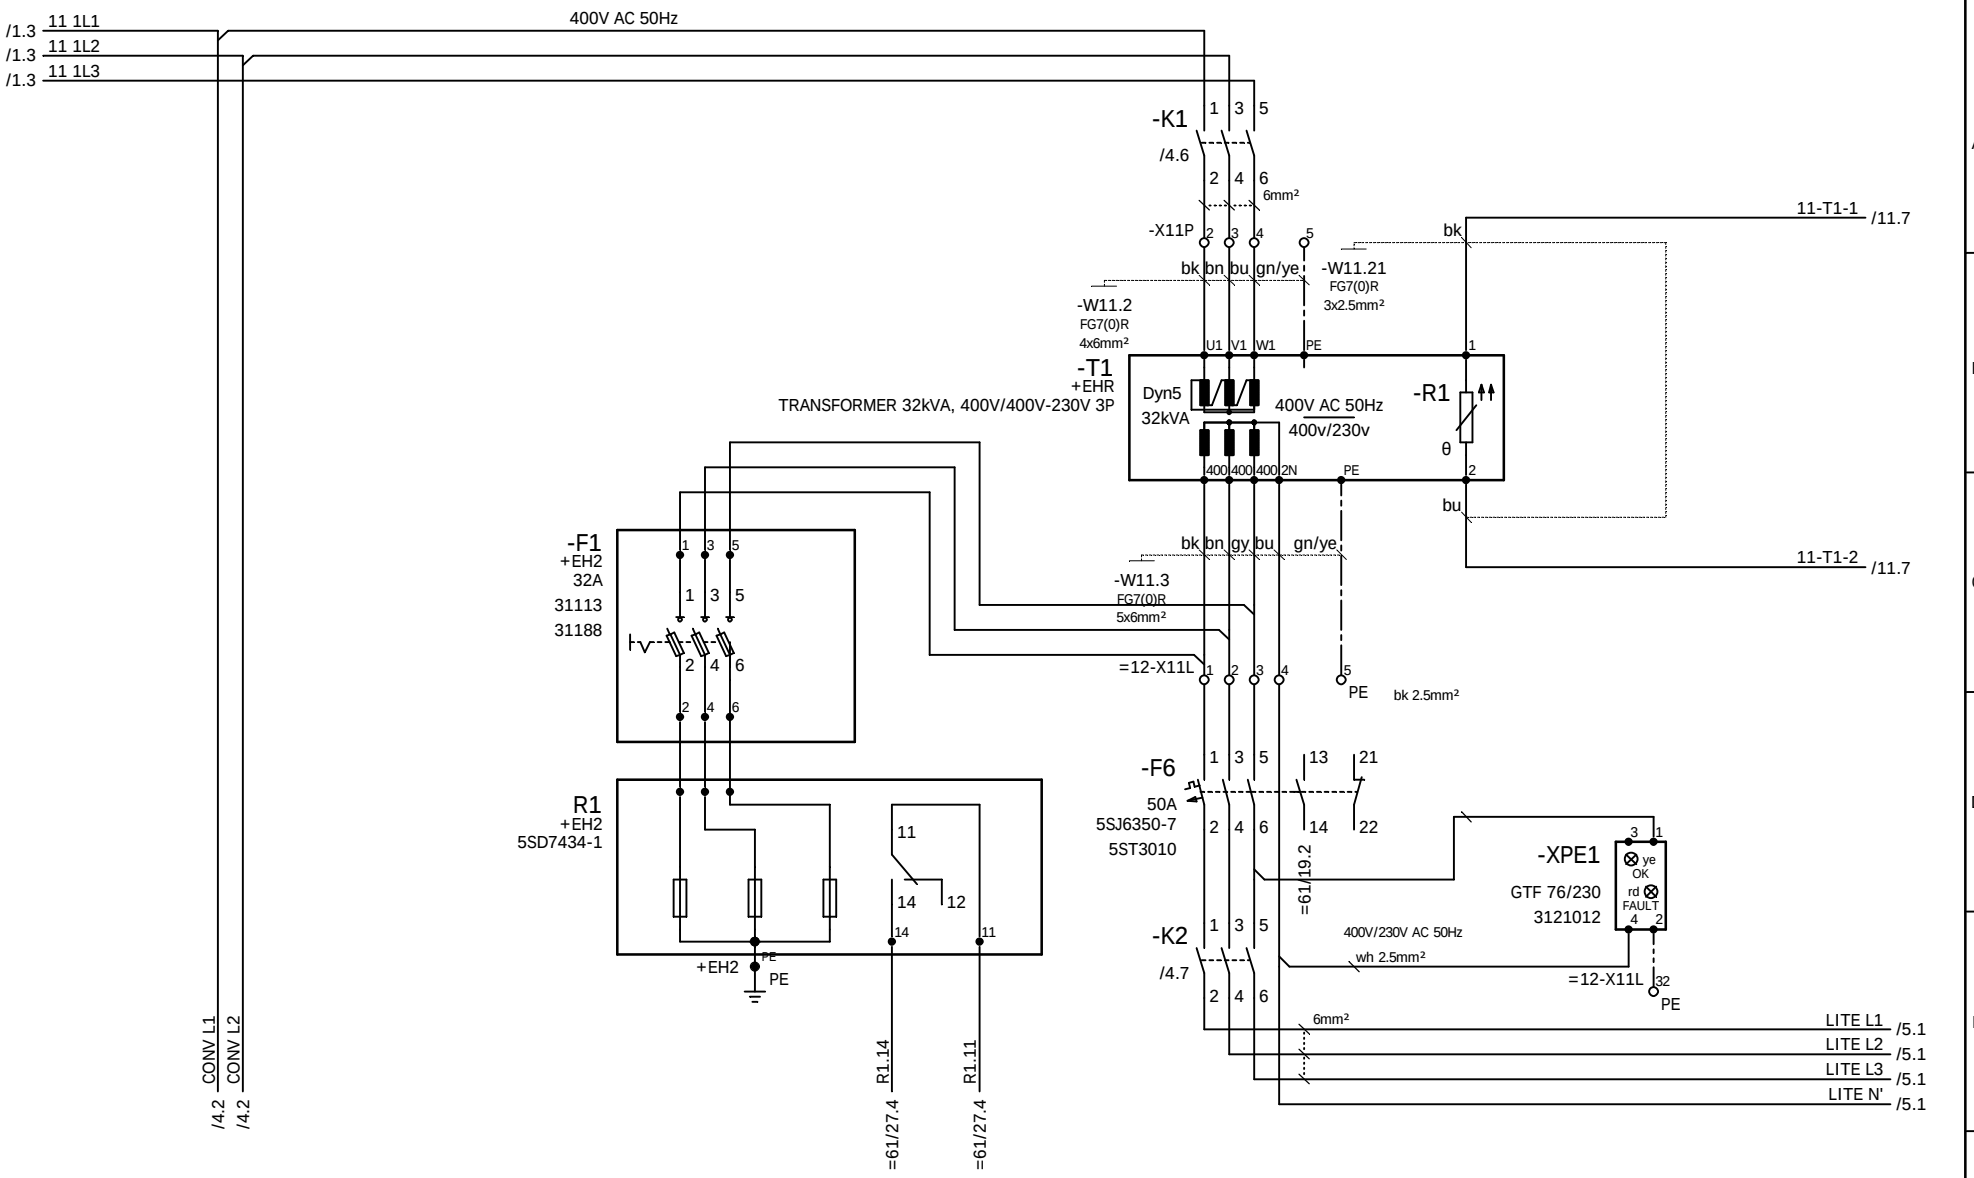

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=11	+EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Sheet 3	32 Sh.


NOELL

feeding, lighting transformer

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

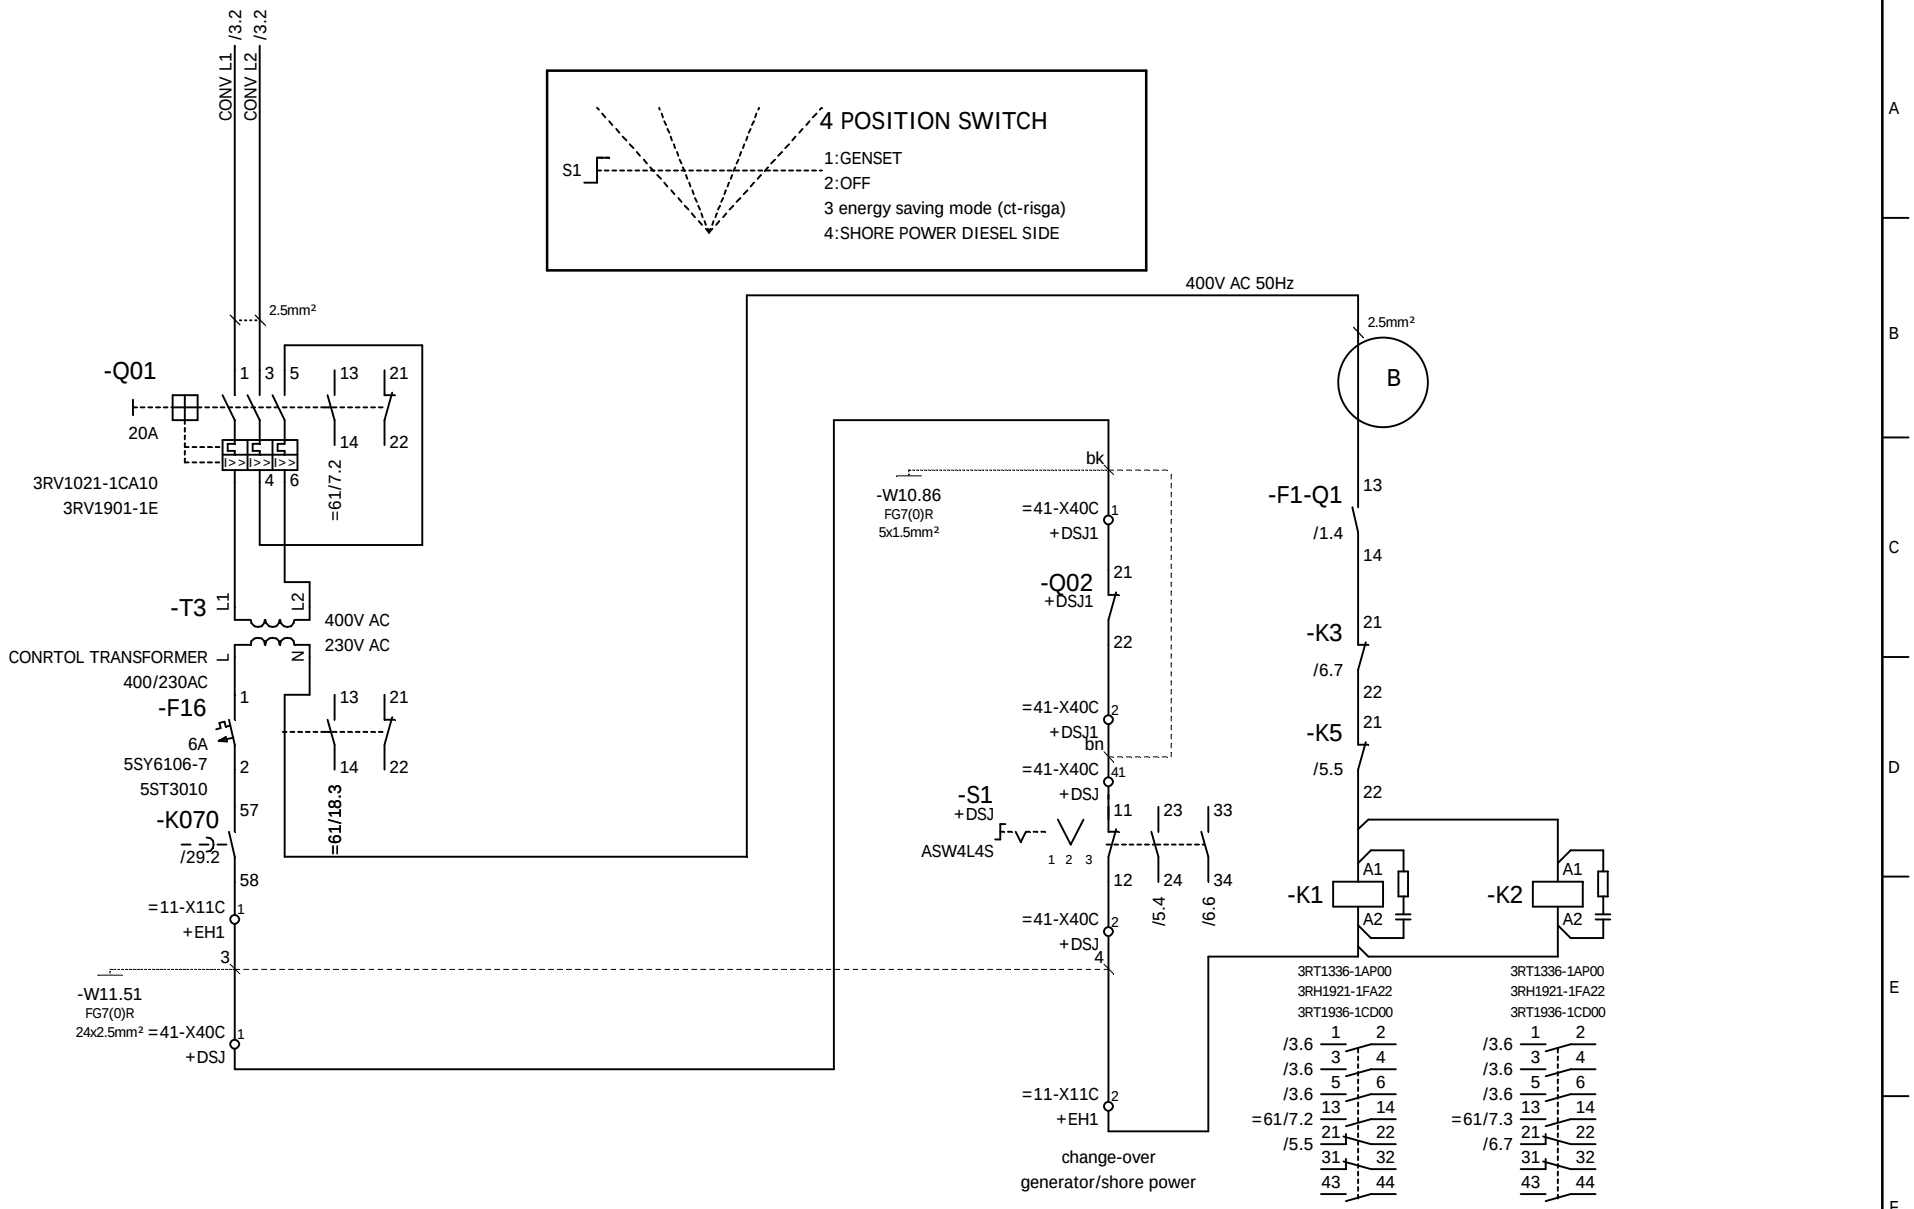

				Date		Costumer	AMPT Egypt	NOELL	feeding, lighting transformer	Type	RTG 50/26.50/5+1/AC	=11
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 4
Ind.	Revision	Date	Name	Standard		Source:						32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

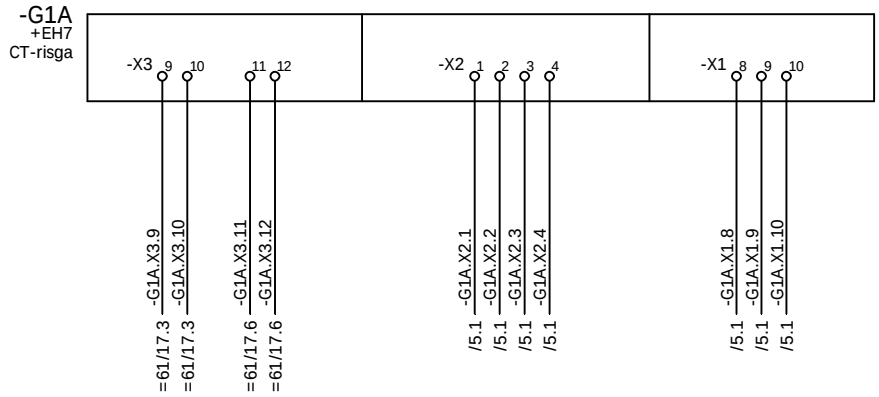

CT-risga drive normal


CT-risga drive on

				Date		Costumer	Type	=11
				Designer	XU HR	AMPT Egypt	RTG 50/26.50/5+1/AC	+EH1
				Checked	LIU KP		Job No. 1255 / Drawing No. 78.5692.60.00	Sheet 4.1
nd.	Revision	Date	Name	Standard		Source:	feeding, lighting transformer	32 Sh.

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

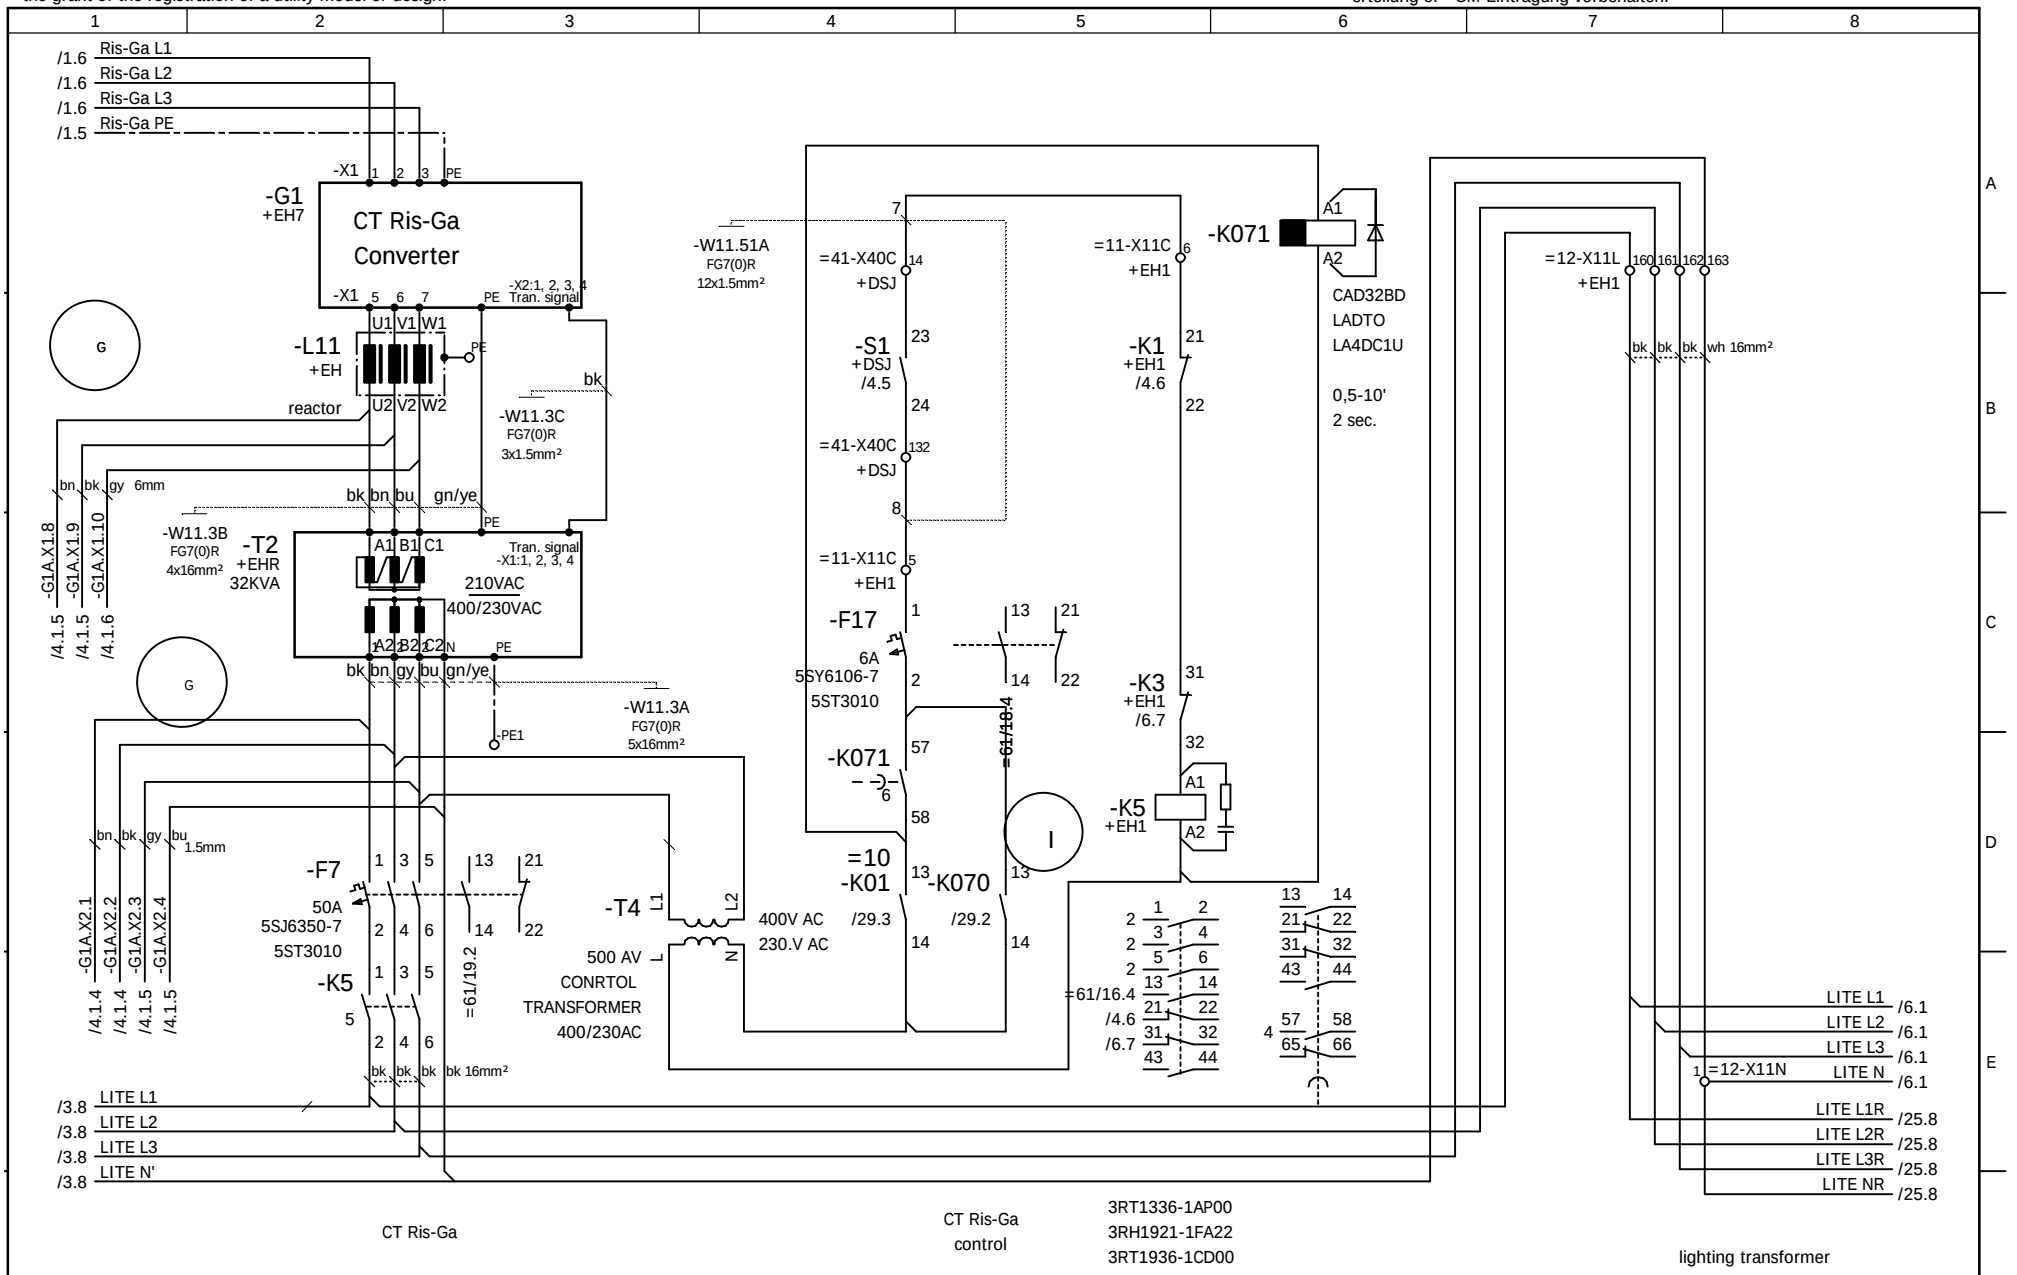

				Date		Costumer	AMPT Egypt	feeding, lighting transformer Stromlaufplan / Circuit Diagram	Type RTG 50/26.50/5+1/AC	=11 +EH1
				Designer	XU HR				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 5 32 Sh.
				Checked	LIU KP						
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

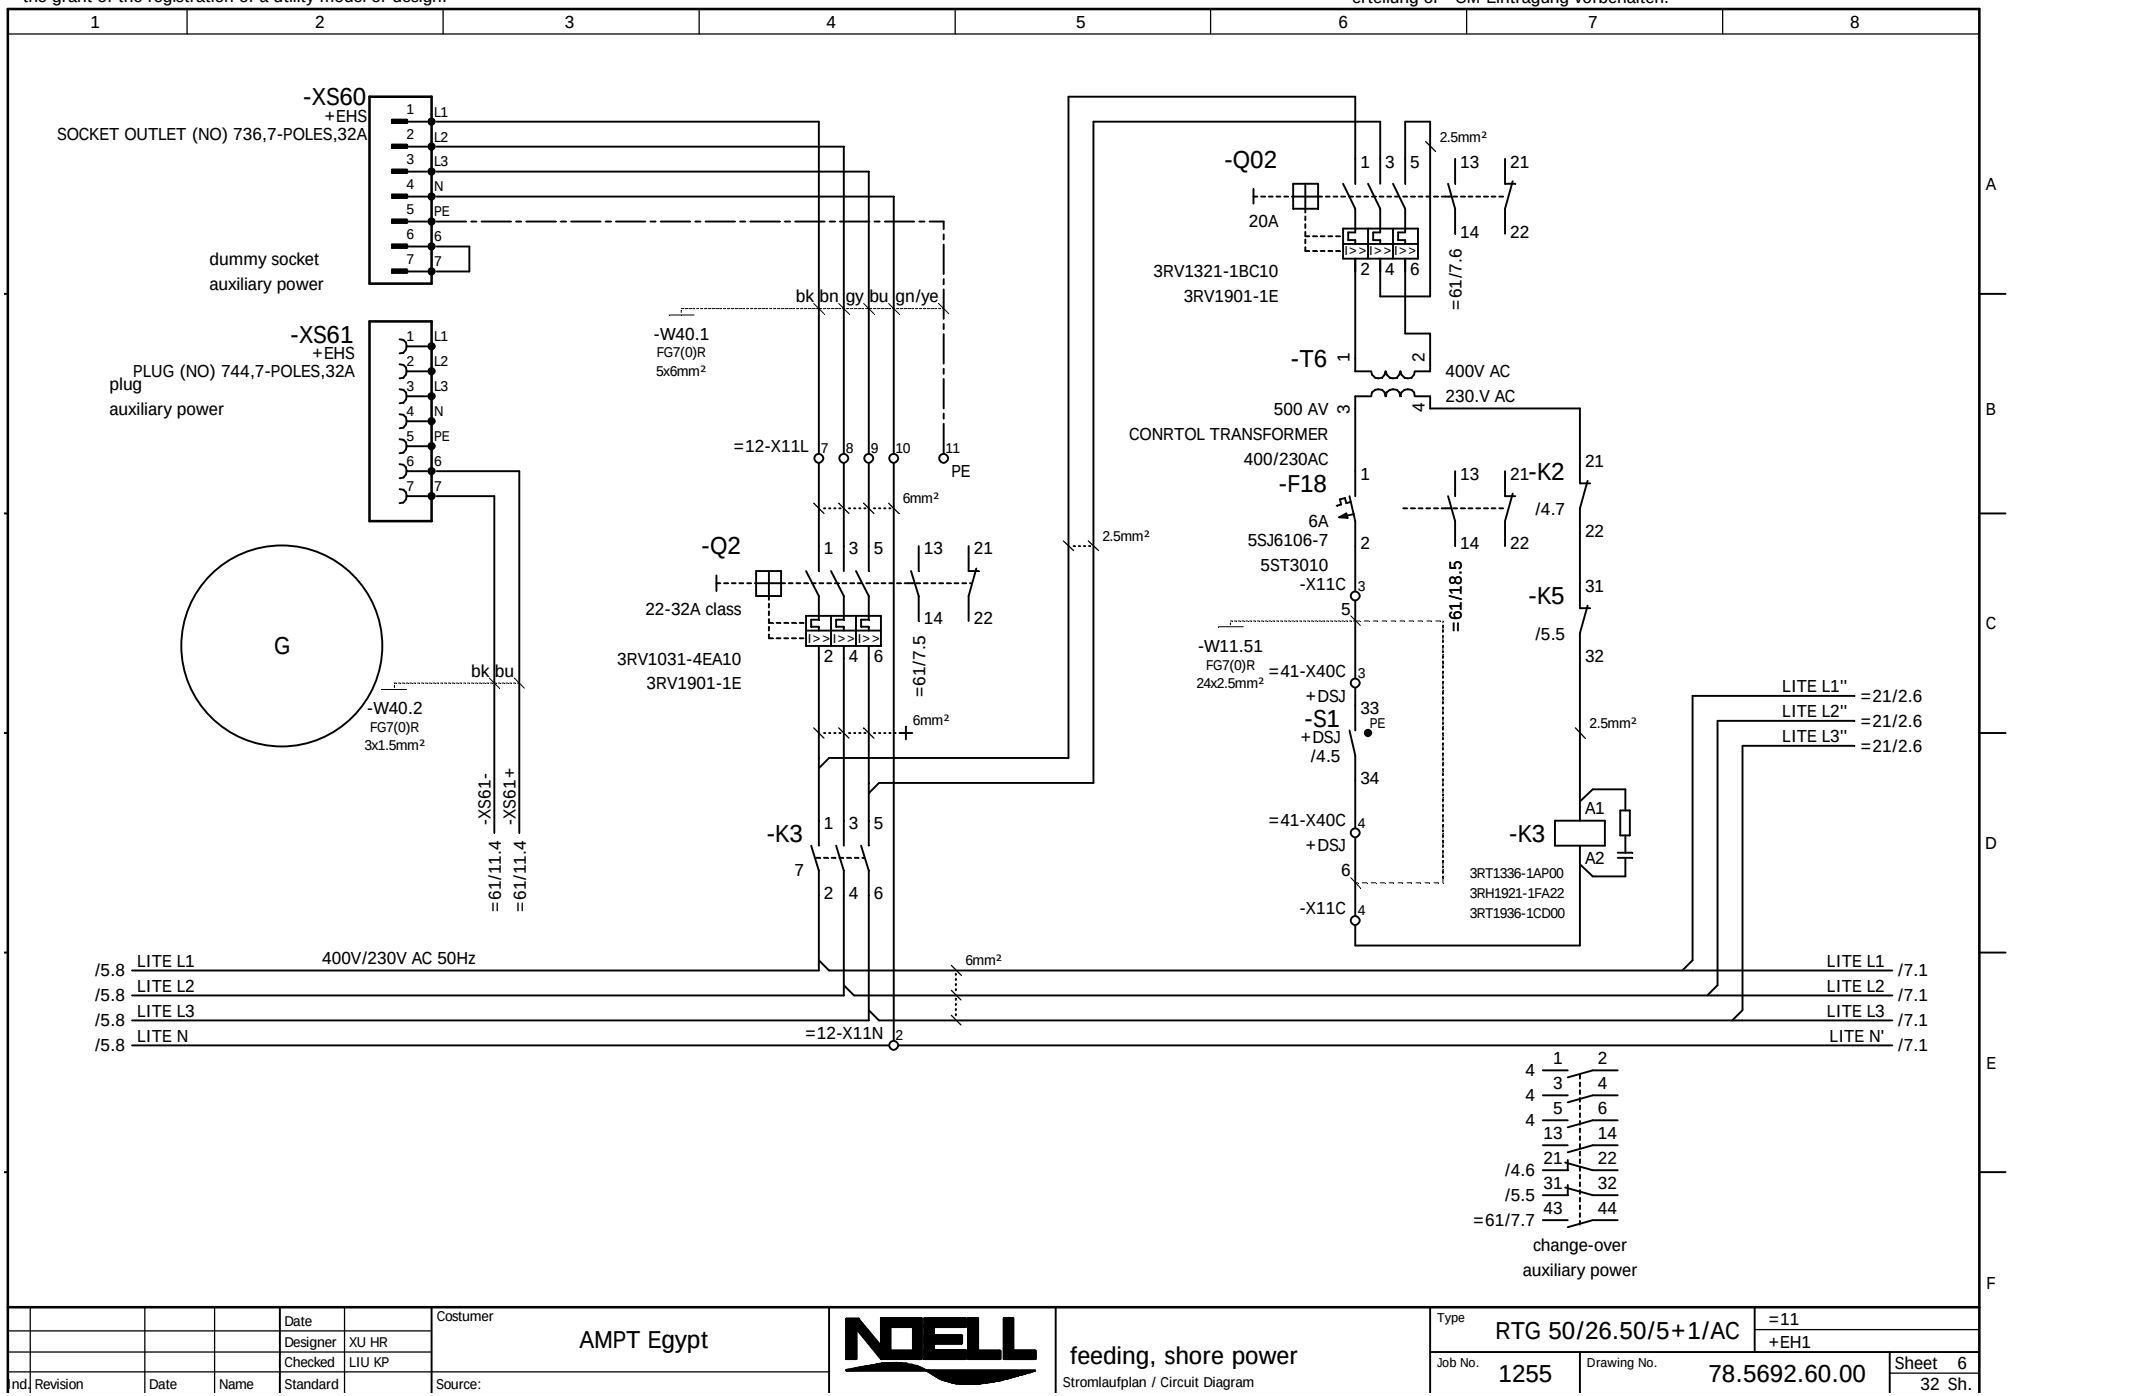

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=11	+EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	feeding, shore power Stromlaufplan / Circuit Diagram		Sheet 6 32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

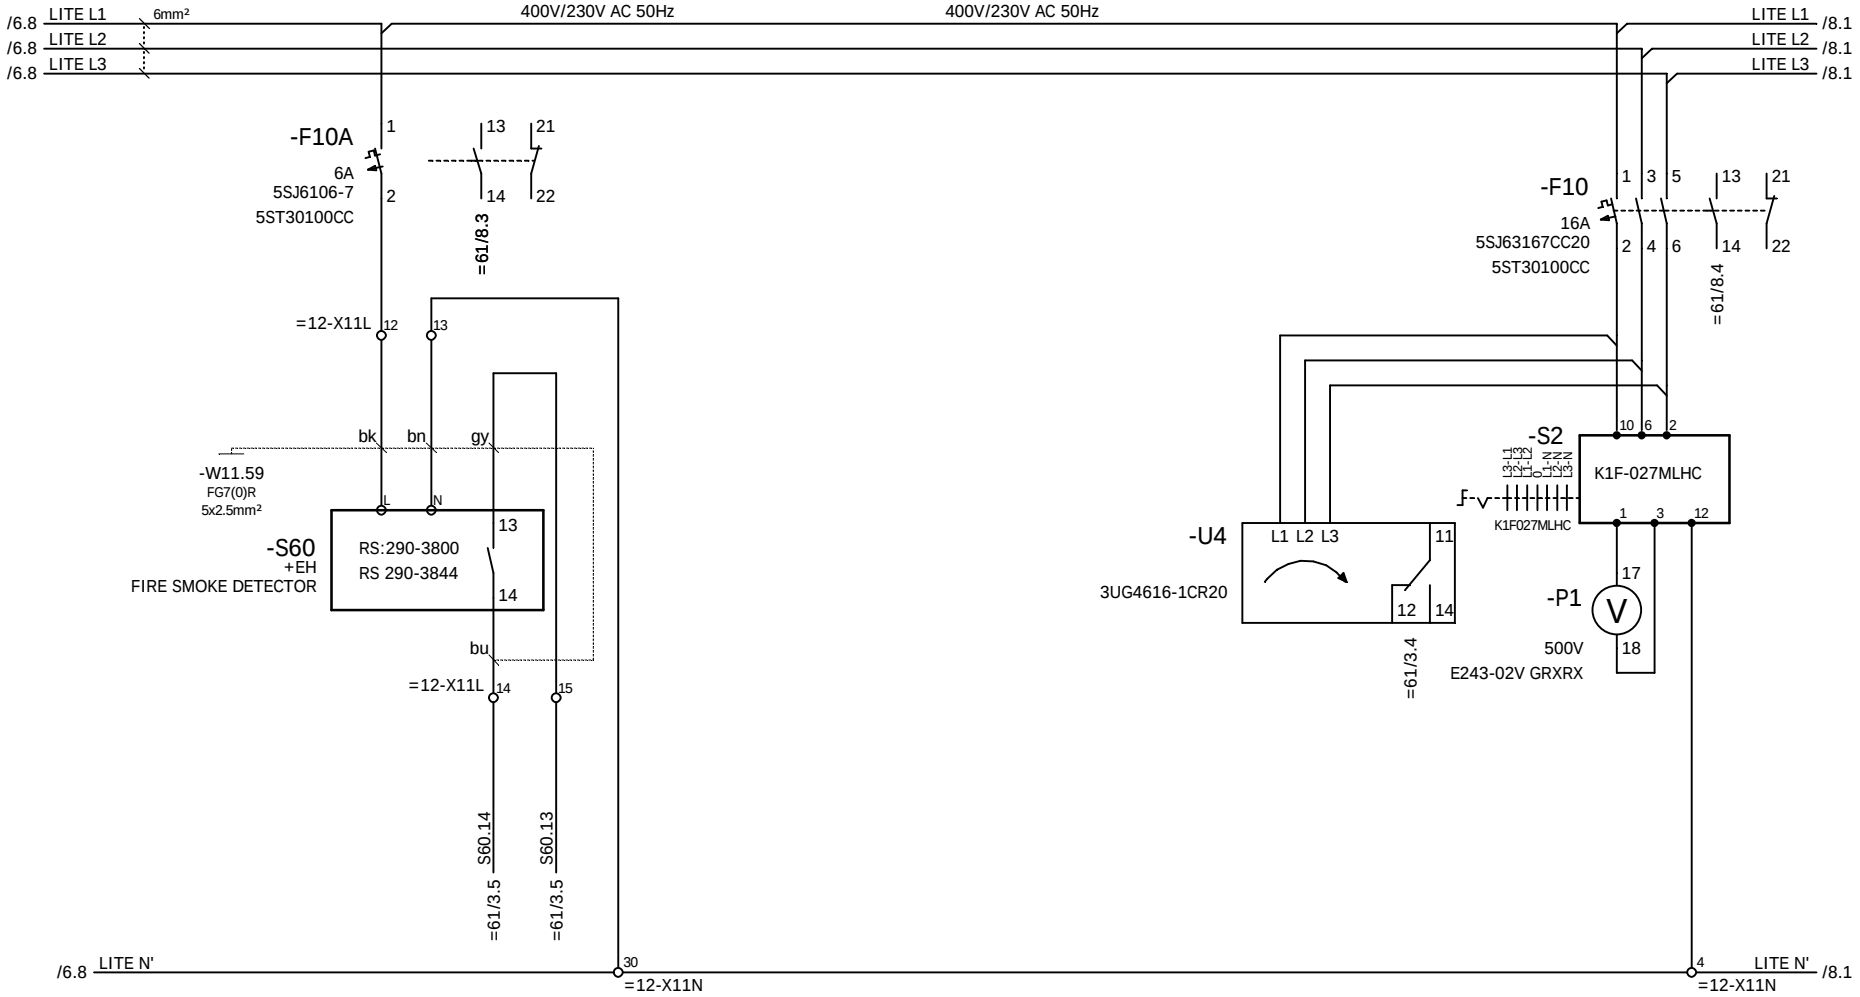

E-house
fire smoke detector

phase monitoring


voltmeter
lighting transformer

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
nd.	Revision	Date	Name	Standard		Source:			Sheet 7 32 Sh.

feeding, Distribution
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

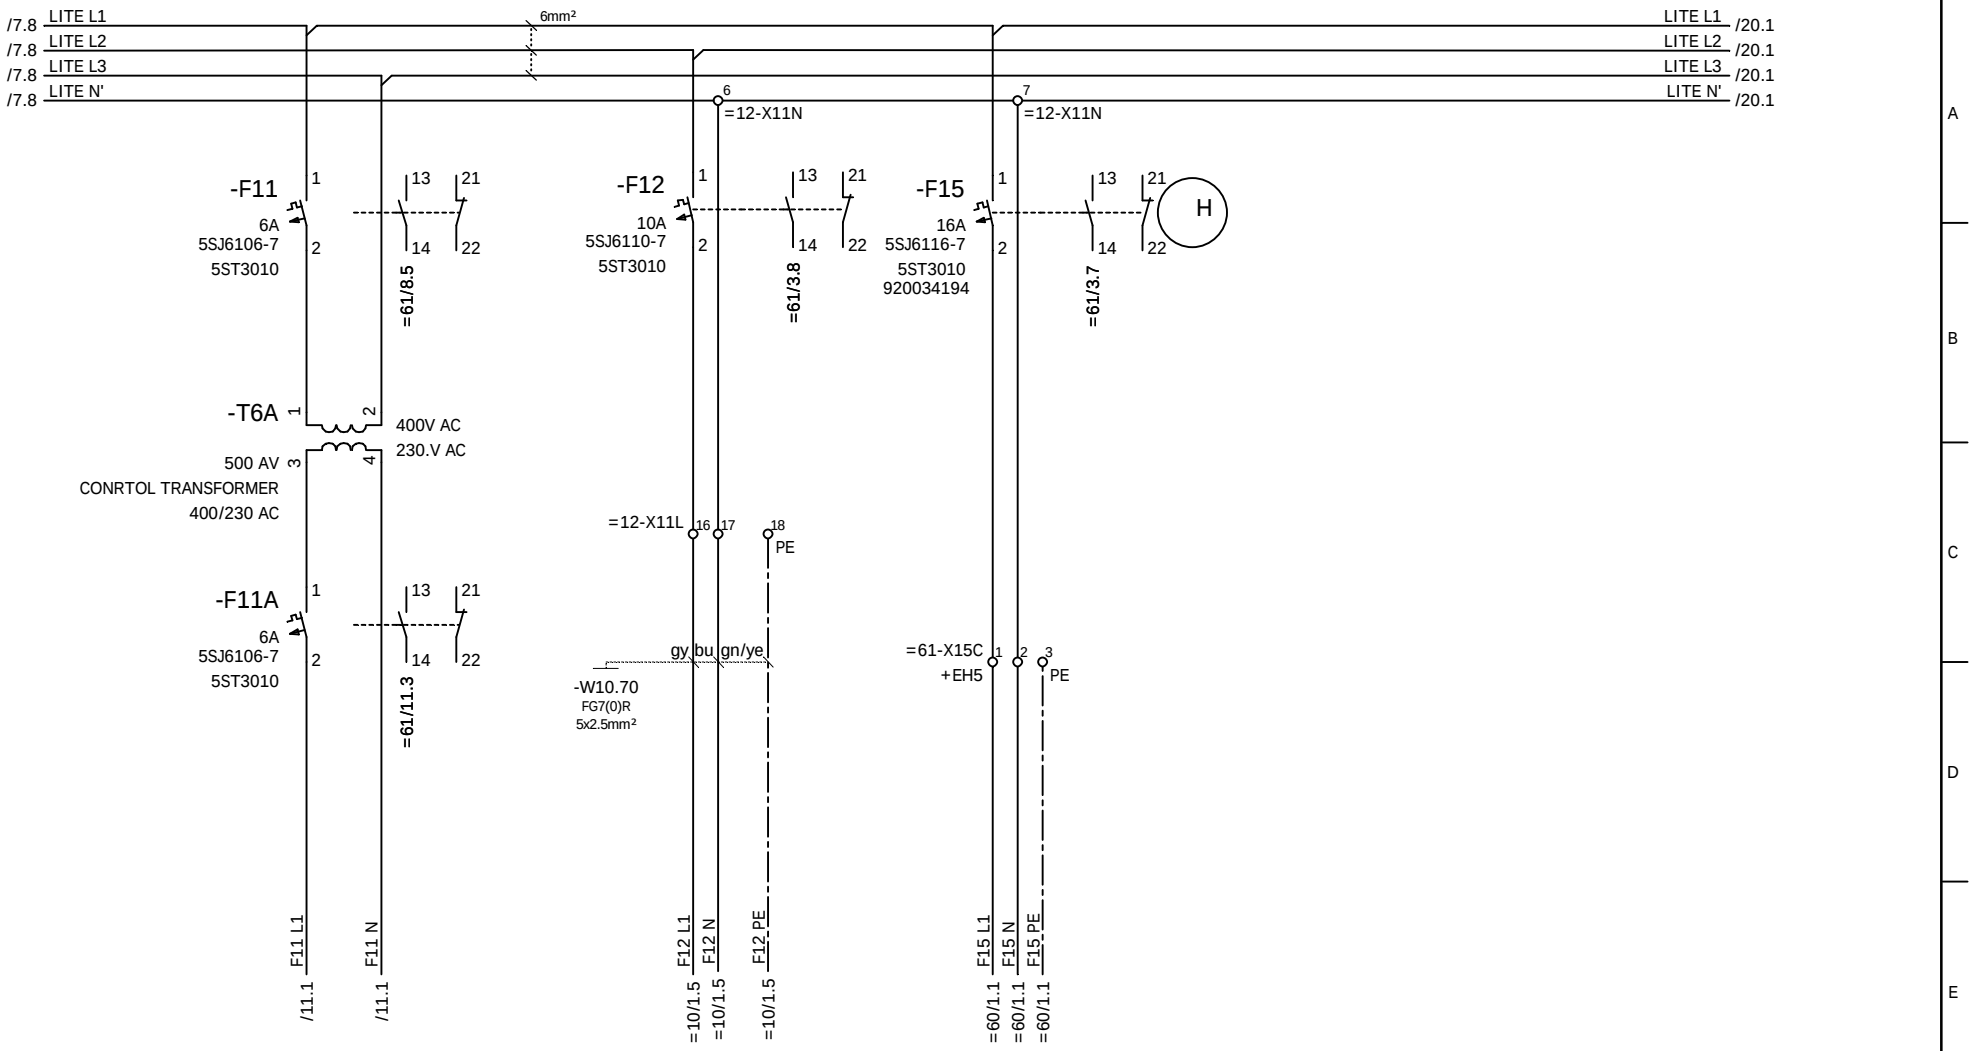

				Date		Costumer	AMPT Egypt	feeding, distribution	Type RTG 50/26.50/5+1/AC =11 +EH1
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255 Drawing No. 78.5692.60.00 Sheet 8 32 Sh.
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

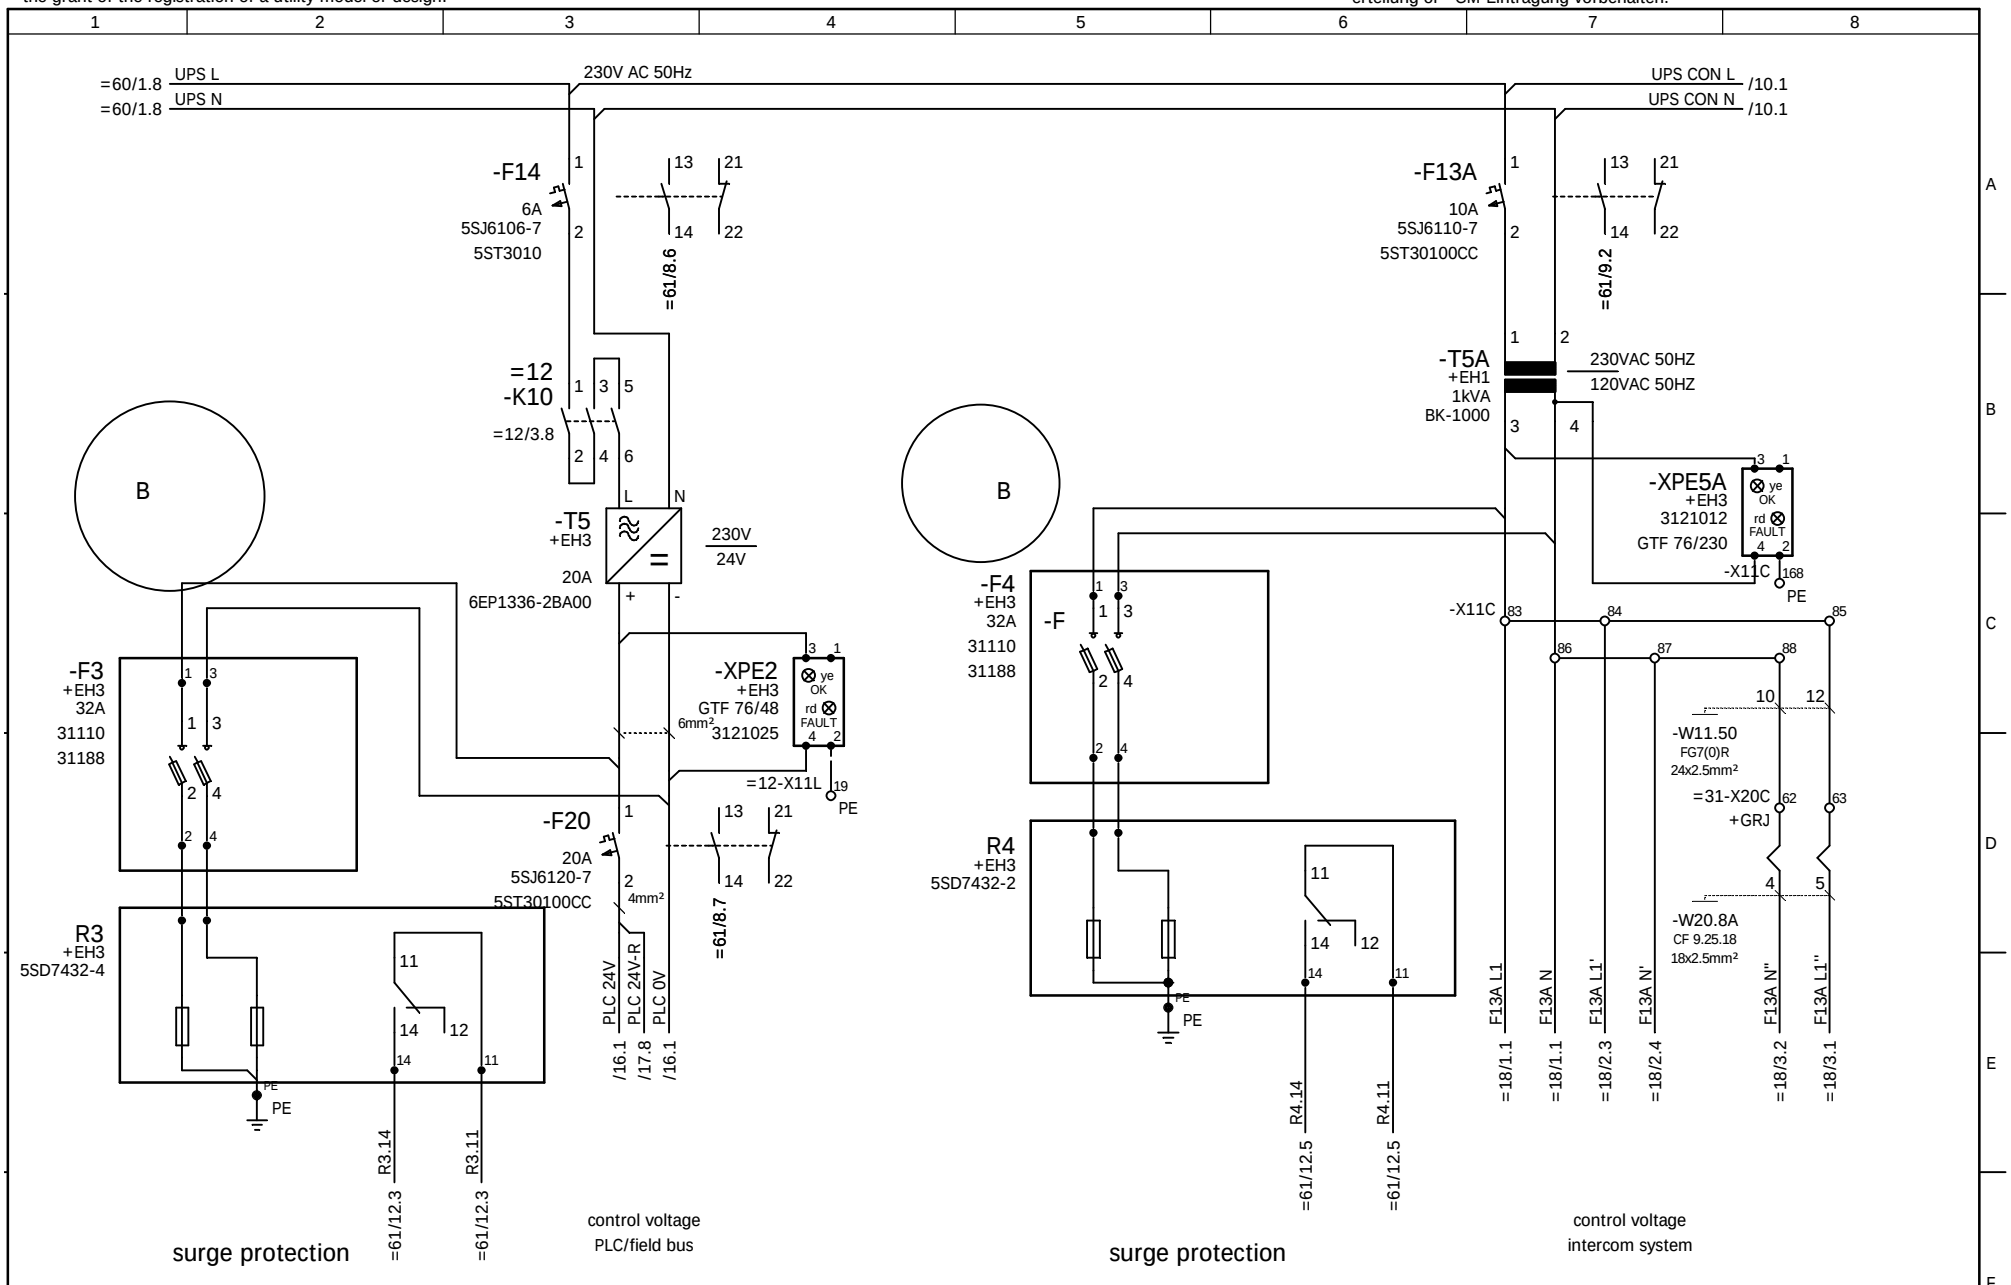


				Date		Costumer	AMPT Egypt	NOELL	feeding, distribution Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=11	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	9	32 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

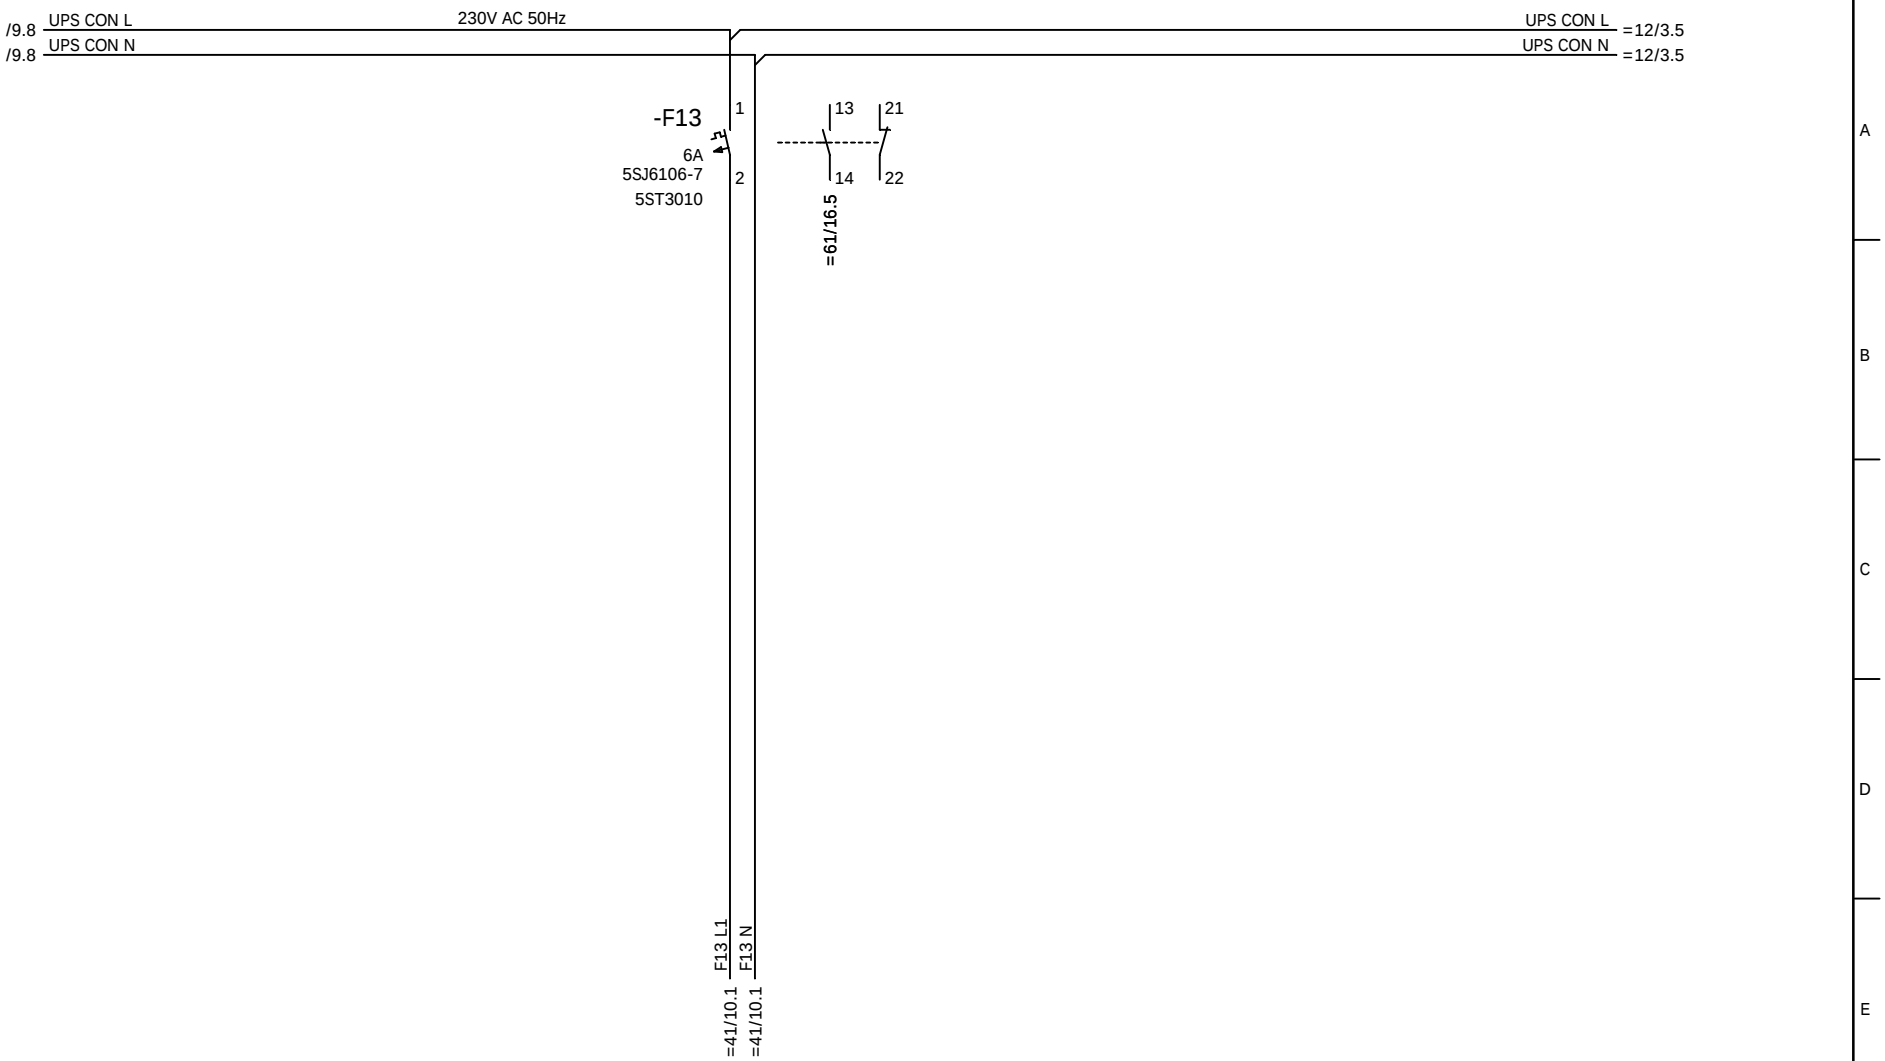


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 10 32 Sh.

NOELL

feeding, distribution
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

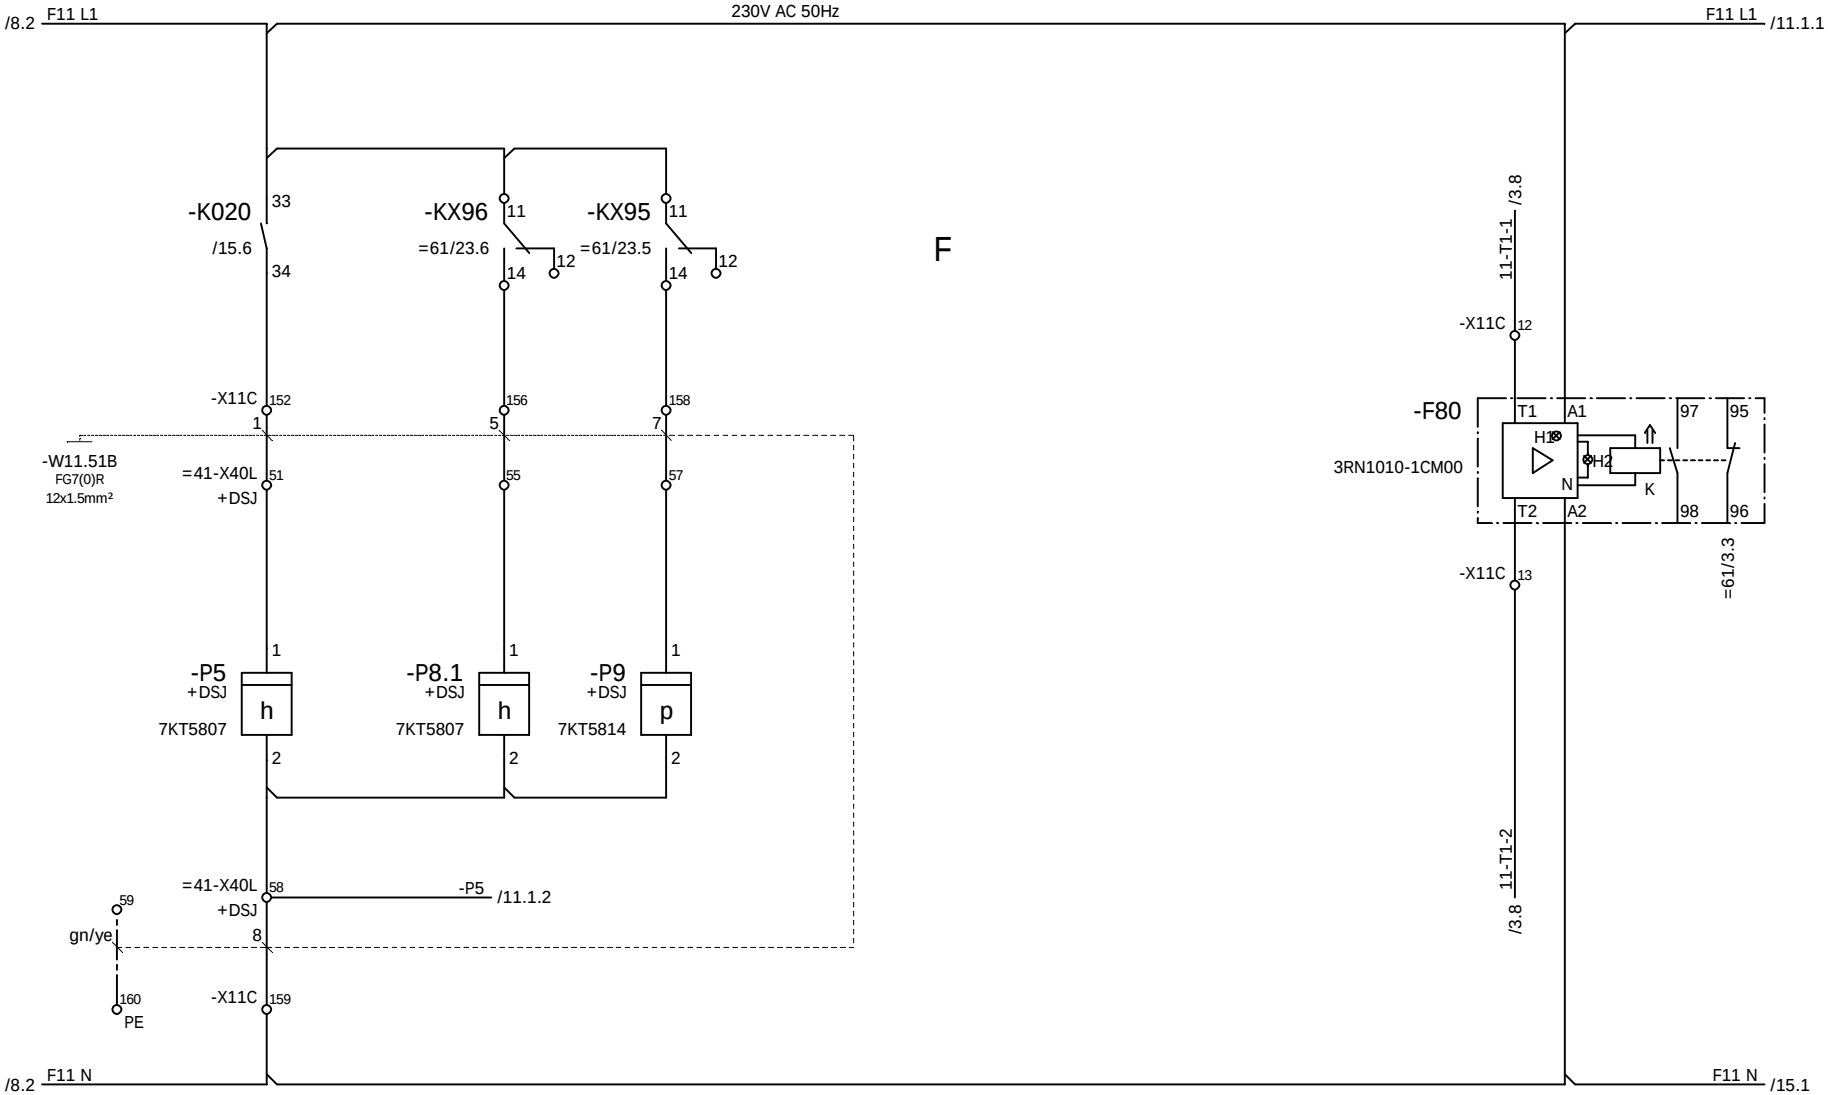

crane switch on

hoist&trolley


crane twistlock
counter

overtemperature
lighting transformer

				Date		Costumer	AMPT Egypt	NOELL	feeding, control	Type RTG 50/26.50/5+1/AC	=11
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11
Ind.	Revision	Date	Name	Standard		Source:						32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

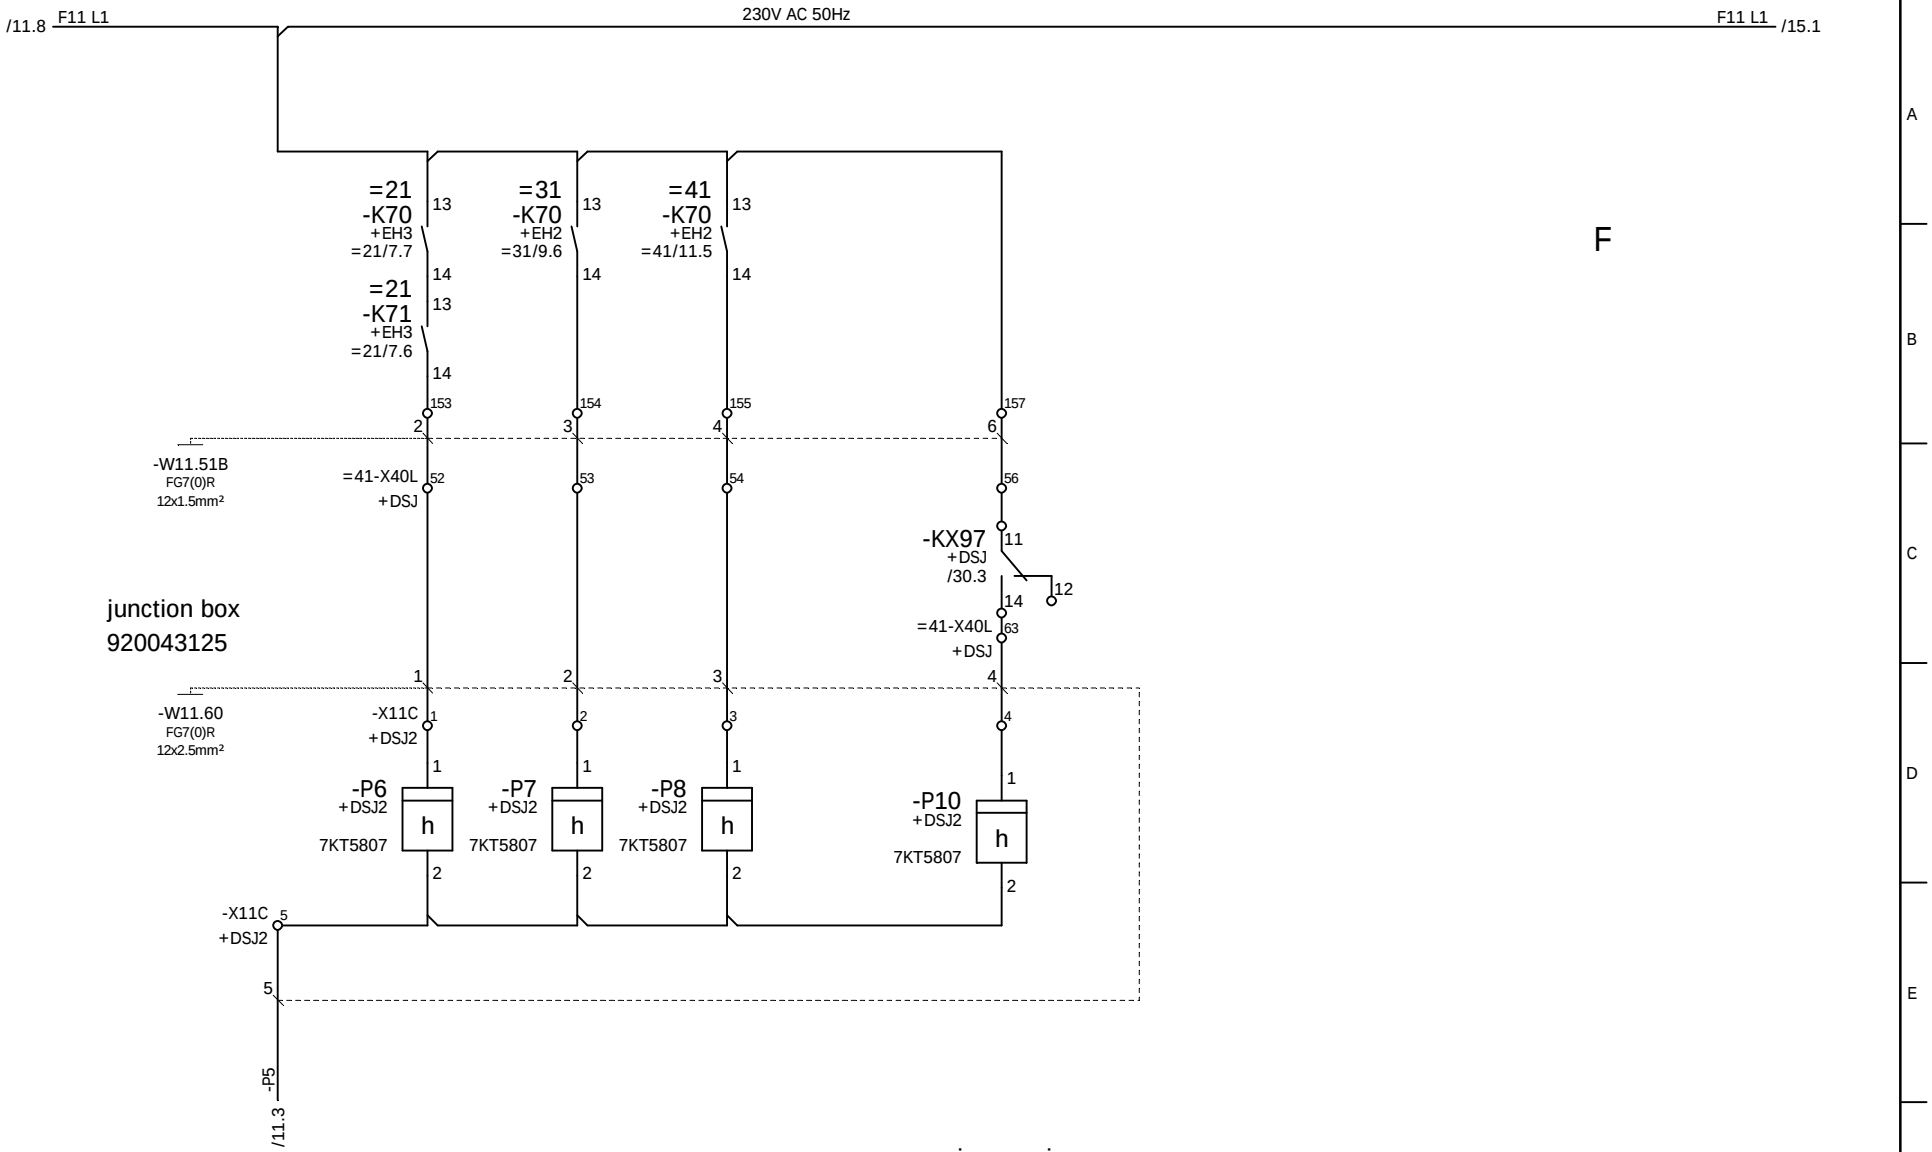


				Date		Costumer	AMPT Egypt	NOELL	feeding, control
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=11	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	11.1	32 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

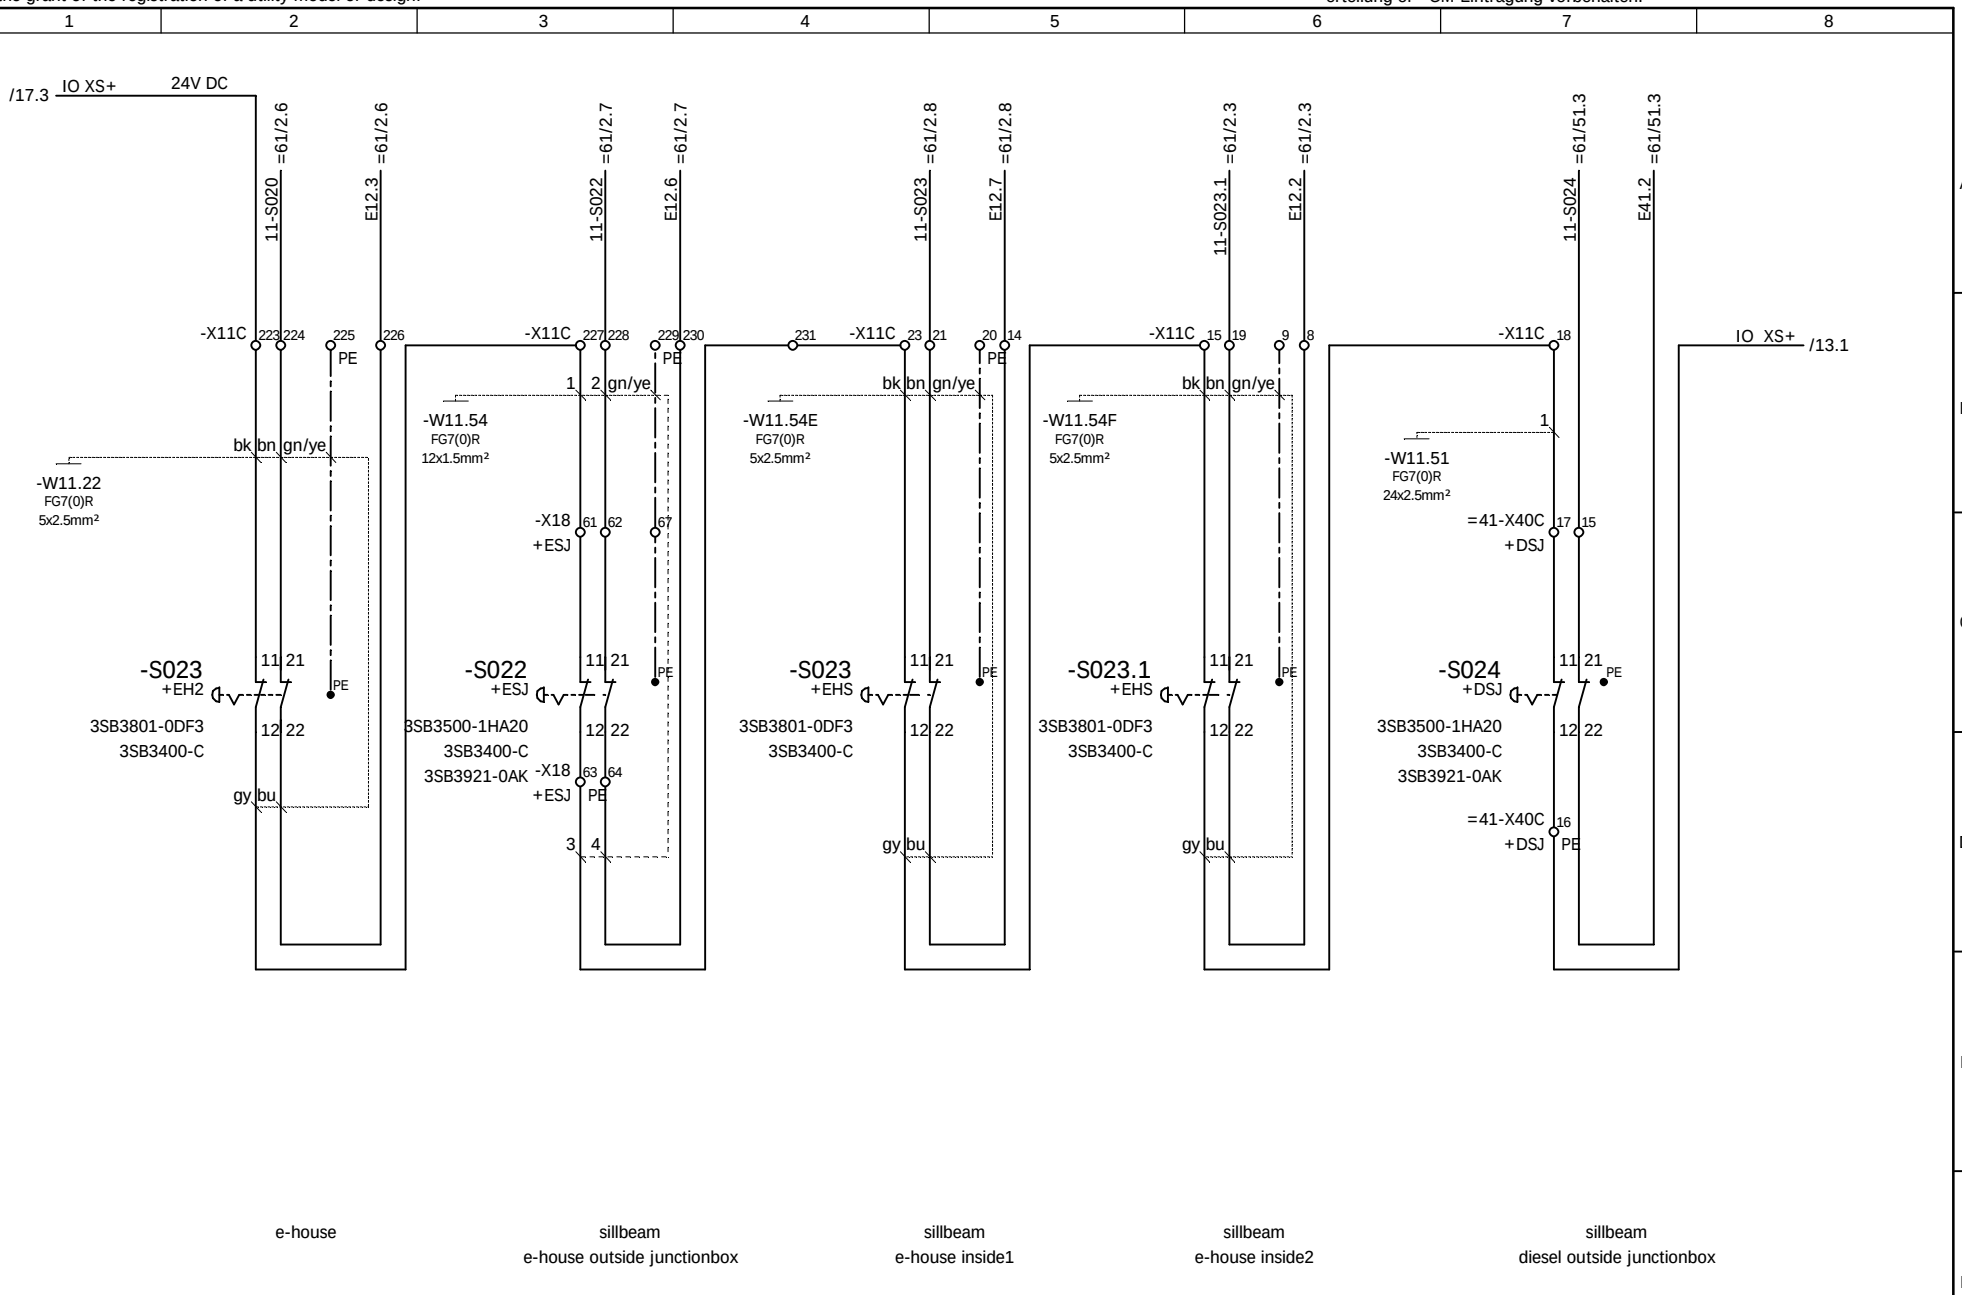

				Date		Costumer	Type	=11
				Designer	XU HR	AMPT Egypt	RTG 50/26.50/5+1/AC	+EH1
				Checked	LIU KP		Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	feeding, emergency stop circuit	Sheet 12
							Stromlaufplan/ / Circuit Diagram	32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

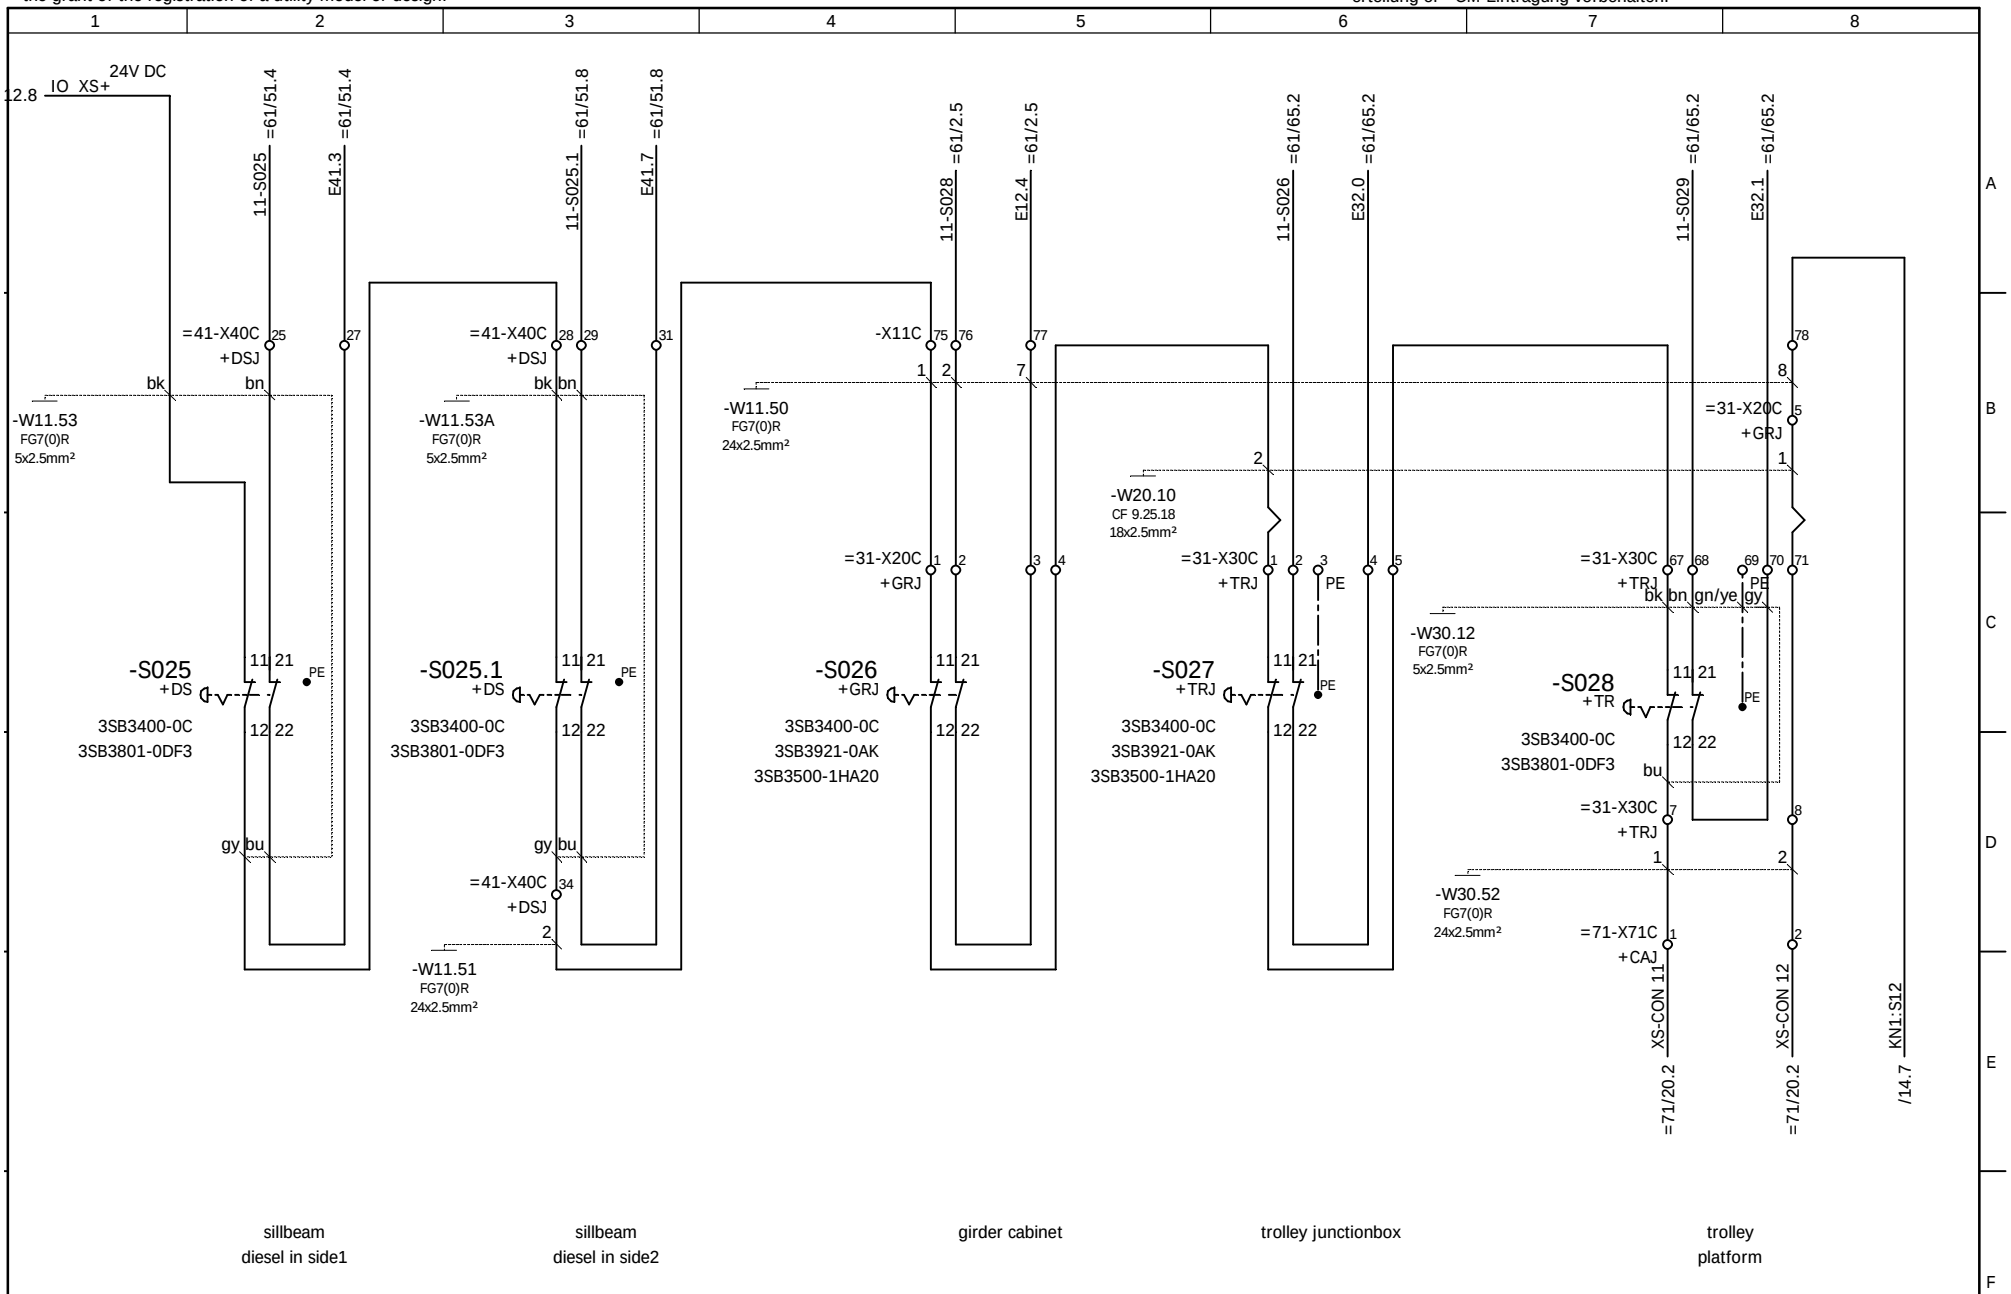


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 13 32 Sh.

NOELL

feeding, emergency stop circuit
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

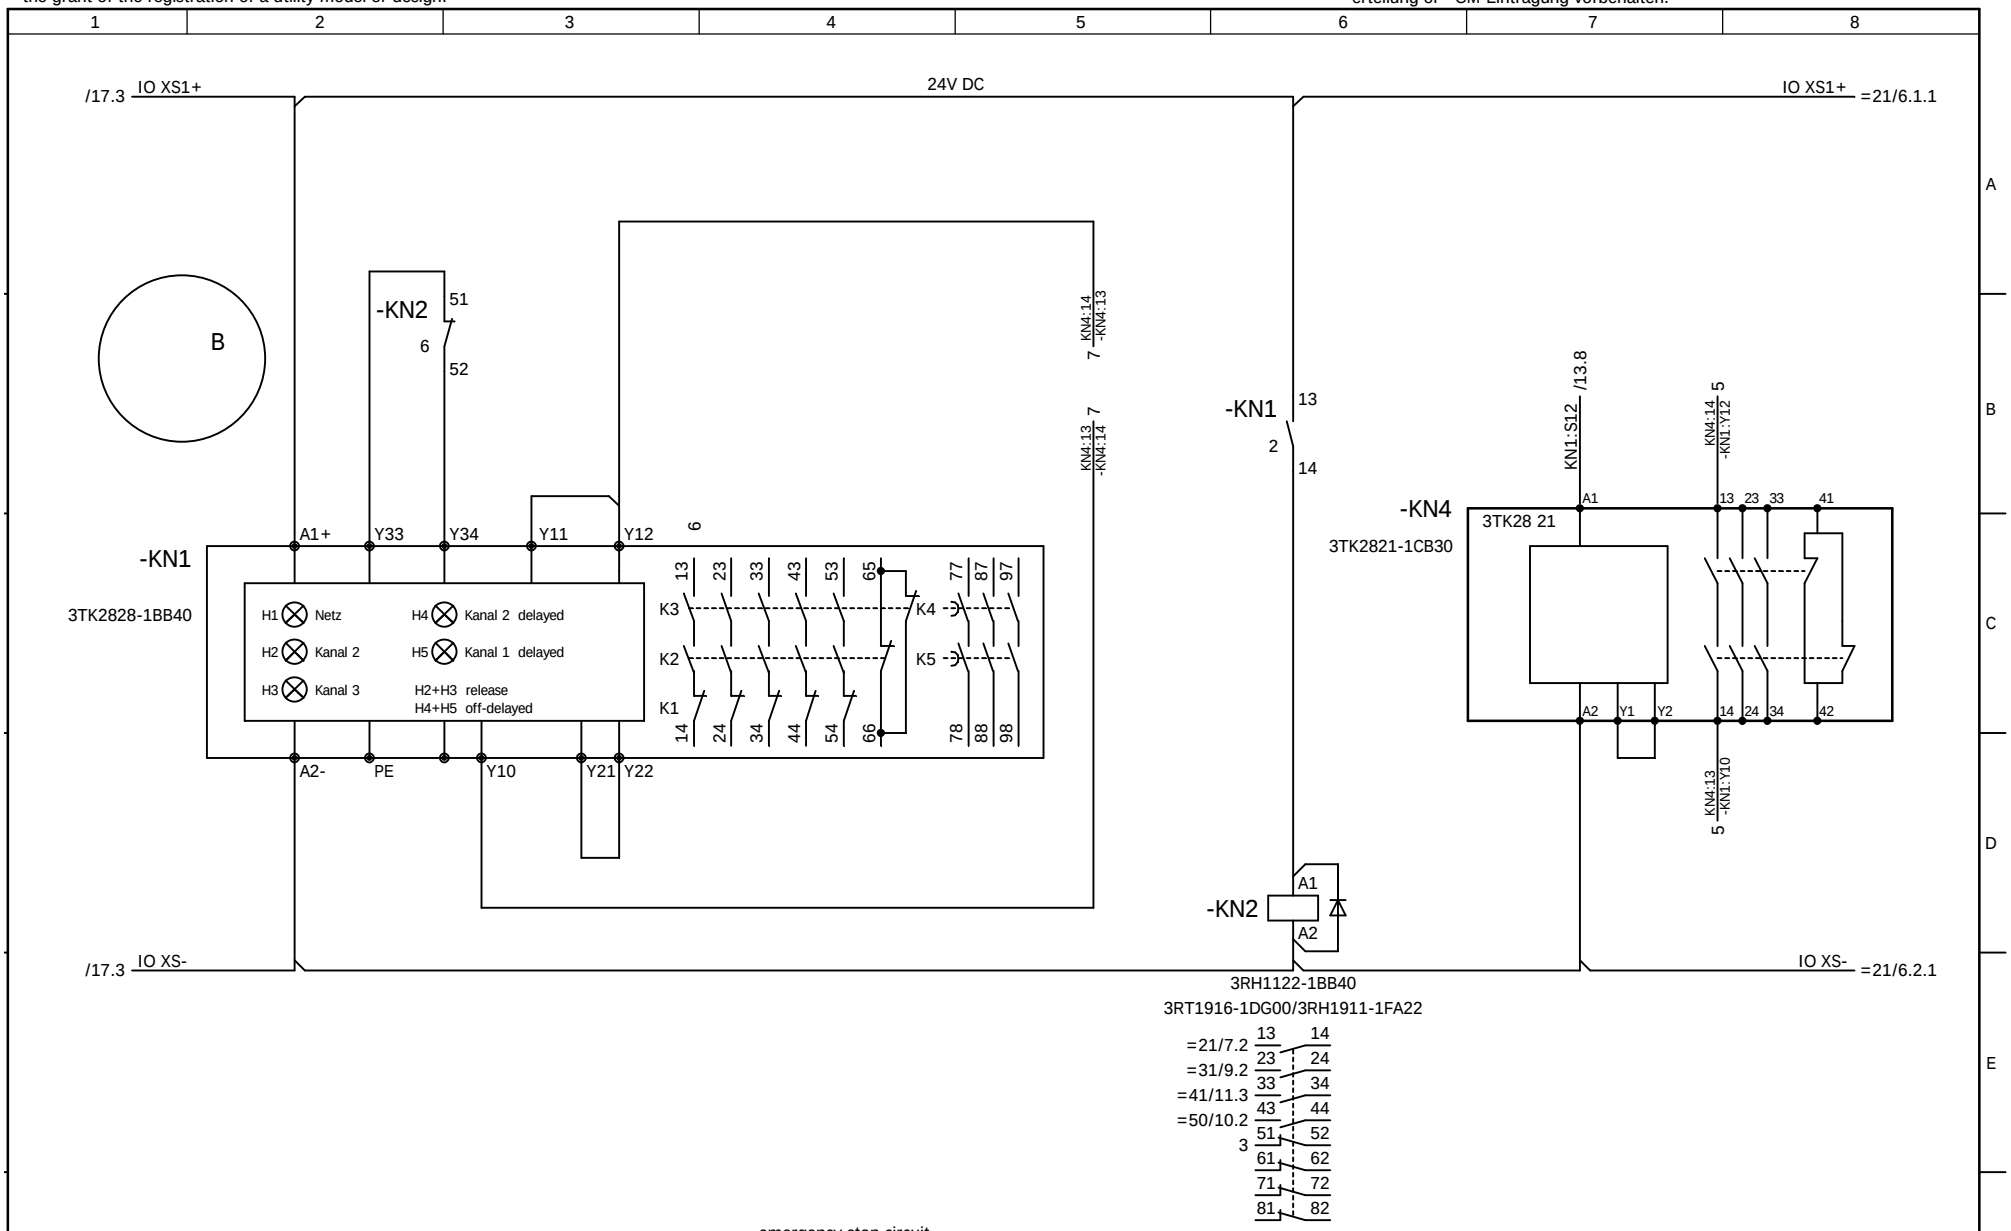

				Date		Costumer	AMPT Egypt	feeding, emergency stop circuit Stromlaufplan / Circuit Diagram	Type RTG 50/26.50/5+1/AC; =11; +EH3
				Designer	XU HR				Job No. 1255; Drawing No. 78.5692.60.00; Sheet 14; 32 Sh.
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

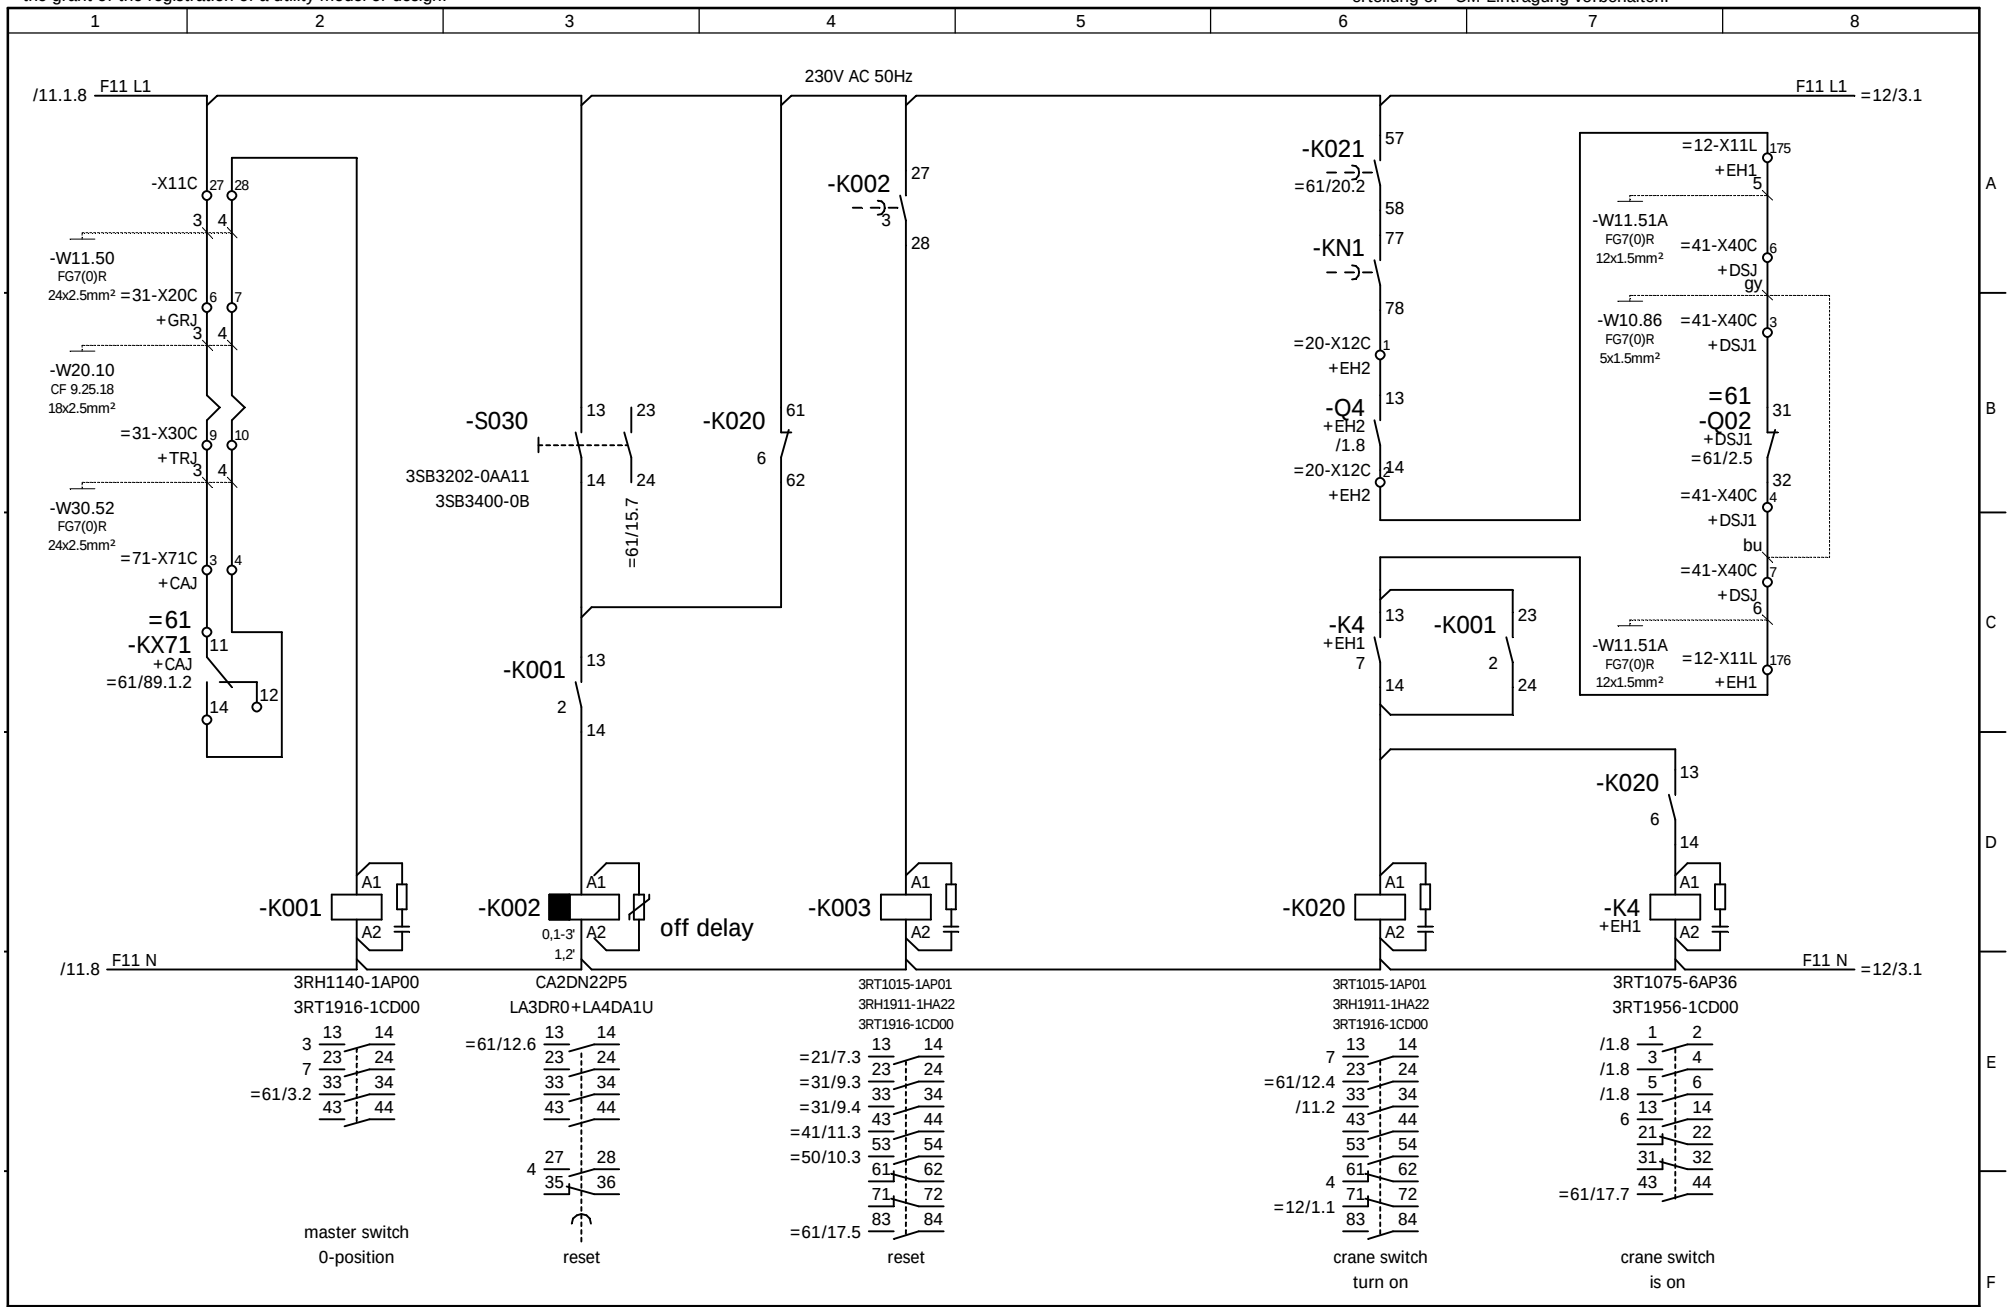

				Date		Costumer		Type	RTG 50/26.50/5+1/AC
				Designer	XU HR	AMPT Egypt	NOELL		=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	feeding, crane switch Stromlaufplan / Circuit Diagram		Sheet 15 32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

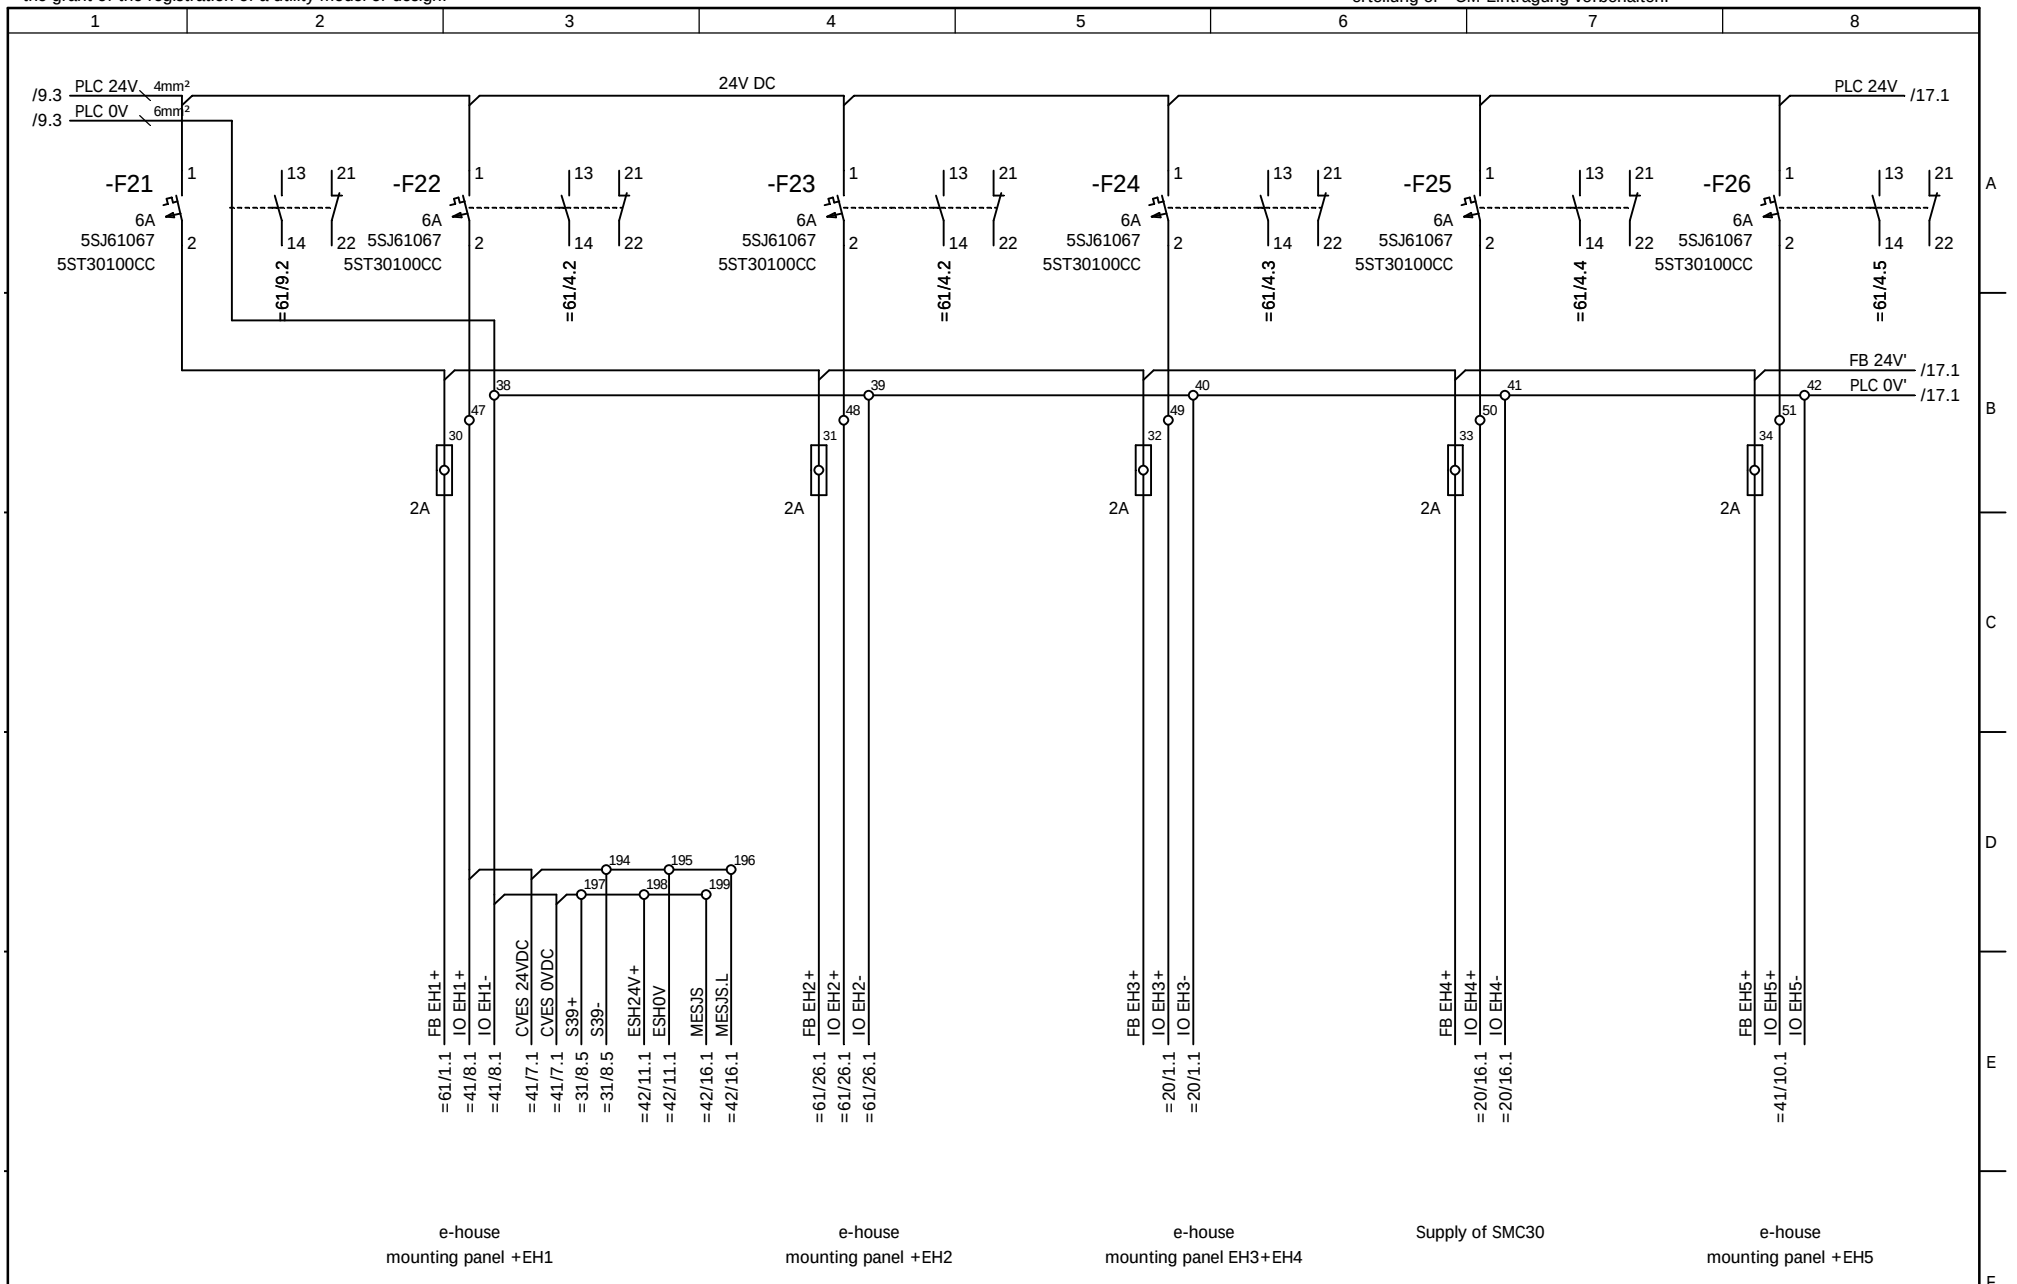


				Date		Costumer	AMPT Egypt	NOELL	feeding, control volt. 24VDC Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=11 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	16 32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

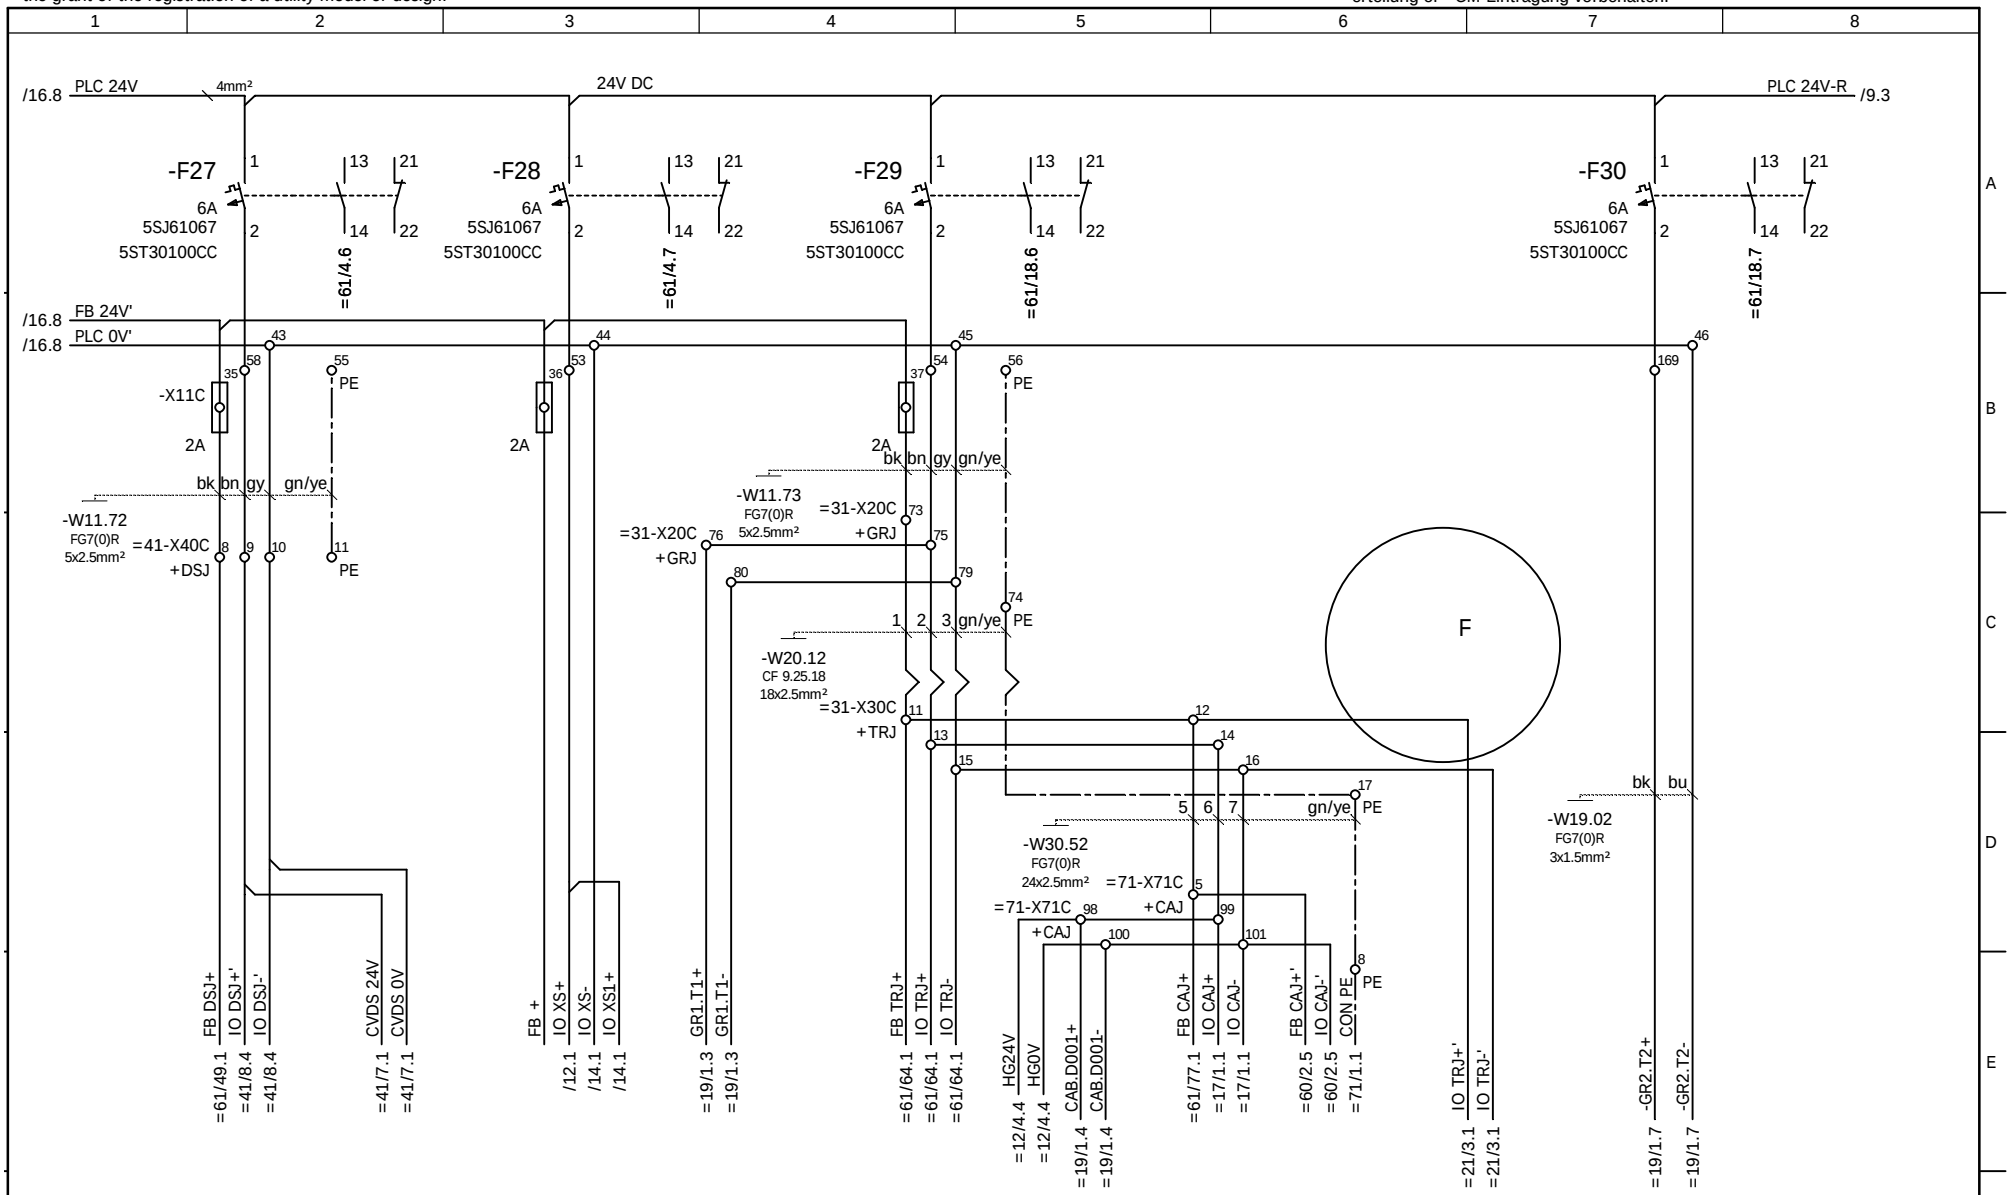

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			Job No.	1255
				Checked	LIU KP			Drawing No.	78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Sheet	17
									32 Sh.


NOELL

feeding, control volt. 24VDC
Stromlaufplan / Circuit Diagram

=11
+EH1

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

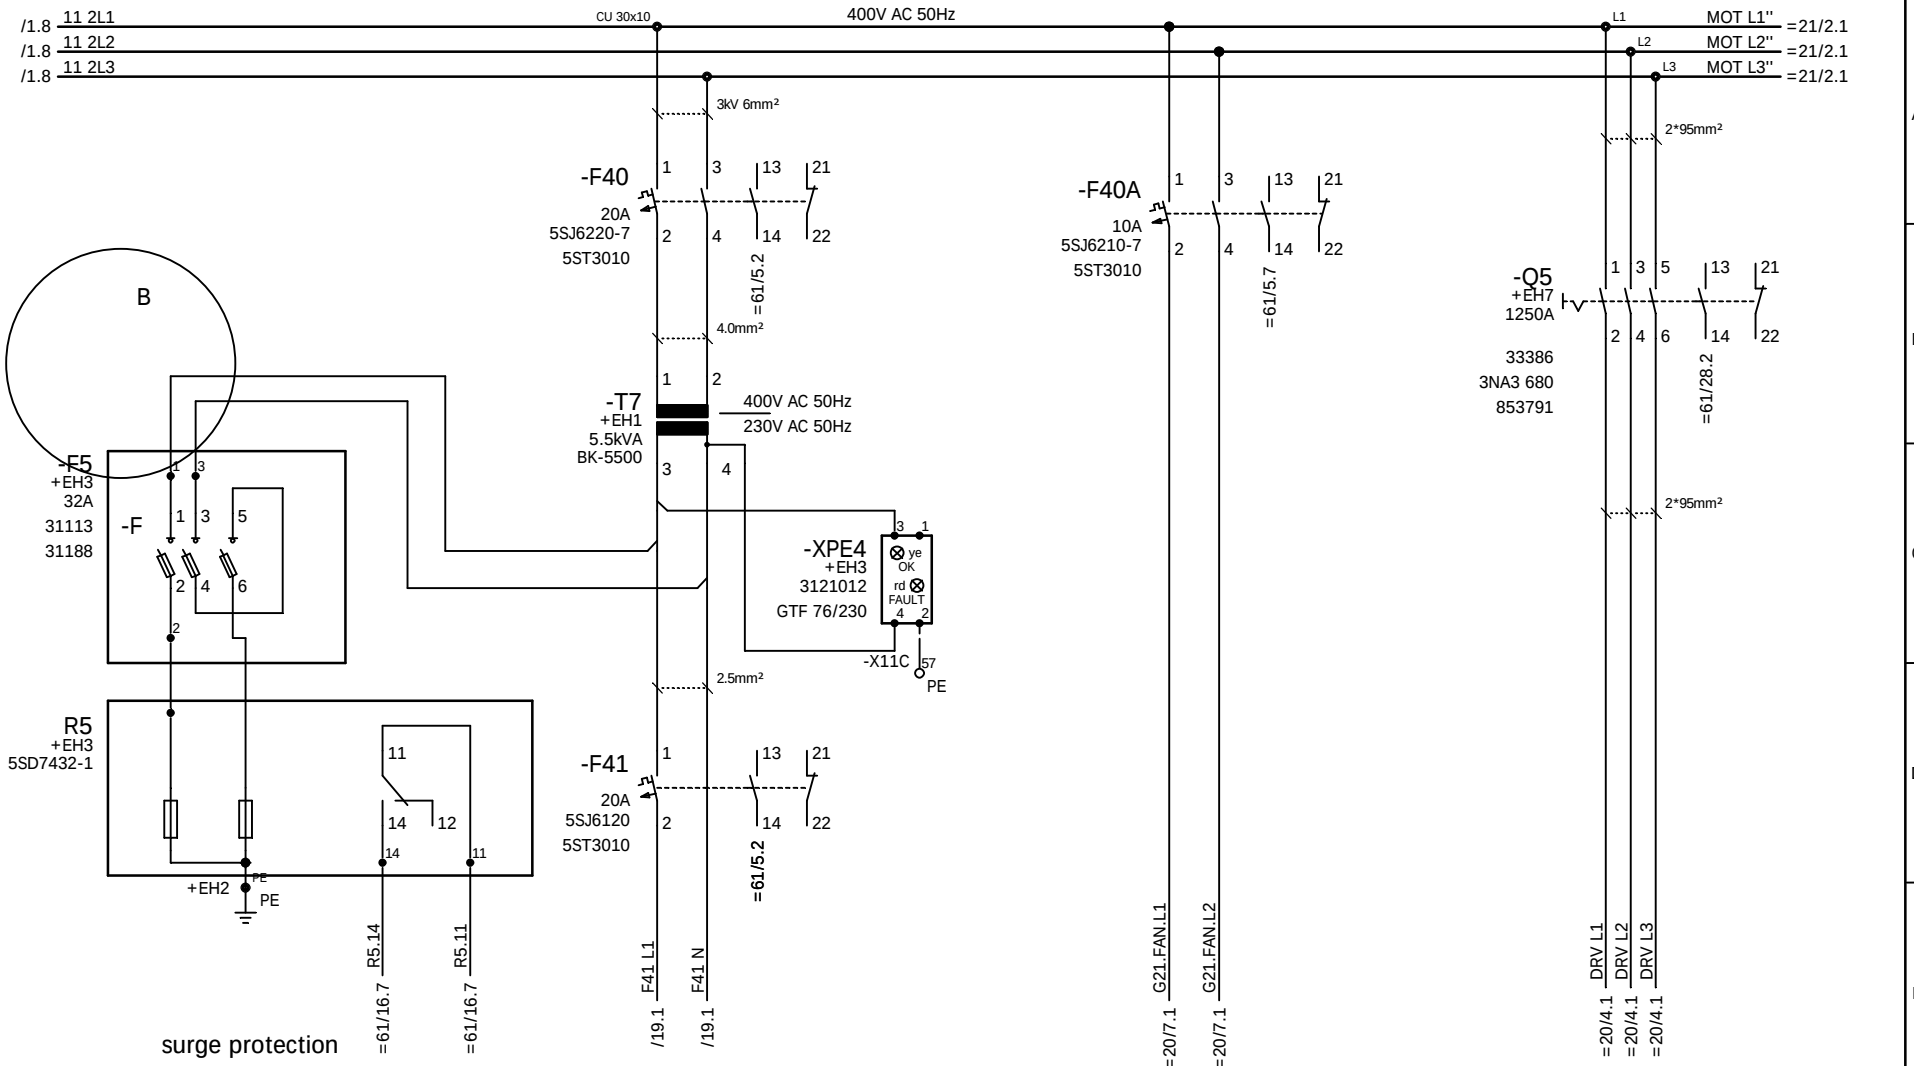

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11
				Checked	LIU KP				+EH1
nd.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00


NOELL

feeding, motors/drives
Stromlaufplan / Circuit Diagram

Sheet 18
32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

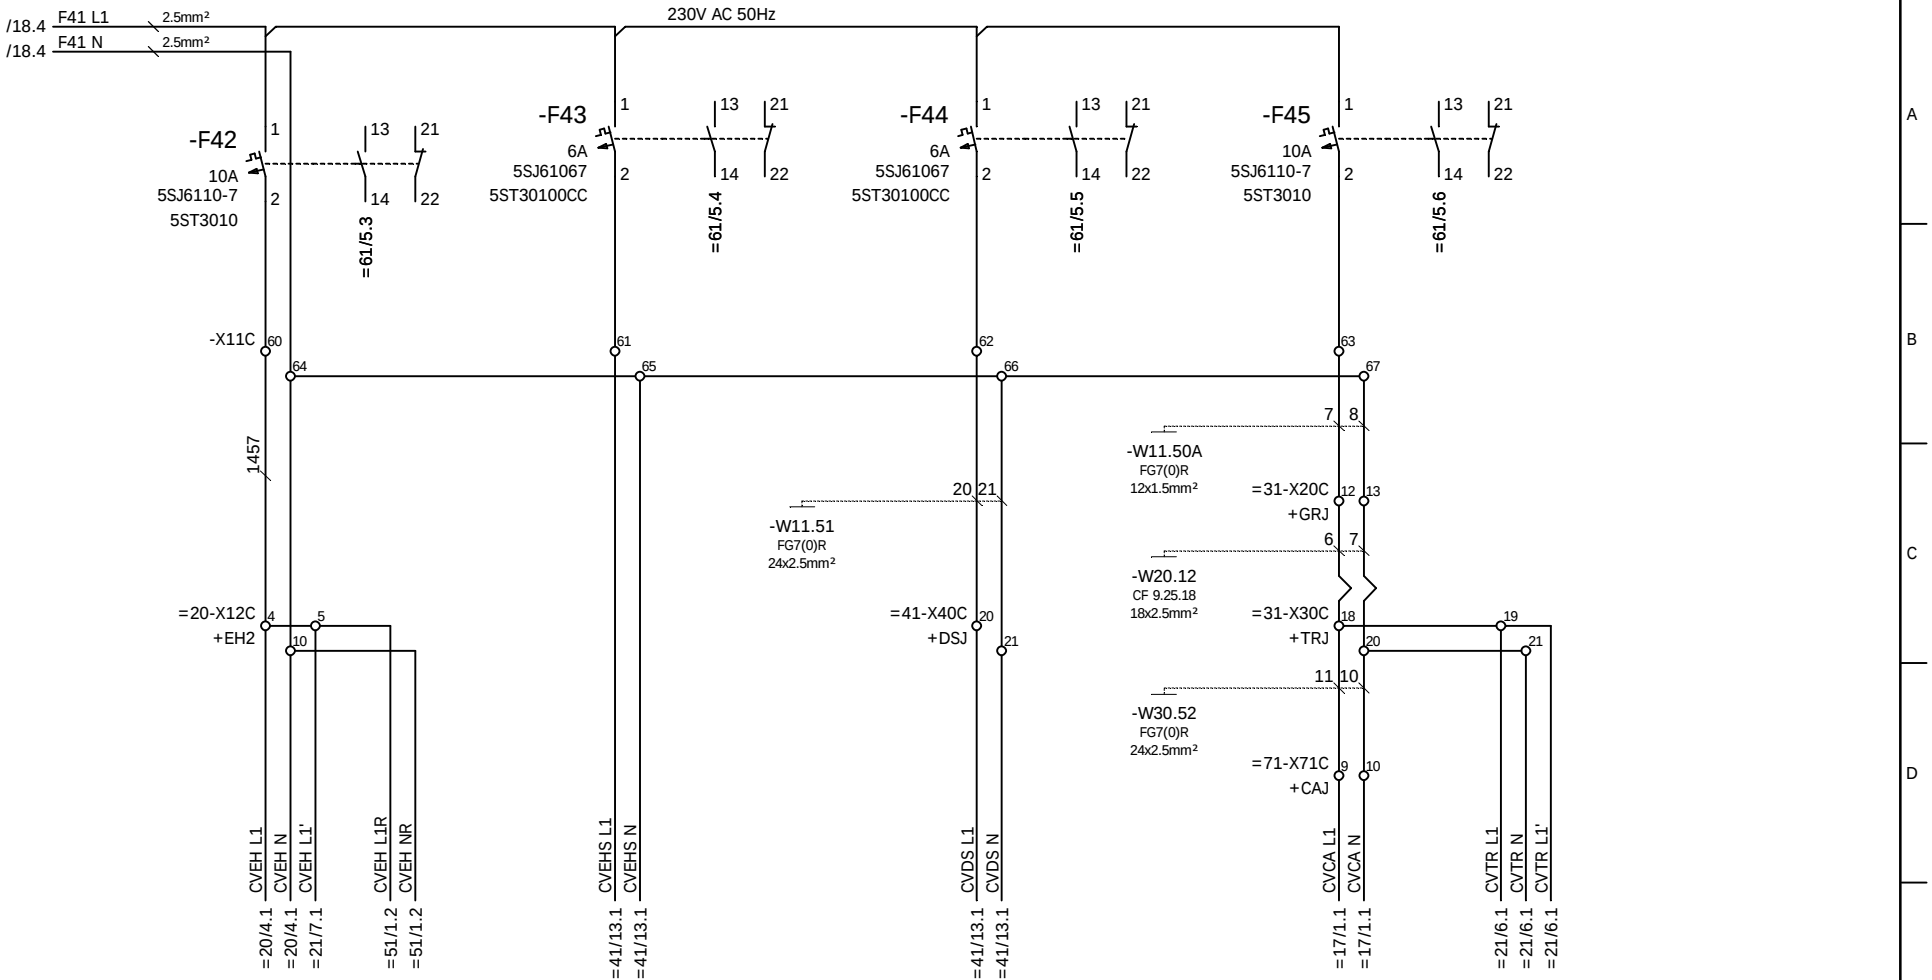


control voltage e-house | control voltage e-house side | control voltage dieselside | control voltage operator's cab | control voltage trolley | power for spreader connectored signal

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

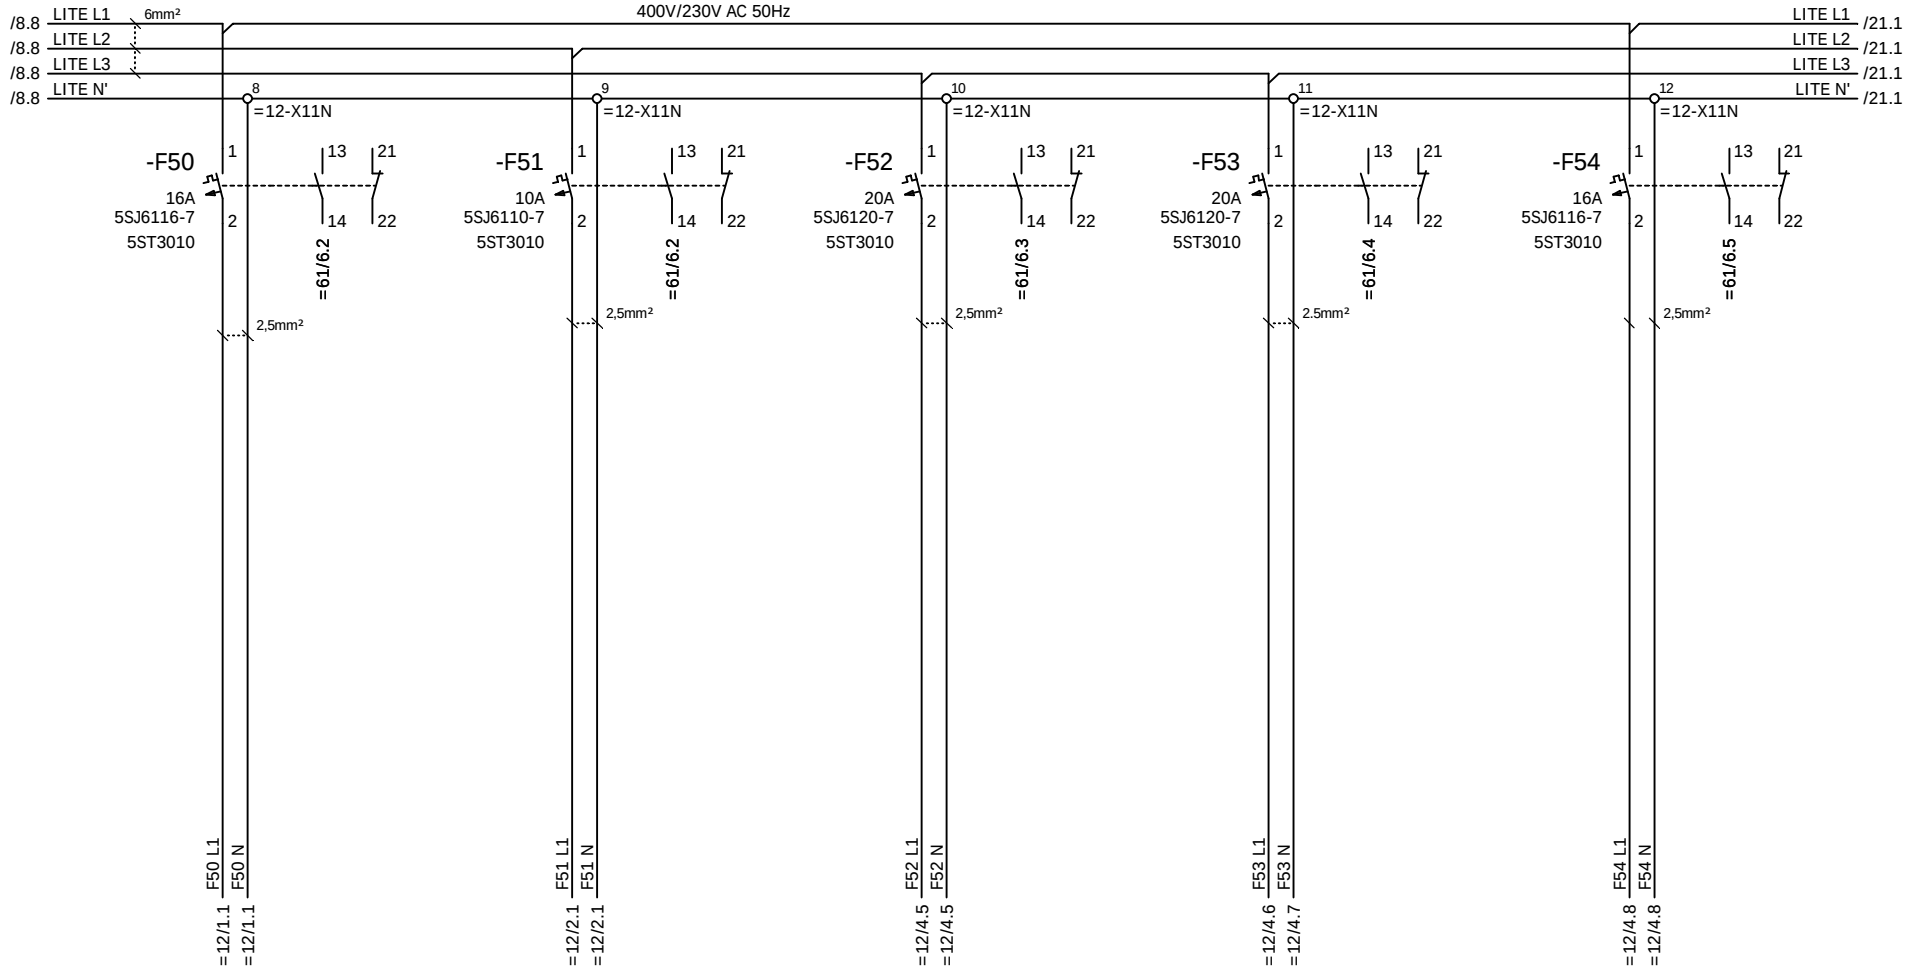

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00


NOELL

auxiliary circuits, dissipation
Stromlaufplan / Circuit Diagram

=11
+EH1
Sheet 20
32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

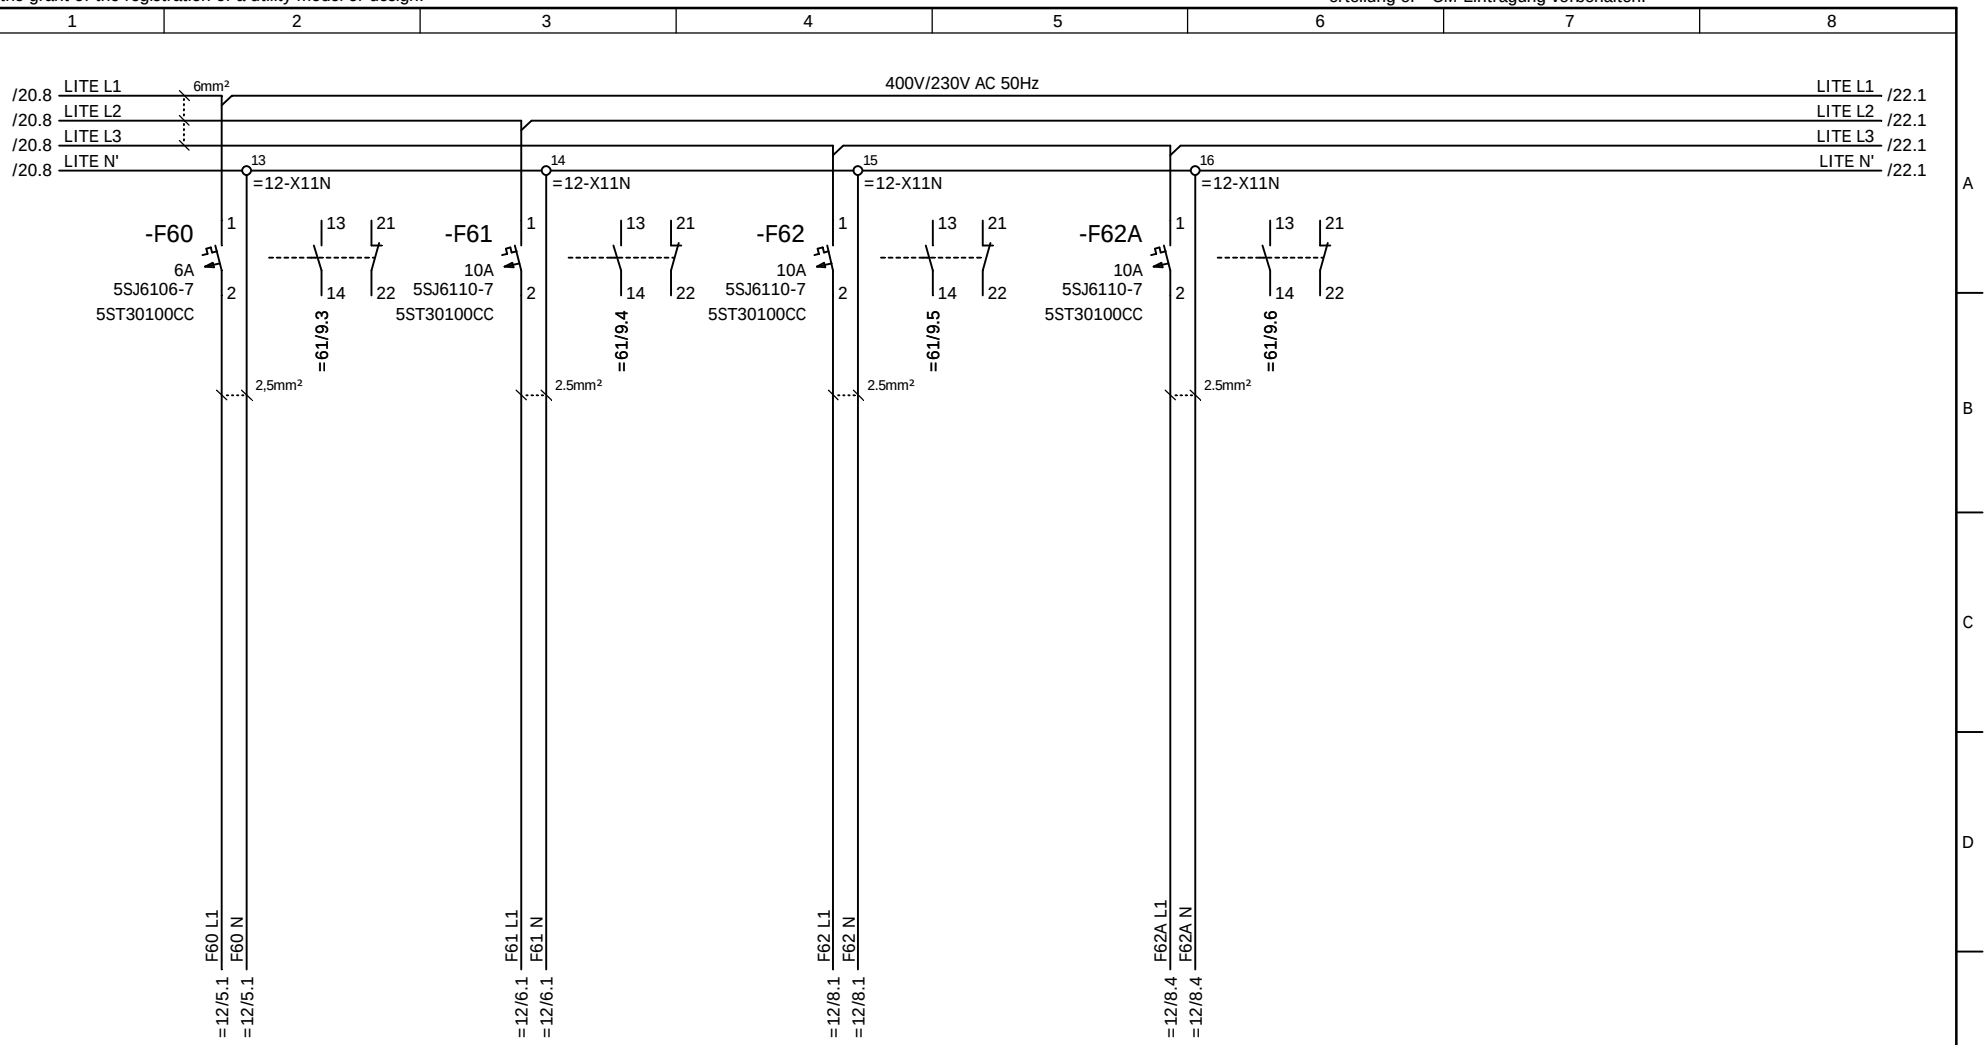

Lights in e-house

lighting control

Florescent lights on ascent side

Florescent lights on ladder platform side

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 21 32 Sh.


NOELL

feeding, dissipation

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

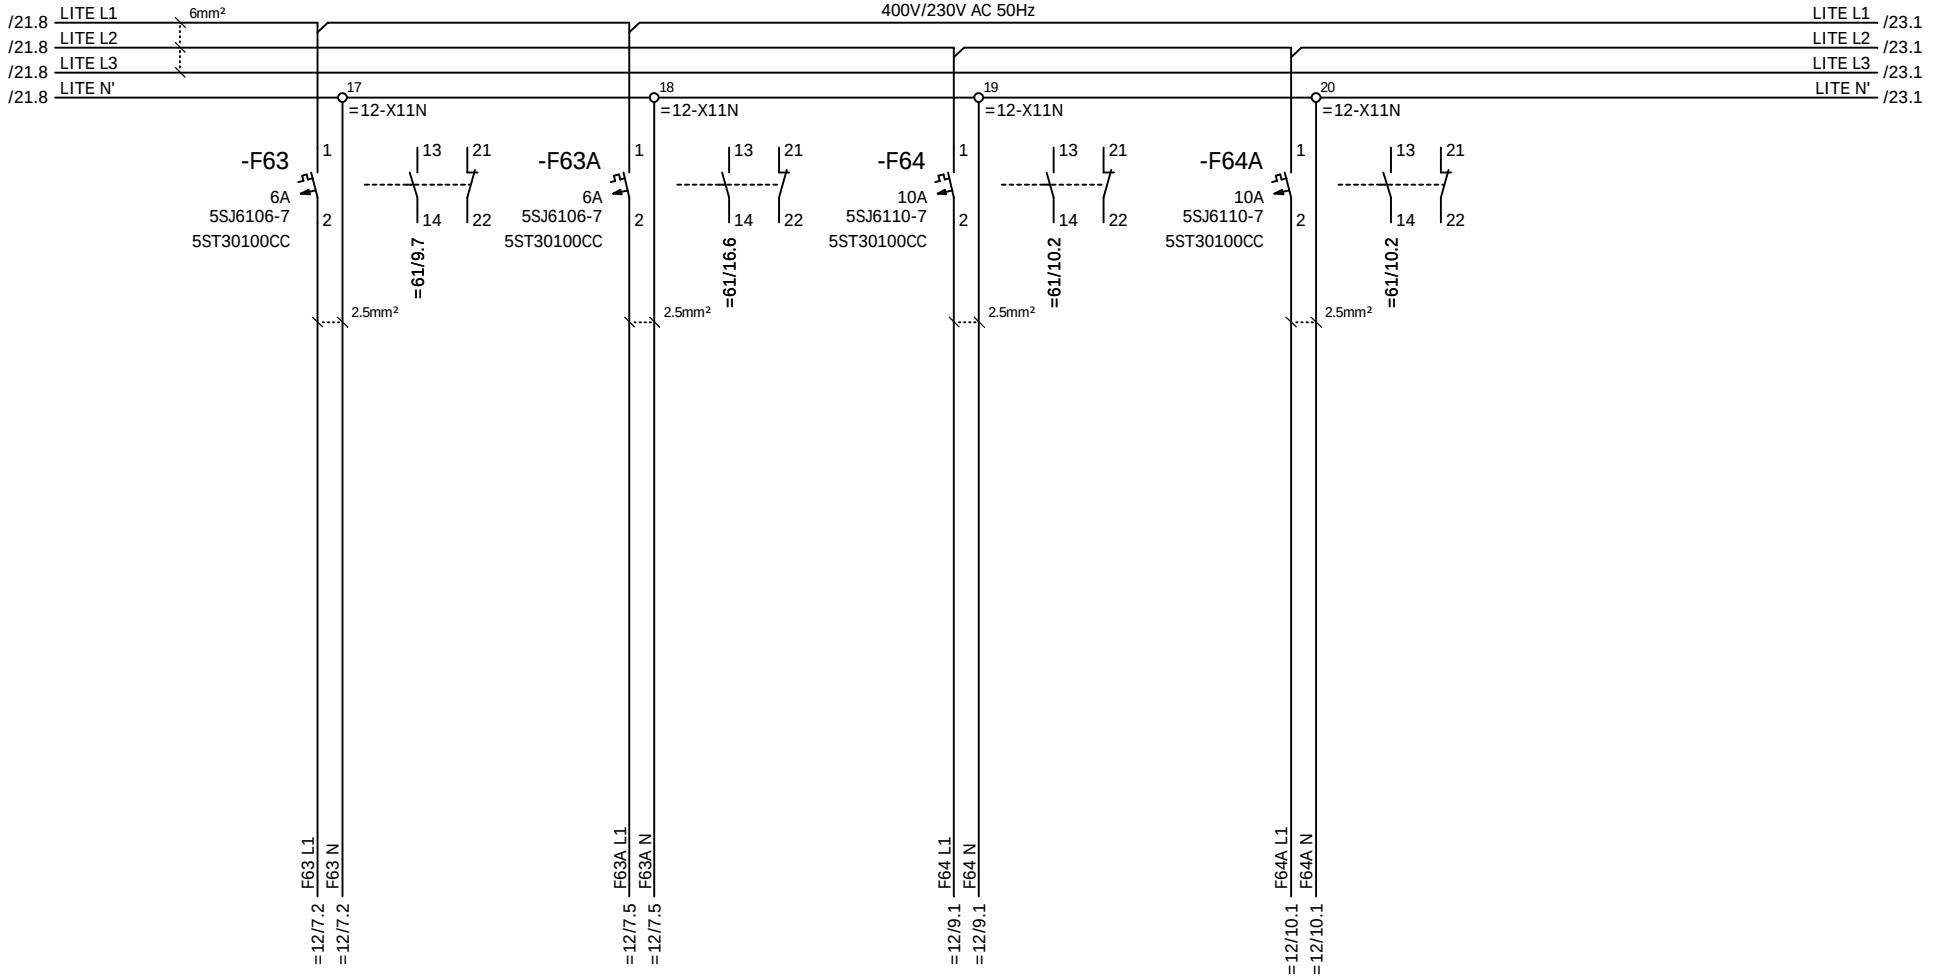

Florescent lights on diesel side

Florescent lights on diesel side

Florescent lights on girder 1+2

Florescent lights on girder 1+2

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 22 32 Sh.


NOELL

feeding, dissipation

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

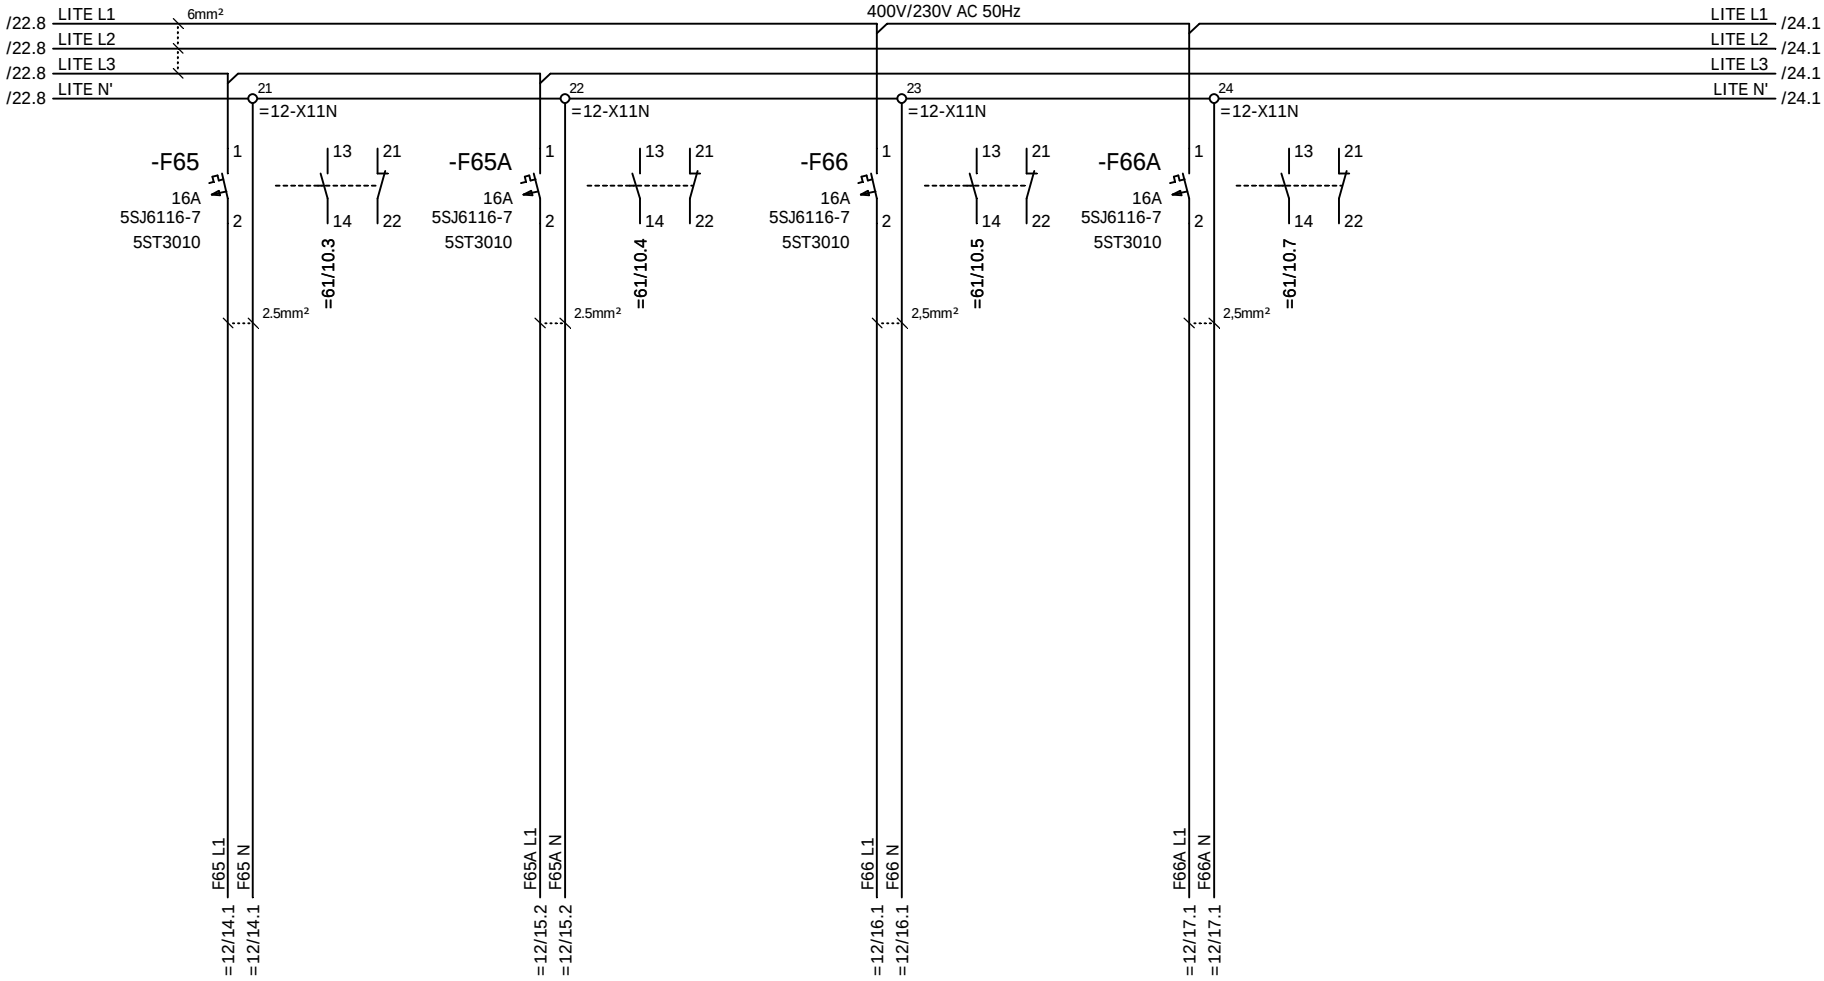

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00


NOELL

feeding, dissipation
Stromlaufplan / Circuit Diagram

=11
+EH1
Sheet 23
32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

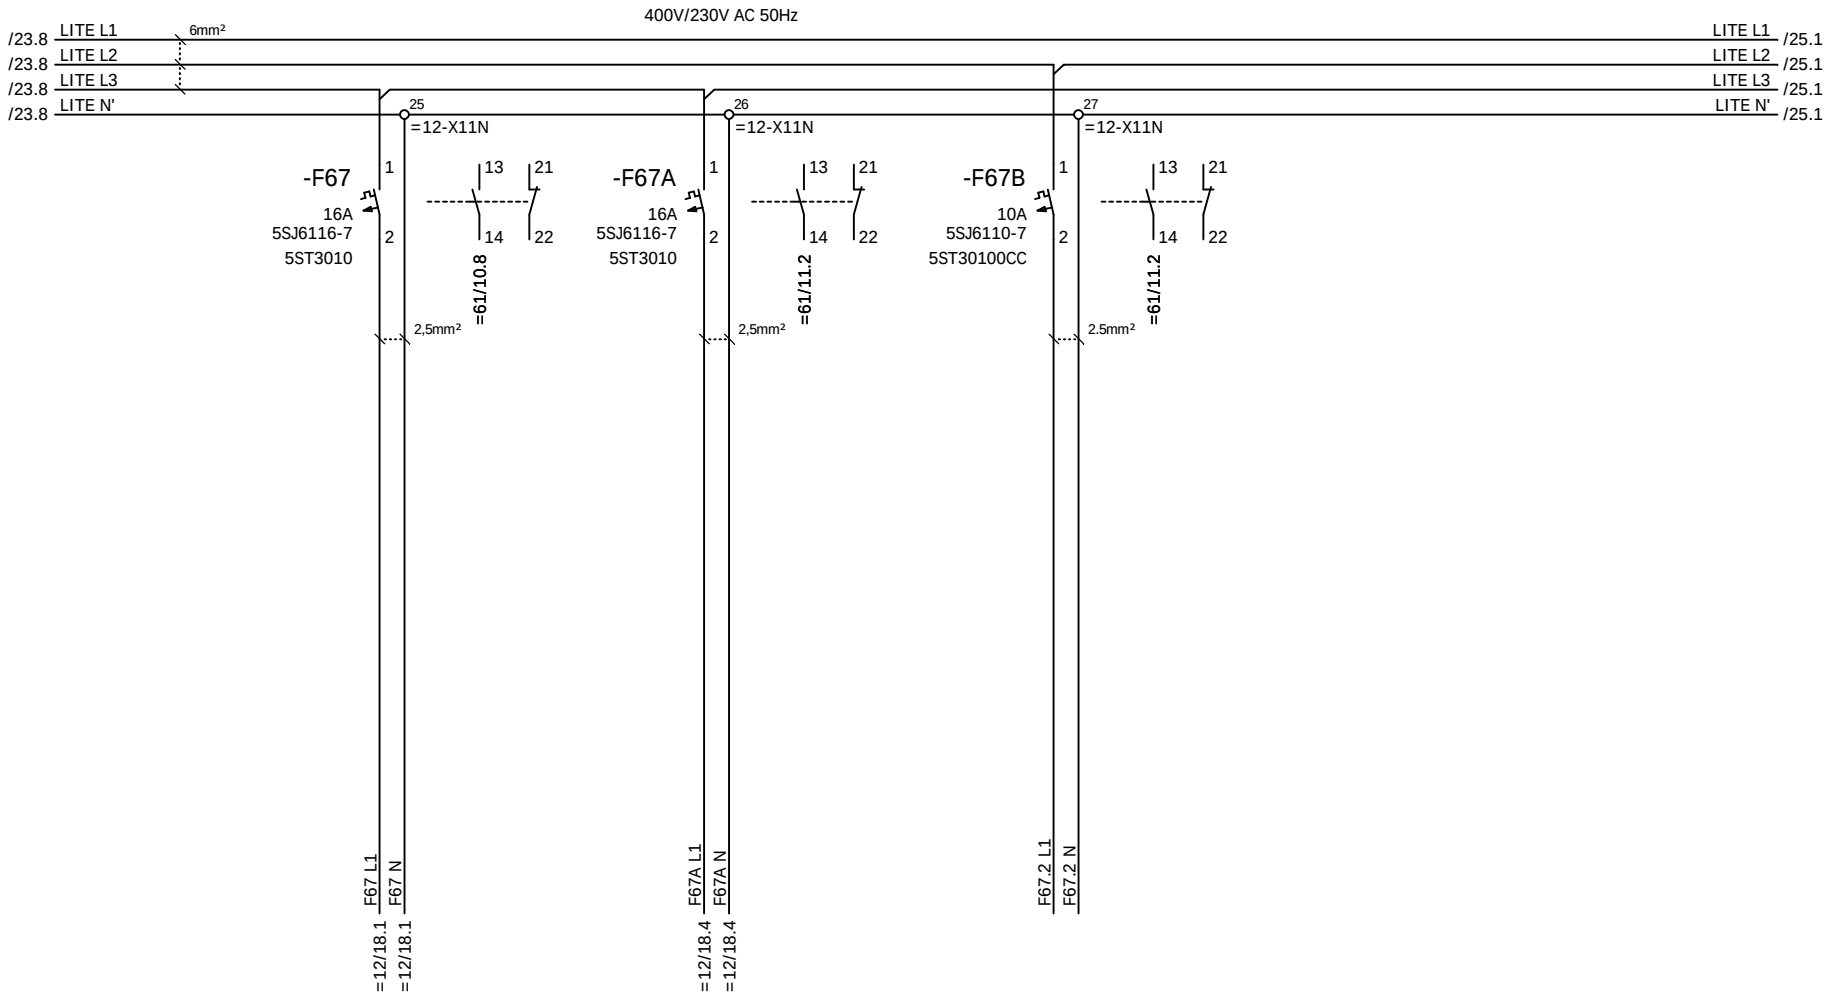

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00


NOELL

feeding, dissipation
Stromlaufplan / Circuit Diagram

=11
+EH1
Sheet 24
32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

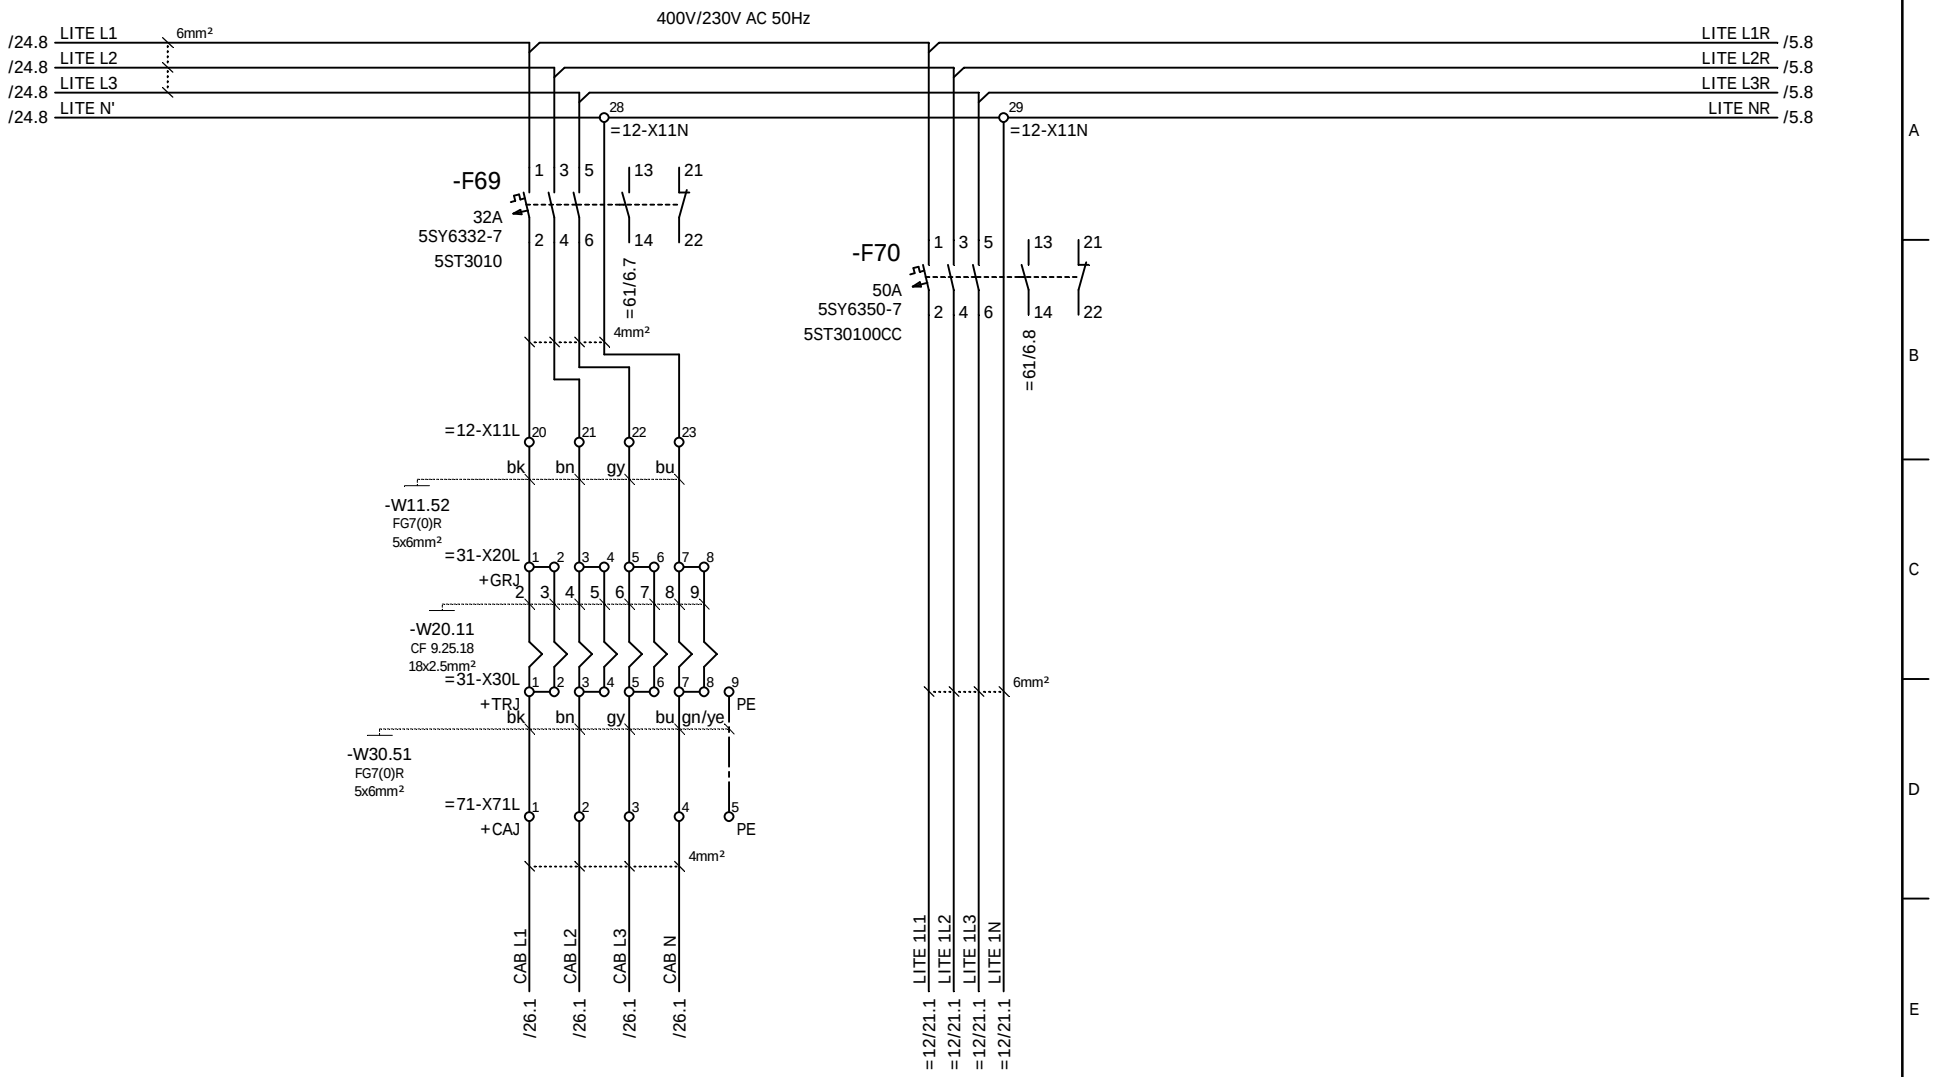


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 25 32 Sh.

auxiliary circuits, dissipation
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

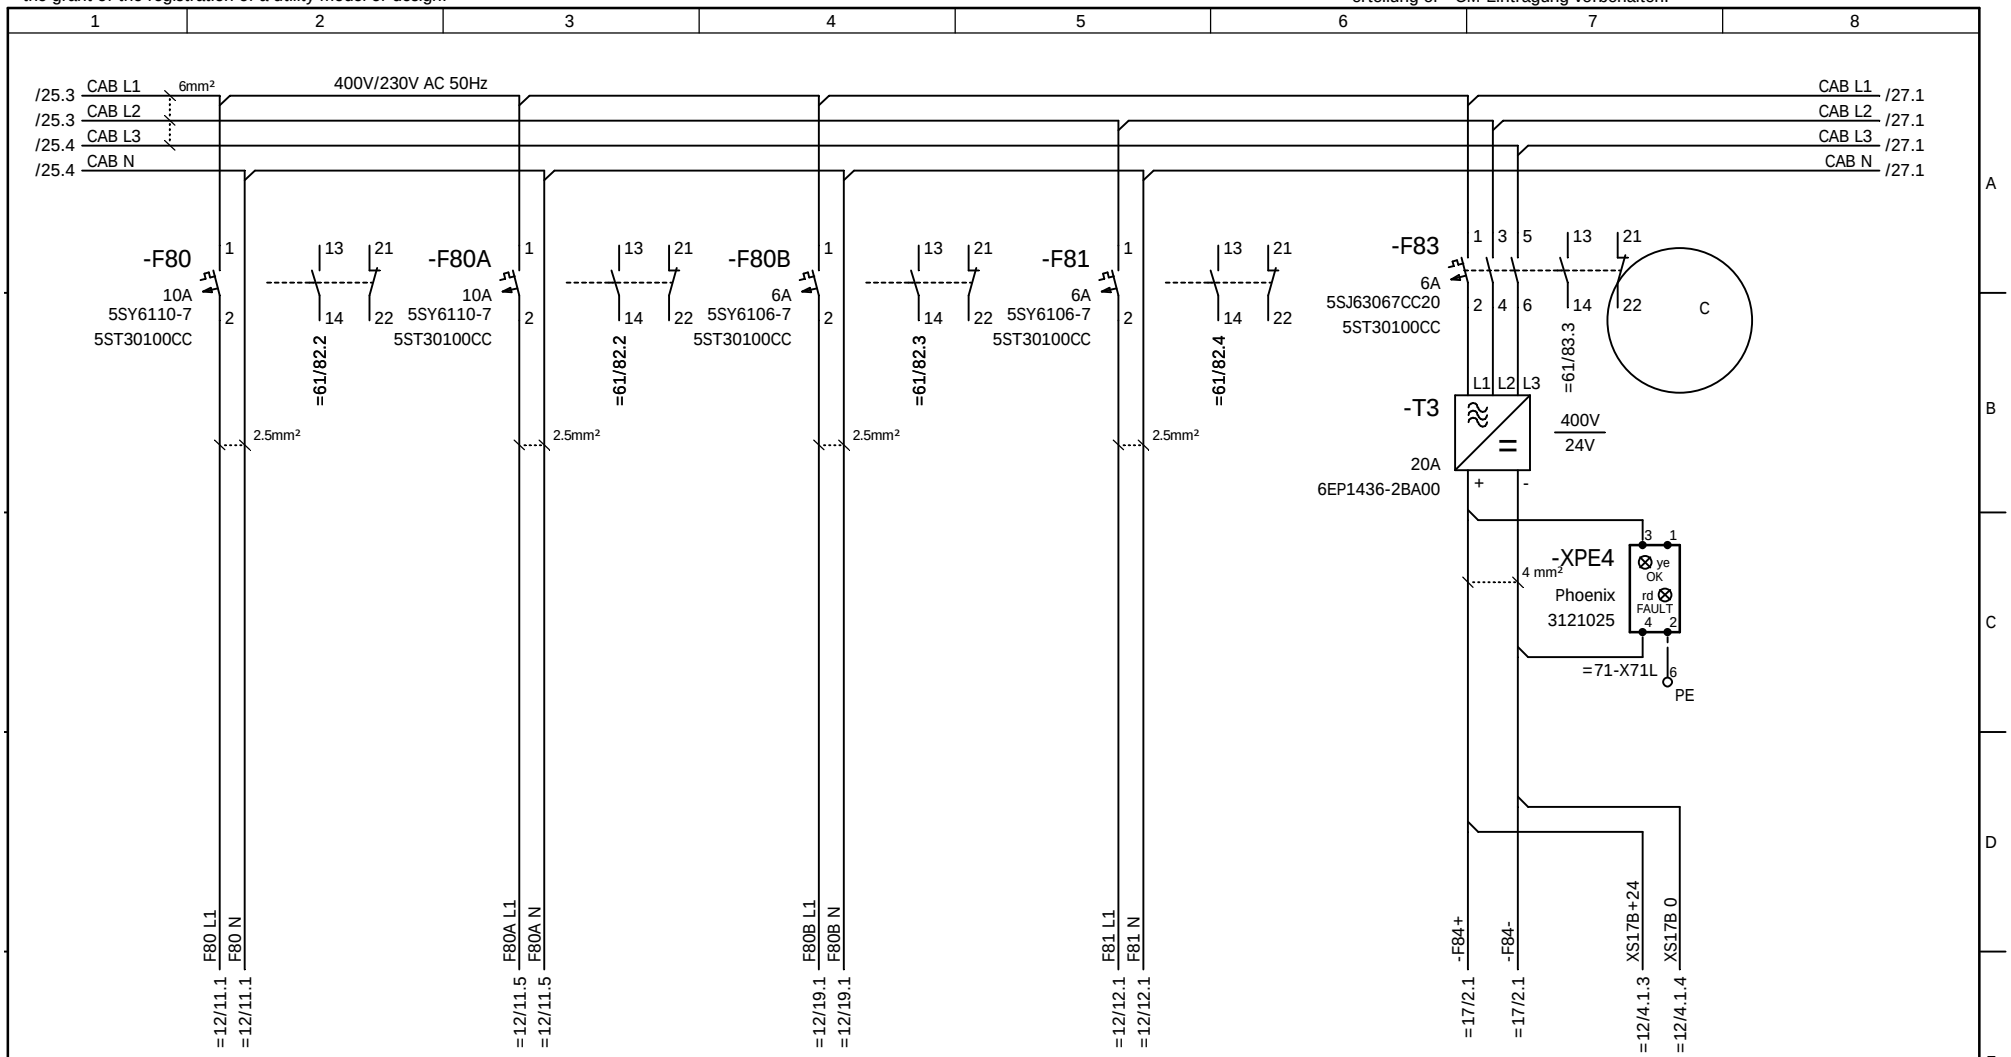

lights on trolley

lights on trolley

maintain floodlight on trolley


lights in cabin

transformer for swher

				Date		Costumer	AMPT Egypt	auxiliary circuits, dissipation	Type	RTG 50/26.50/5+1/AC	=11
				Designer	XU HR			Stromlaufplan / Circuit Diagram			+CAJ
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 26
Ind.	Revision	Date	Name	Standard		Source:					32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

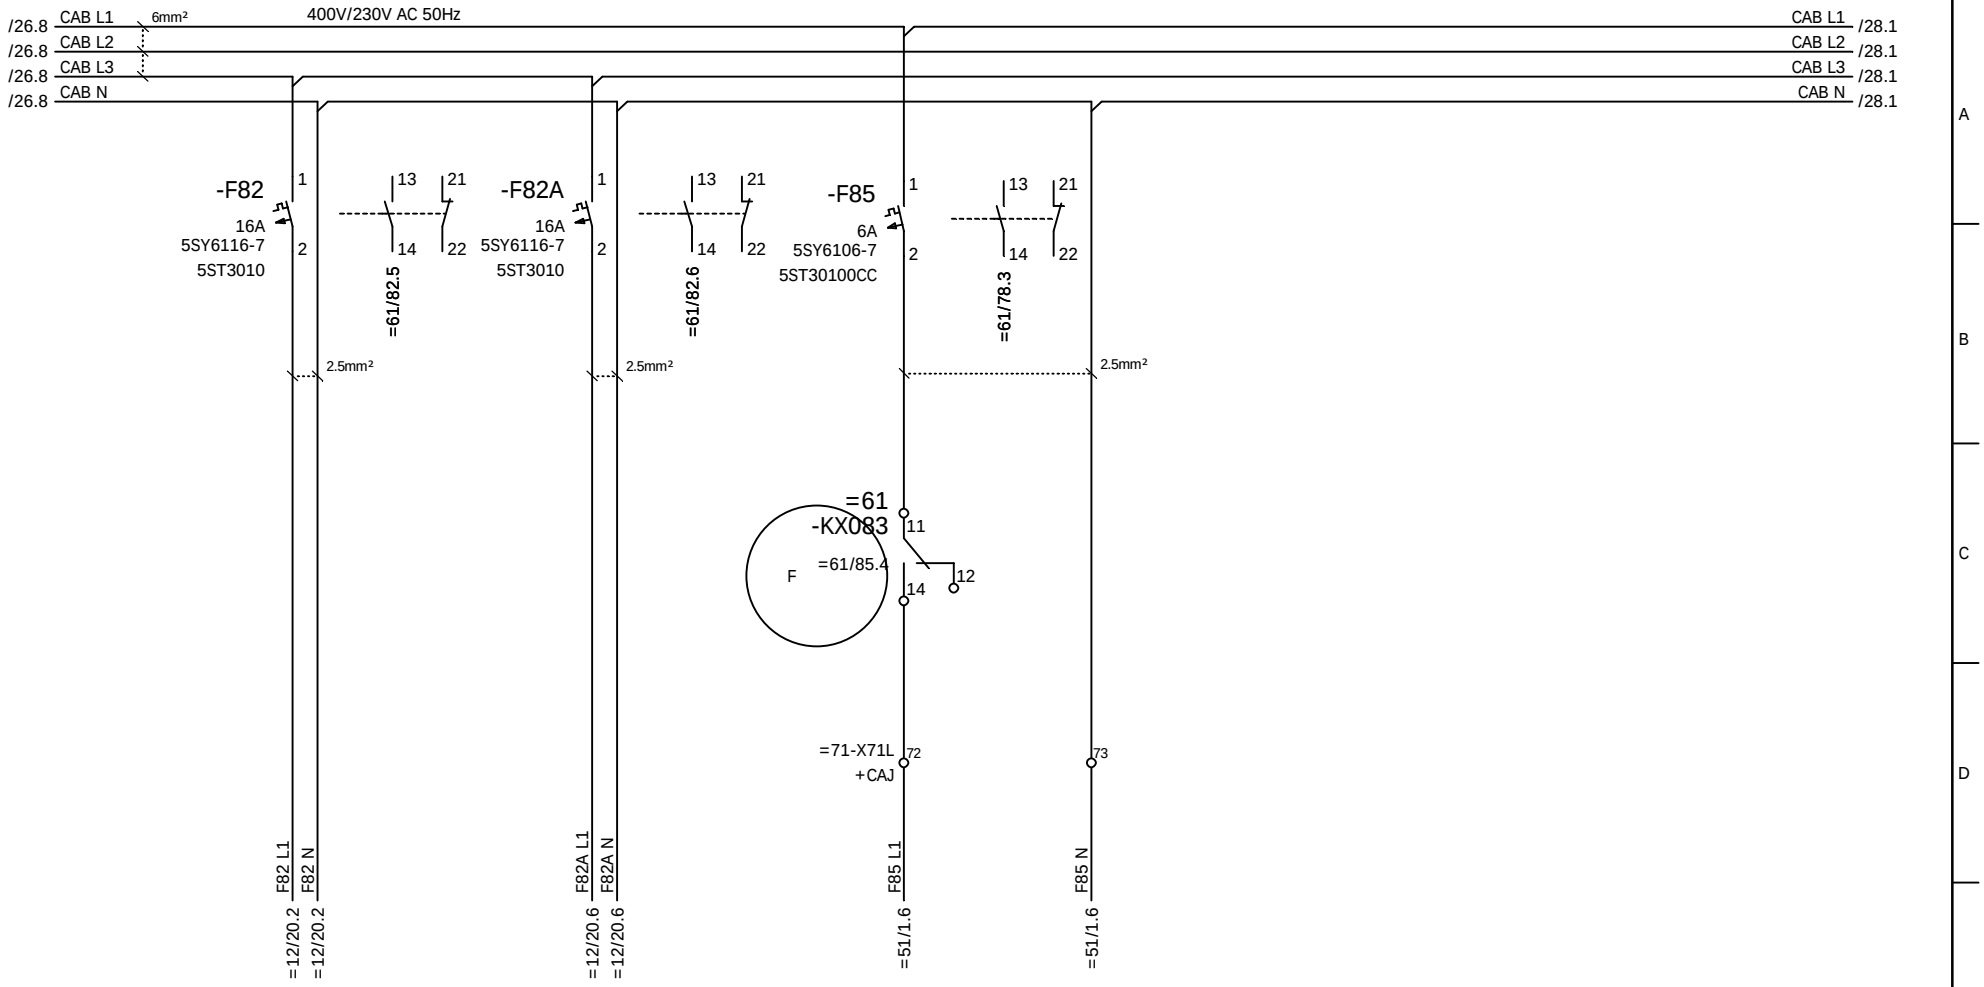


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 27 32 Sh.

auxiliary circuits, dissipation
Stromlaufplan / Circuit Diagram


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

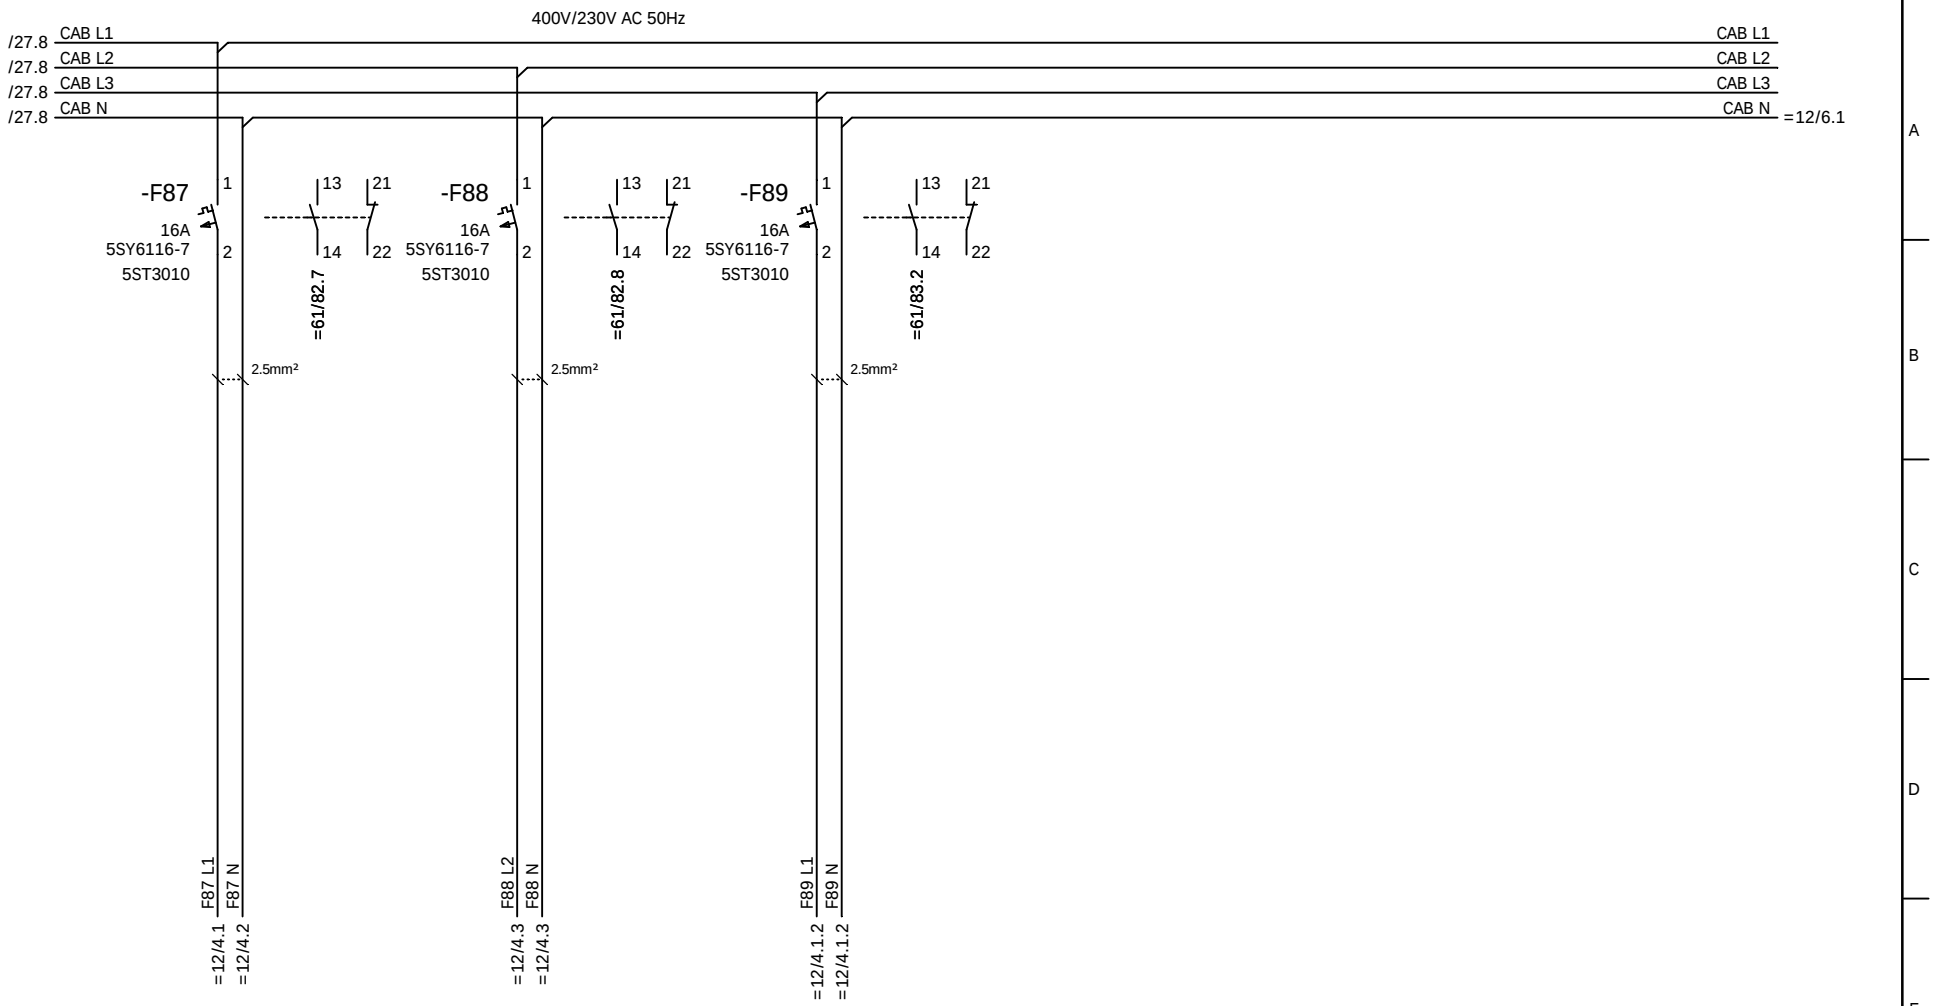

				Date		Costumer	AMPT Egypt	auxiliary circuits, dissipation	Type RTG 50/26.50/5+1/AC	=11
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+CAJ
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 28
Ind.	Revision	Date	Name	Standard		Source:					32 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

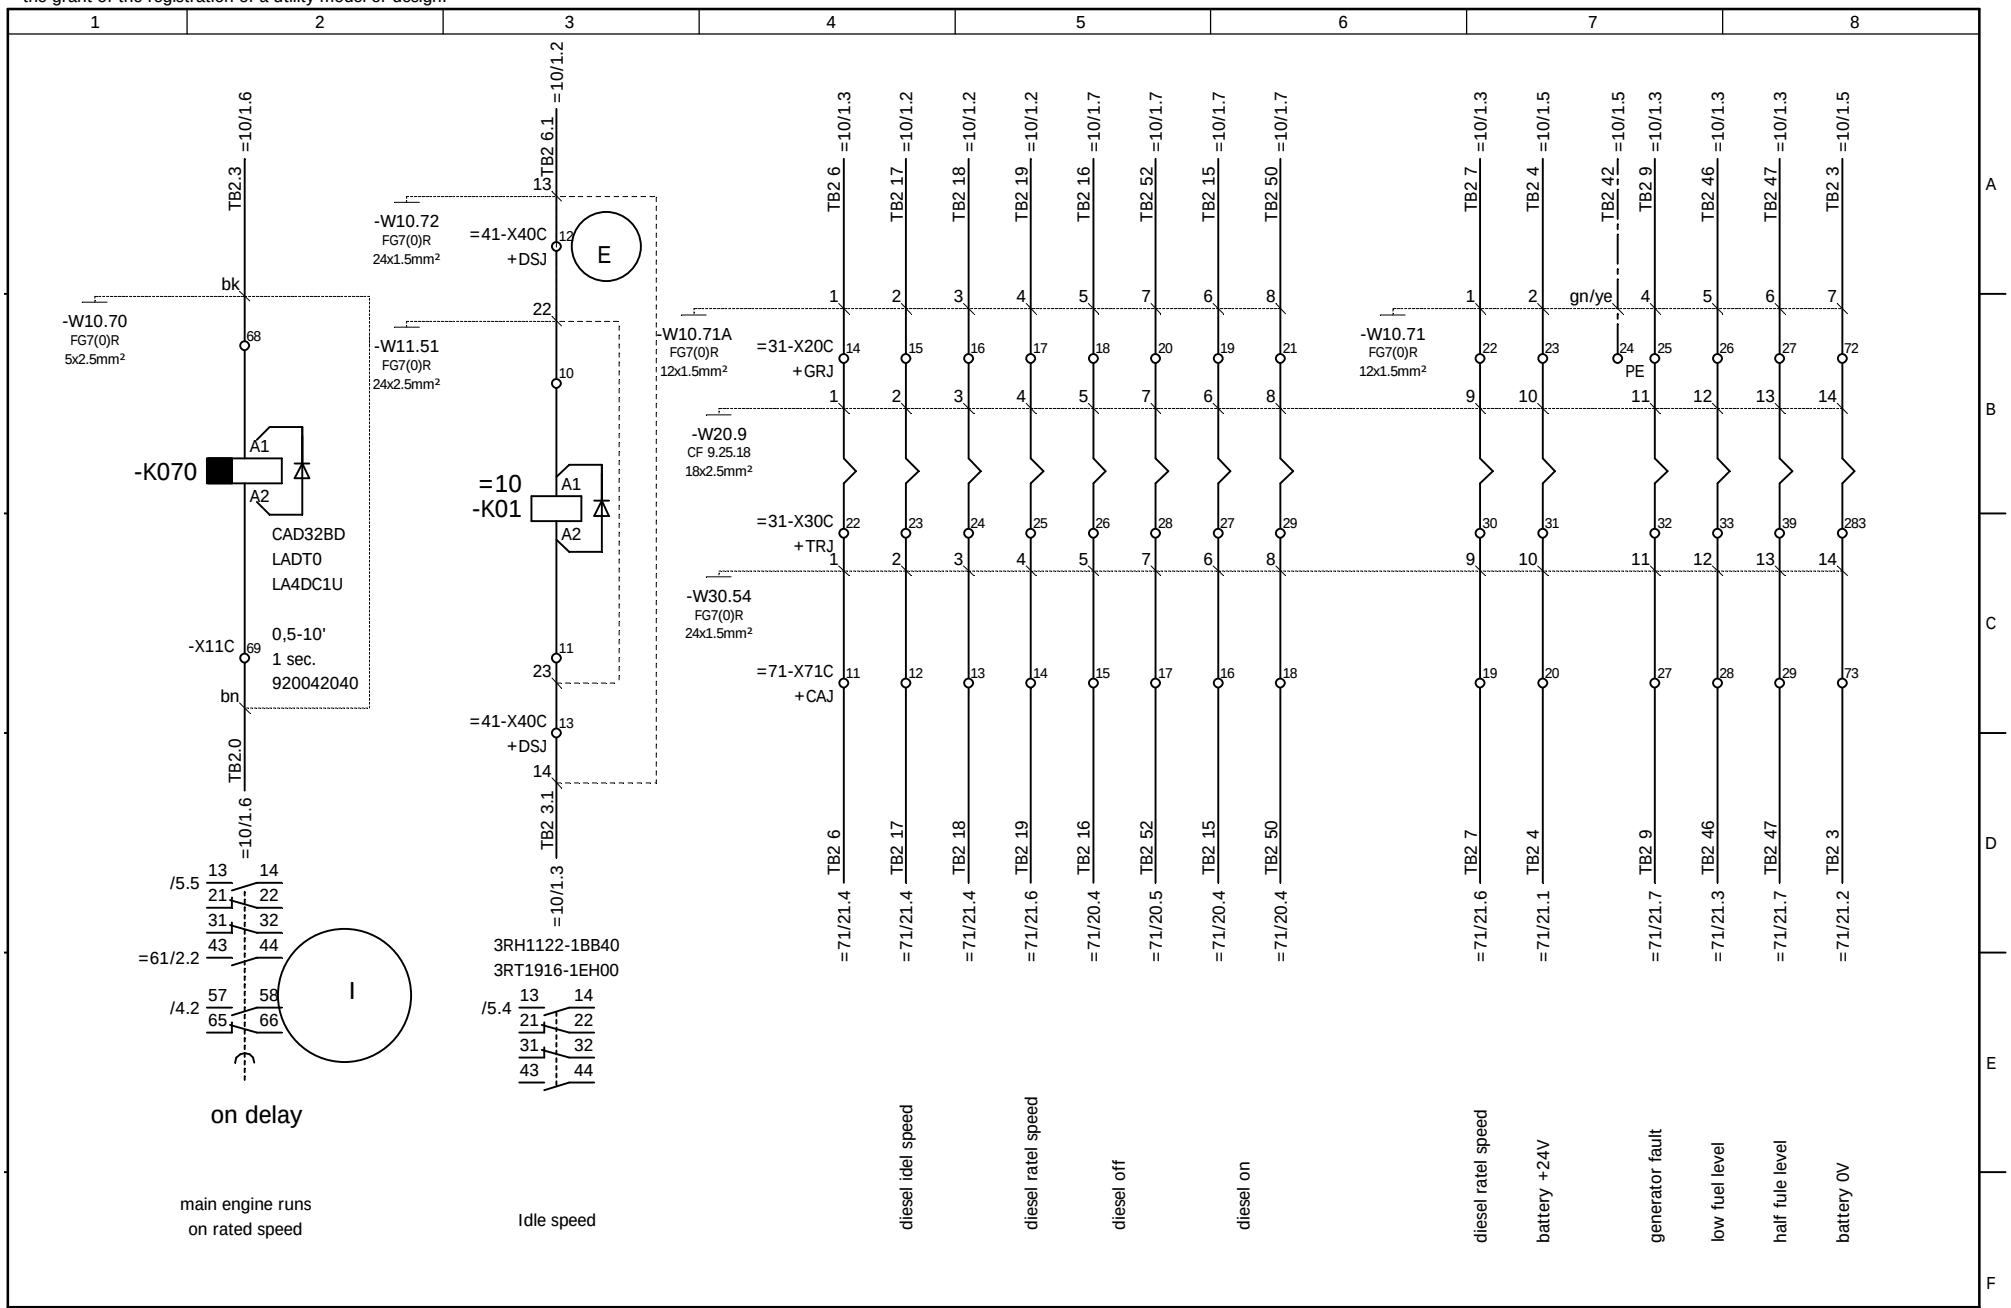

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=11	
				Checked	LIU KP			+EH1	
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00
								Sheet 29	32 Sh.


NOELL

feeding, dissipation

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

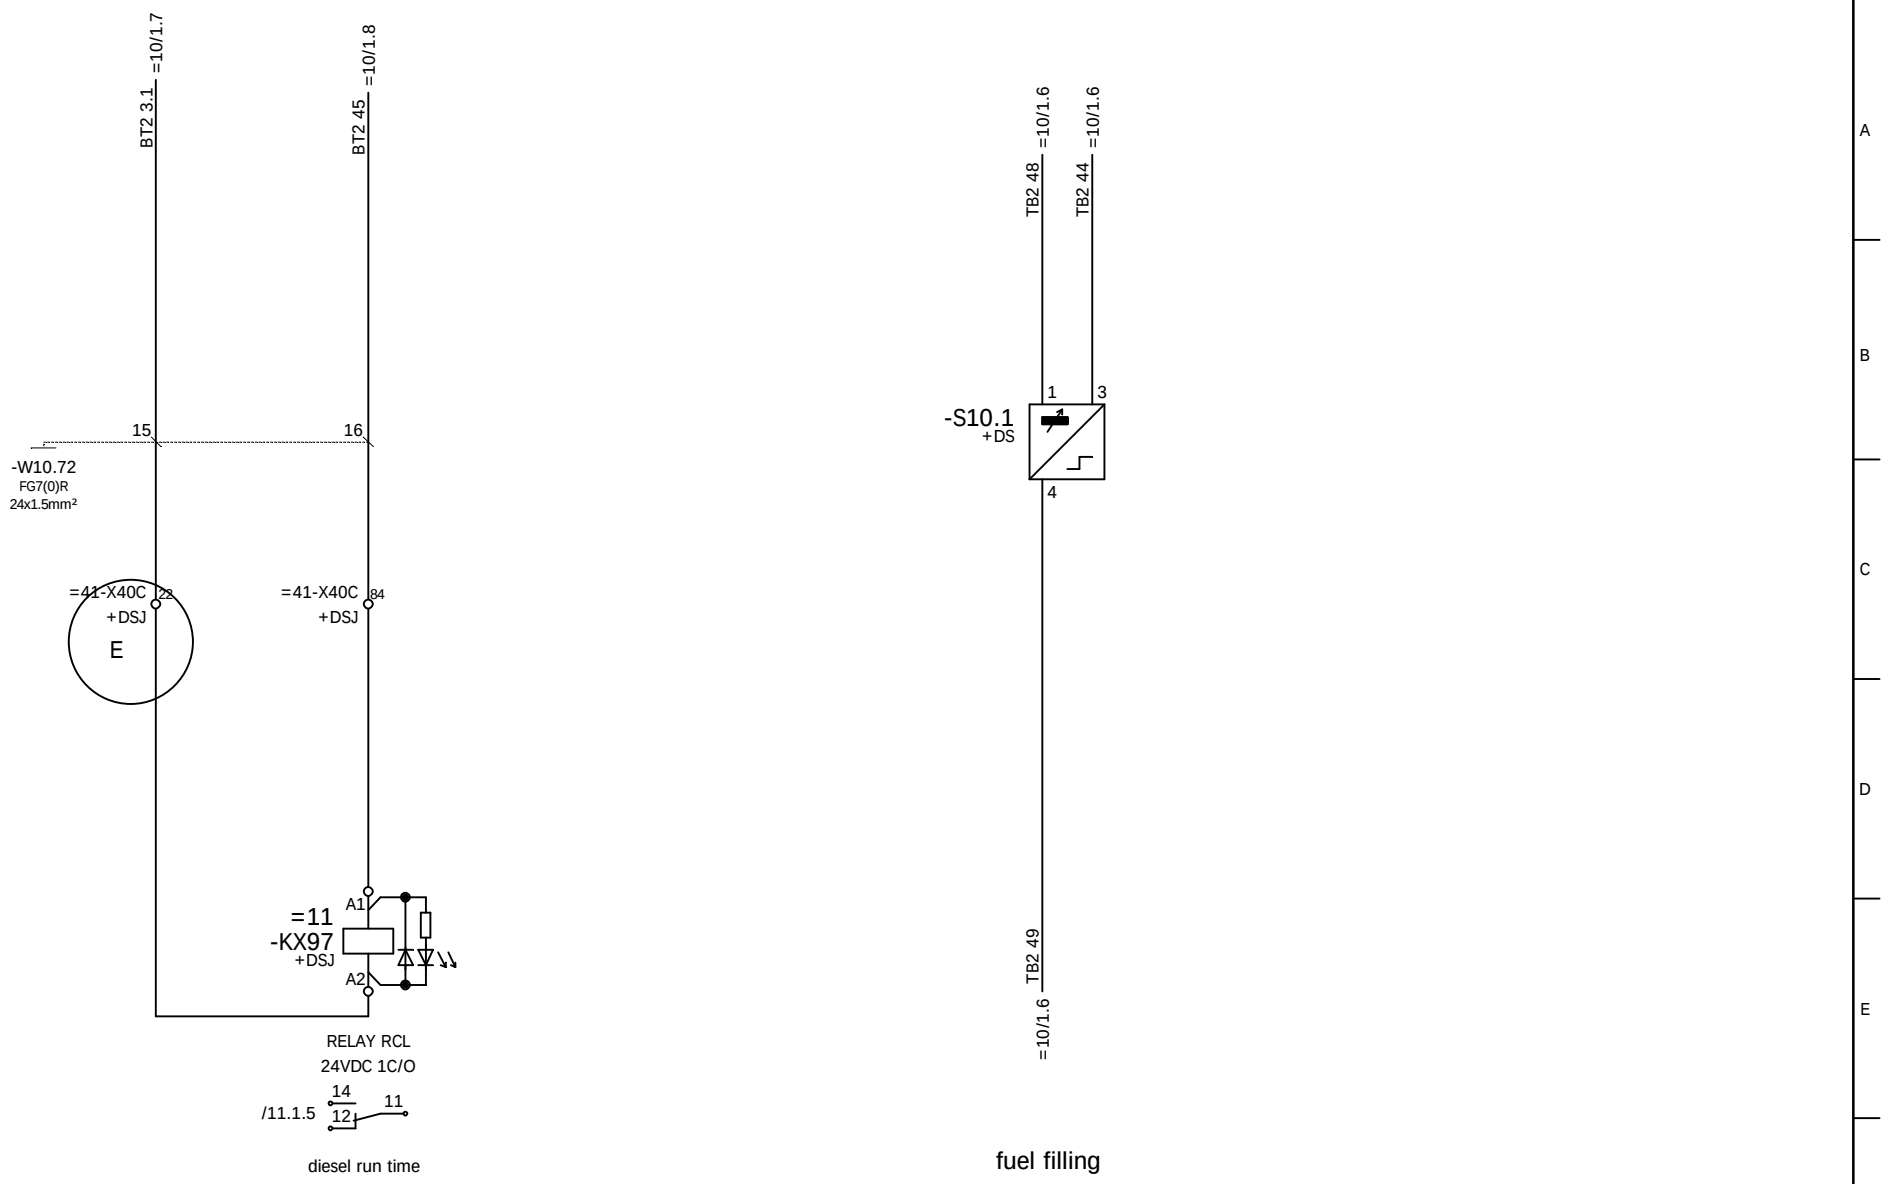


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=11 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 30 32 Sh.

NOELL

feeding, dissipation
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

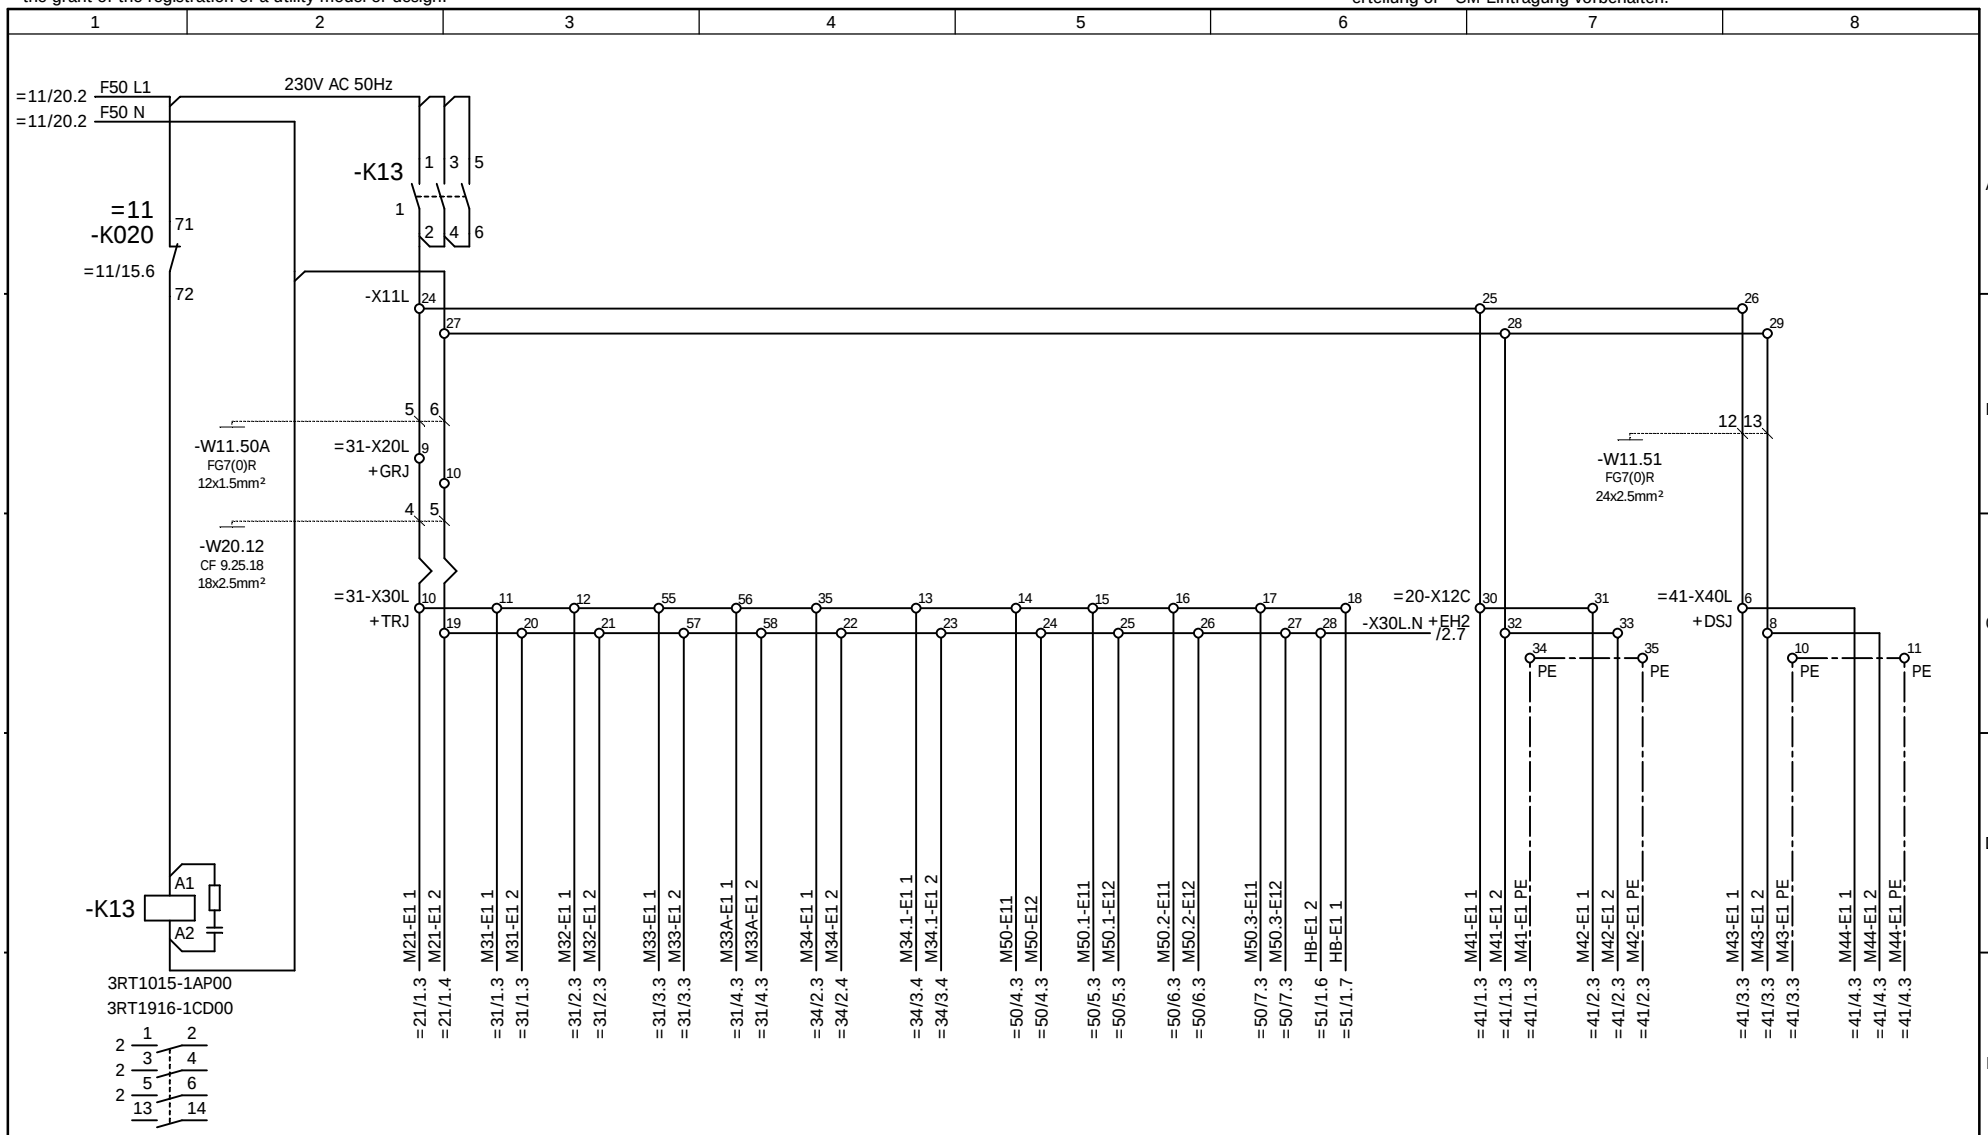


anti condensing heating on	motor hoist travel	motor 1+2+3+4 trolley travel	motor1 skew/trim	motor2 skew/trim	motor 1+2+3+4 antisway unit	Spreader hydraulic motor	motor 1 gantry travelling	motor 2 gantry travelling	motor 3 gantry travelling	motor 4 gantry travelling

				Date		Costumer	AMPT Egypt	NOELL	heating, anti condensing heating	Type RTG 50/26.50/5+1/AC	=12
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:					Sheet 1 / 26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

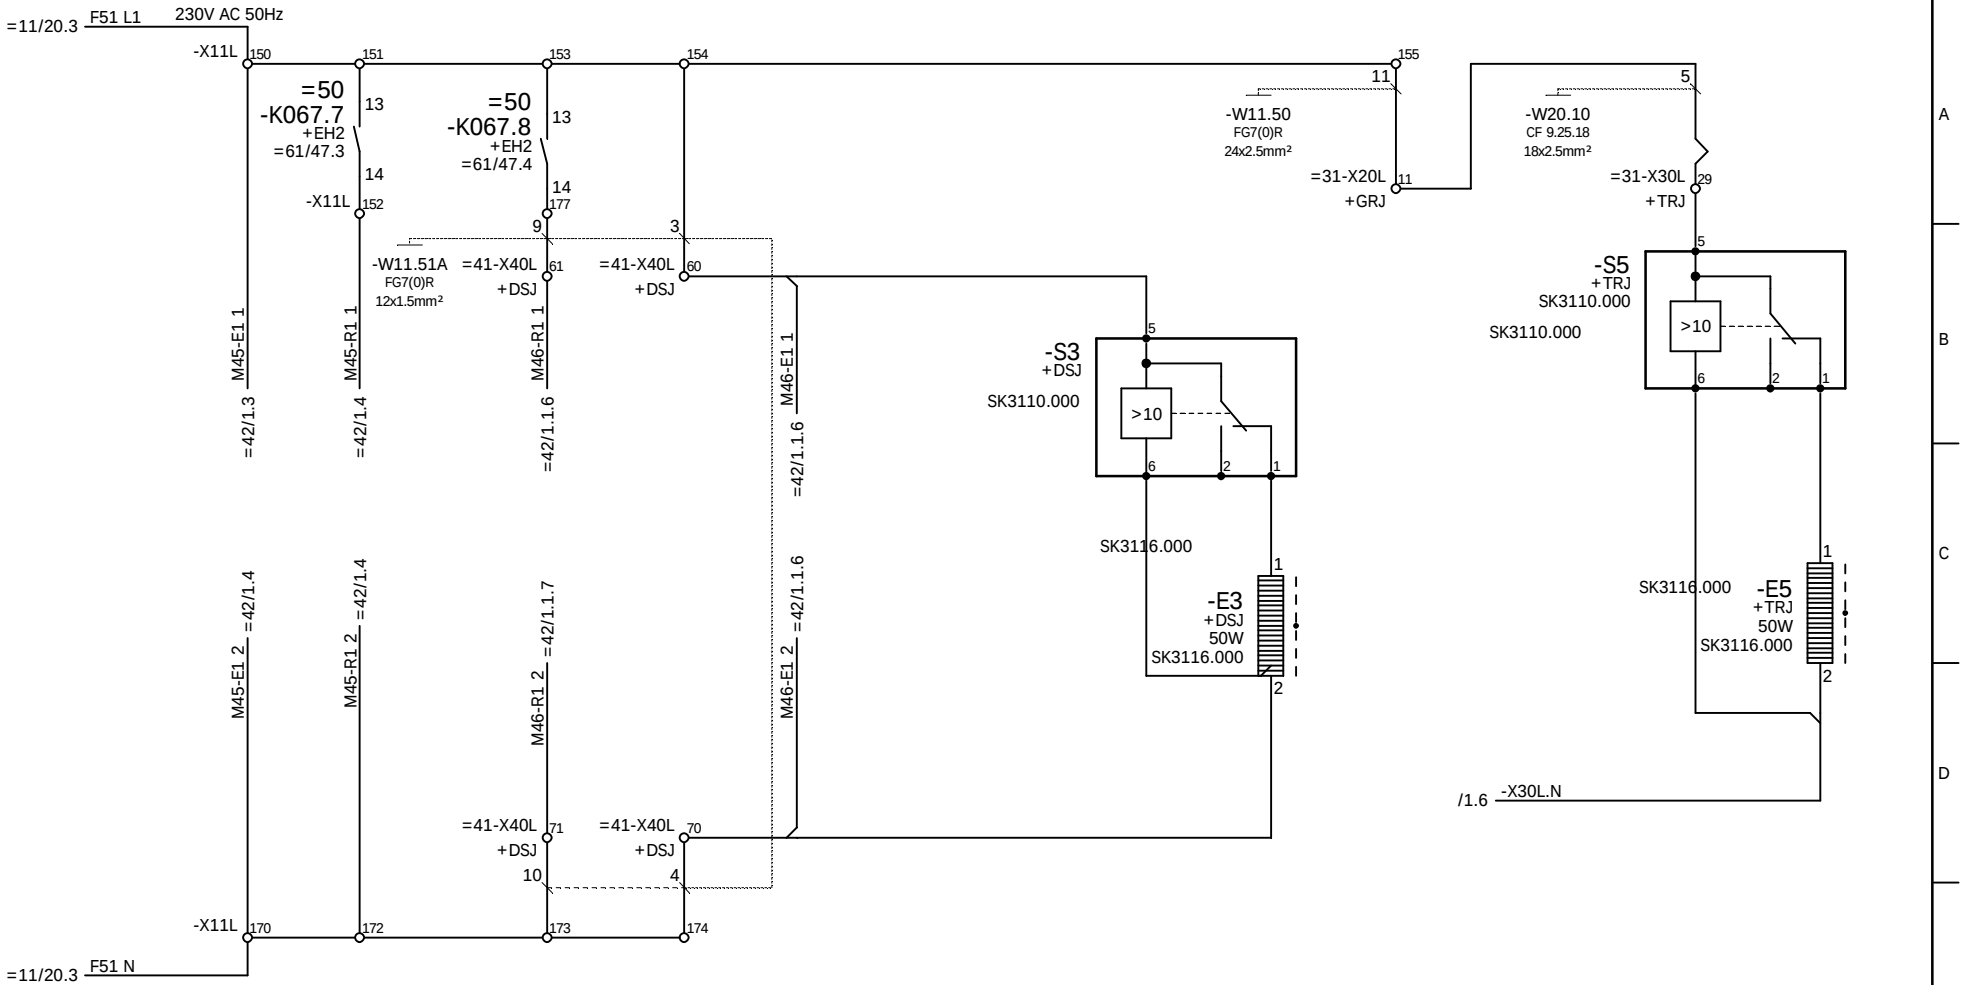

anti condensing heating e-house side

anti condensing heating e-house side

cabinet dieselside


cabinet trolley

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 2 26 Sh.

heating, pumps and cabinets
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

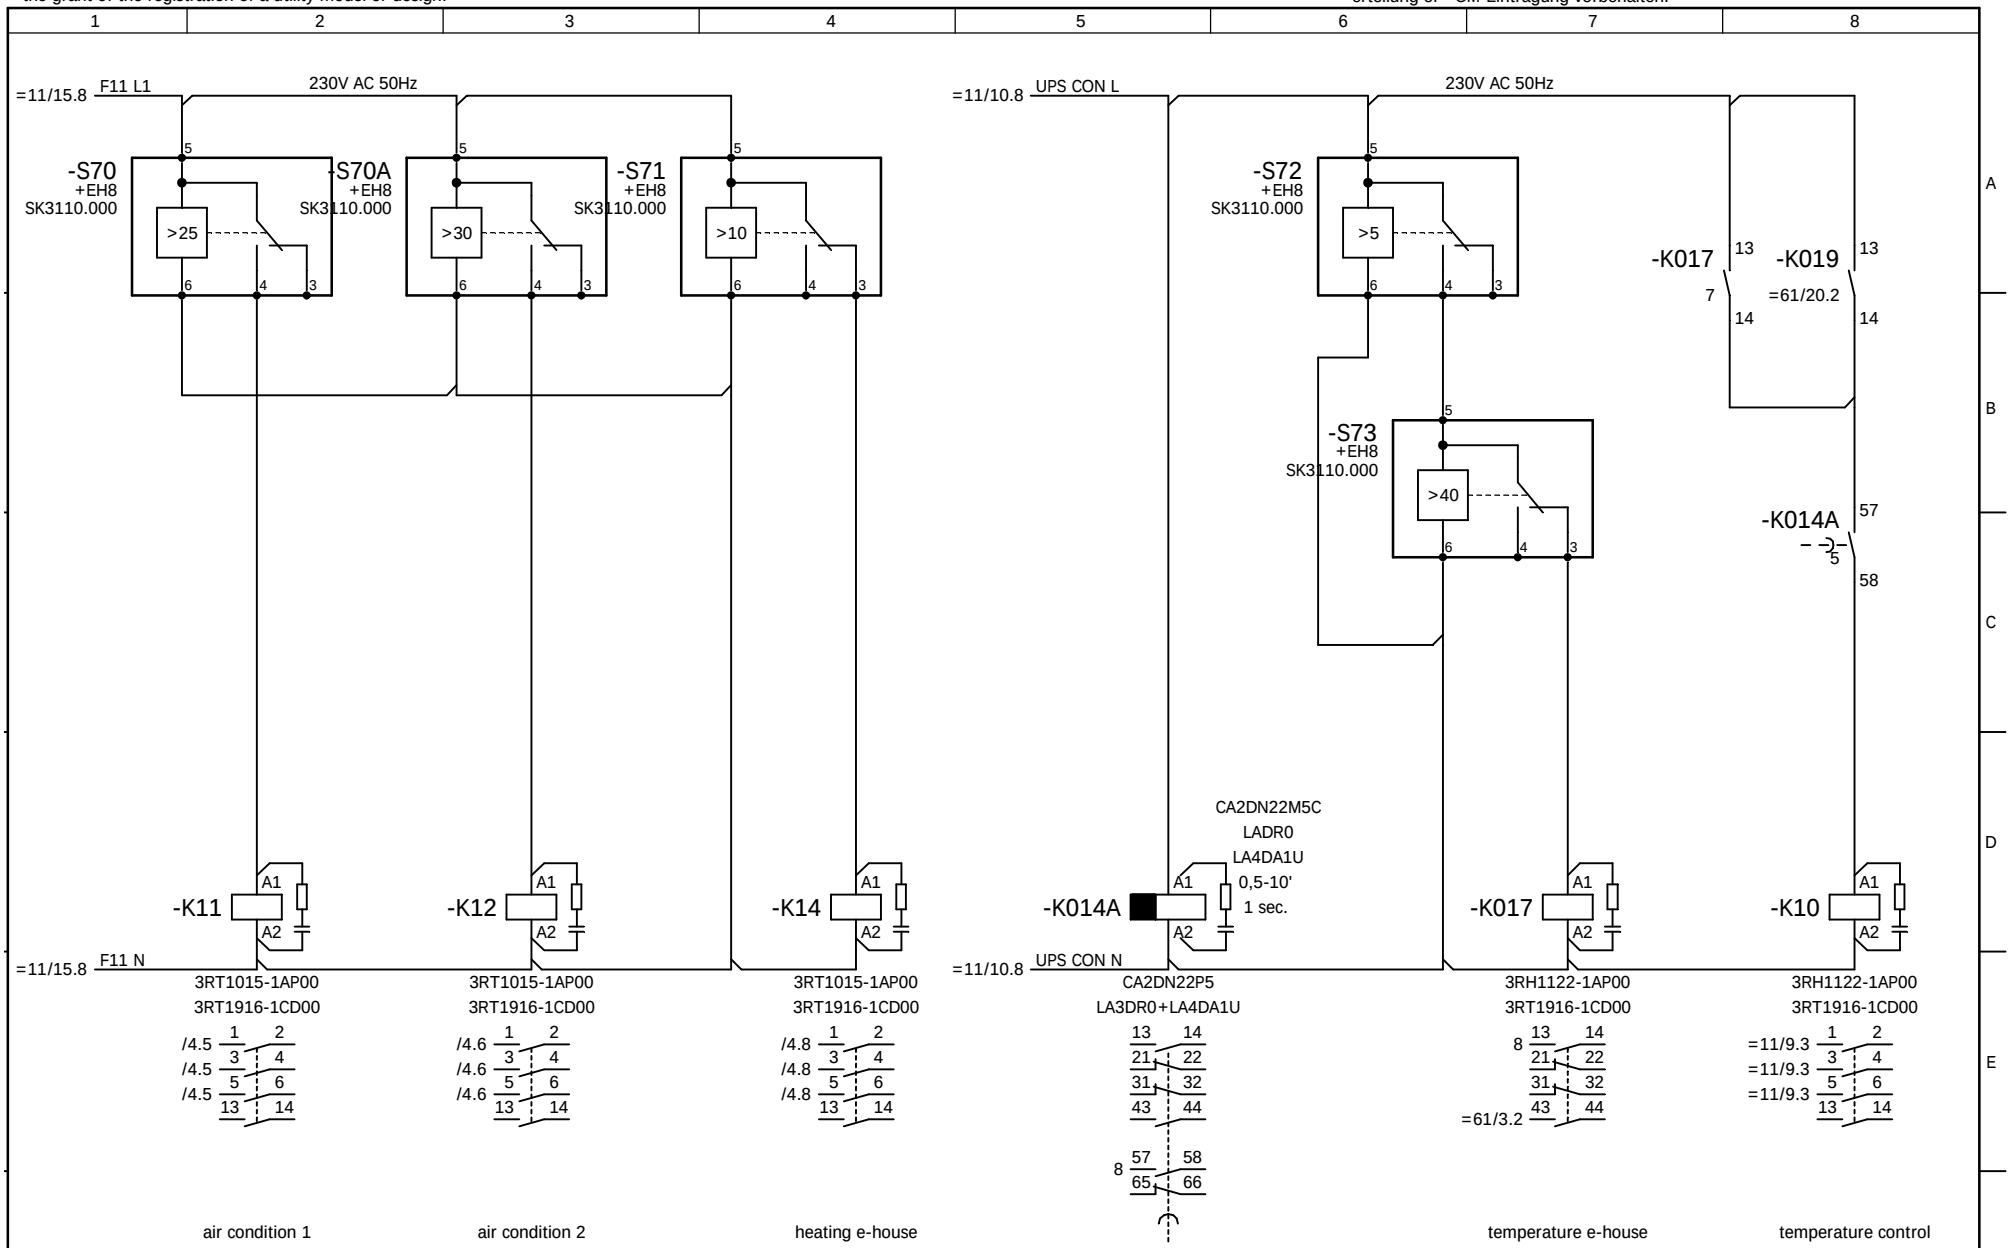

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=12	
				Checked	LIU KP			+EH1	
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00
							heating, electrical room		Sheet 3
							Stromlaufplan / Circuit Diagram		26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

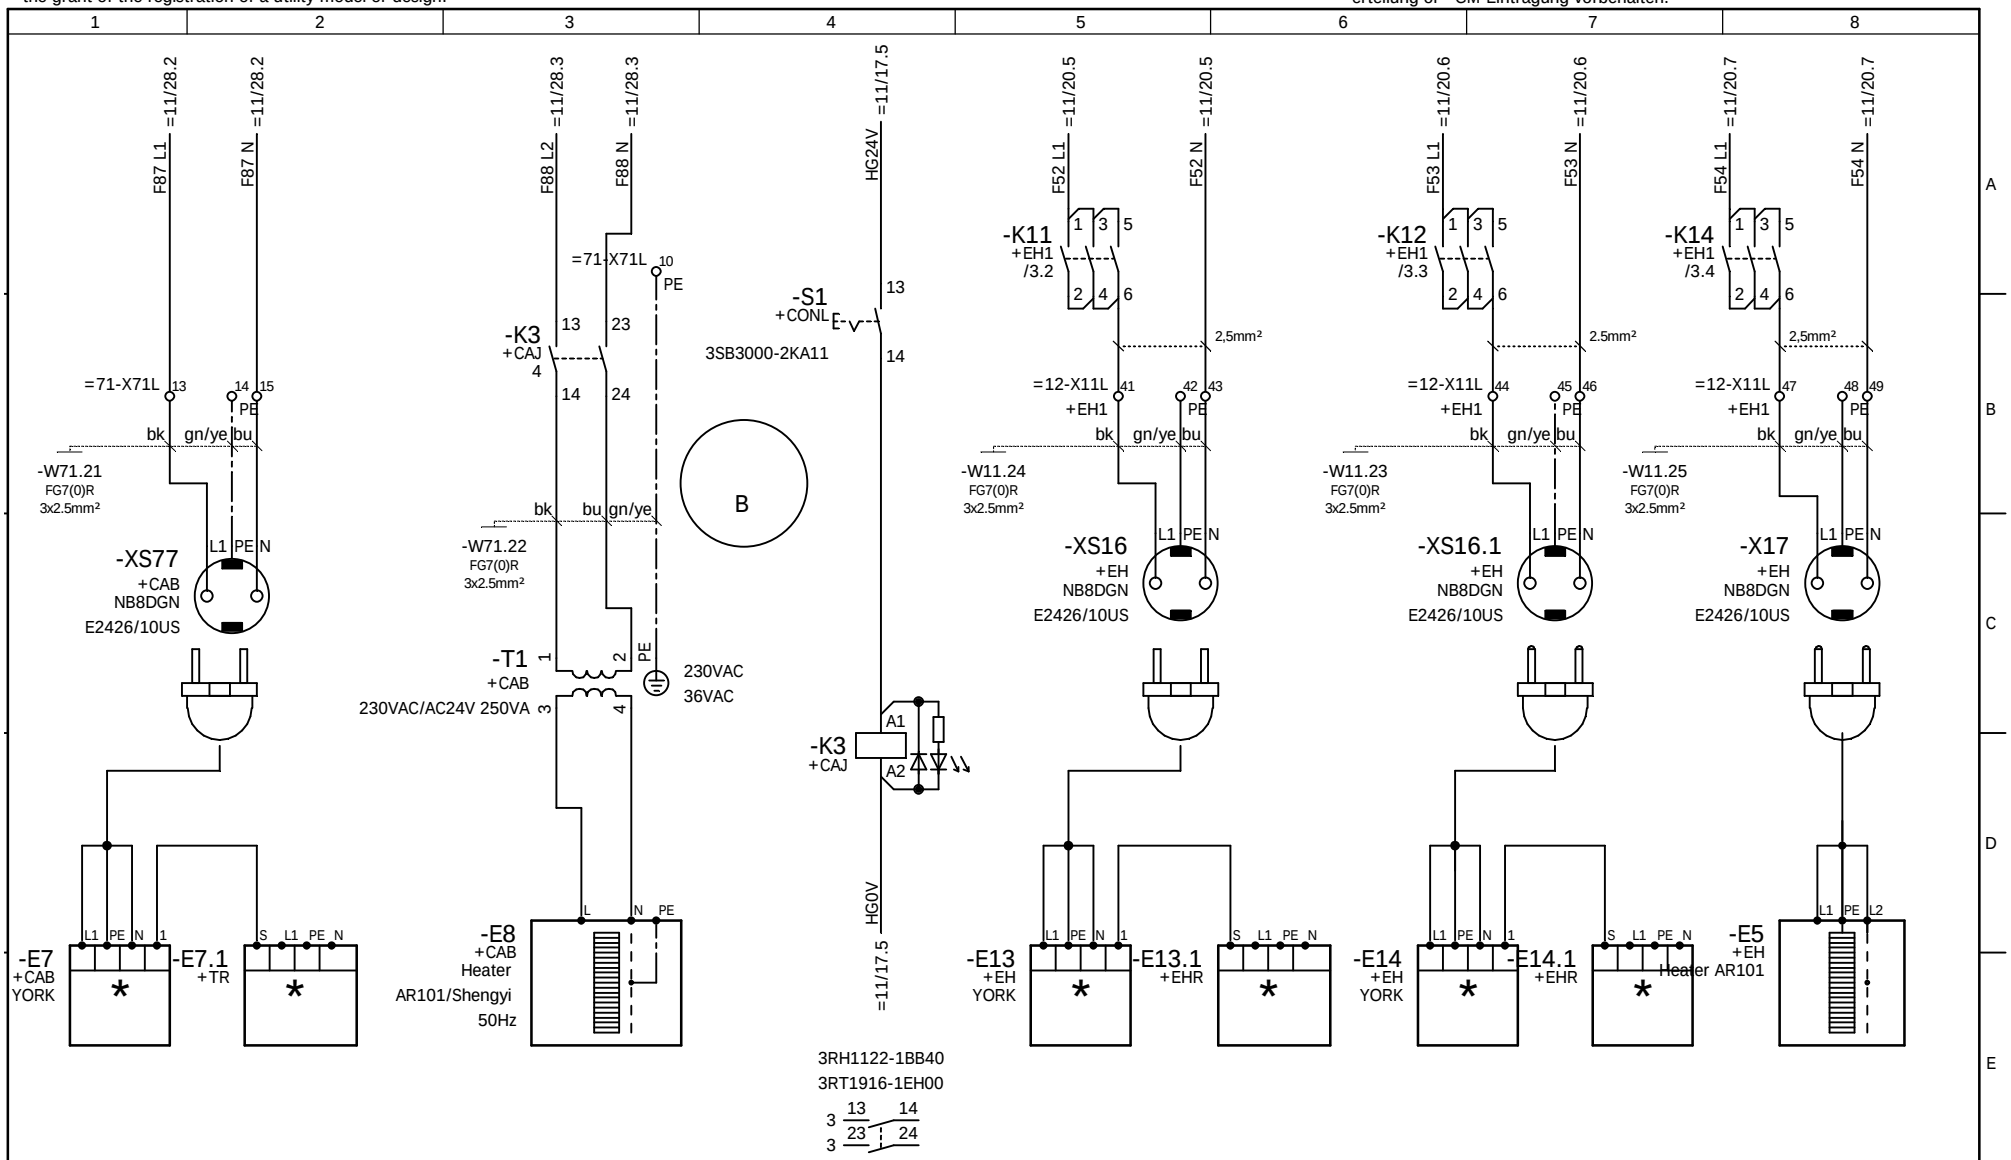

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 4 / 26 Sh.


NOELL

Aircondition, heaters

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

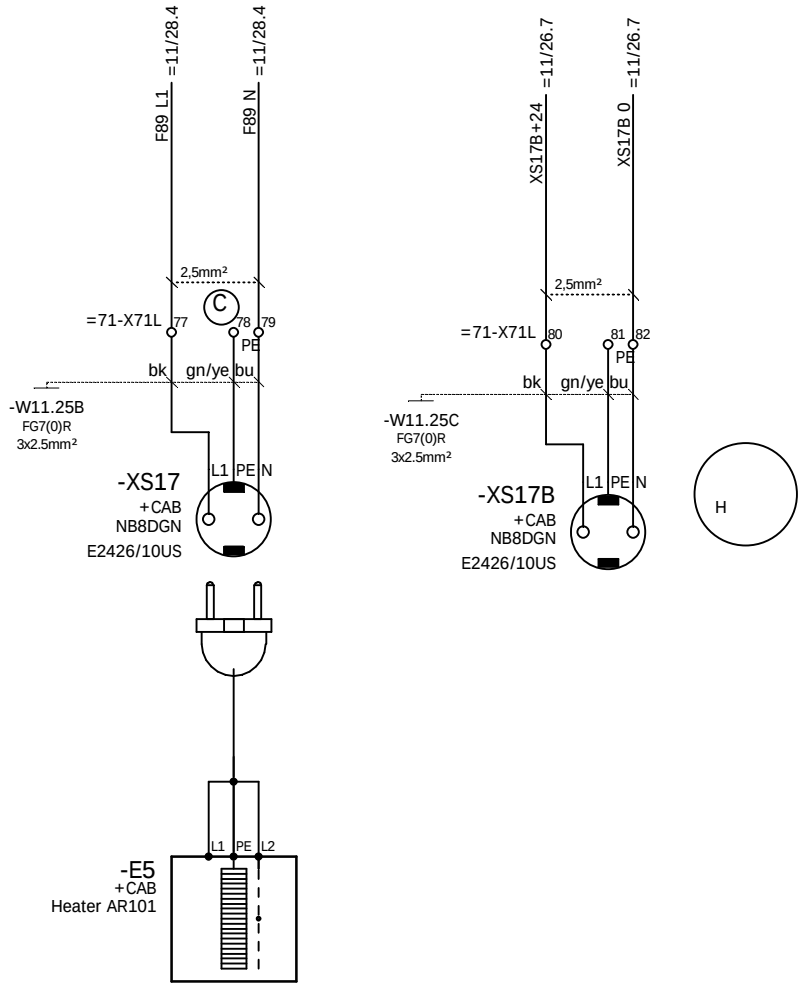

heater
cabin

24V DC socket


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 4.1 26 Sh.

NOELL

Aircondition, heaters
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

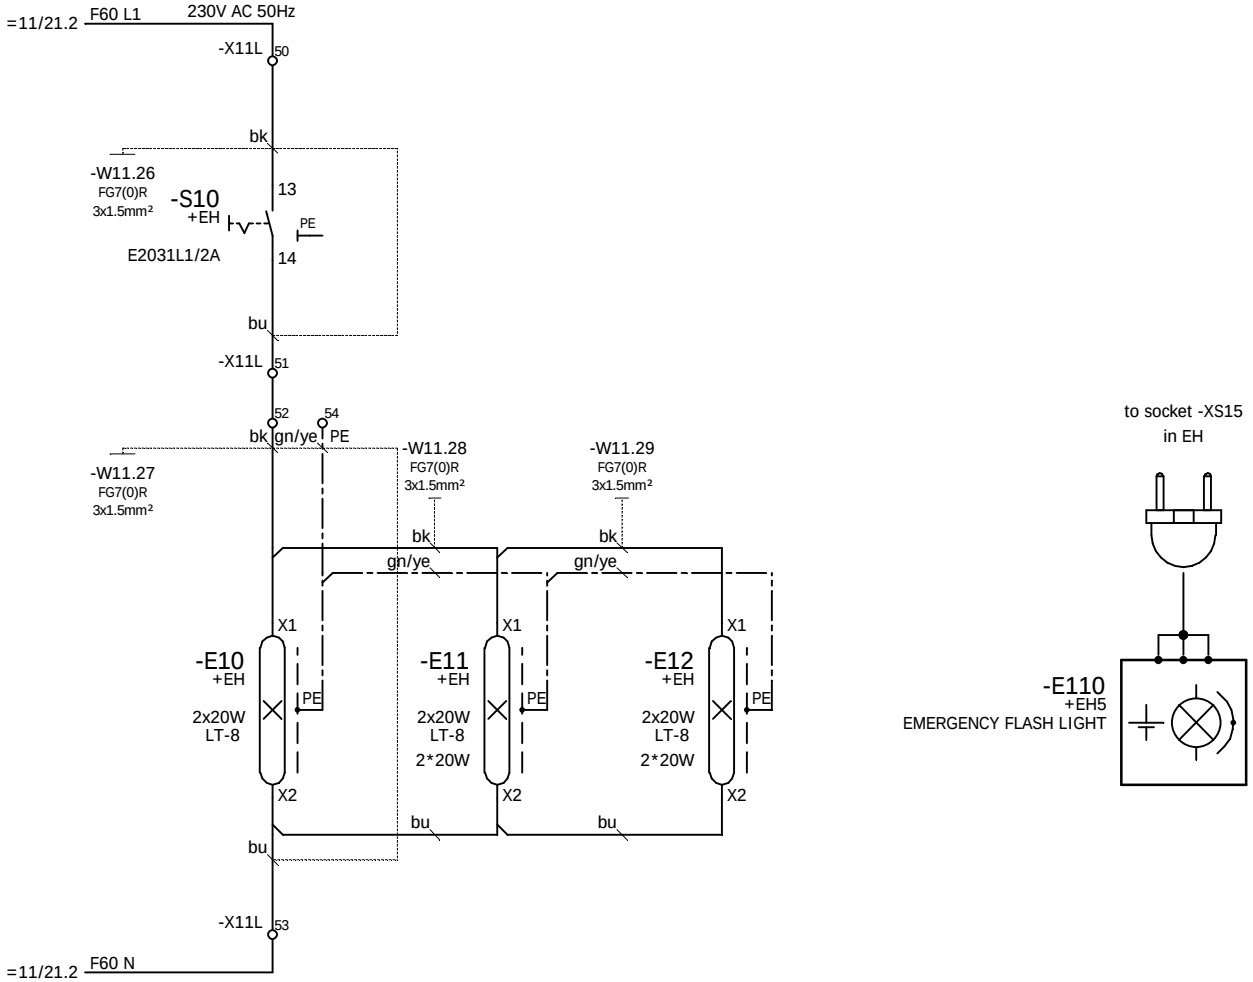

lighting
e-house

portable
emergency light


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
nd.	Revision	Date	Name	Standard		Source:			Sheet 5 26 Sh.

NOELL

lighting, e-house
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

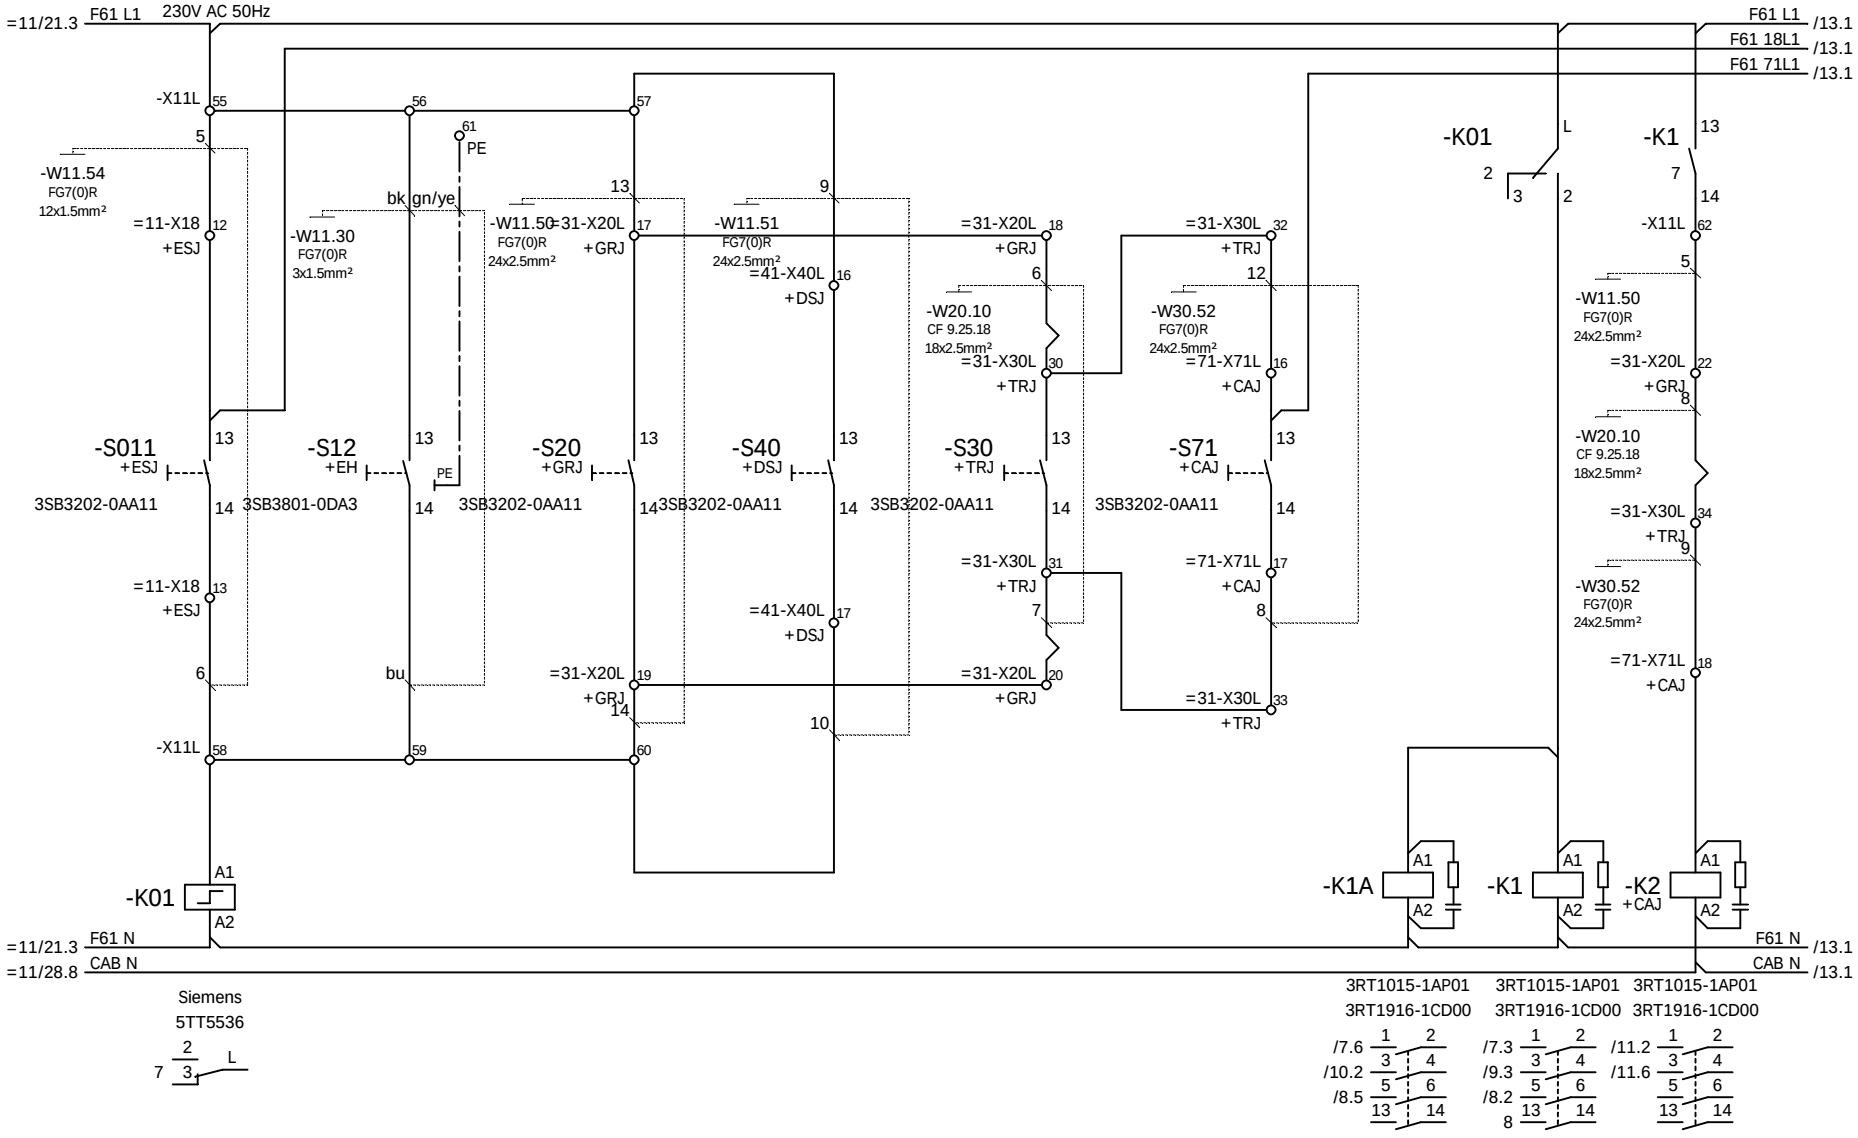

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 6 / 26 Sh.


NOELL

lighting, e-house

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

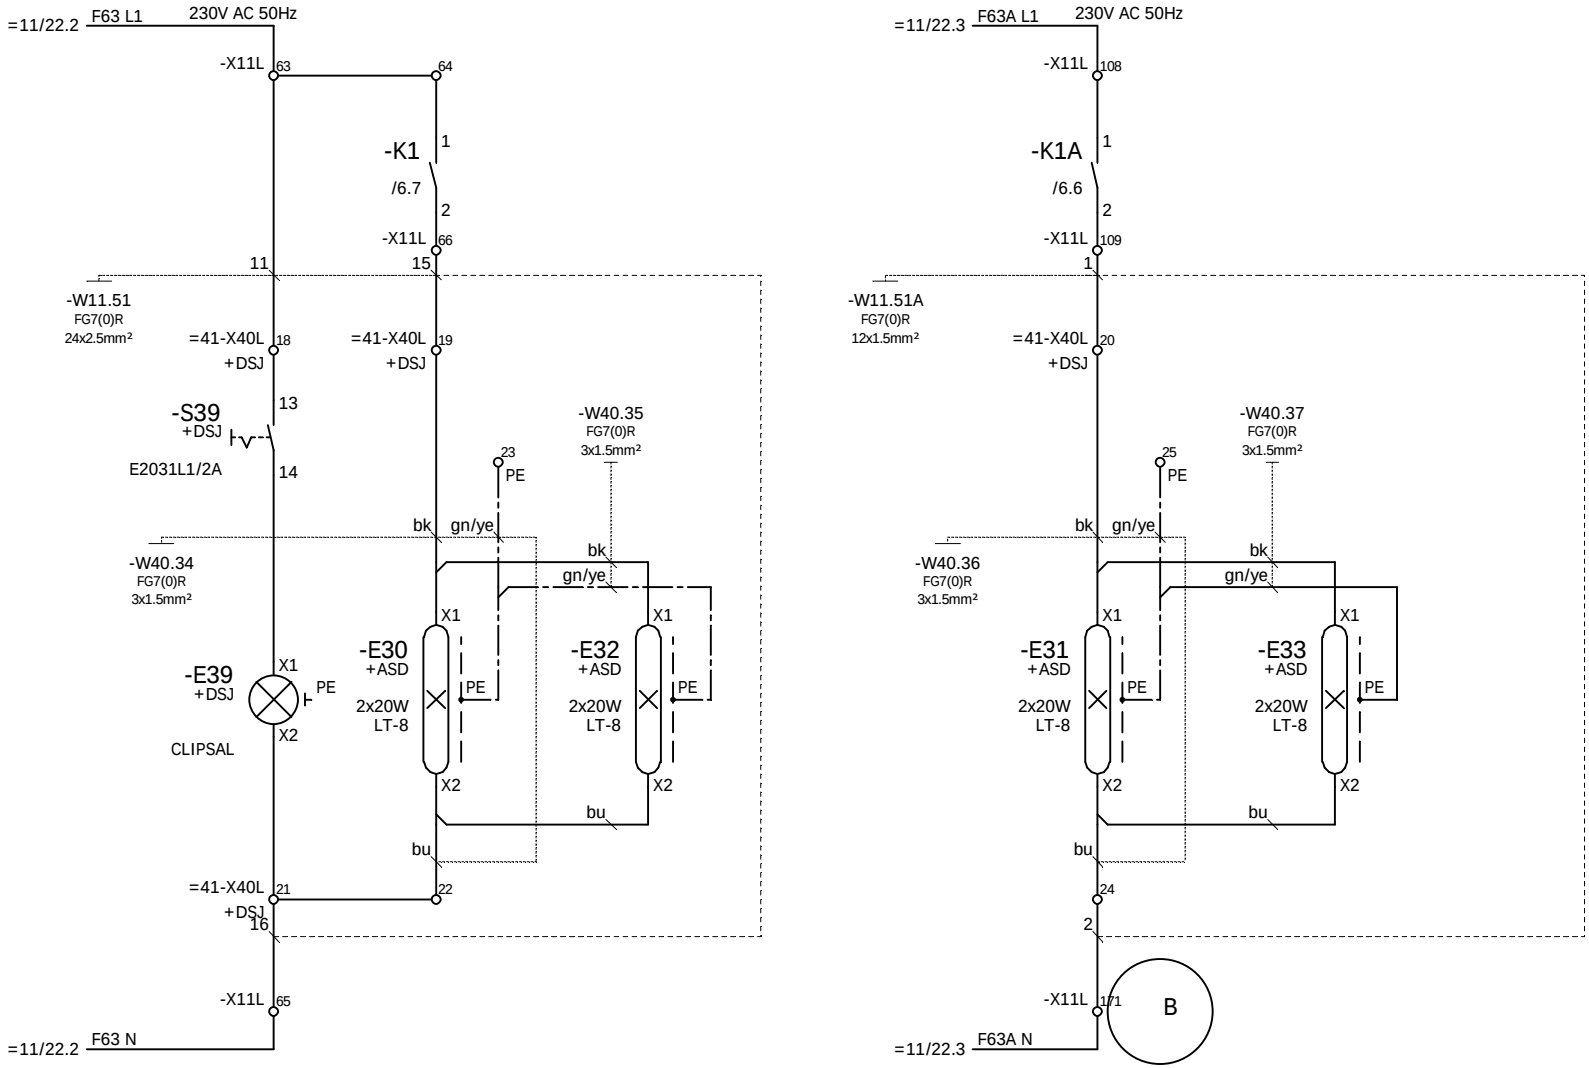

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=12
				Designer	XU HR					+EH1
				Checked	LIU KP	AMPT Egypt	NOELL	lighting, diesel side	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 7
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram			26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

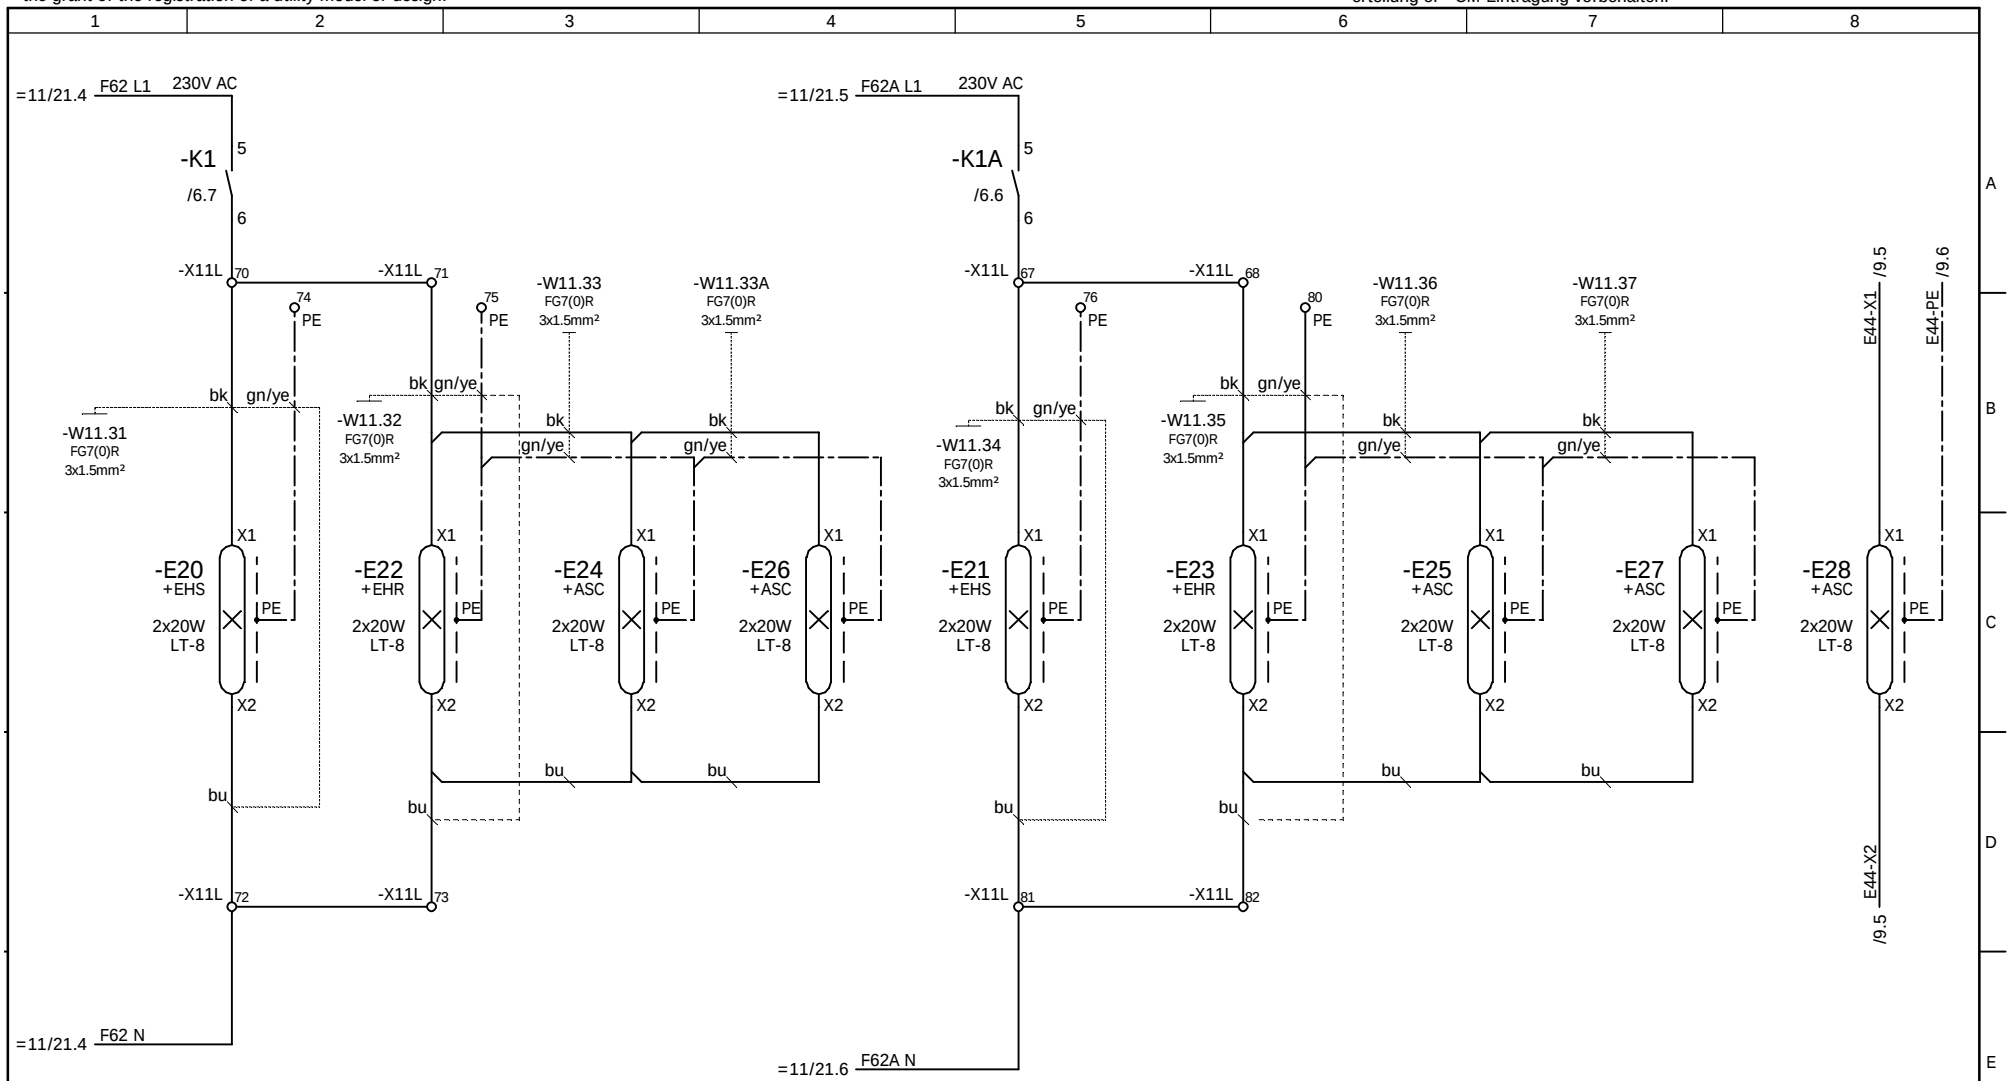

				Date		Costumer	AMPT Egypt	lighting, e-house side	Type RTG 50/26.50/5+1/AC	=12
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 8 / 26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

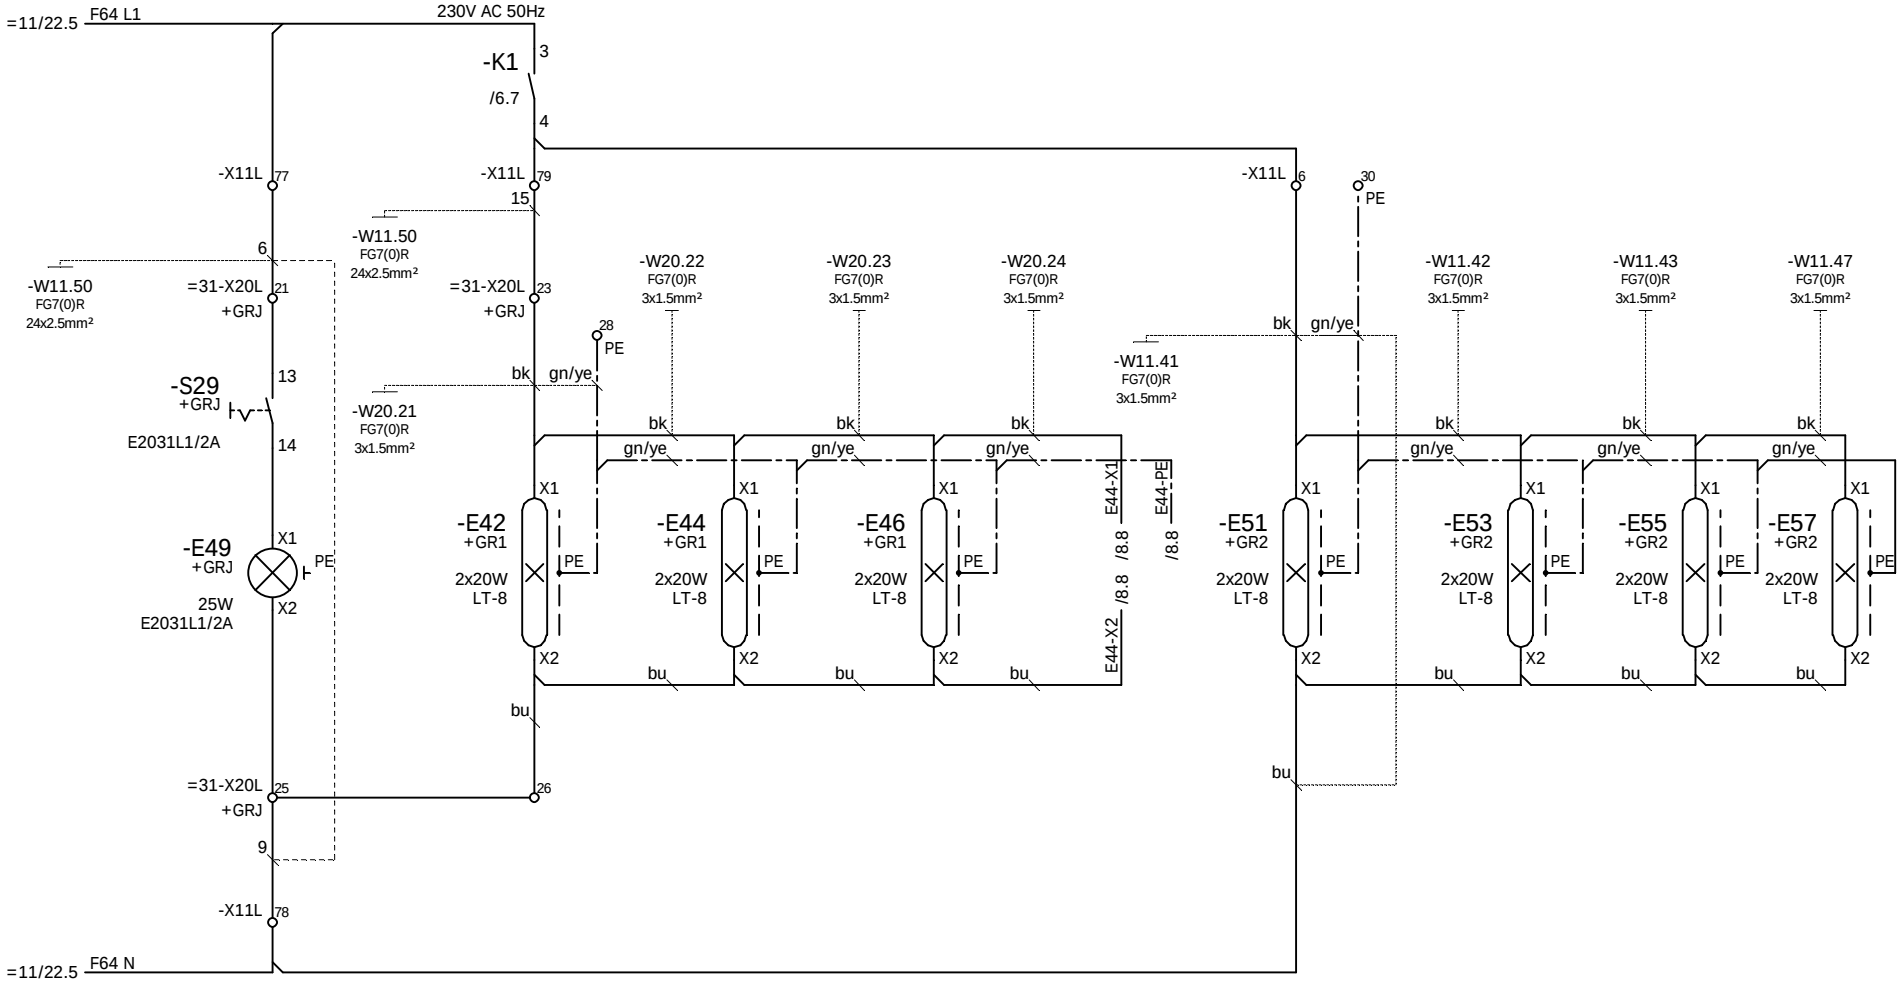


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 9 / 26 Sh.

lighting, girder 1/girder 2
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

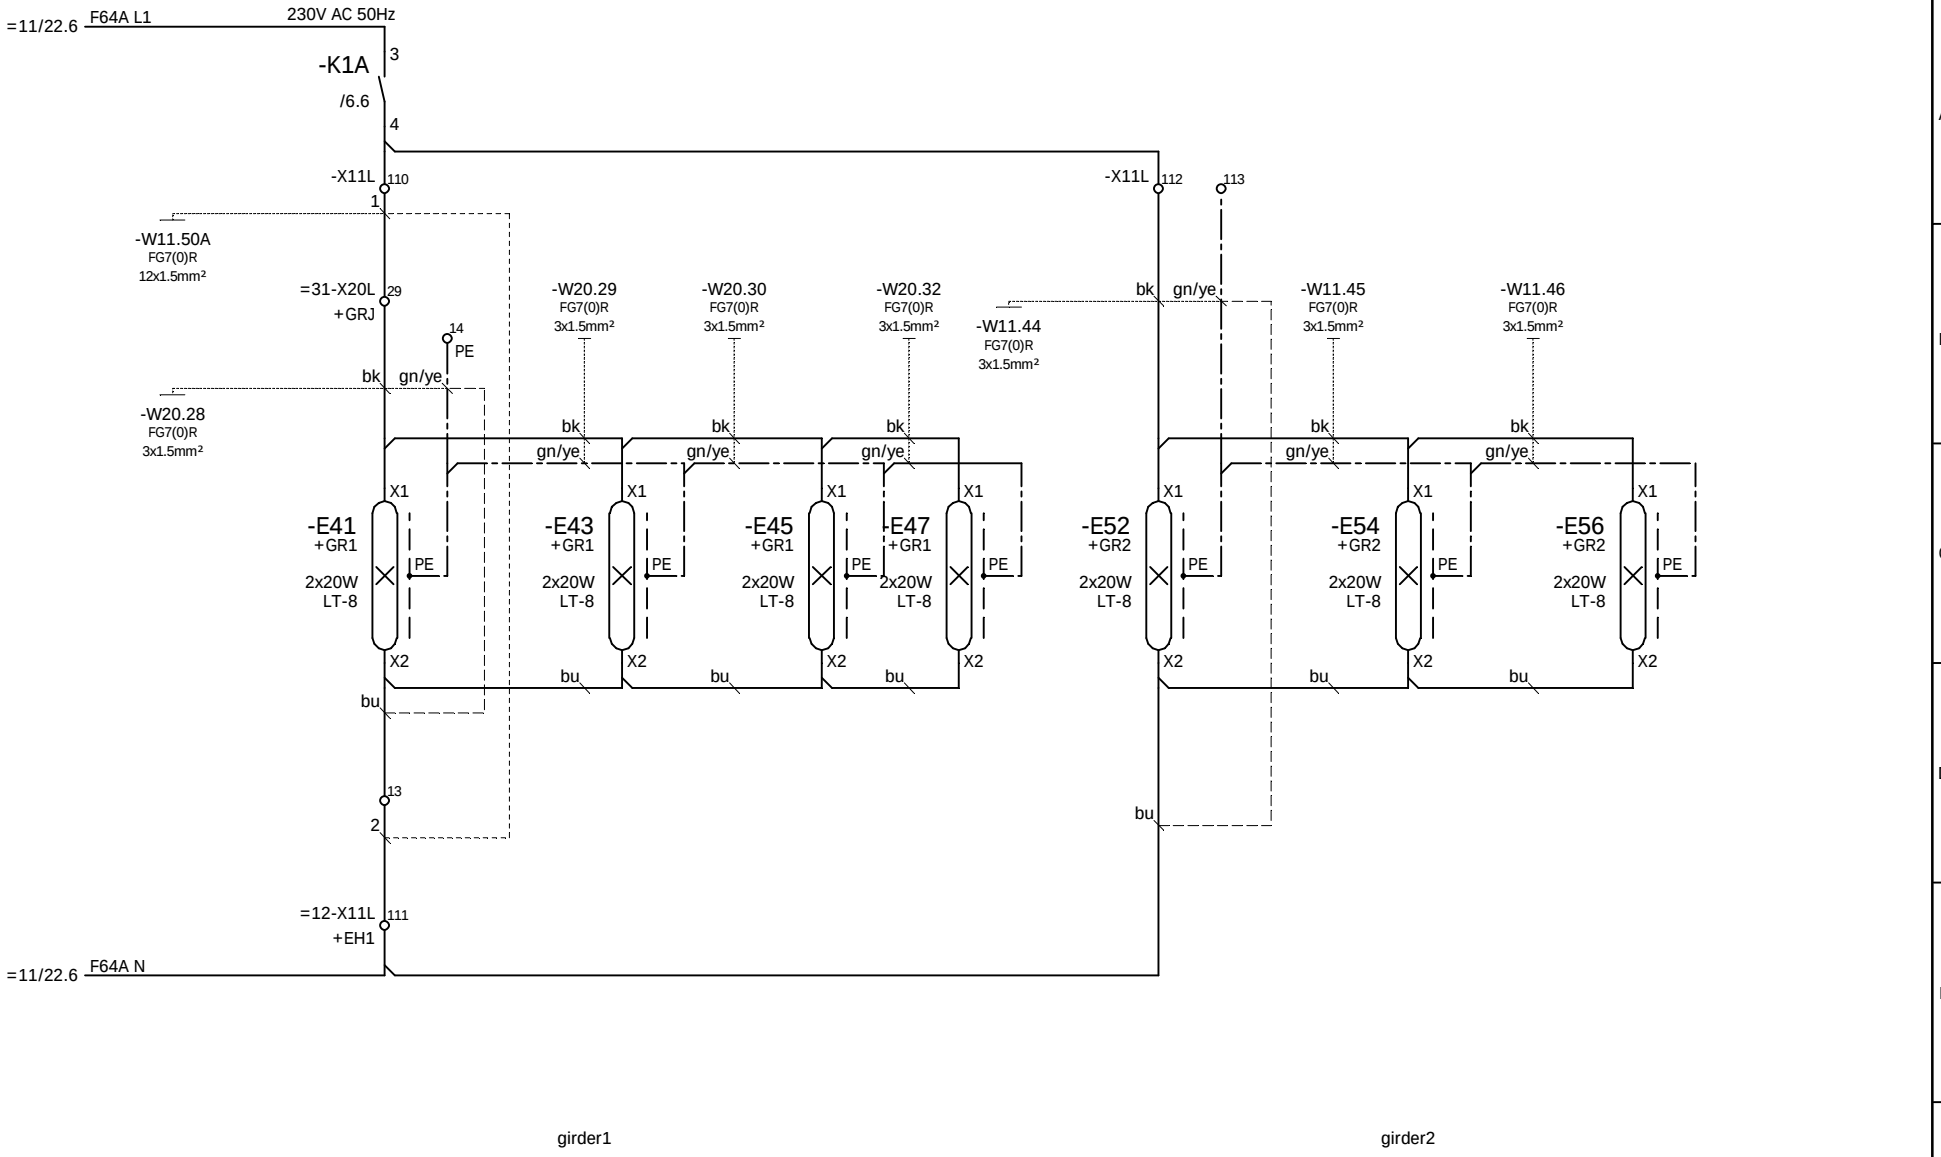


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 10 26 Sh.

NOELL

lighting, girder 1/girder 2
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

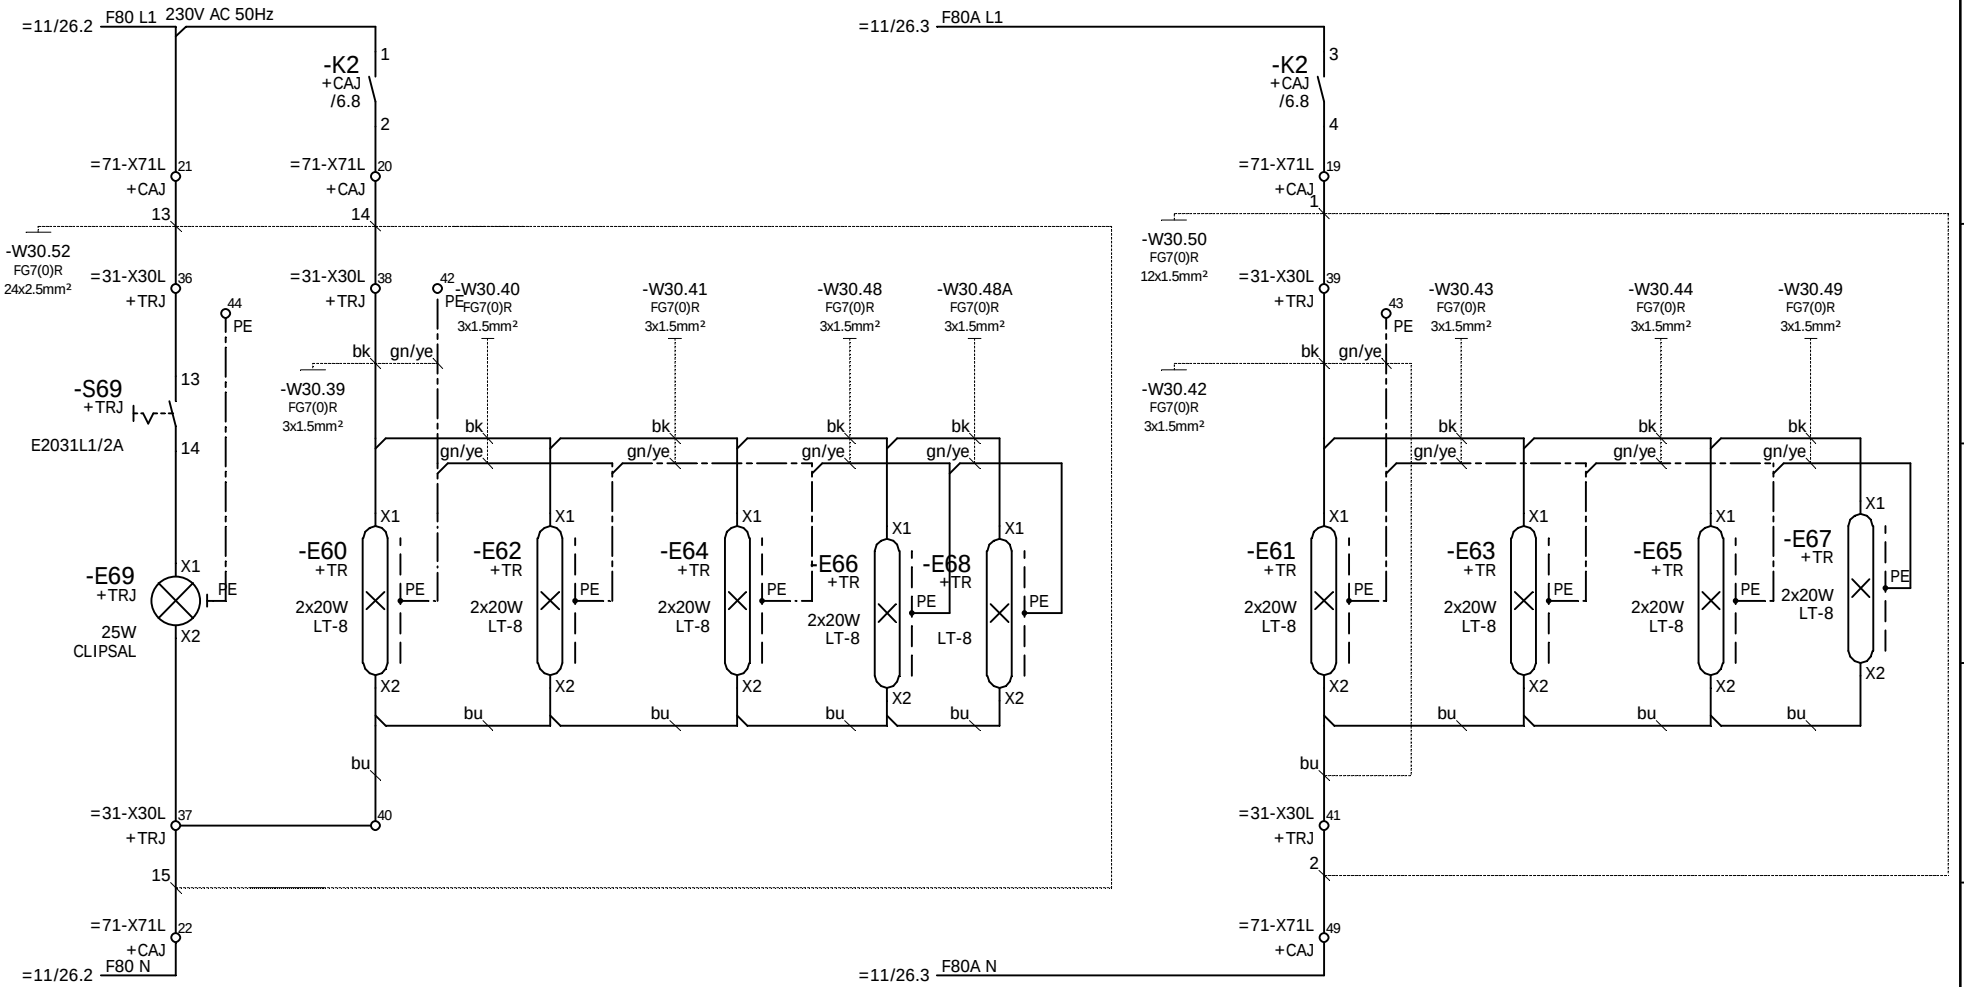

				Date		Costumer	AMPT Egypt	NOELL	Lighting trolley	Type RTG 50/26.50/5+1/AC	=12
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11
Ind.	Revision	Date	Name	Standard		Source:						26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

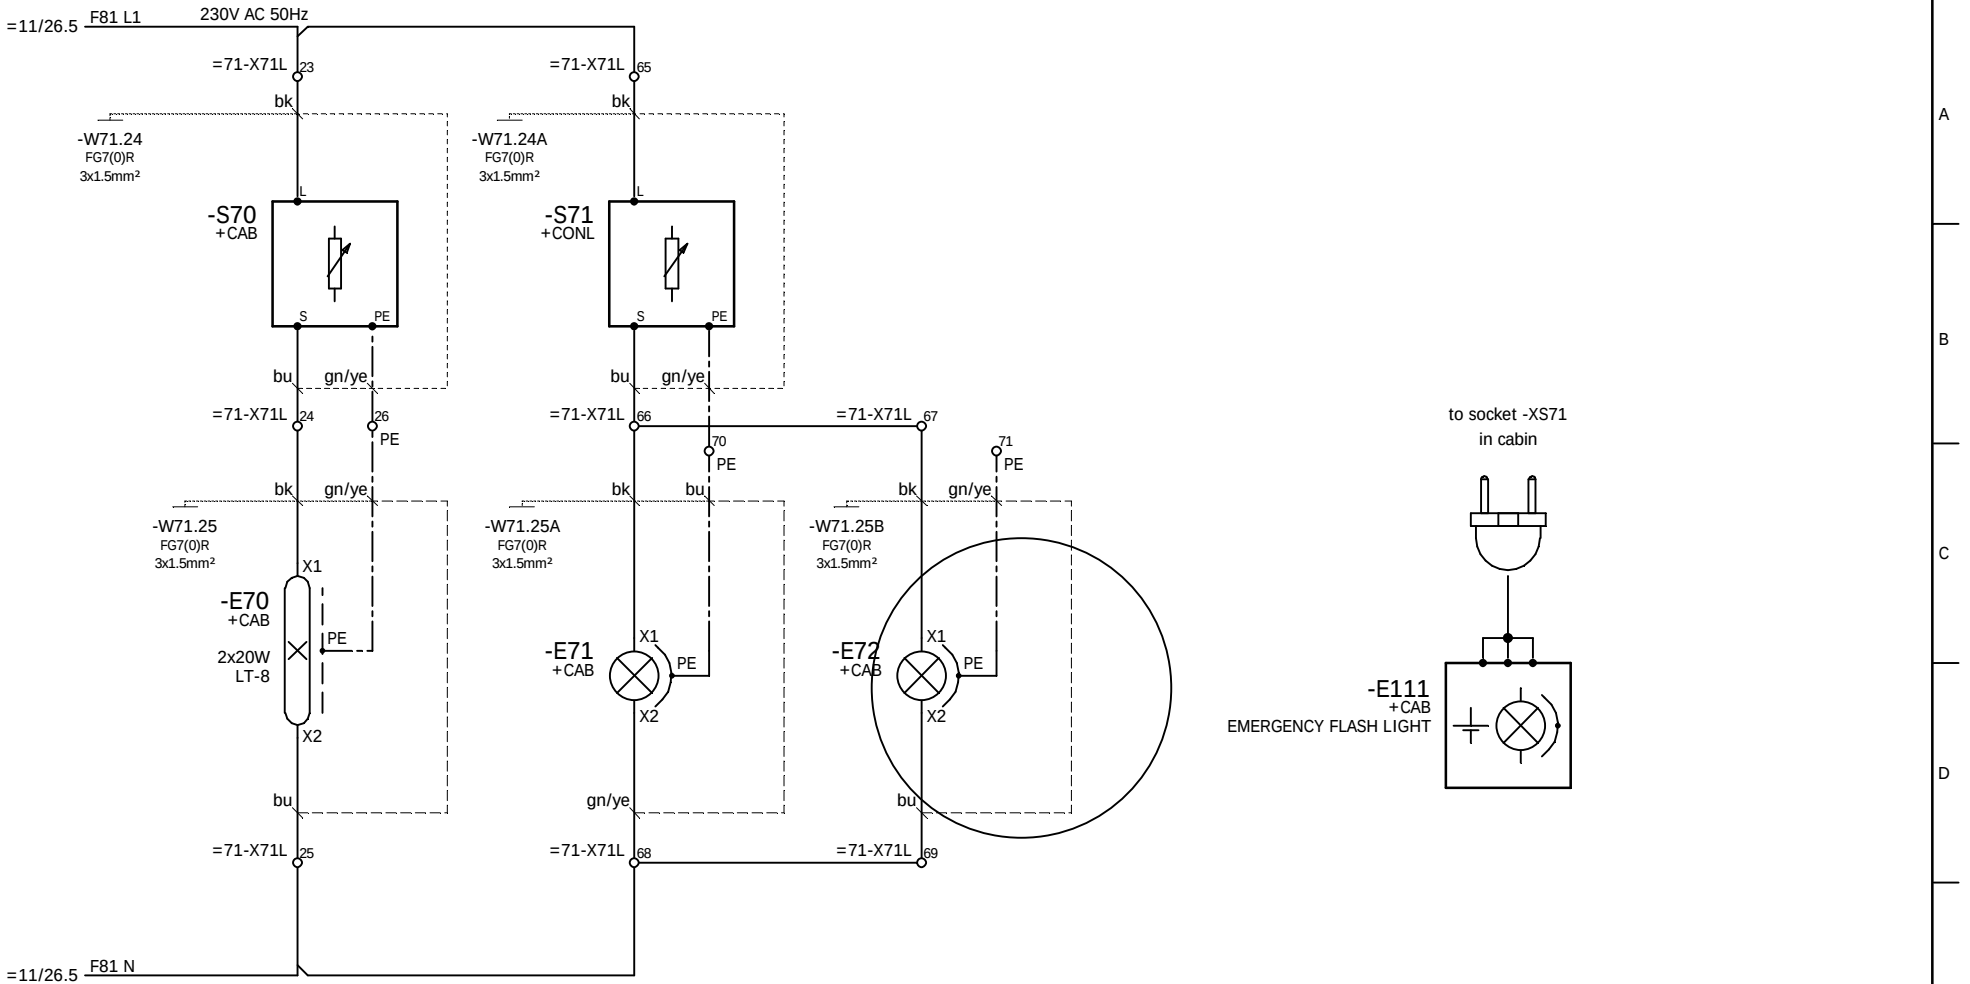

lighting
operator's cab

reading light1
operator cabin

reading light2
operator cabin

portable
emergency light


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 12 26 Sh.

NOELL

Lighting cabin
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

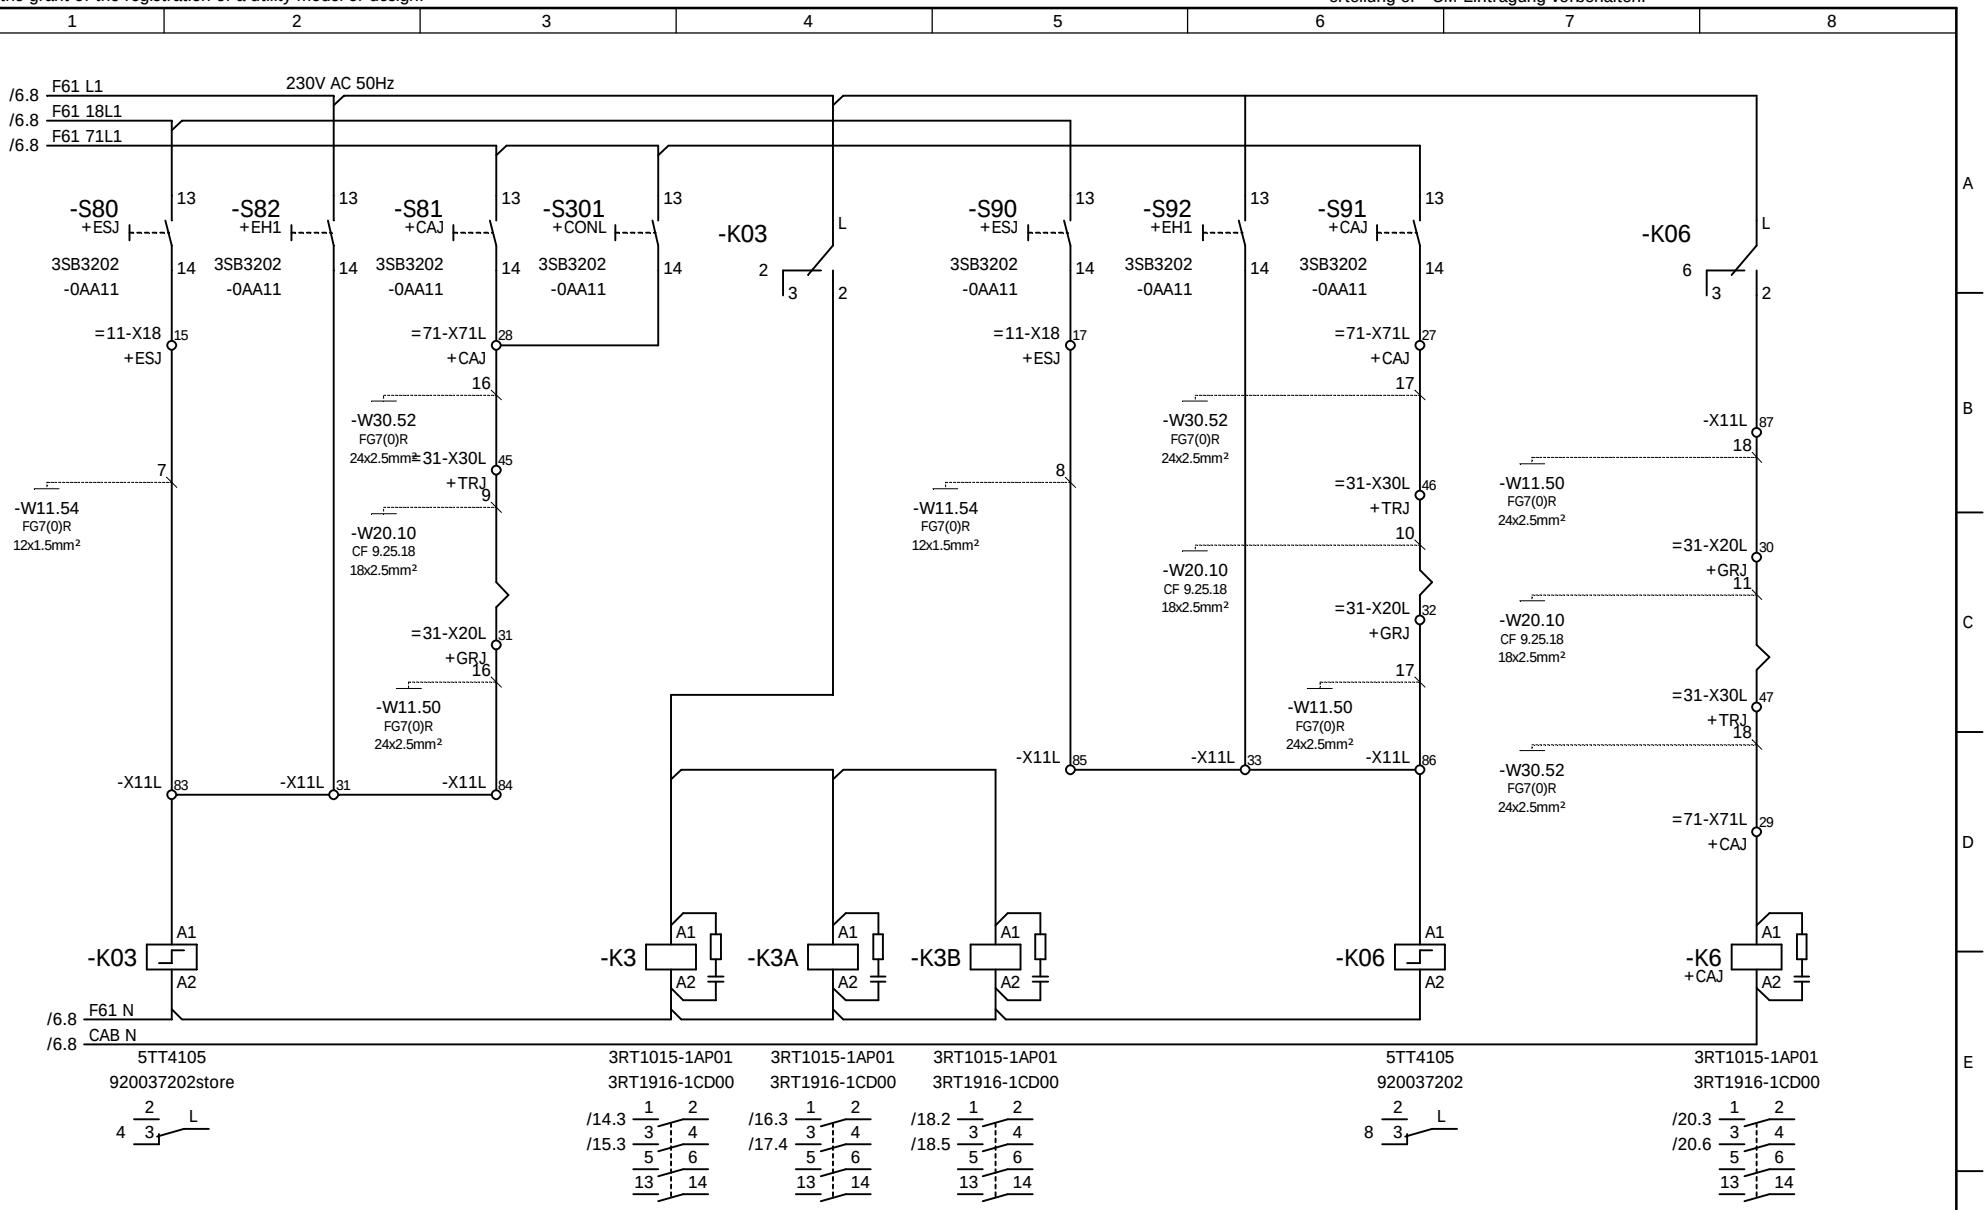

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=12 +EH1
				Designer	XU HR		AMPT Egypt			
				Checked	LIU KP			Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 13 26 Sh.


NOELL

flood lights, control

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

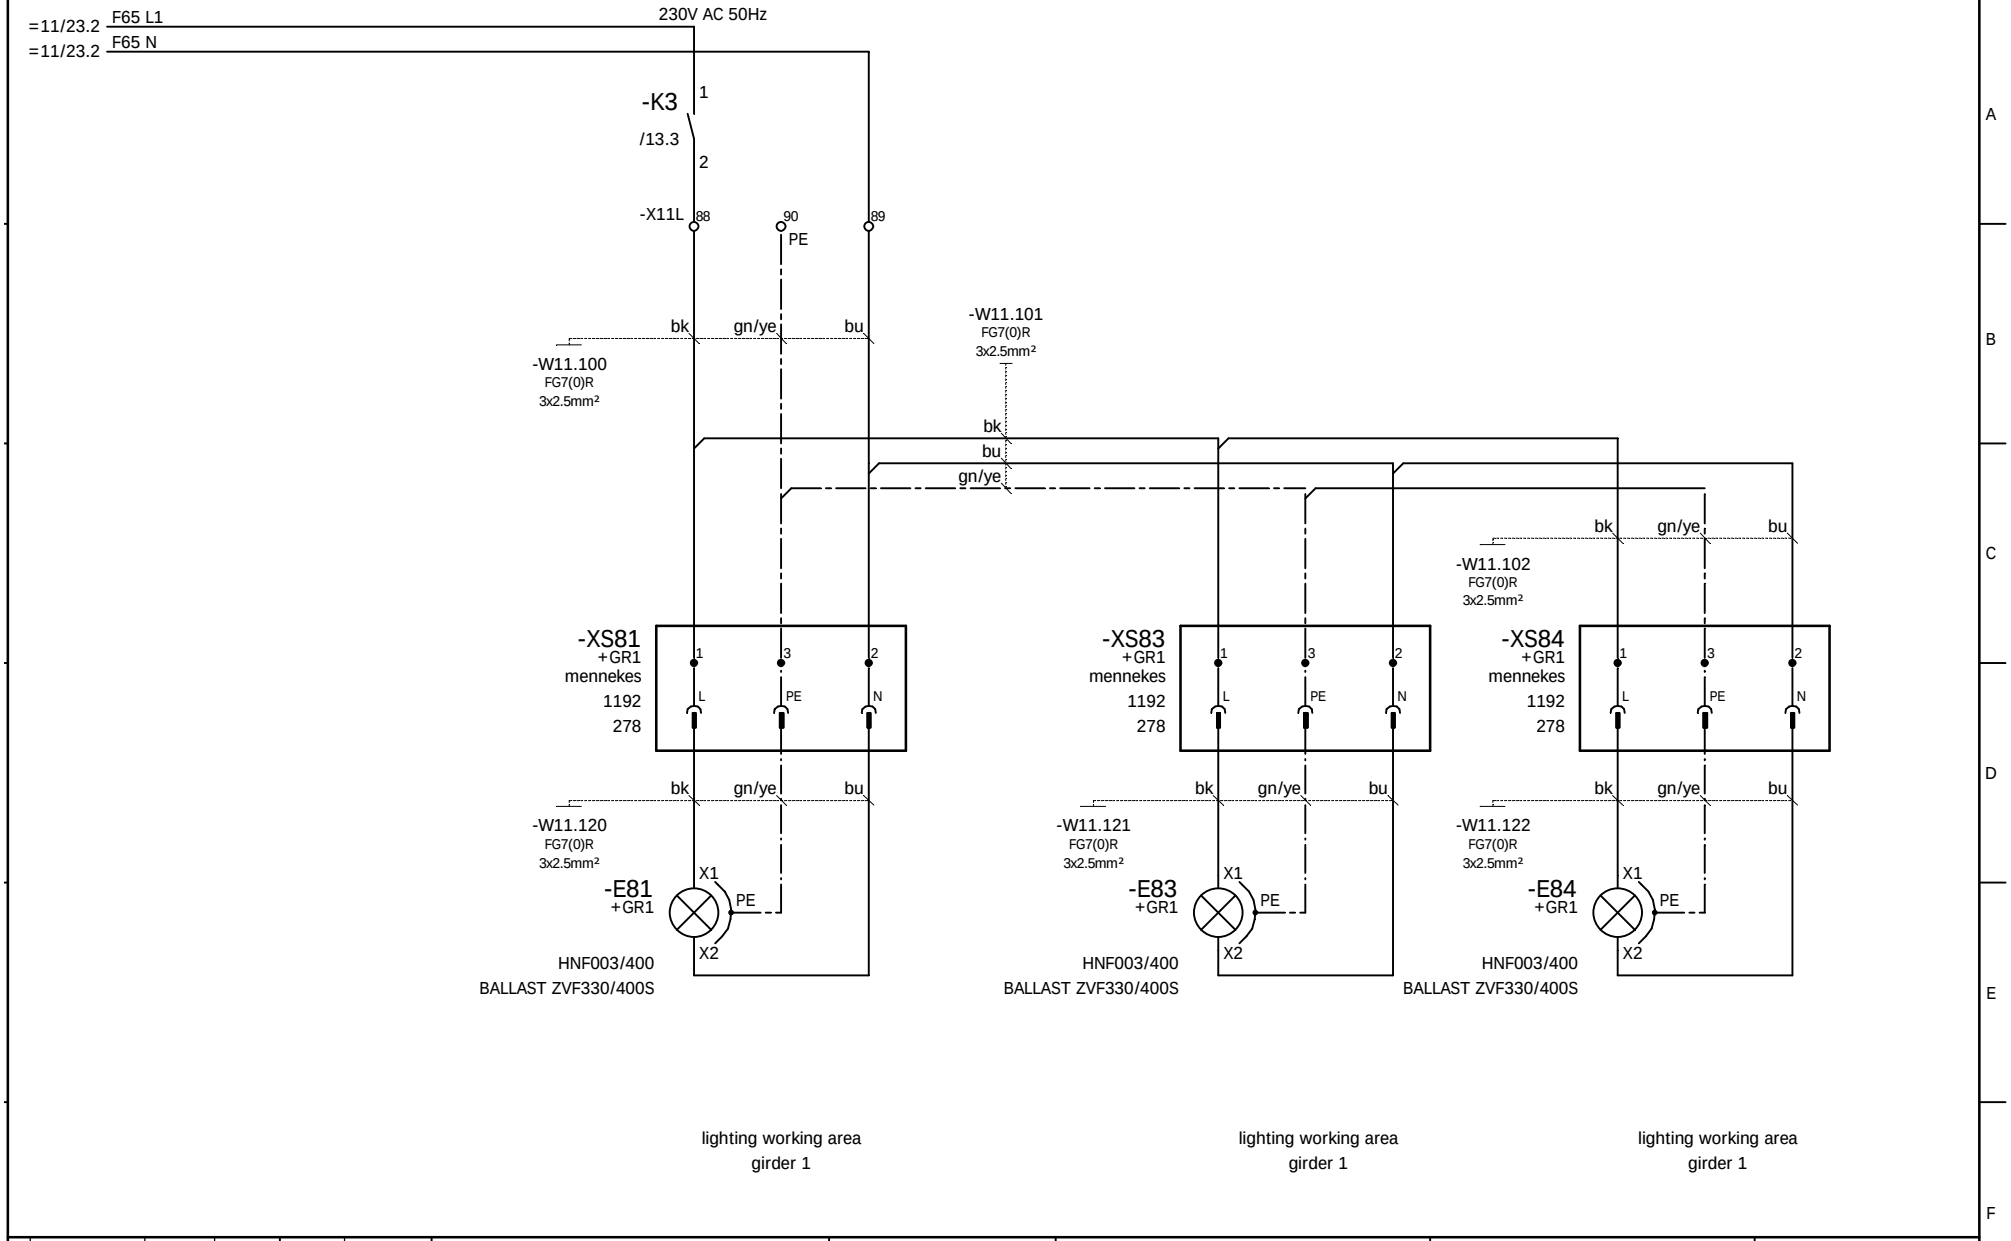

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00


NOELL

flood lights, girder 1
Stromlaufplan / Circuit Diagram

=12
+EH1
Sheet 14
26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

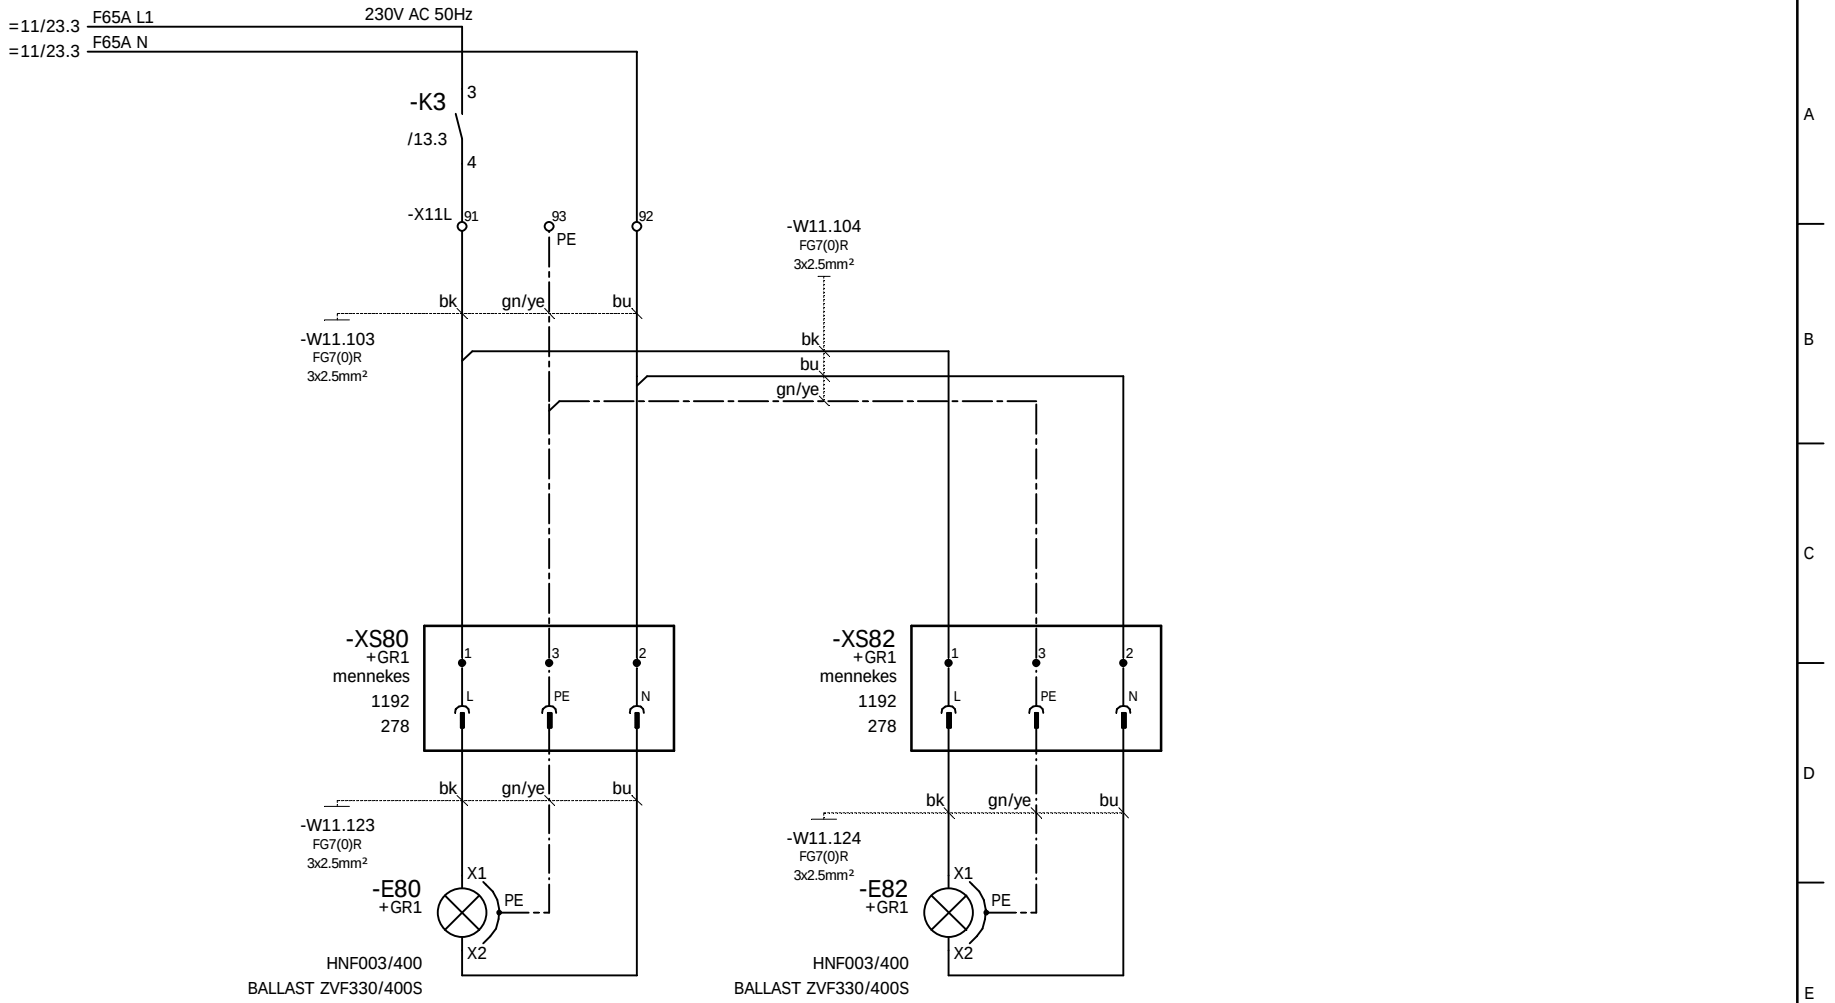


				Date		Costumer	AMPT Egypt	NOELL	flood lights, girder 1
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC		=12 +EH1
Job No.	1255	Drawing No.	78.5692.60.00
			Sheet 15 26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

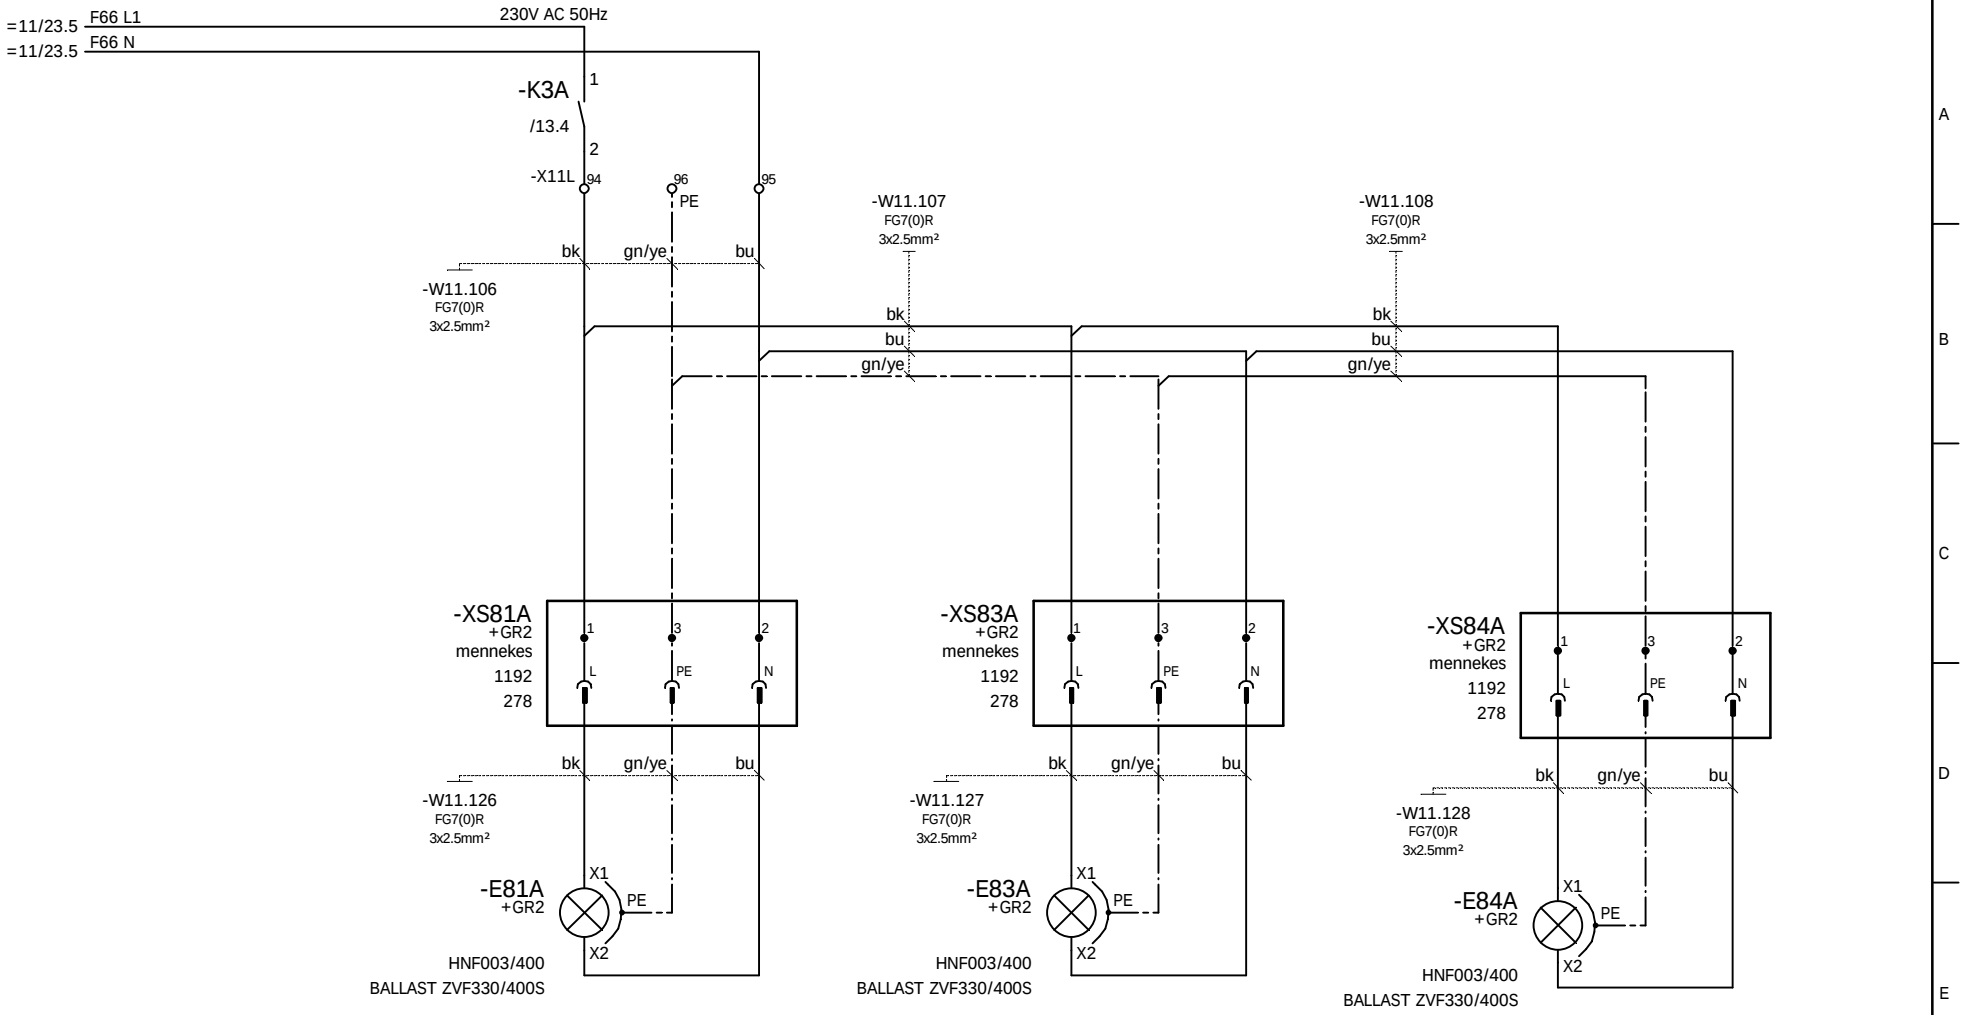


				Date		Costumer	AMPT Egypt	NOELL	flood lights, girder 2
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=12	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 16	26 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

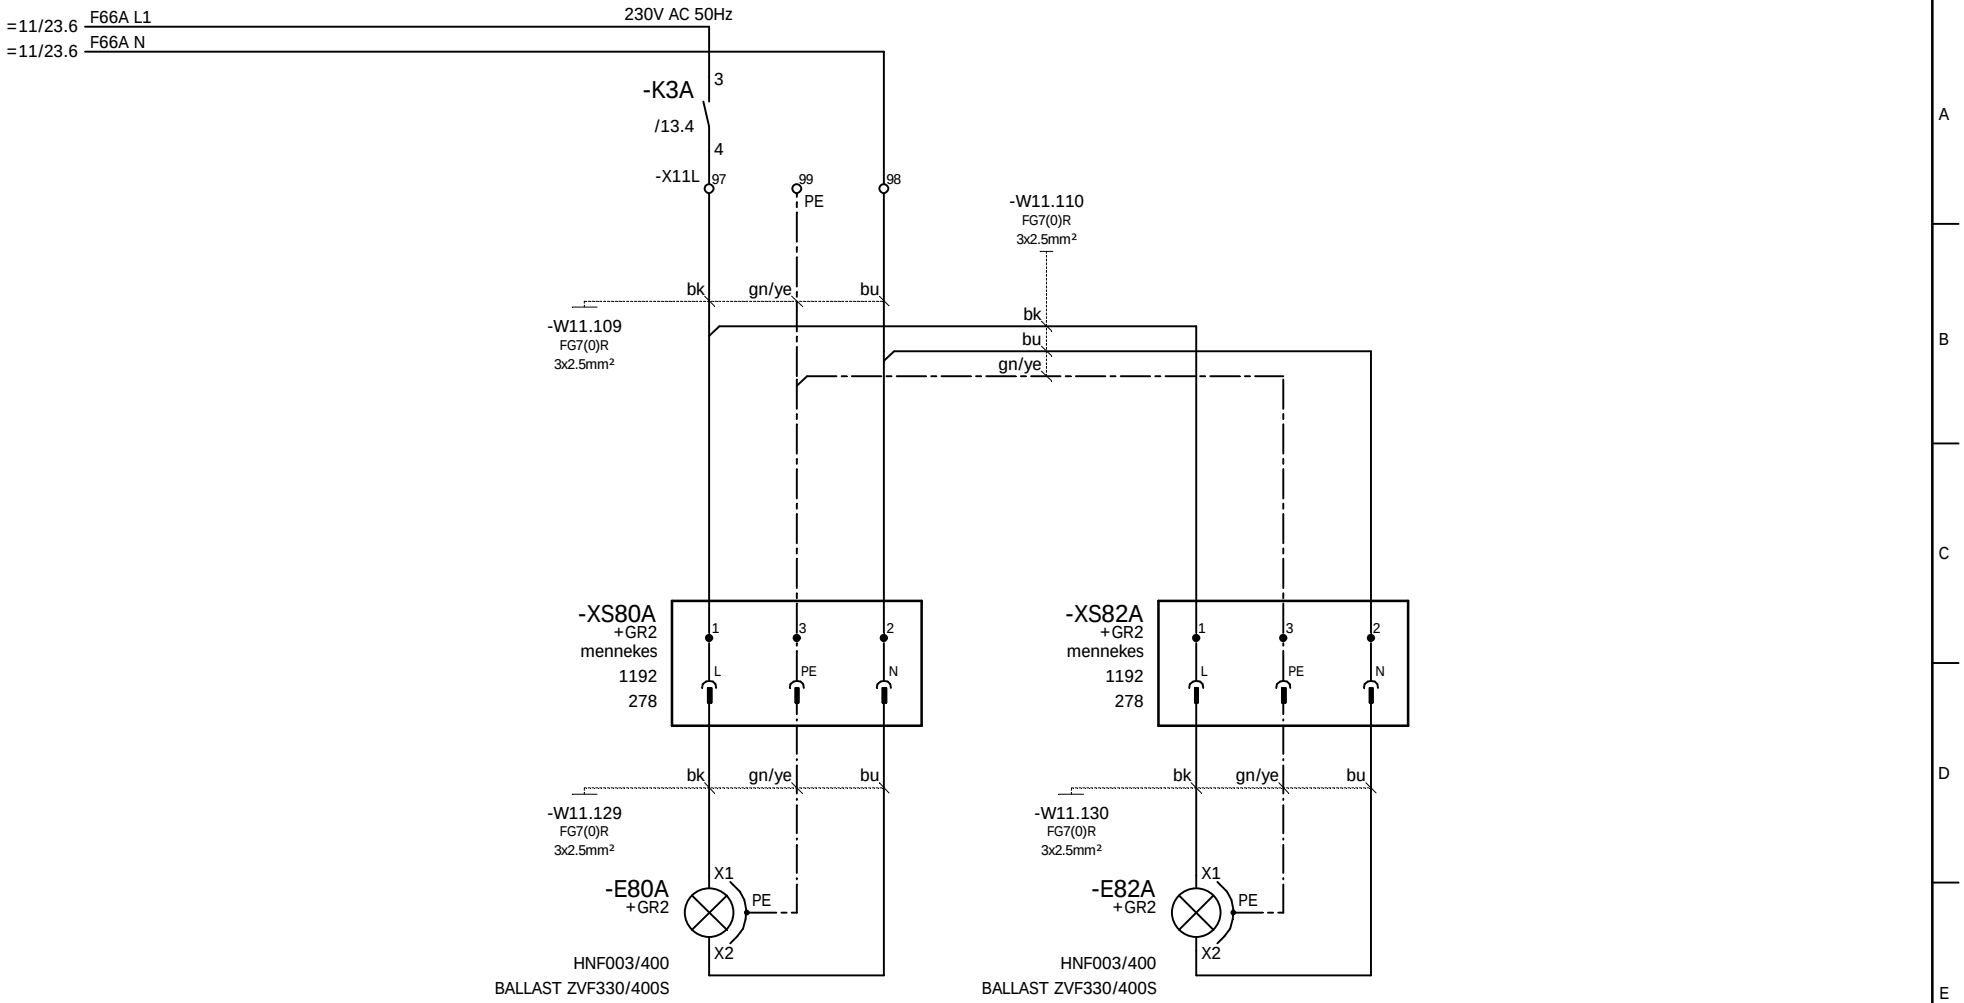


				Date		Costumer	AMPT Egypt	NOELL	flood lights, girder 2
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=12	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 17	26 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

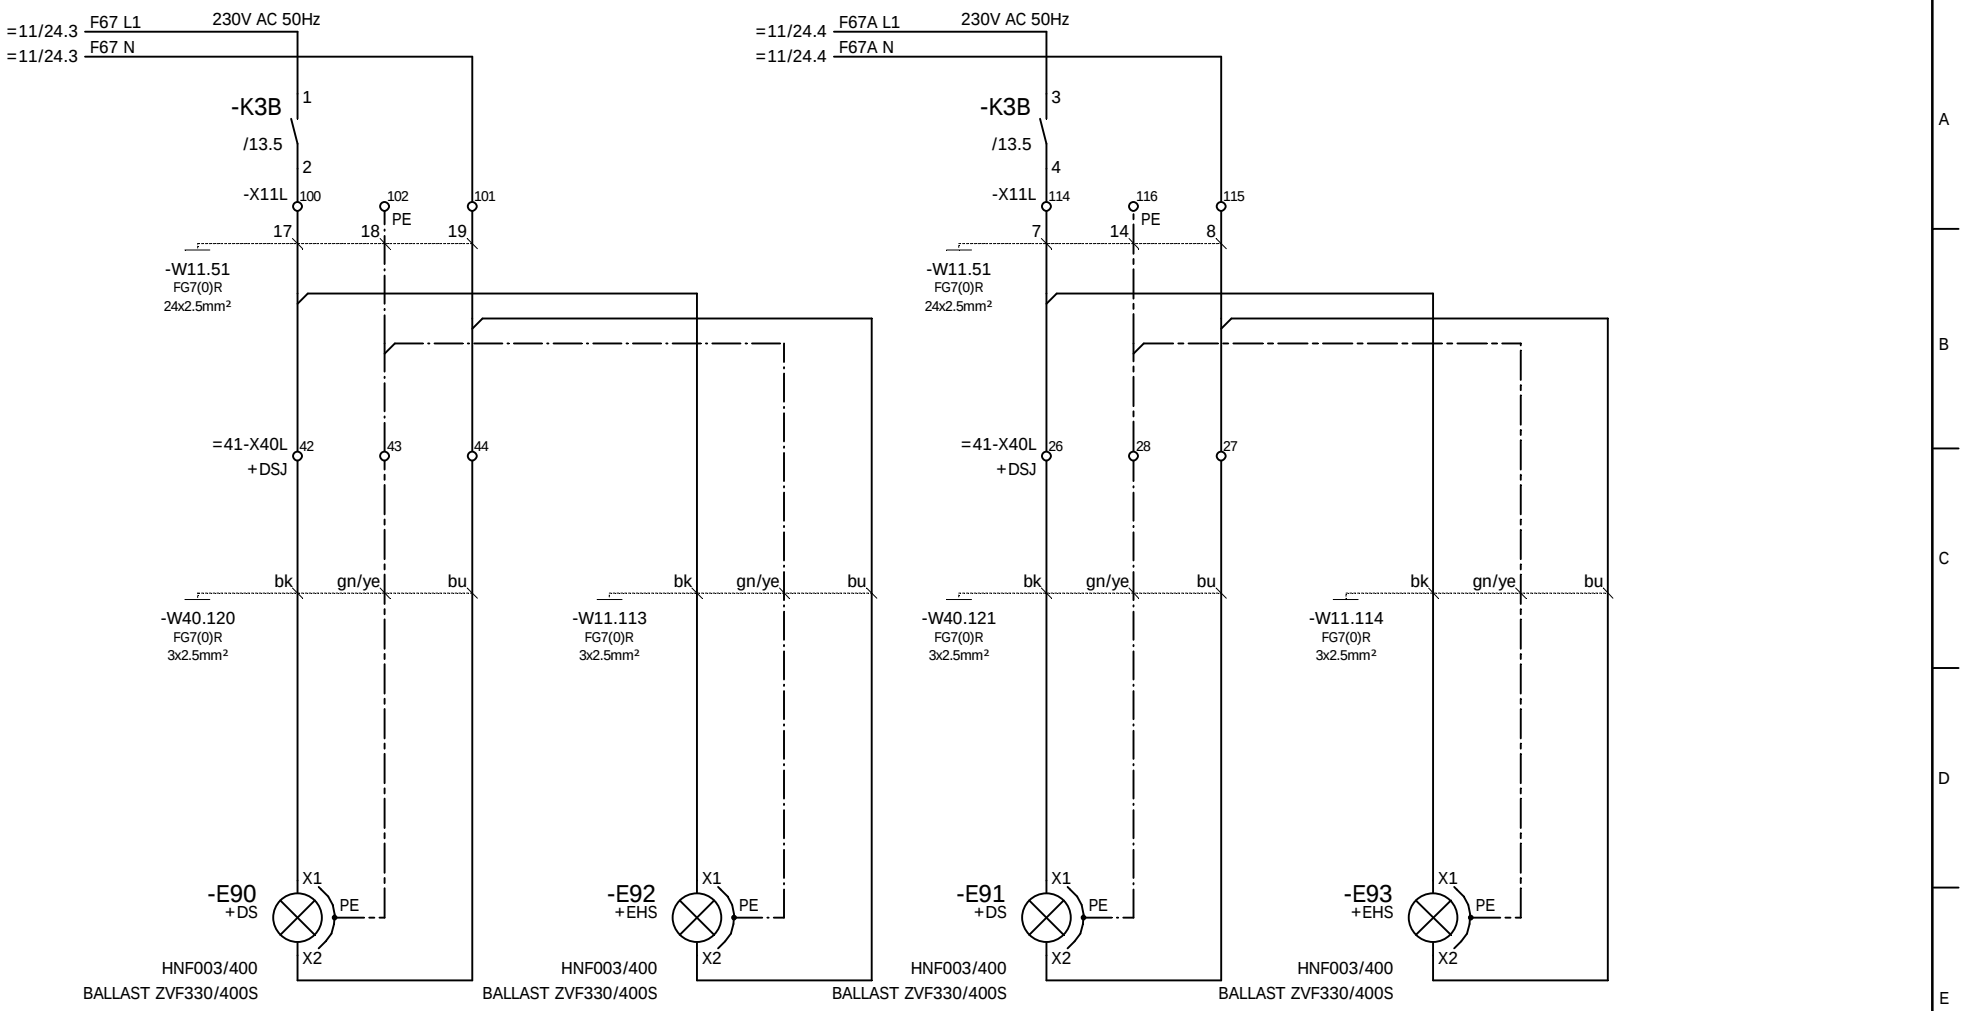

DS
lighting corner3

EHS
lighting corner2

DS lighting corner4

ES lighting corner1


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 18 26 Sh.

NOELL

flood lights, gantry
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

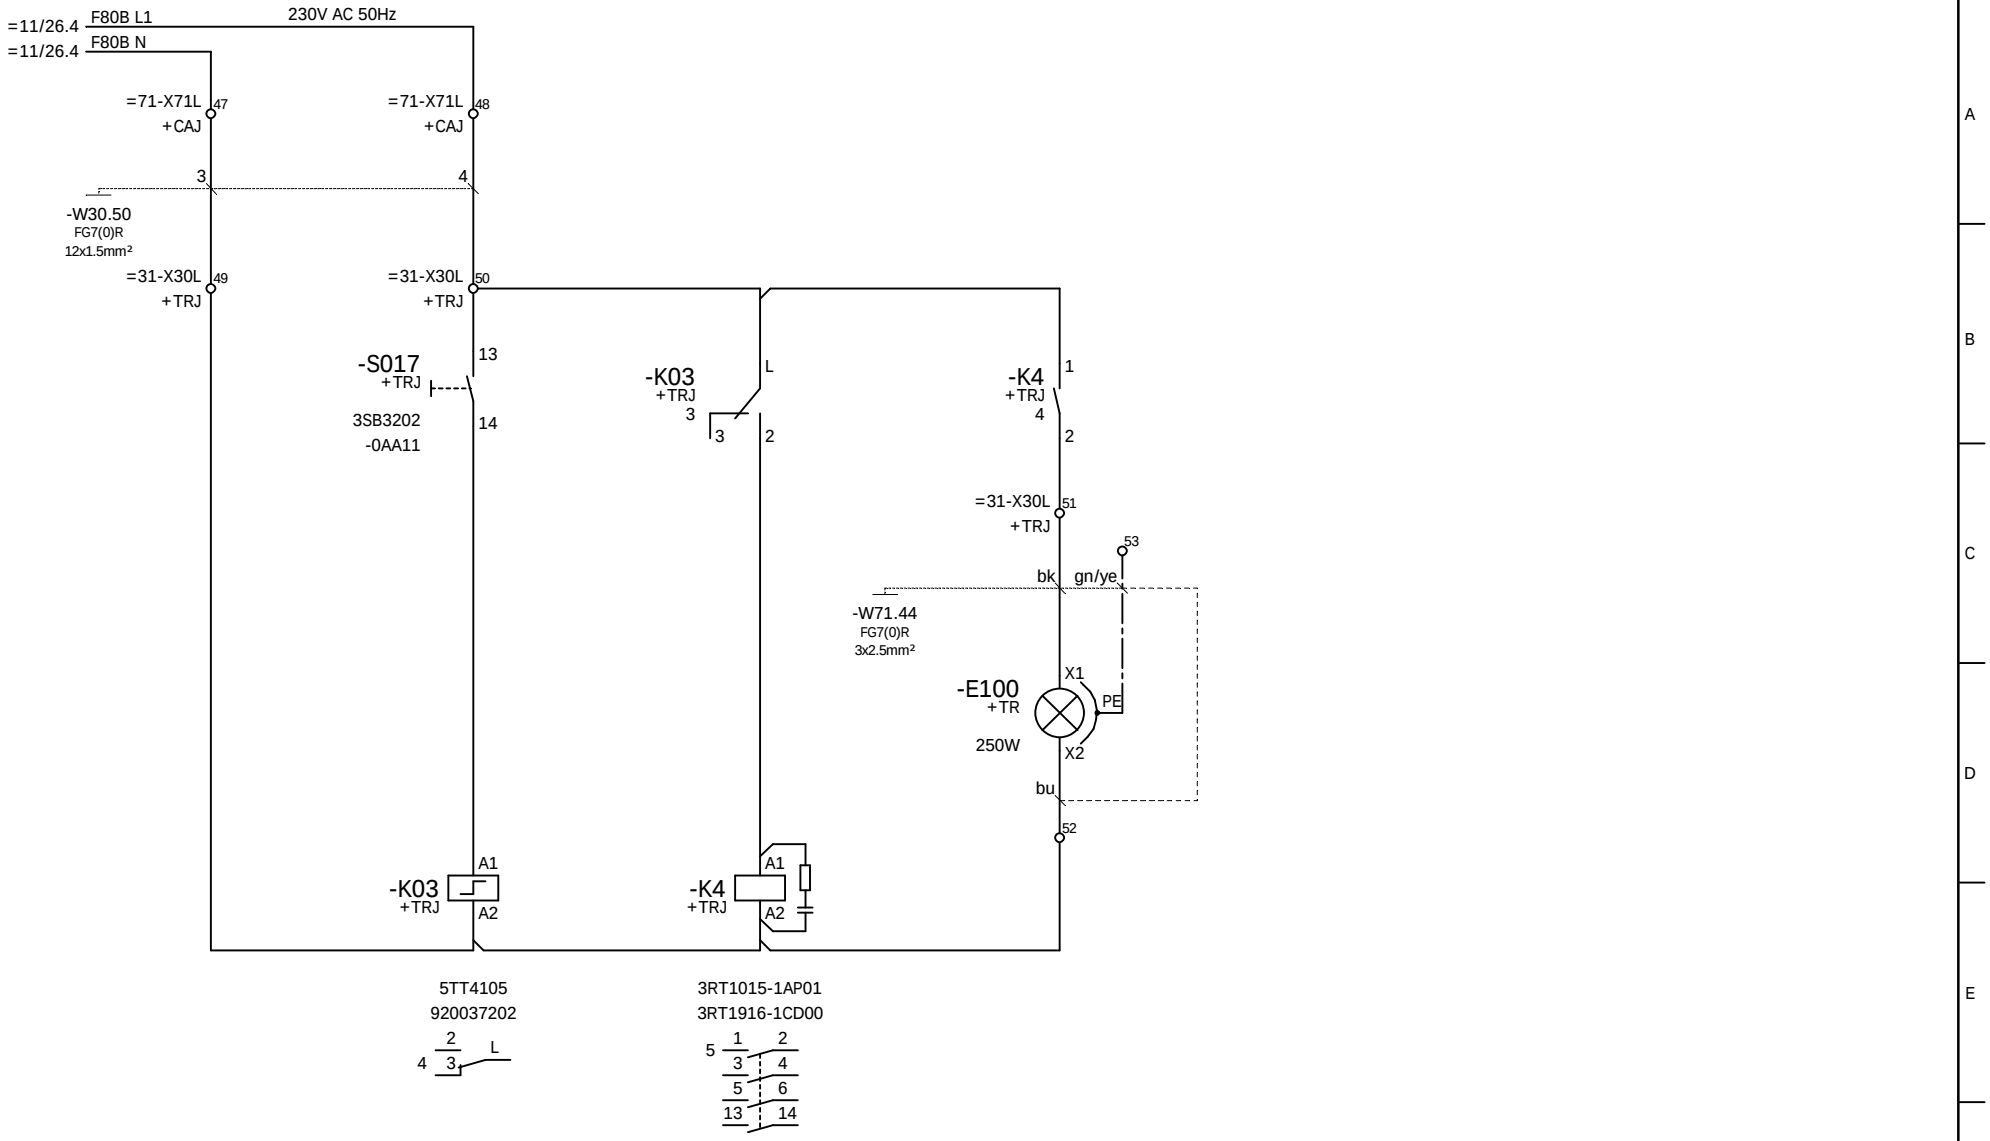

junction box
trolley

maintain floodlights,
trolley


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 19 / 26 Sh.

NOELL

maintain flood lights, trolley
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

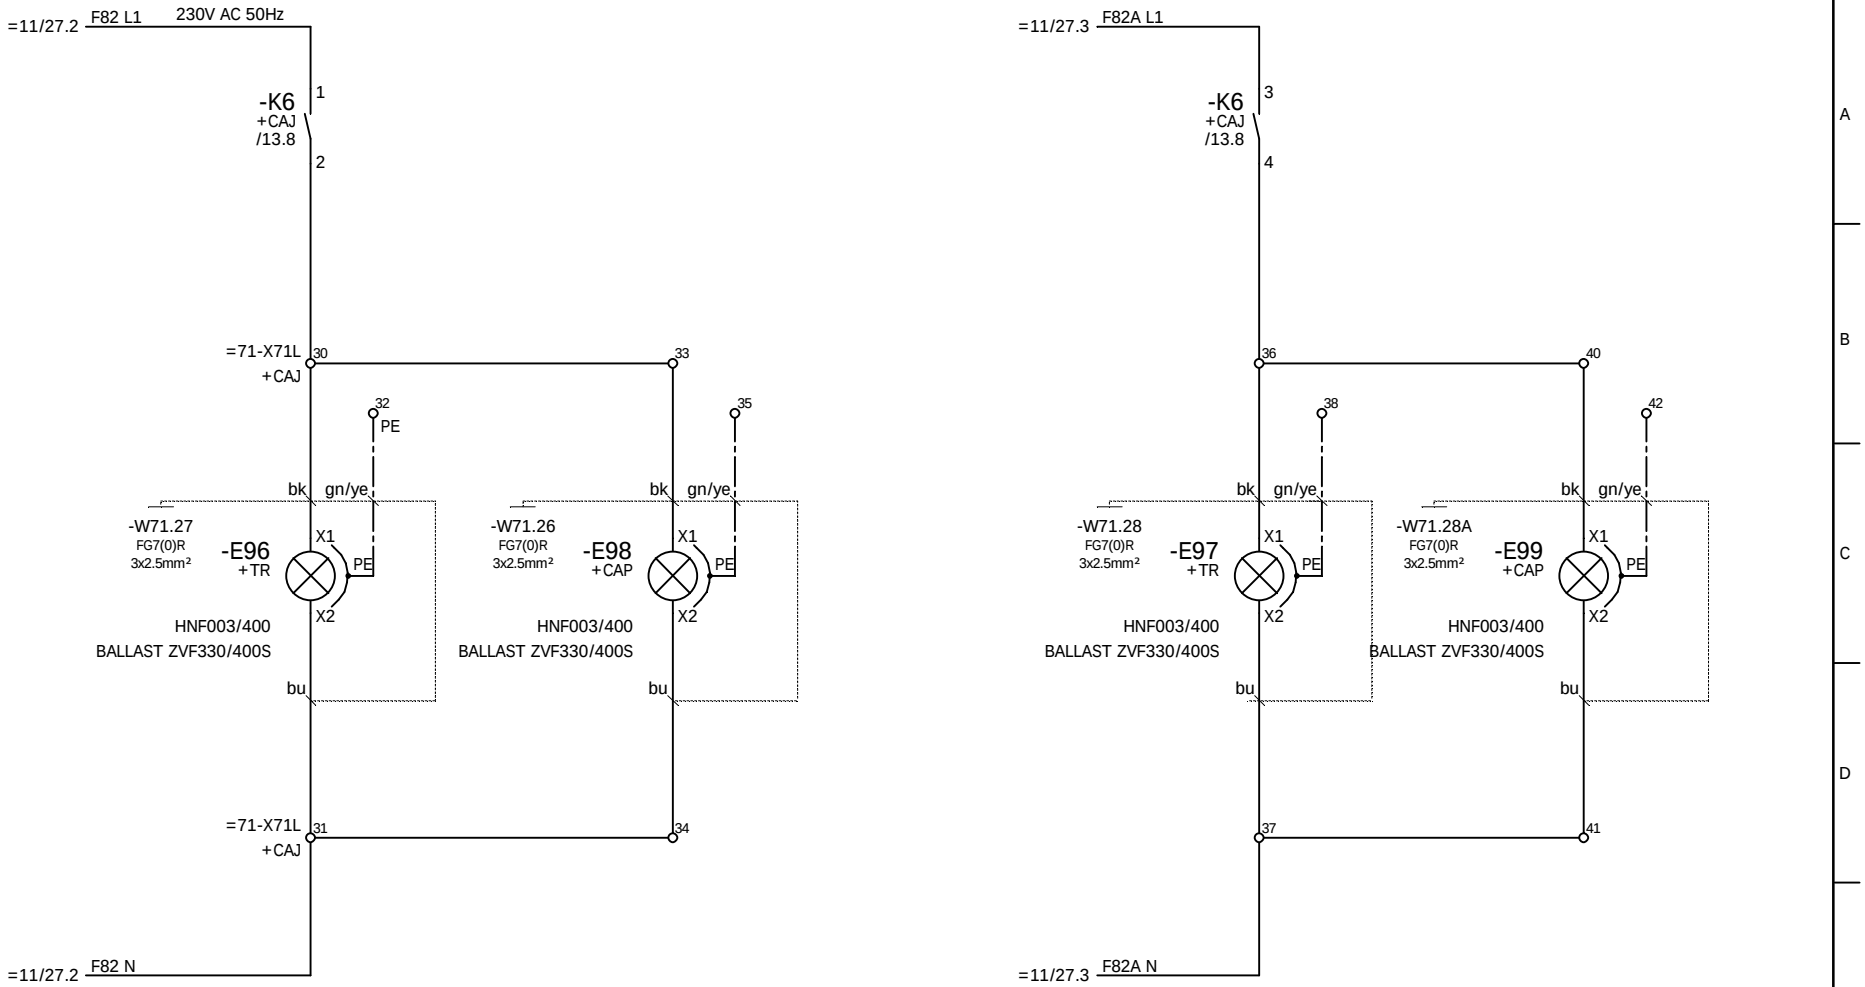


				Date		Costumer	AMPT Egypt	NOELL	socket outlets, trolley, Cabin
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=12	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 20	26 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

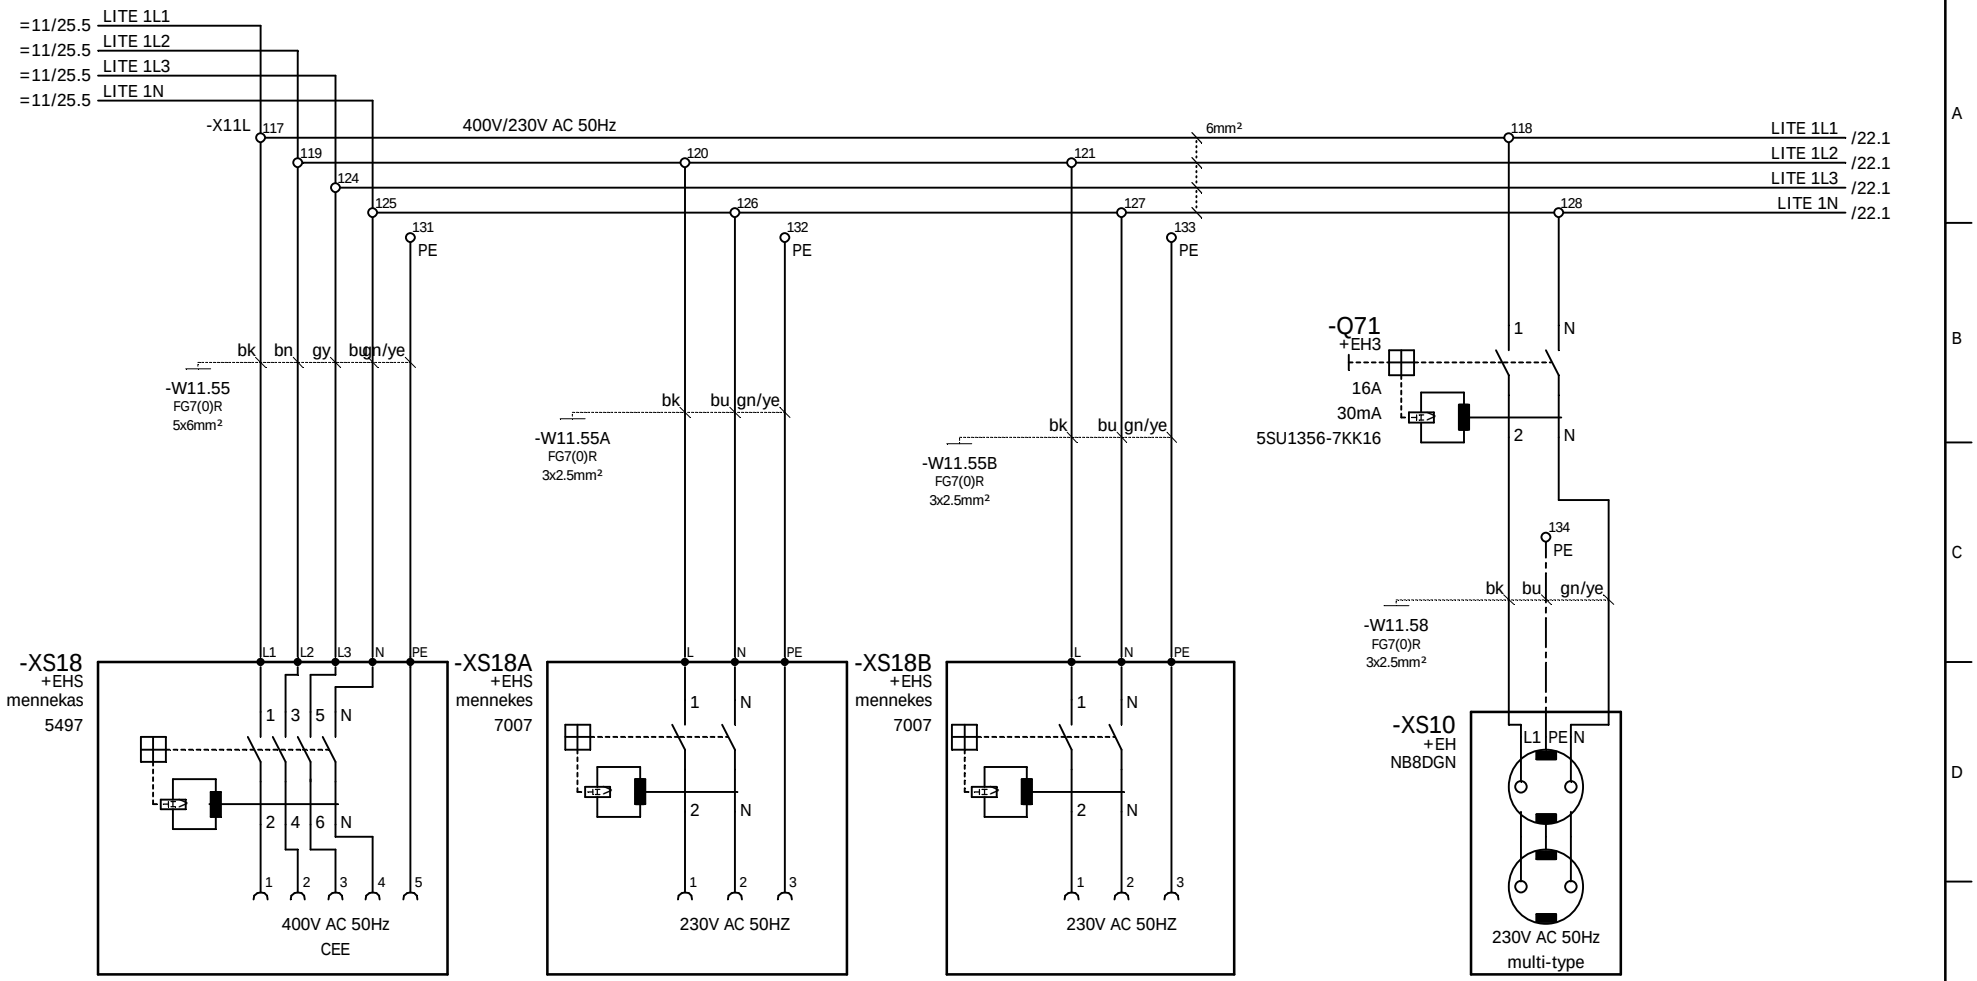


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=12 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 21 26 Sh.

socket outlets, e-house side
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

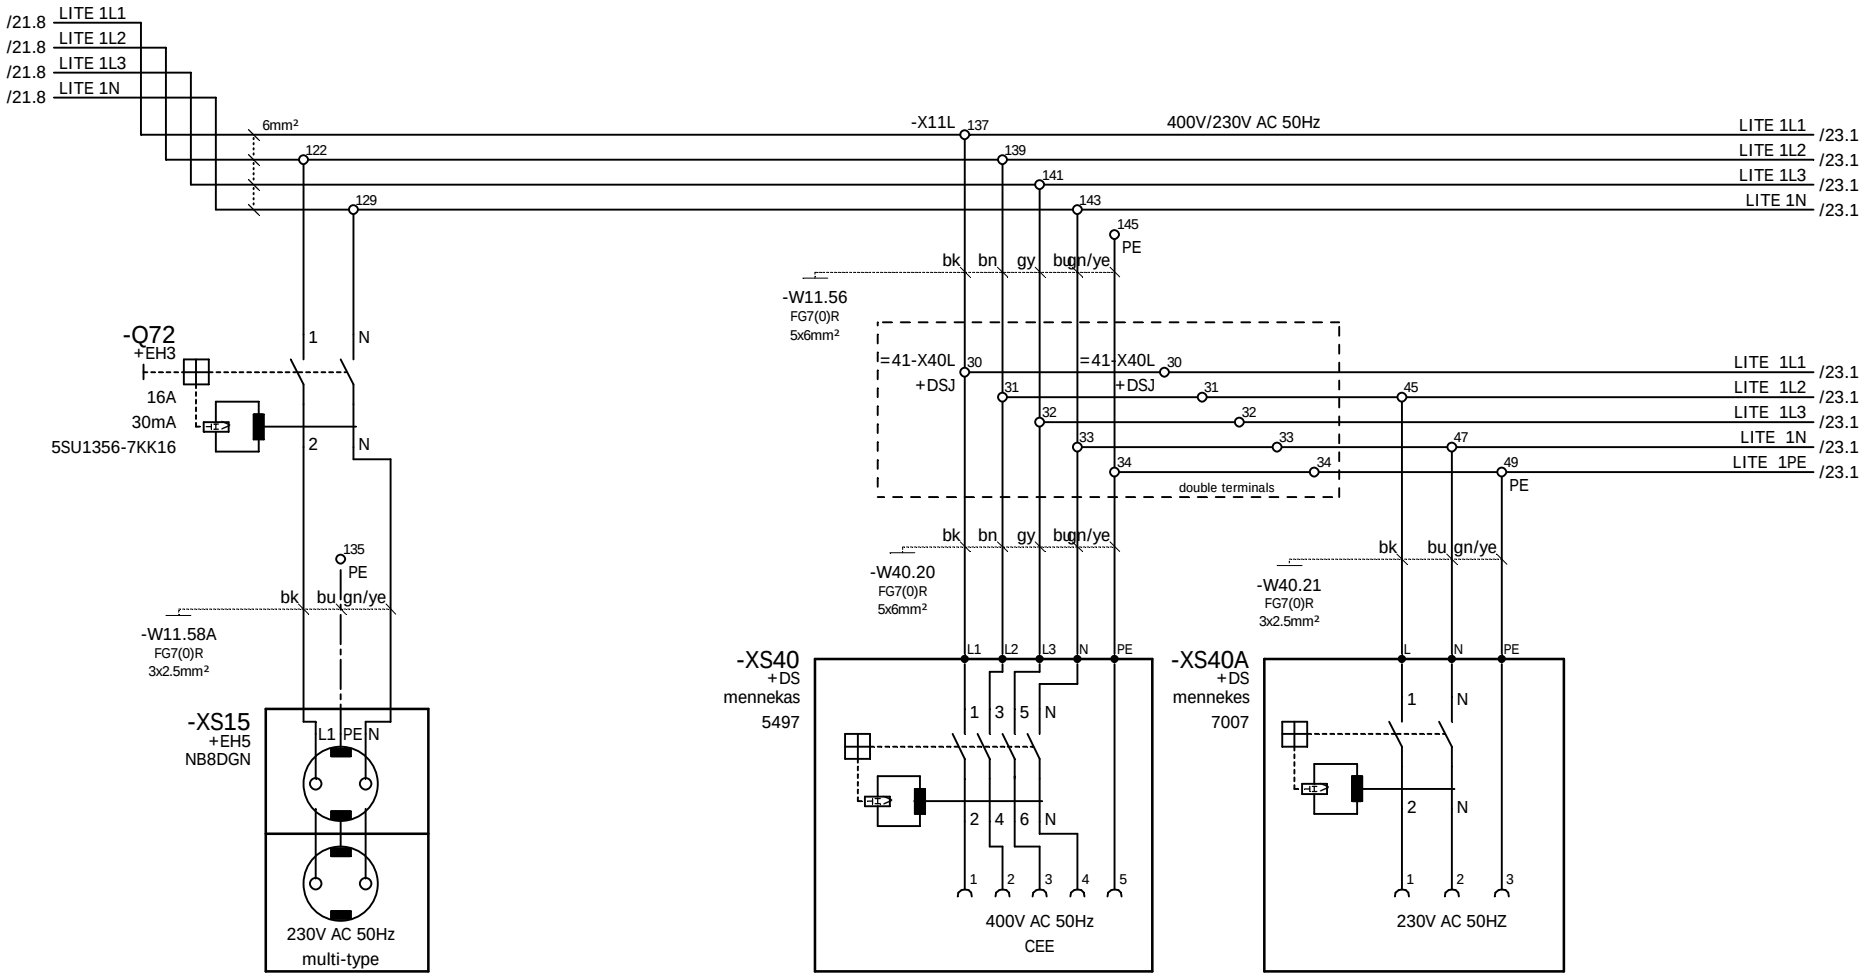

double socket outlet
mounting panel 5

socket 400VAC
32A

socket 230VAC
16A

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

socket outlets, e-house side
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC		=12 +EH1
Job No.	1255	Drawing No.	78.5692.60.00
			Sheet 22 26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

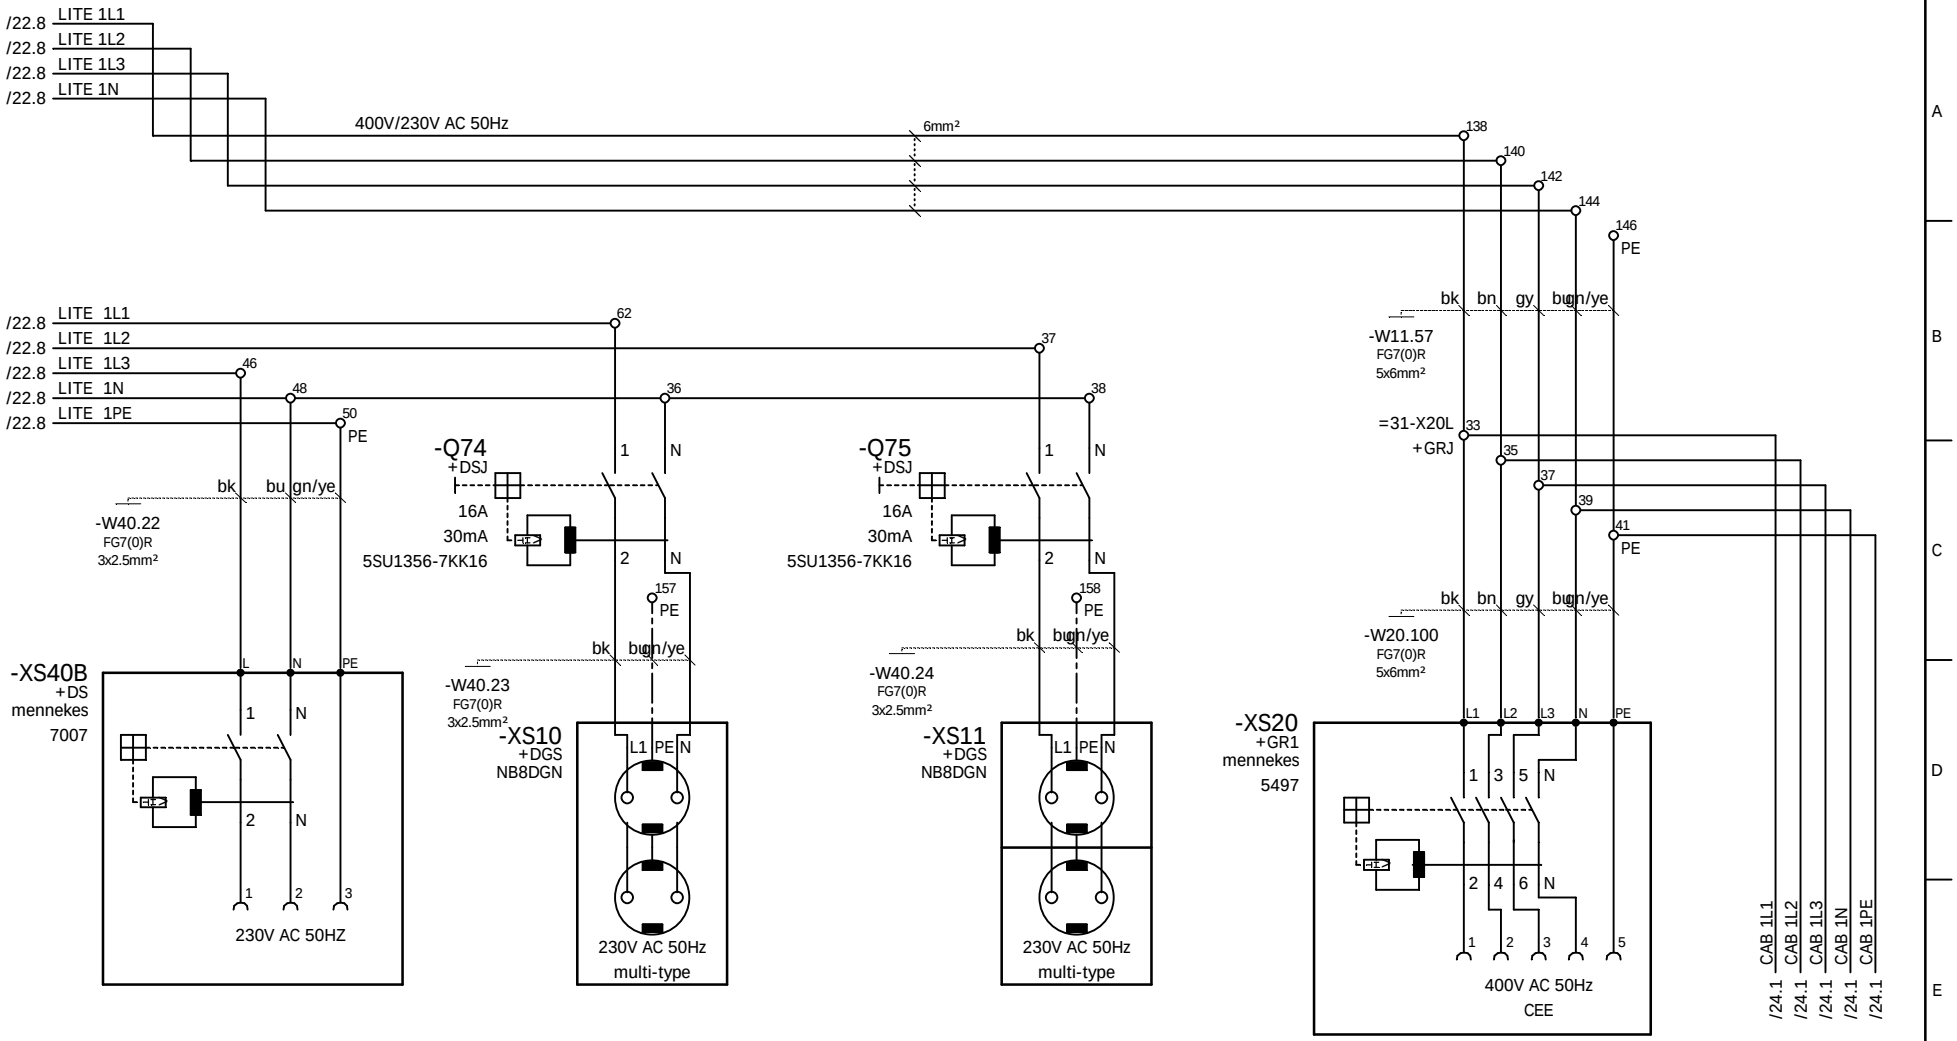

socket 230VAC
16A

double socket outlet
genset

double socket outlet
genset

socket 400VAC
32A

supply
trolley/cabin


				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

floodlights, diesel side
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=12	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	23
			26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

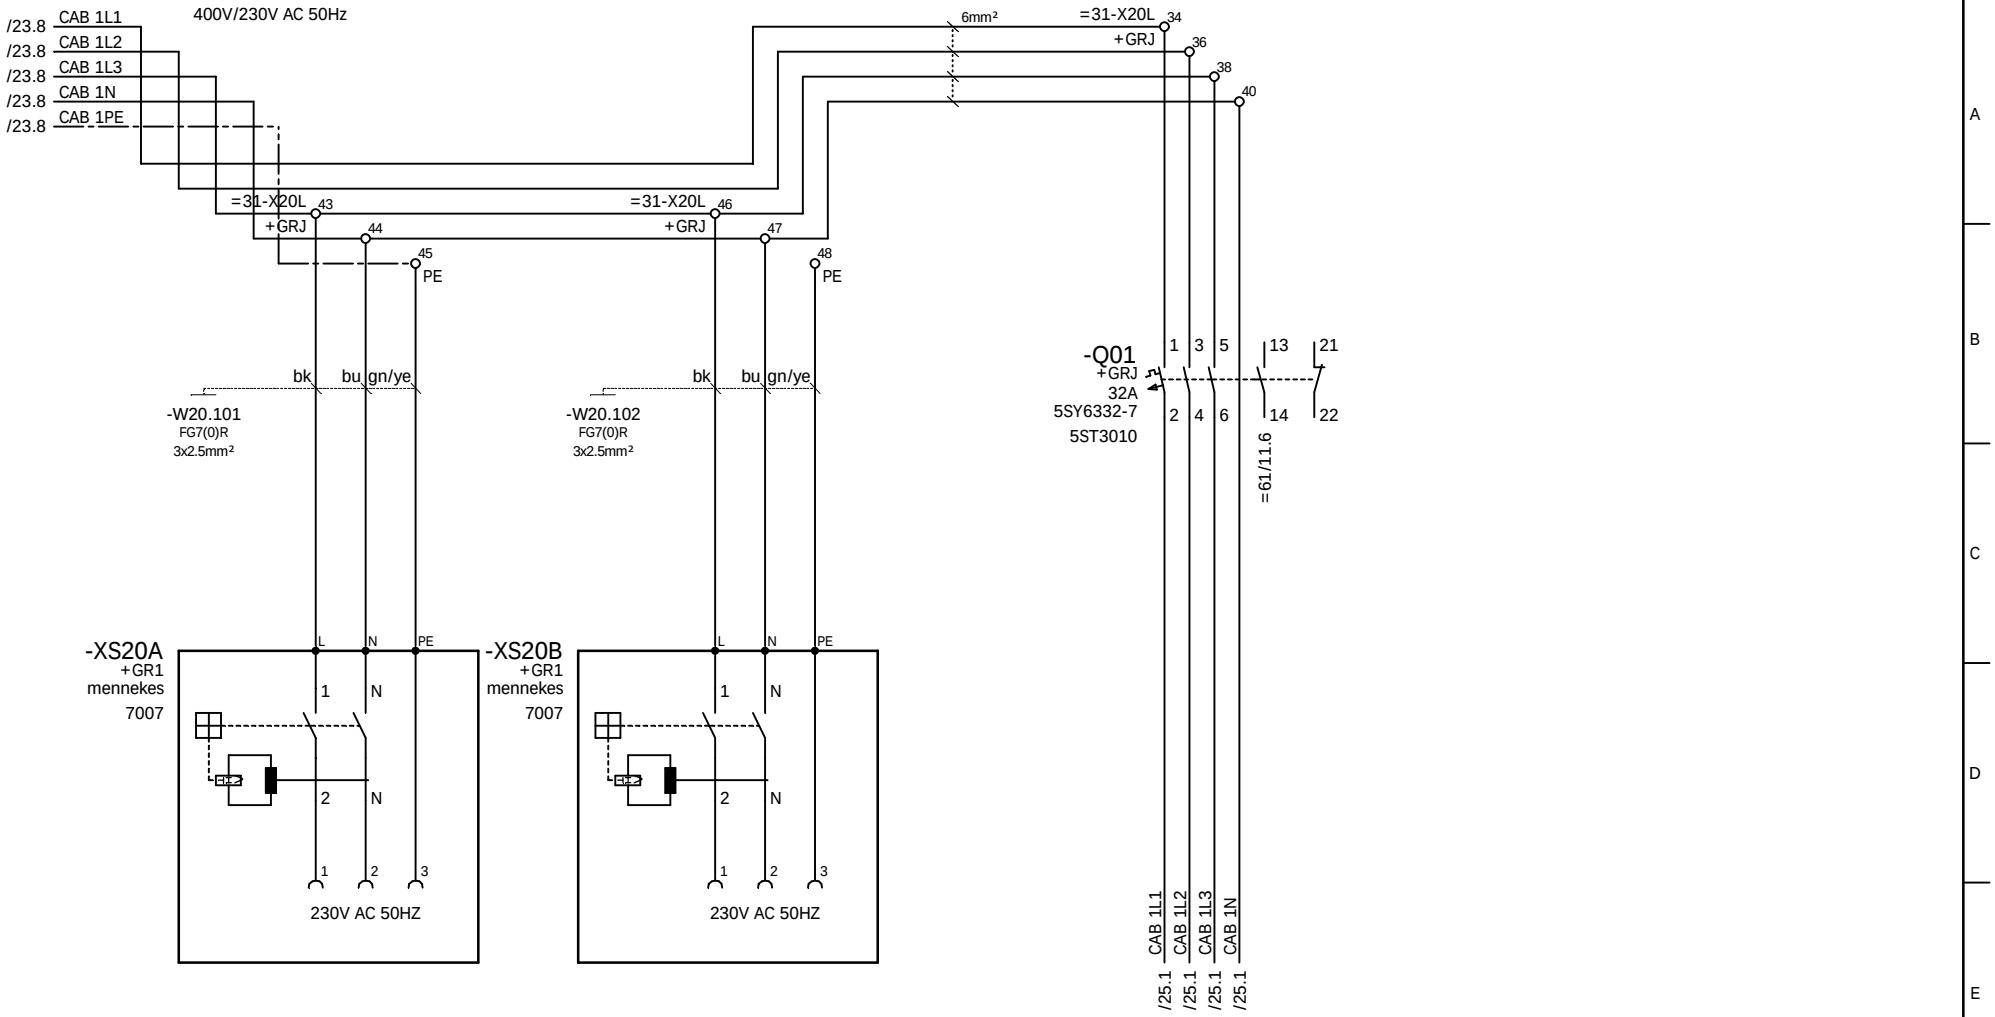

				Date		Costumer	AMPT Egypt	socket outlets, trolley, Girder	Type RTG 50/26.50/5+1/AC	=12
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 24 / 26 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

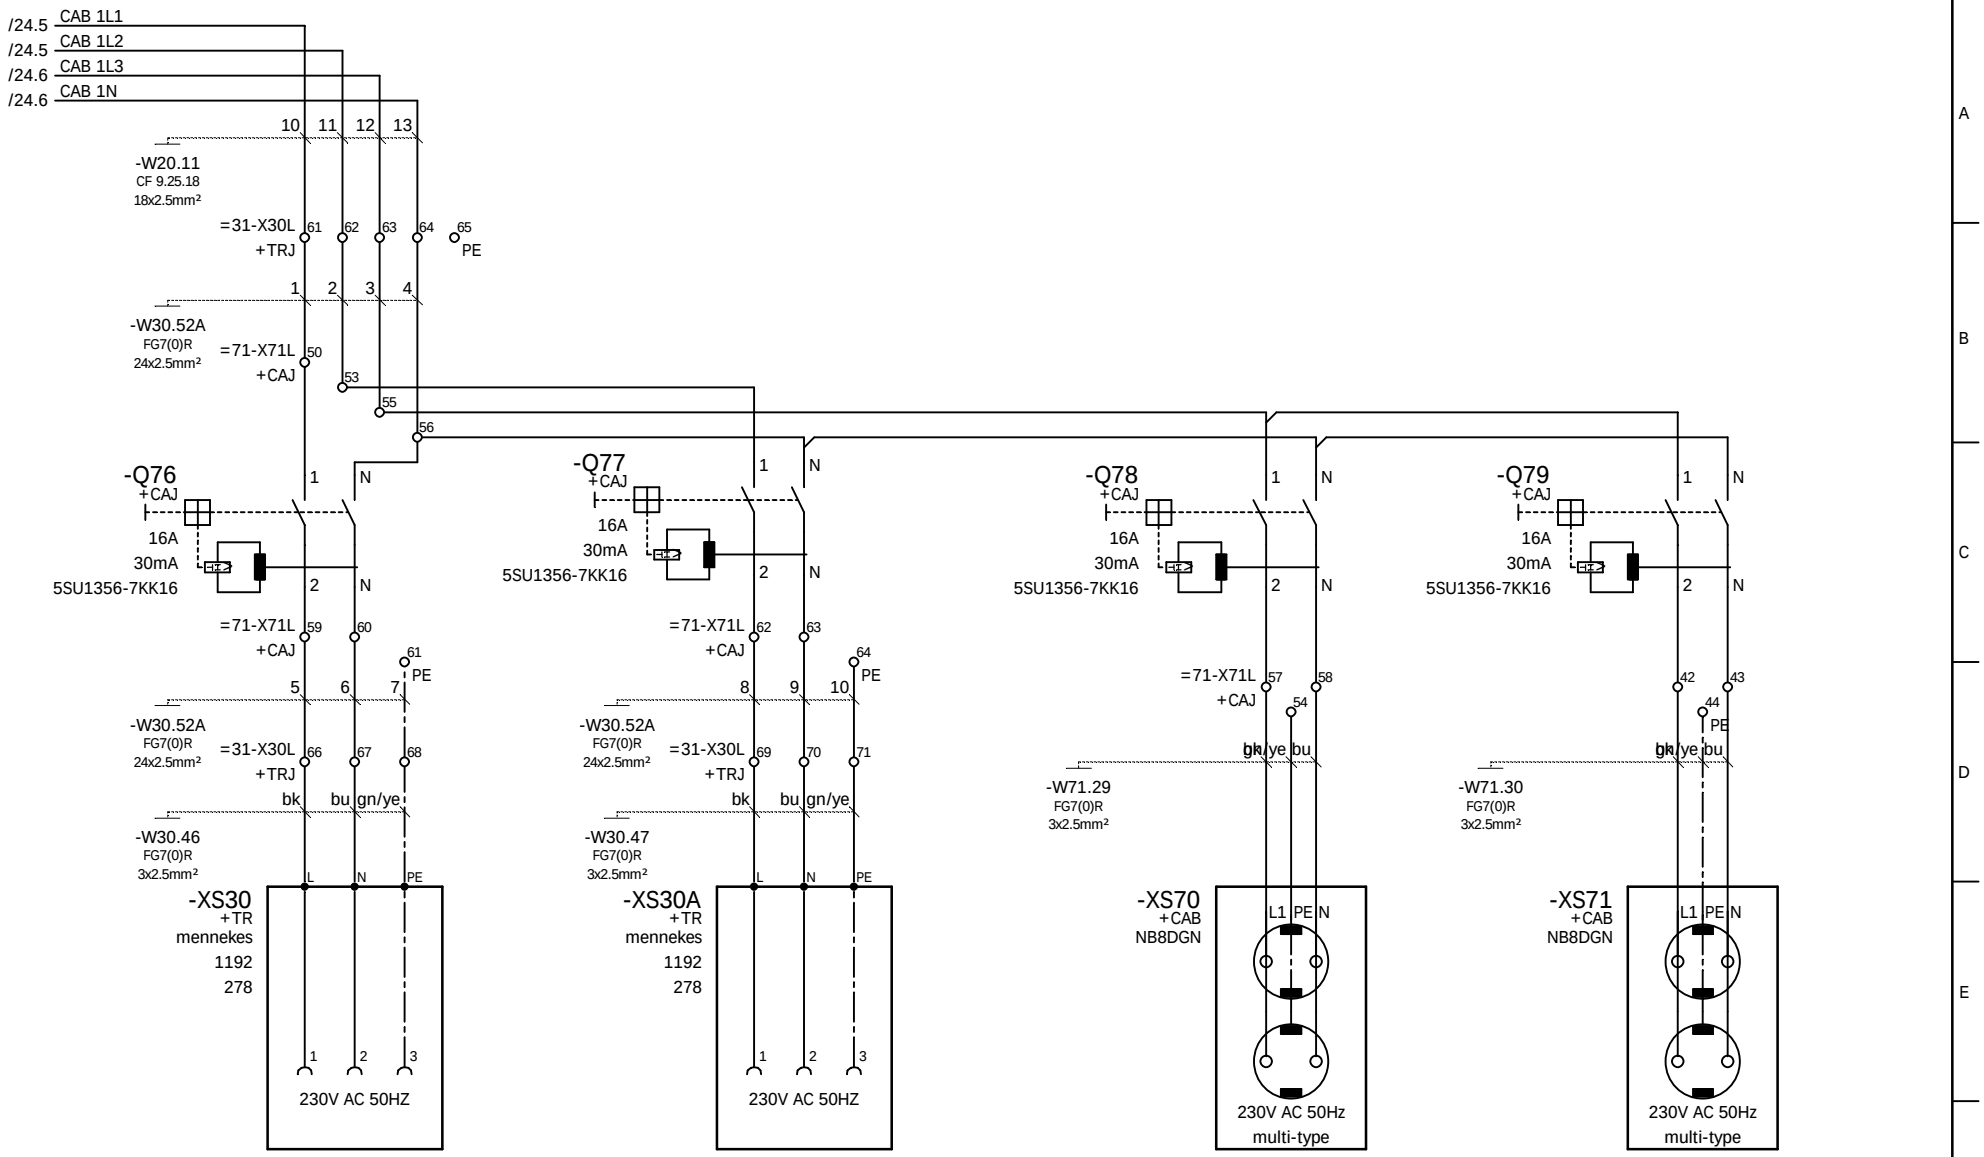


				Date		Costumer	AMPT Egypt	NOELL	socket outlets, Cabin
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=12	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 25	26 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

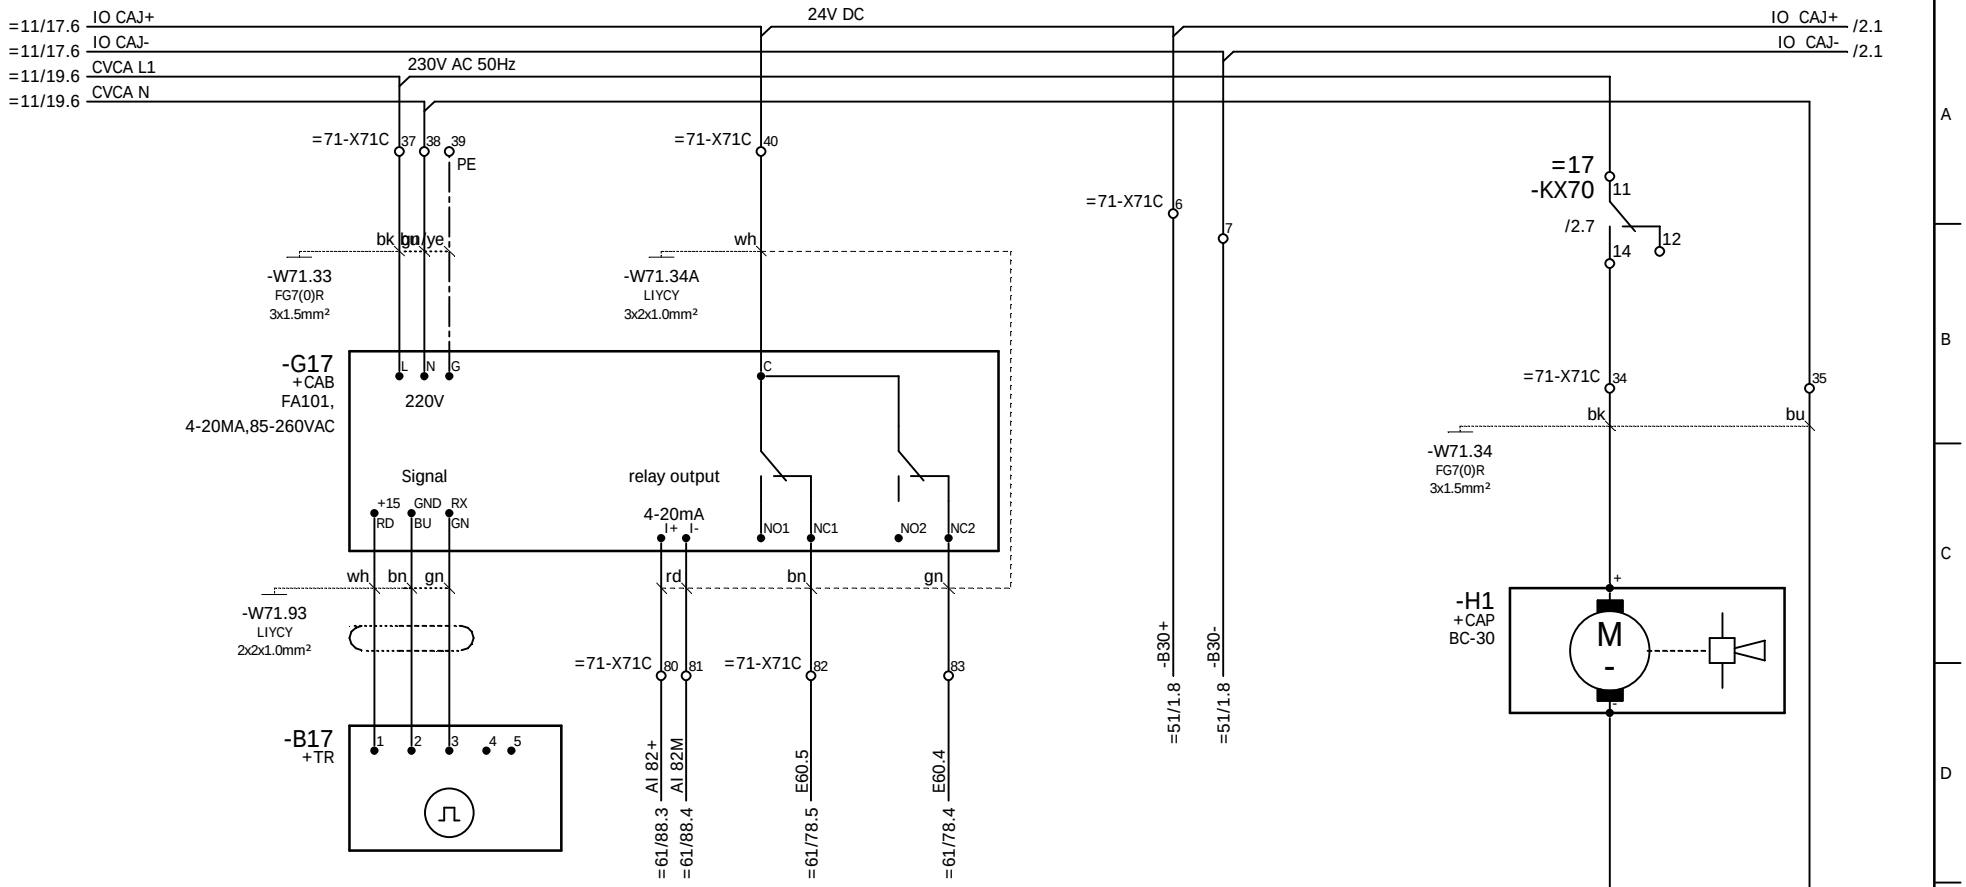


				Date		Costumer	AMPT Egypt	NOELL	auxiliary circuits, cabin
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=17	
		+CAJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	1	2 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

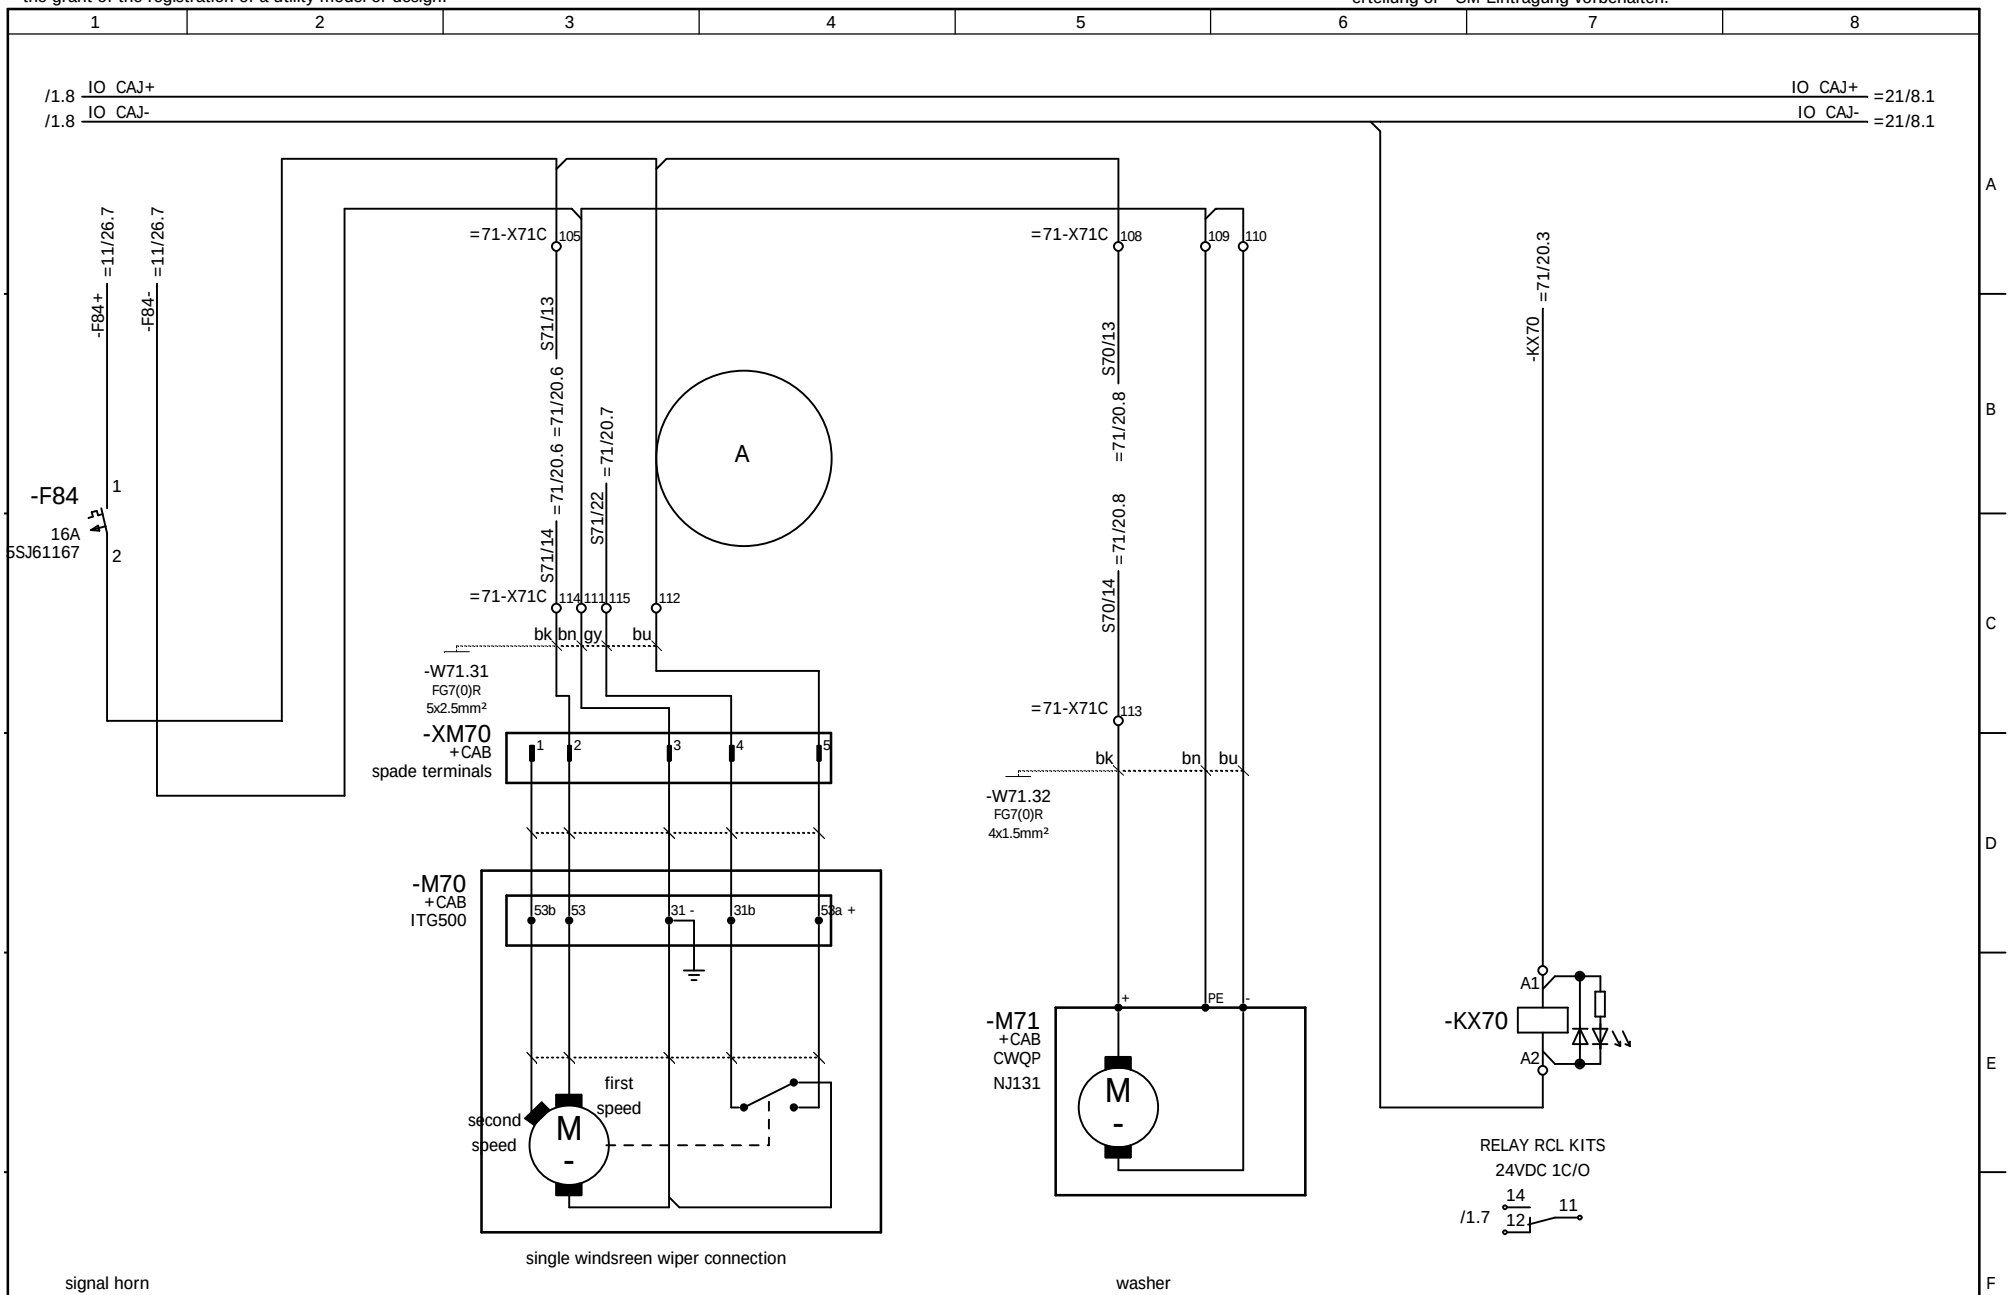


				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

auxiliary circuits, cabin
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=17	
		+CAJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	2
			2 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

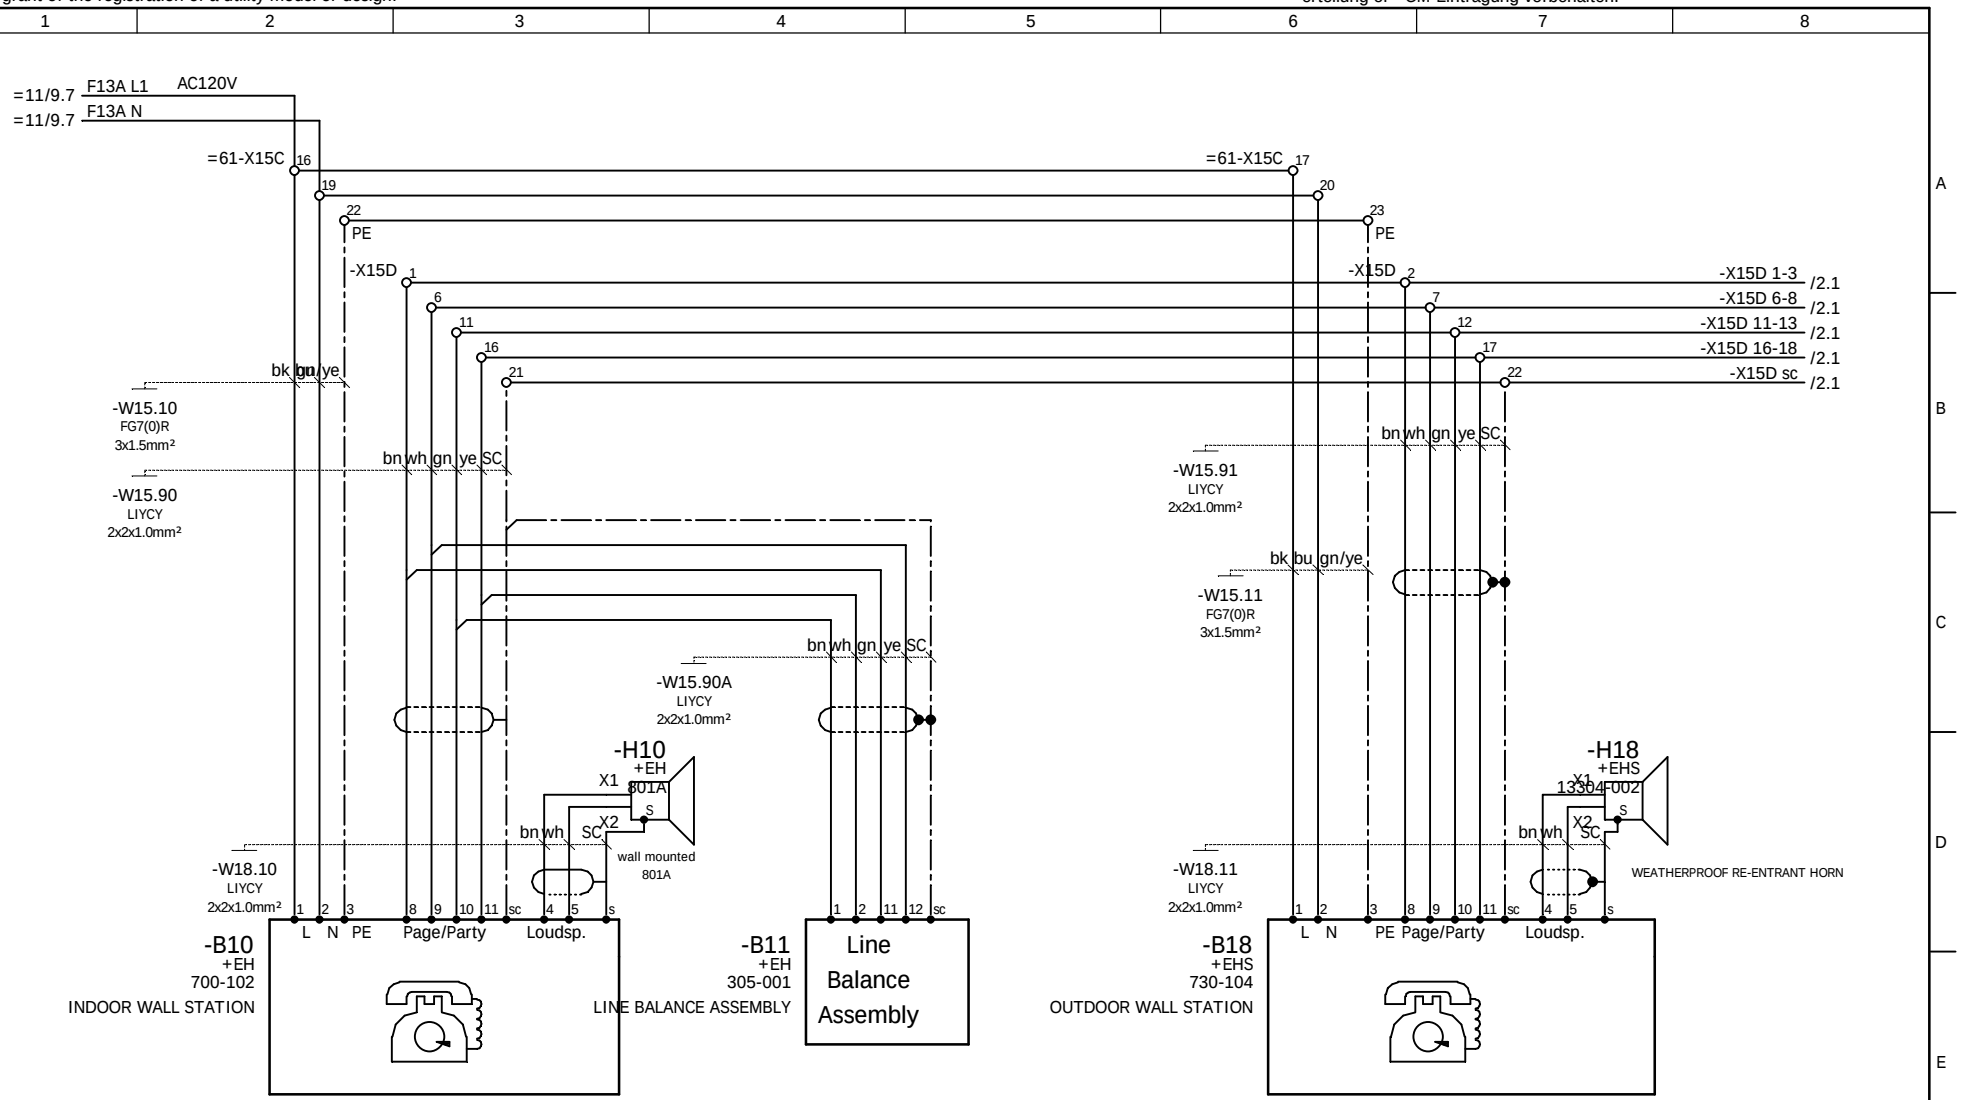

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00


NOELL

intercom system
Stromlaufplan / Circuit Diagram

=18
+EH5
Sheet 1
3 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

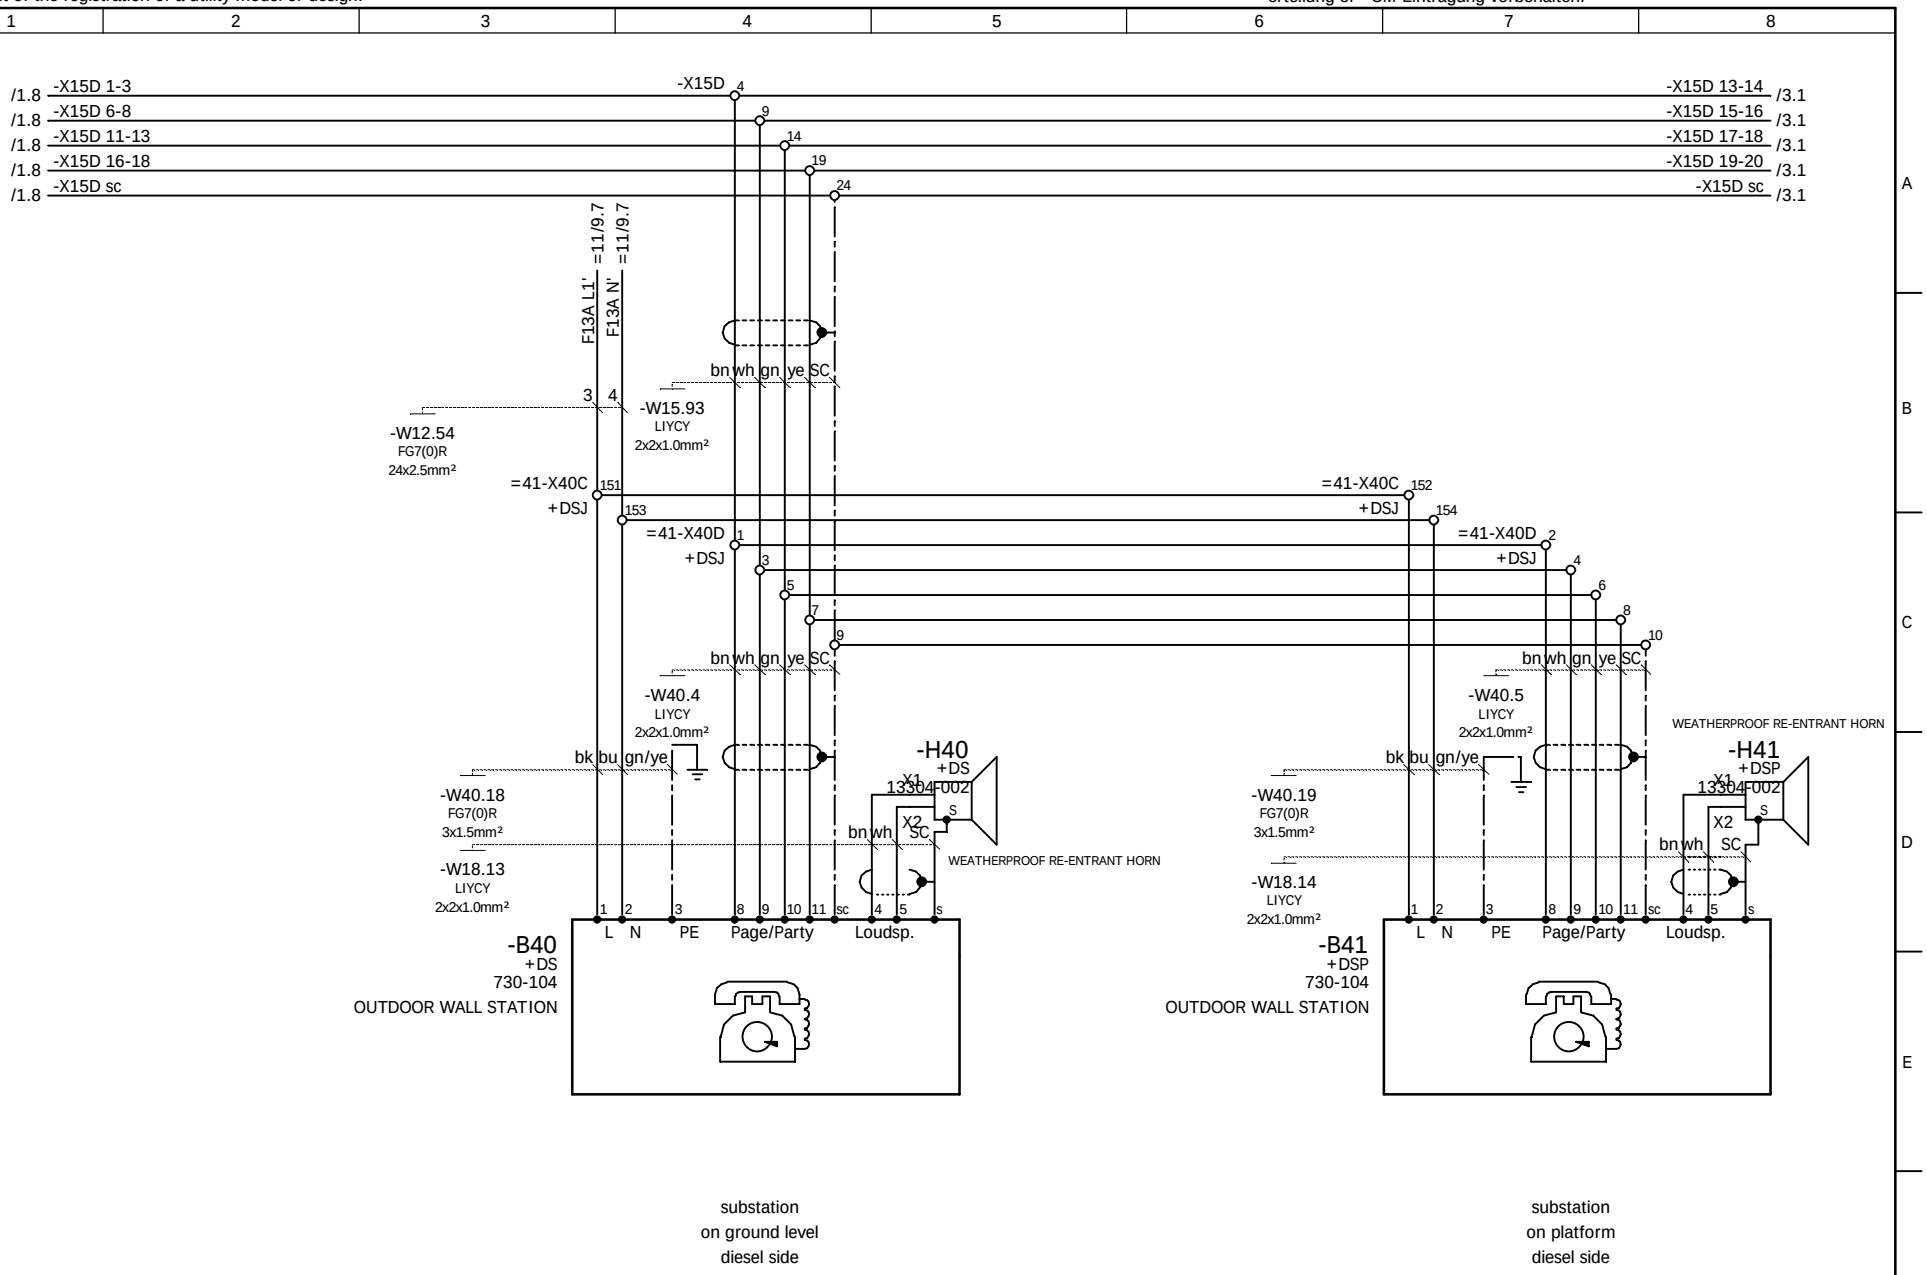

				Date		Costumer	AMPT Egypt	NOELL	public address system	Type RTG 50/26.50/5+1/AC	=18
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH5
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2
Ind.	Revision	Date	Name	Standard		Source:						3 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

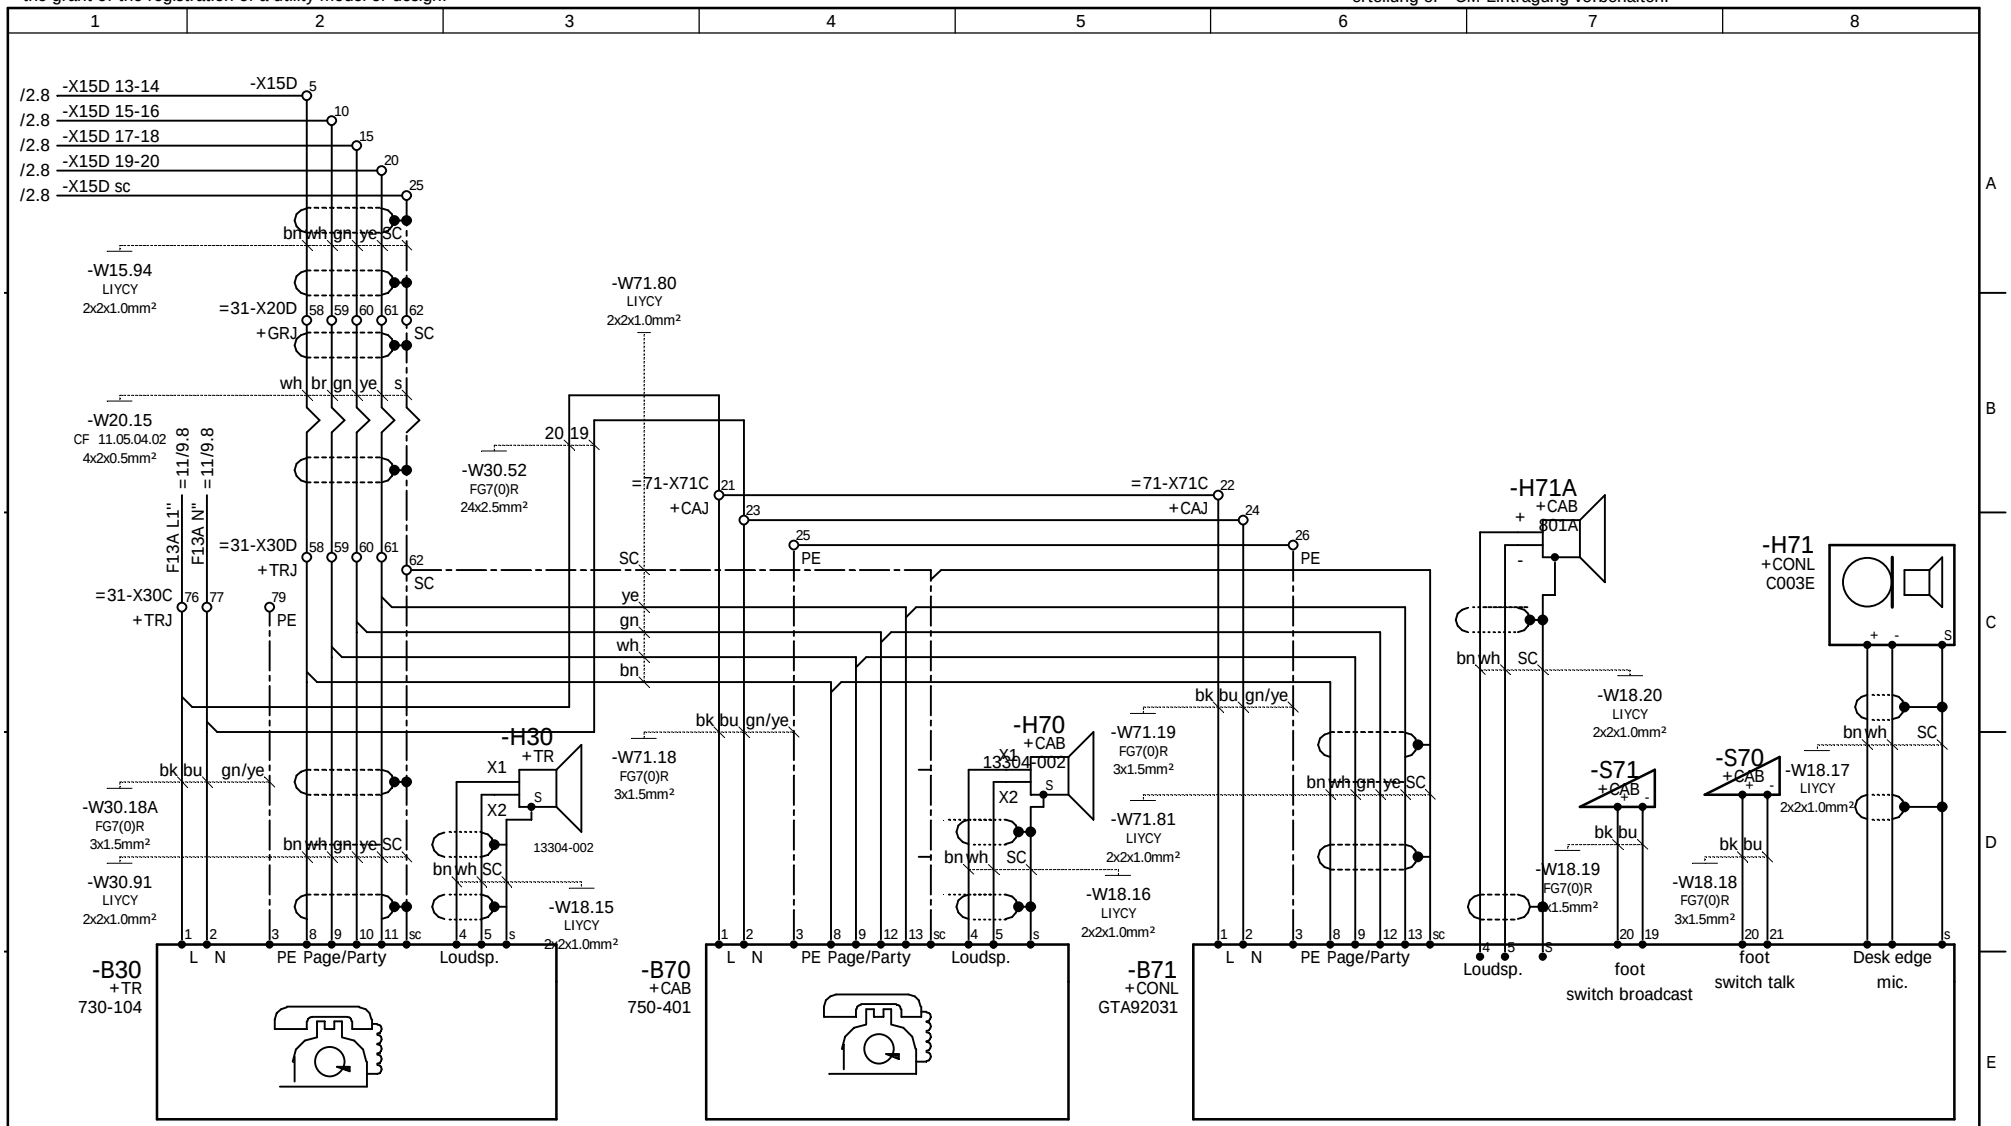

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=18 +EH5
				Checked	LIU KP				
ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00


NOELL

public address system
Stromlaufplan / Circuit Diagram

Sheet 3
3 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

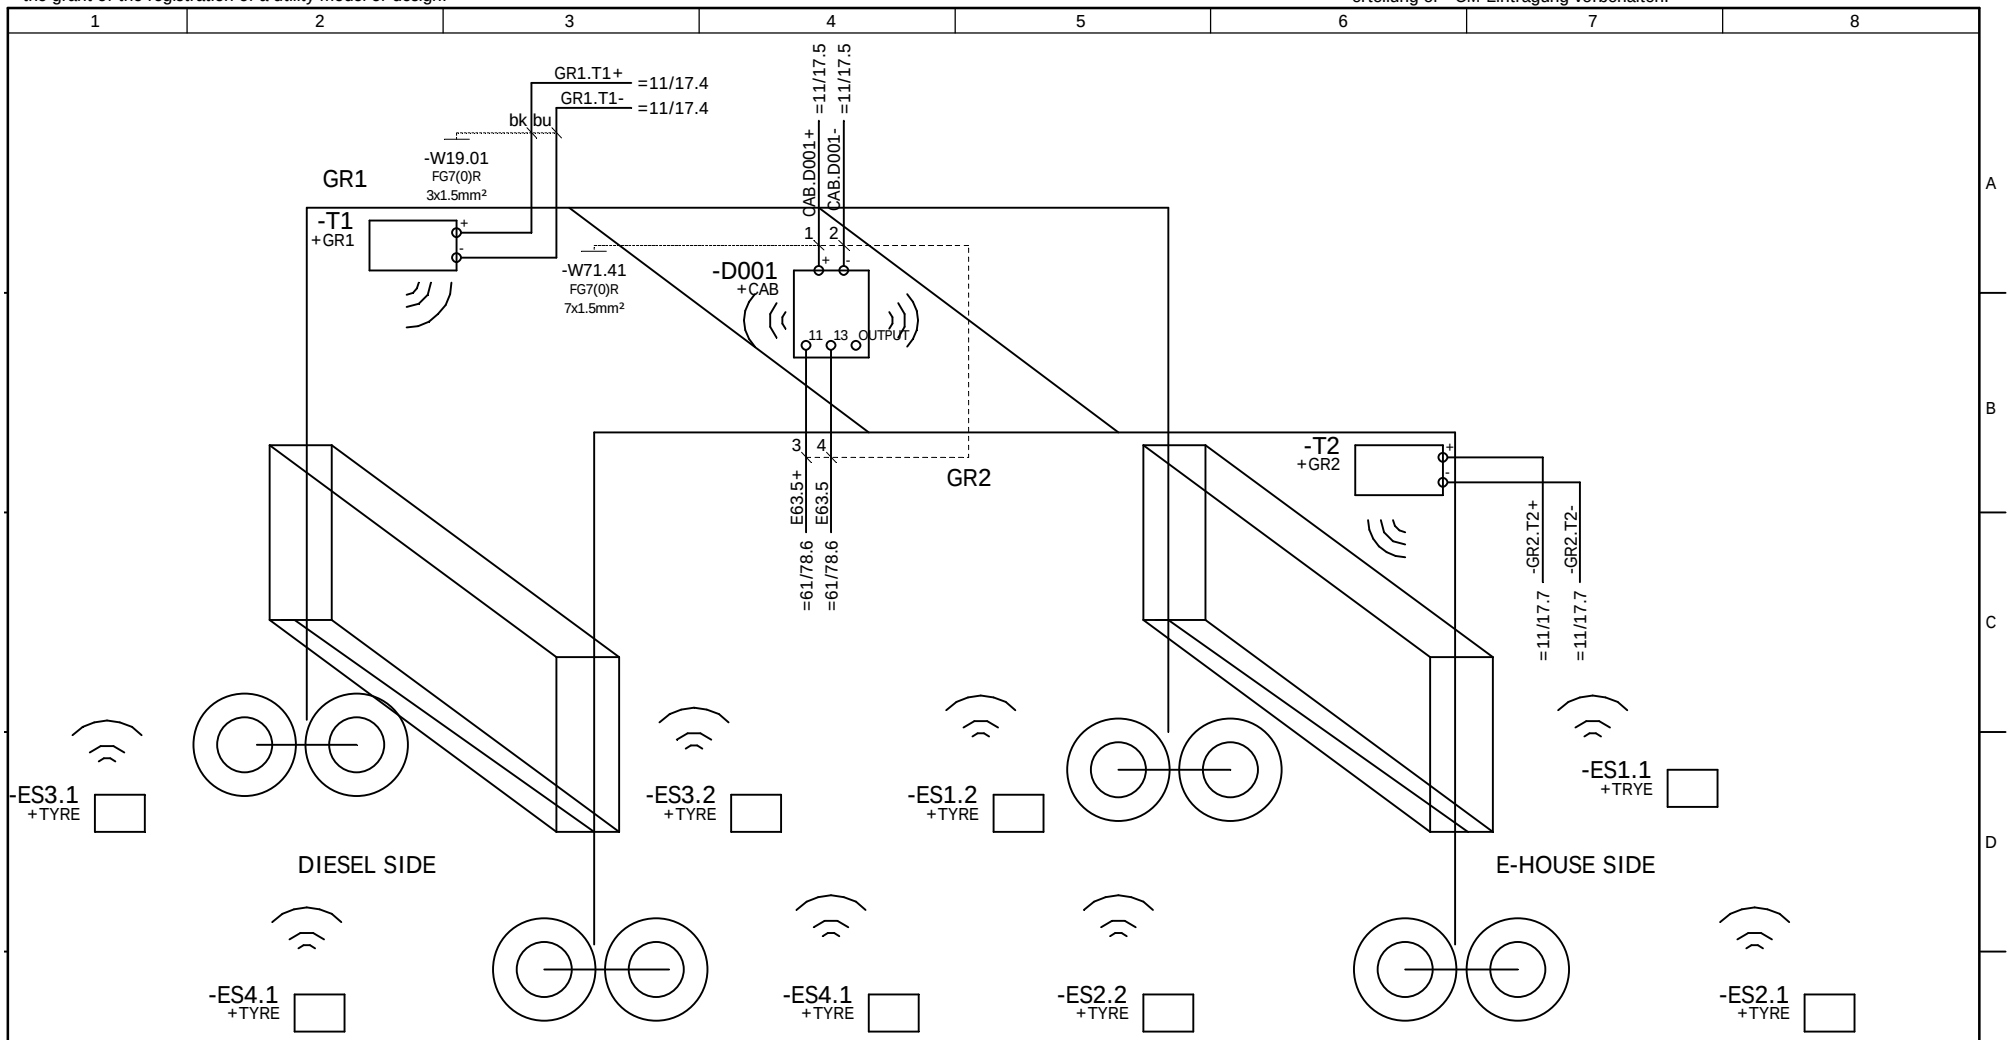

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=19 +EH5
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 1 / 1 Sh.


NOELL

tyre pressure system

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

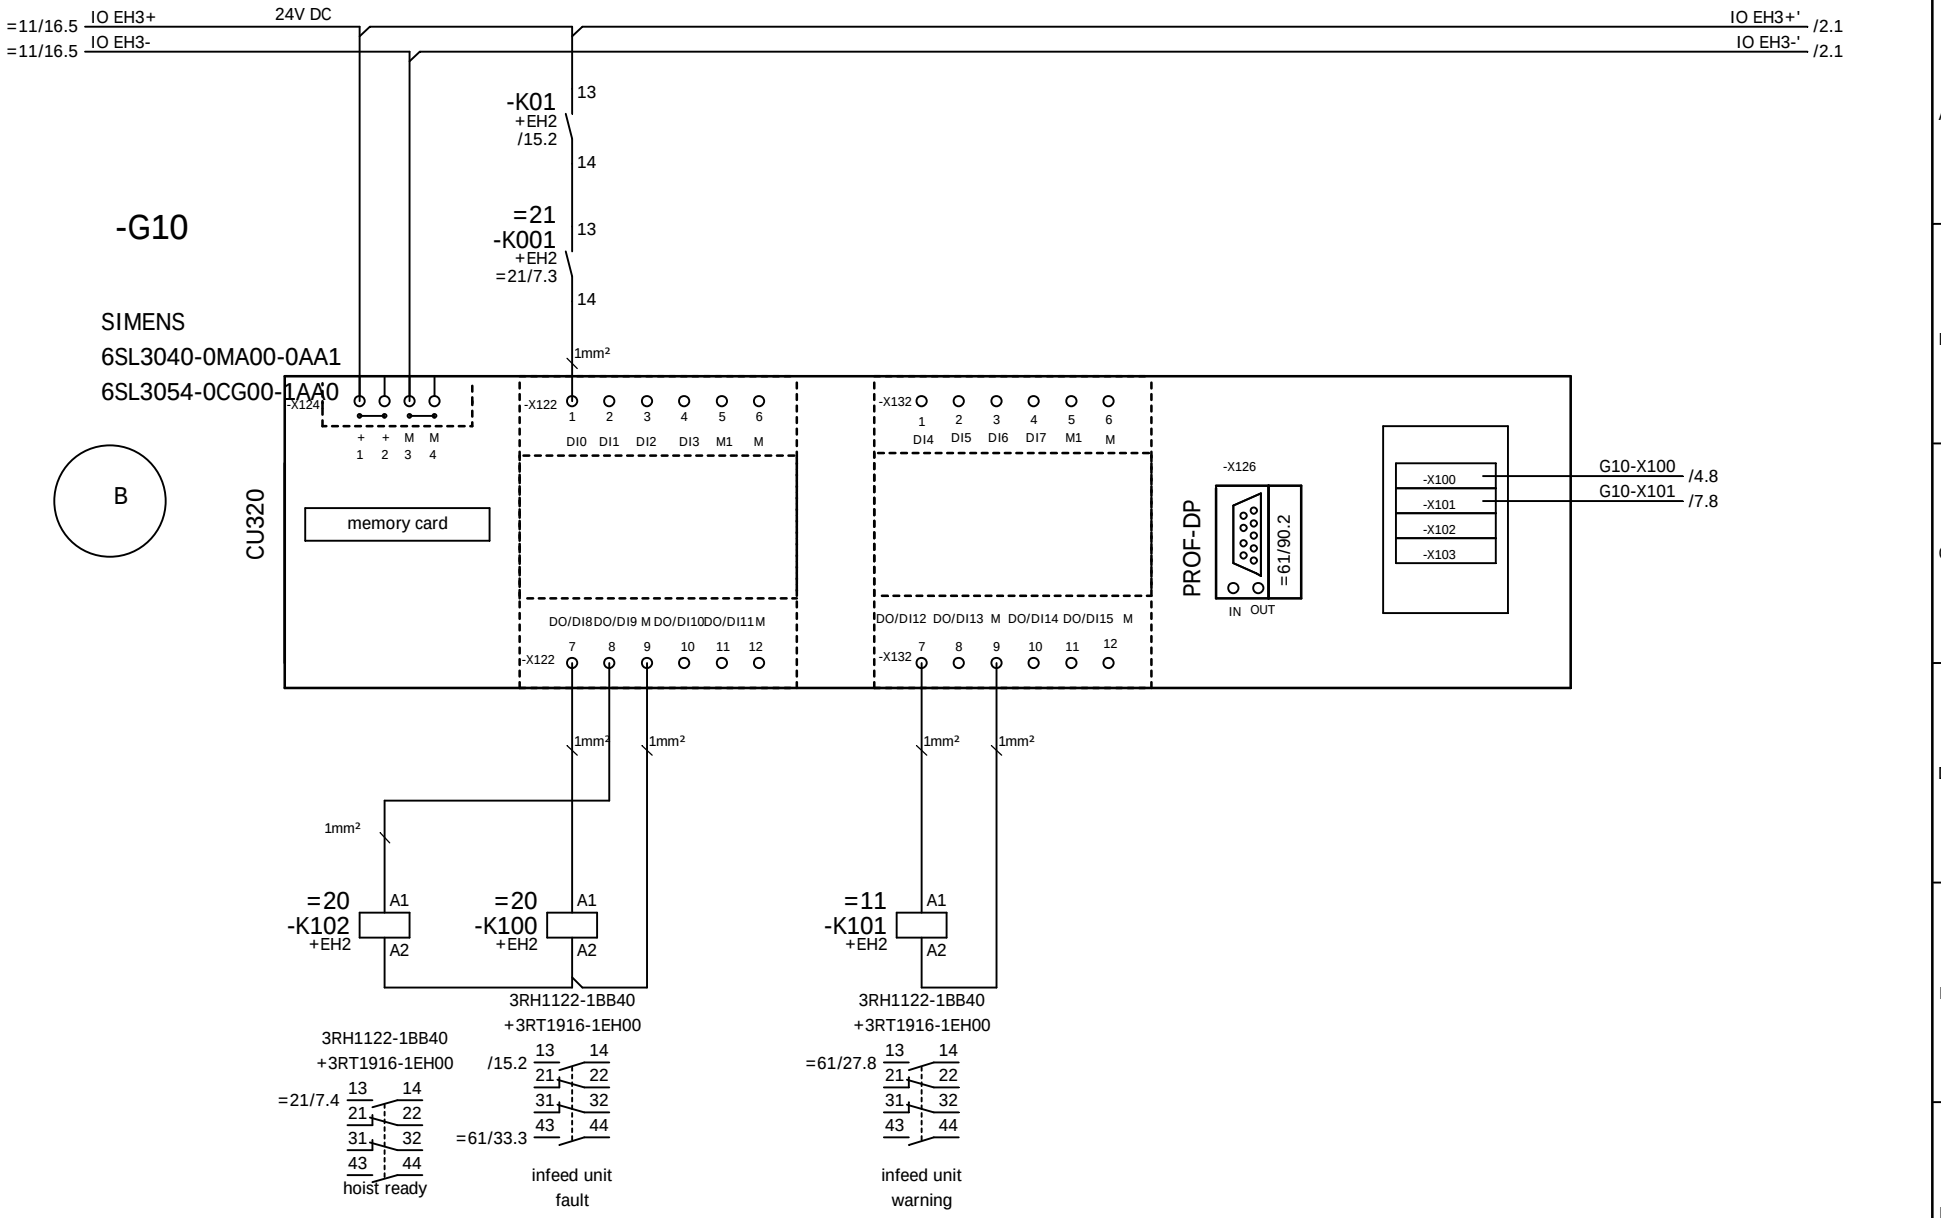

				Date		Costumer	AMPT Egypt	NOELL	drives, feeding	Type RTG 50/26.50/5+1/AC	=20 +EH3
				Designer	XU HR				Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1 20 Sh.
				Checked	LIU KP							
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

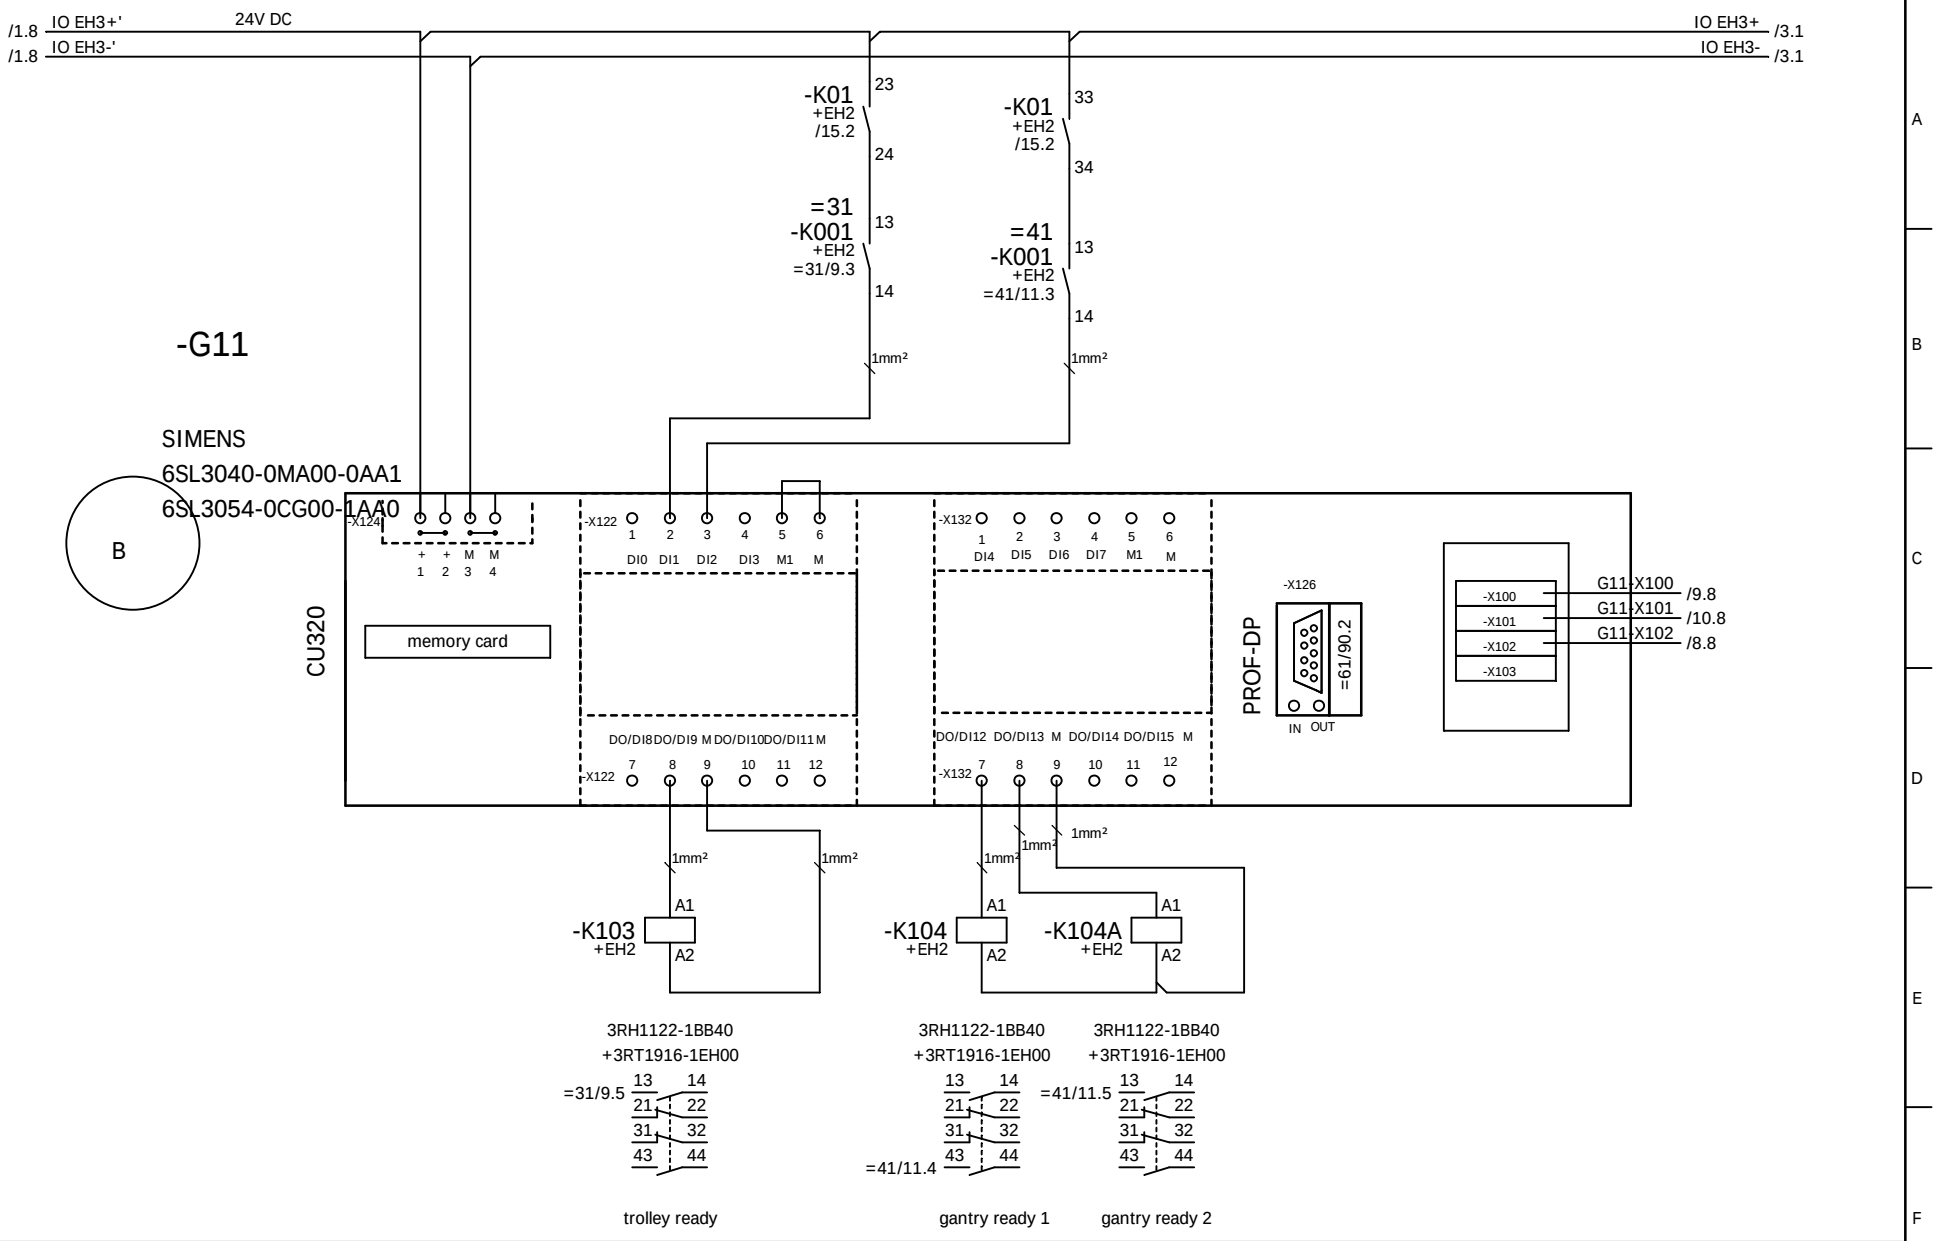


				Date		Costumer	AMPT Egypt	NOELL	drives, feeding
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=20	
		+EH3	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	2	20 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

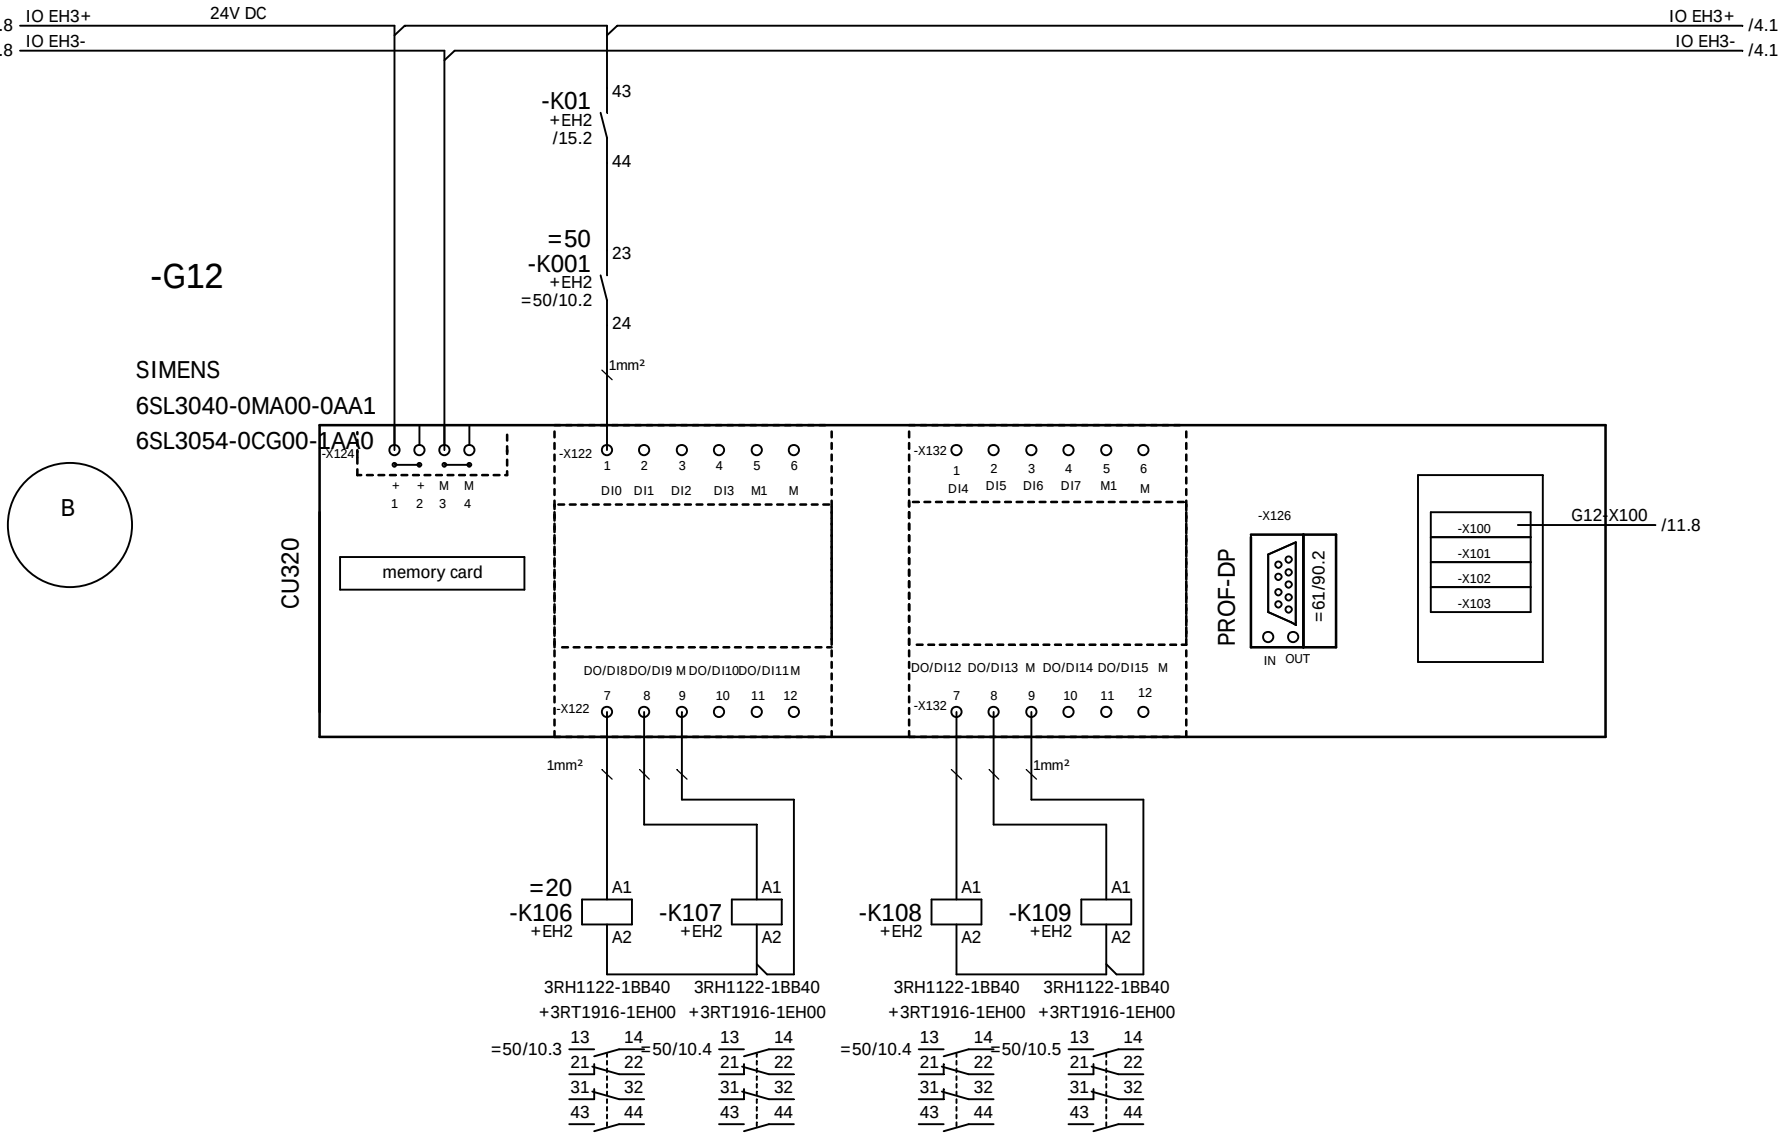


Anti-sway motors release

				Date		Costumer	AMPT Egypt	drives, feeding	Type	RTG 50/26.50/5+1/AC	=20 +EH3
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 3 20 Sh.
				Checked	LIU KP						
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

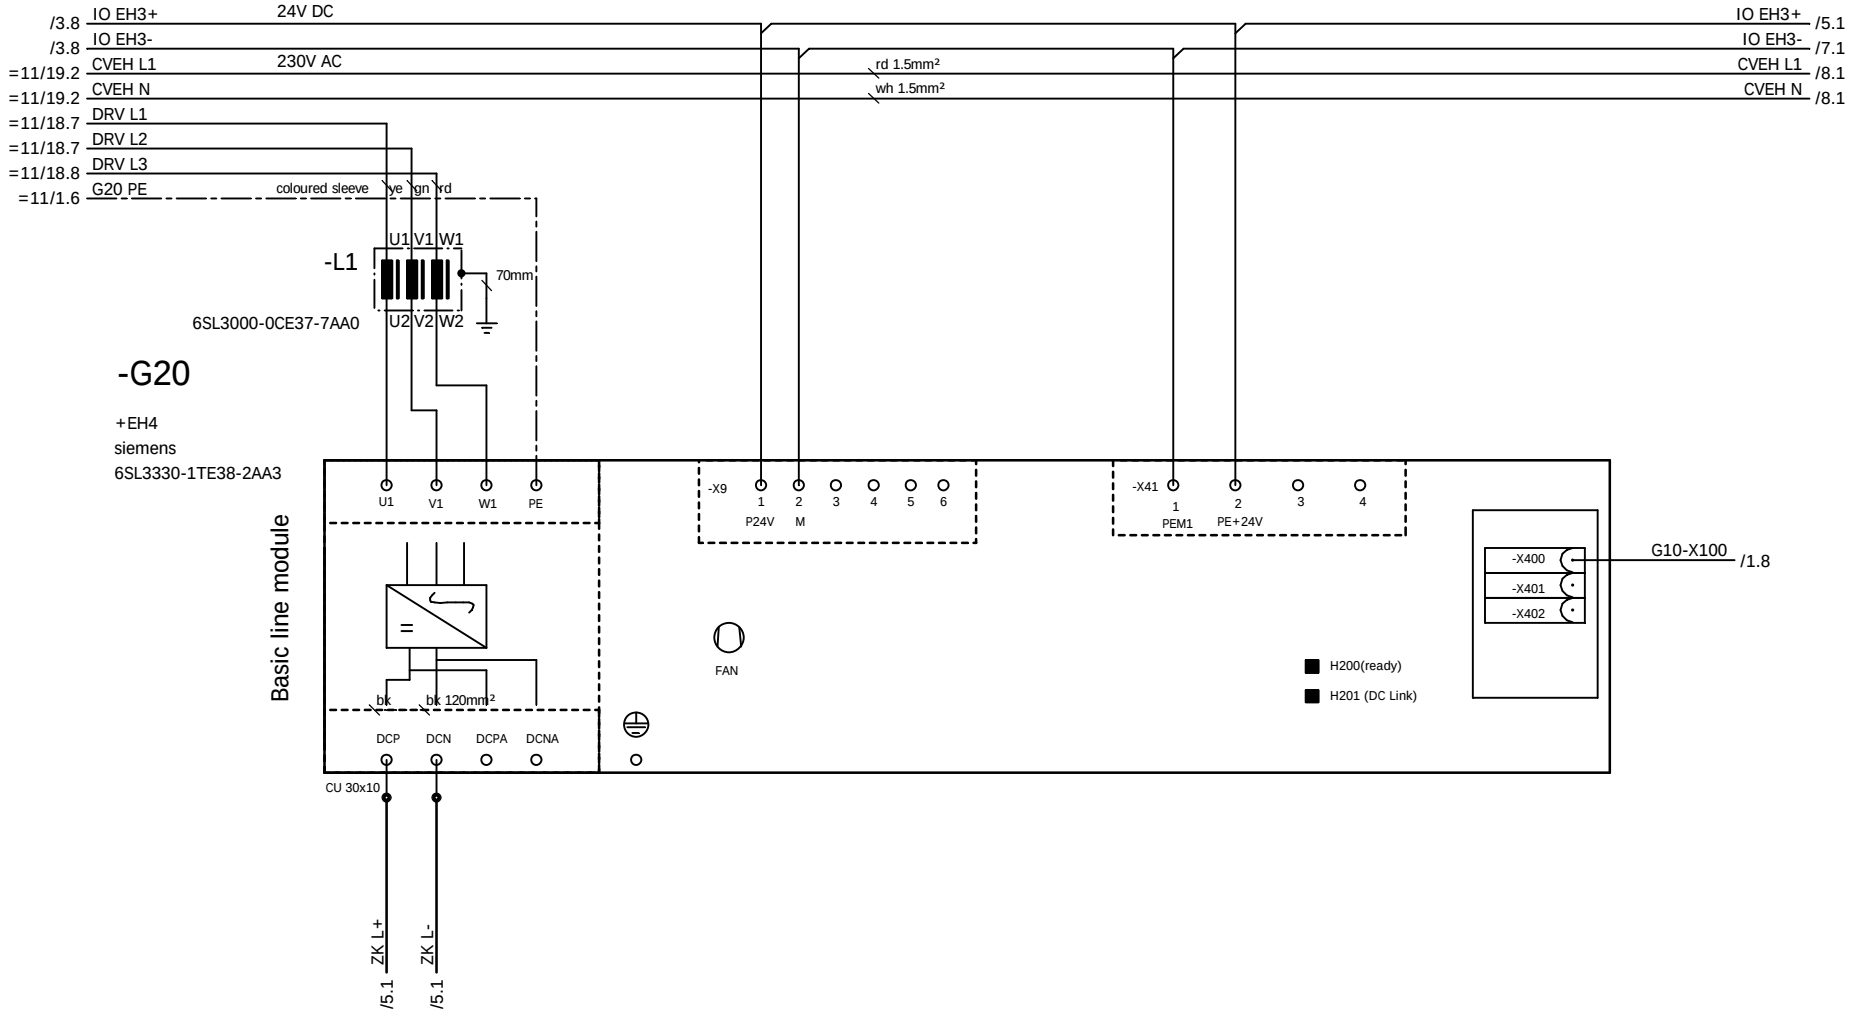

Frequenzumrichter

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL


drives, feeding
Stromlaufplan / Circuit Diagram

=20
+EH3

Sheet 4
20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

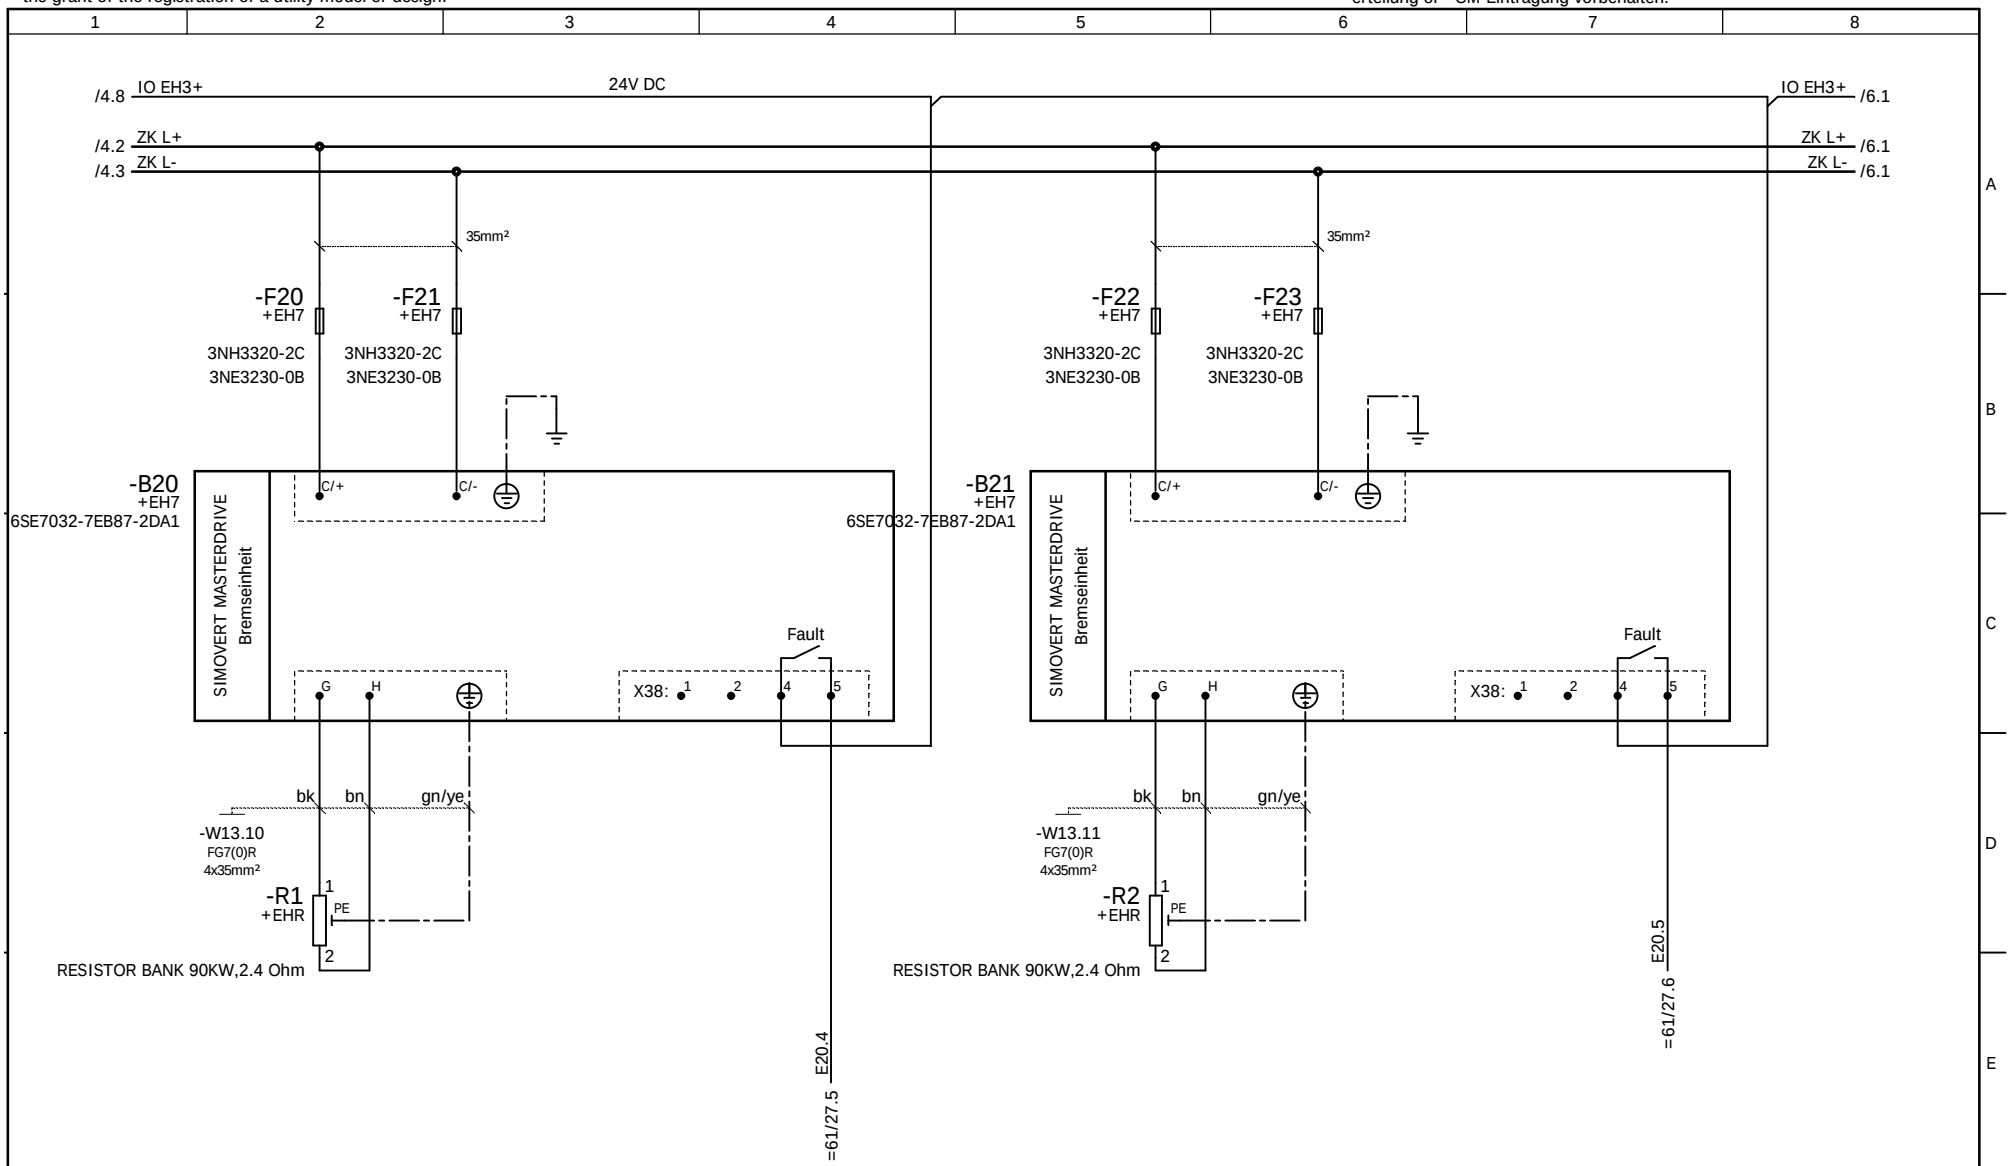

				Date		Costumer	AMPT Egypt	NOELL	drives, feeding	Type	RTG 50/26.50/5+1/AC	=20 +EH3
				Designer	XU HR				Stromlaufplan / Circuit Diagram	Job No.	1255	Drawing No. 78.5692.60.00	Sheet 5 20 Sh.
				Checked	LIU KP								
Ind.	Revision	Date	Name	Standard		Source:							

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

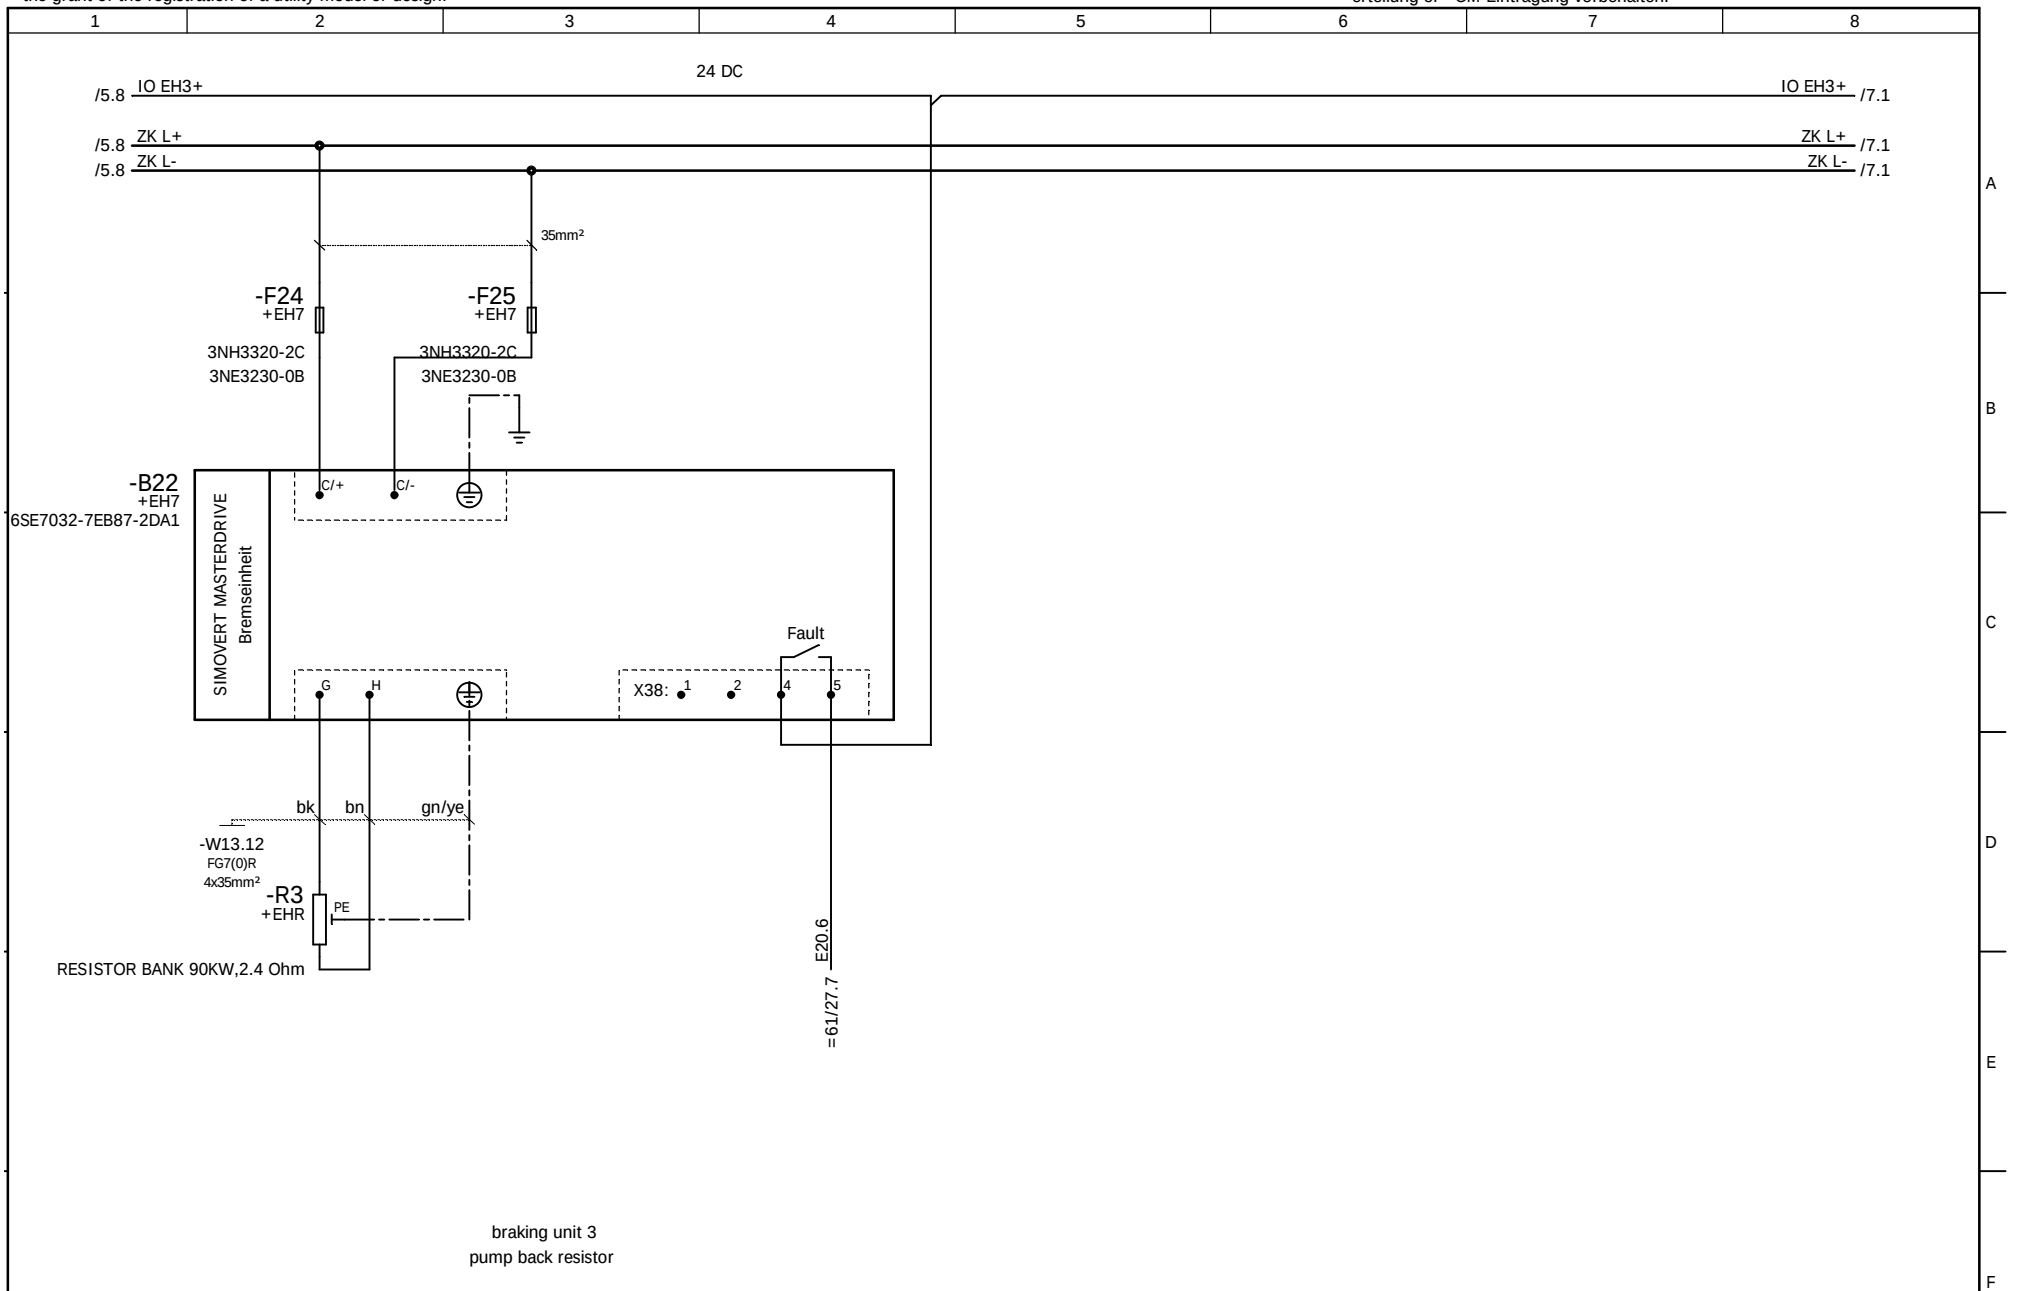


braking unit 3
pump back resistor

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20 +EH3
				Designer	XU HR			Stromlaufplan / Circuit Diagram		
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 6 20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

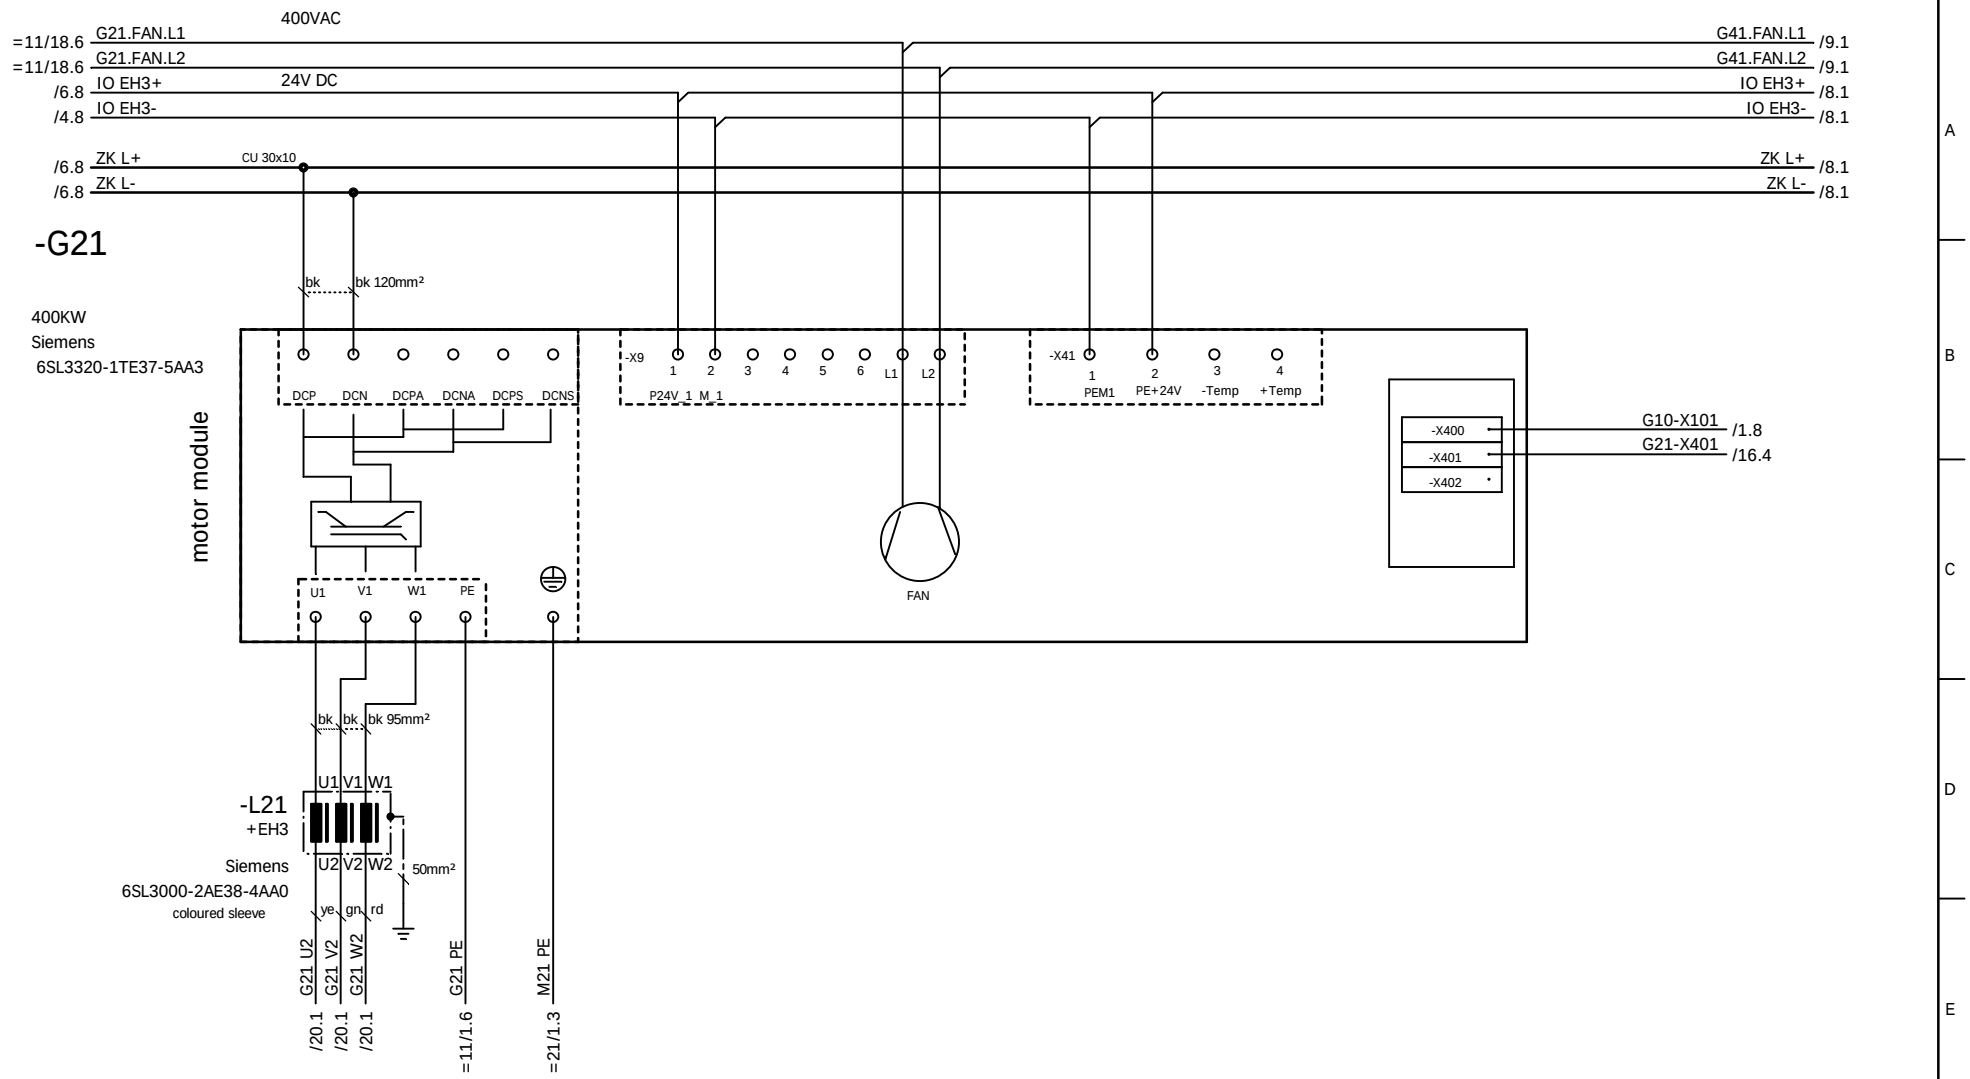

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20 +EH6
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00
				Checked	LIU KP					Sheet 7 20 Sh.
nd.	Revision	Date	Name	Standard		Source:				

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

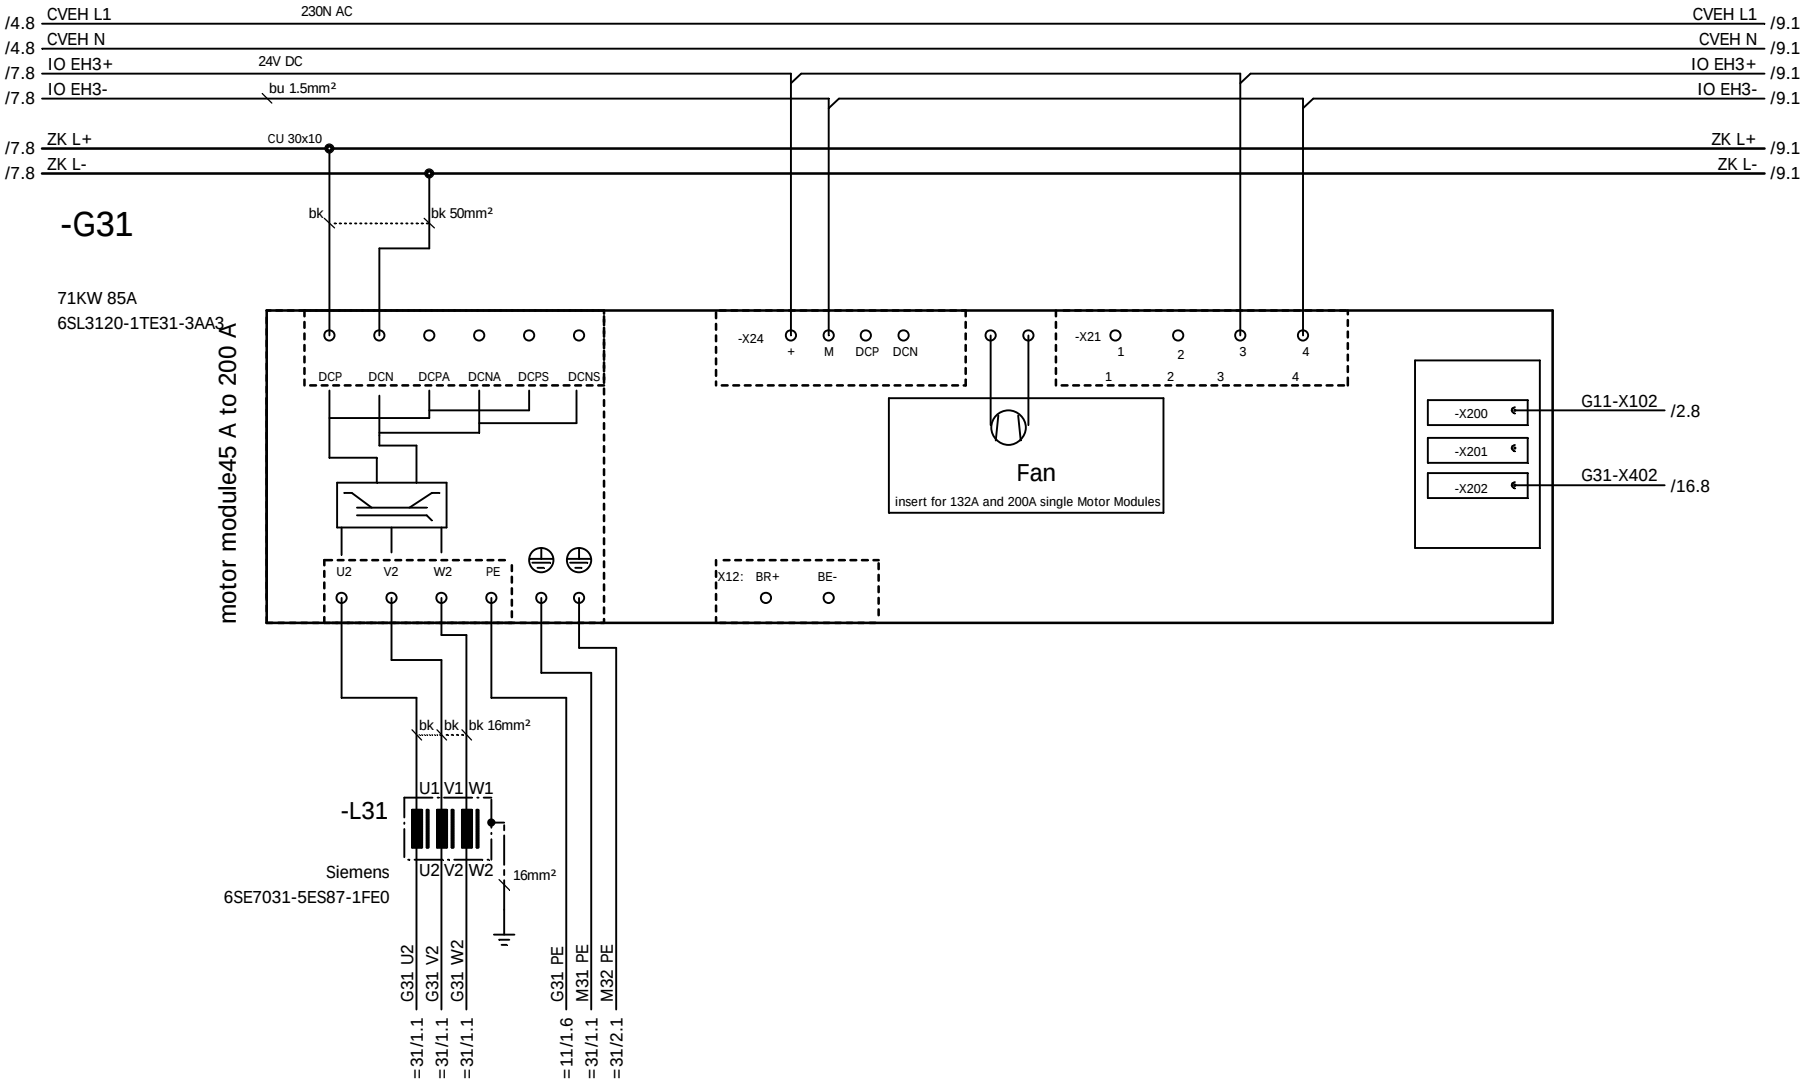

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20 +EH4
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00
				Checked	LIU KP					Sheet 8 20 Sh.
nd.	Revision	Date	Name	Standard		Source:				

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

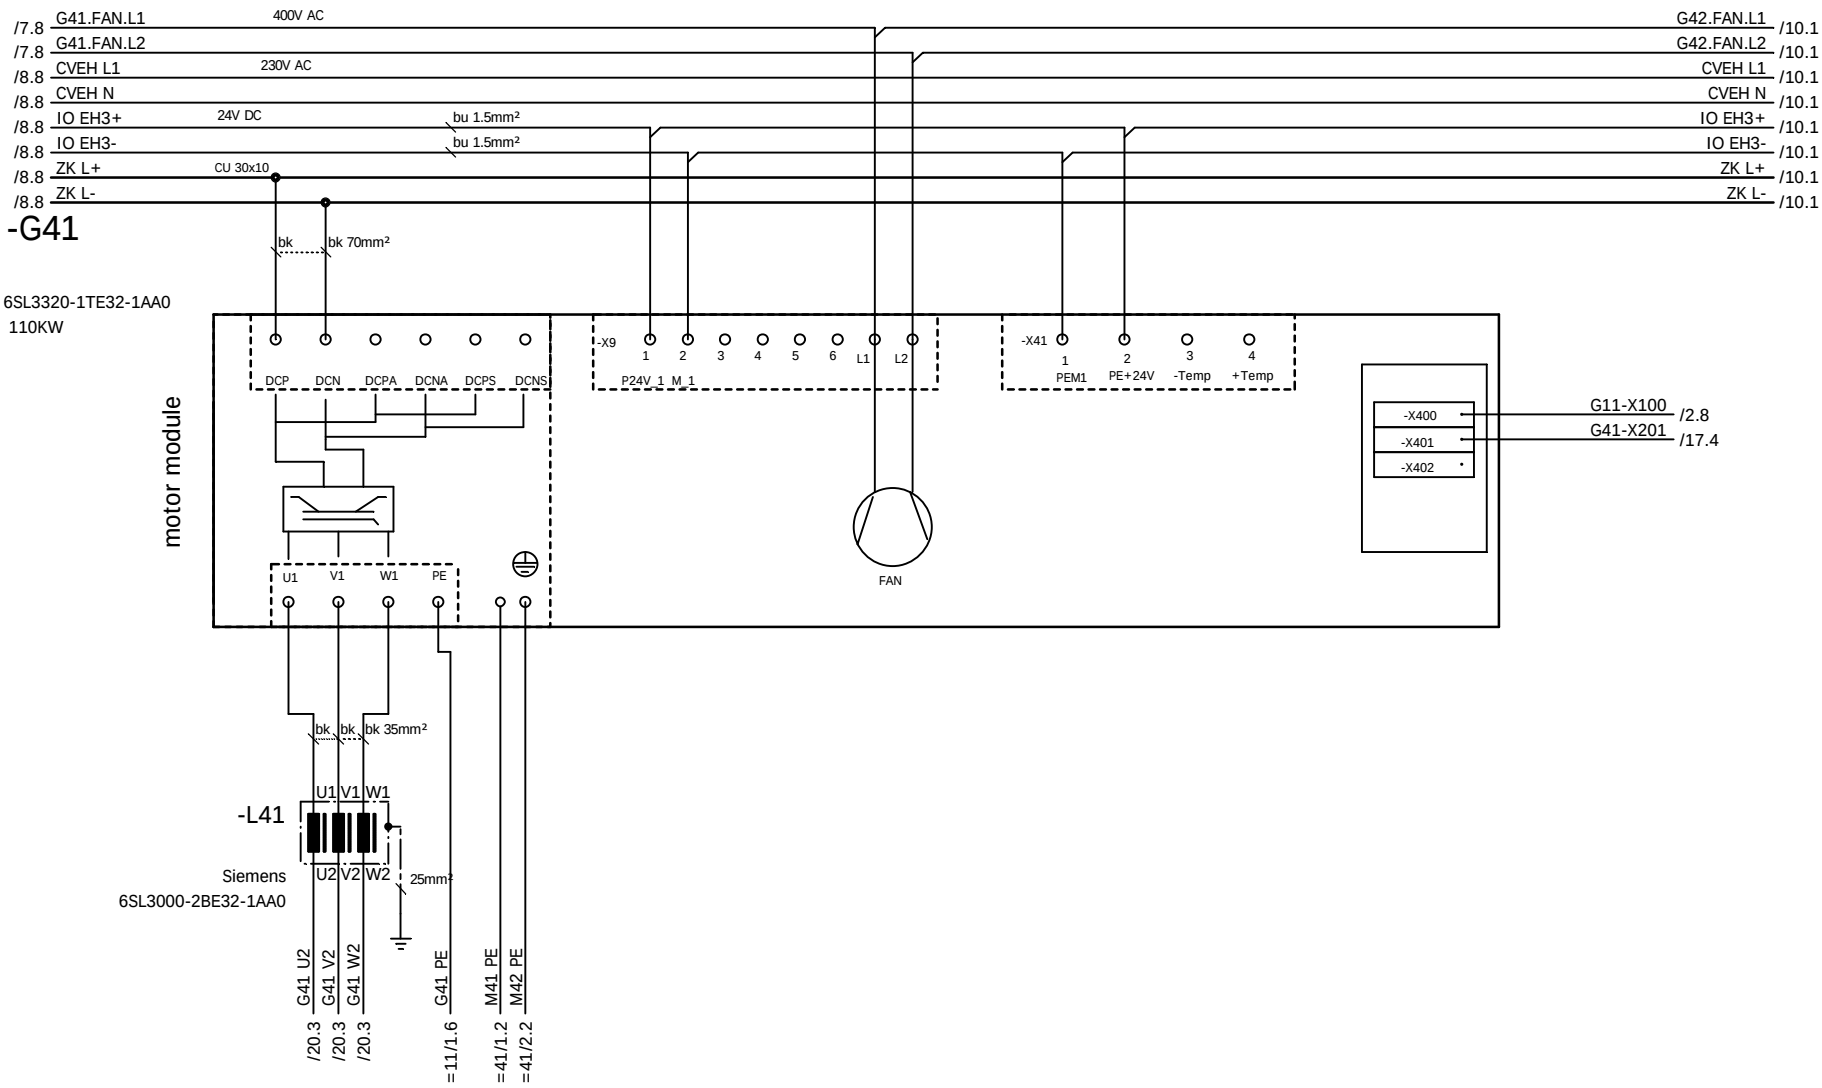

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC =20 +EH5
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255 Drawing No. 78.5692.60.00 Sheet 9 20 Sh.
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

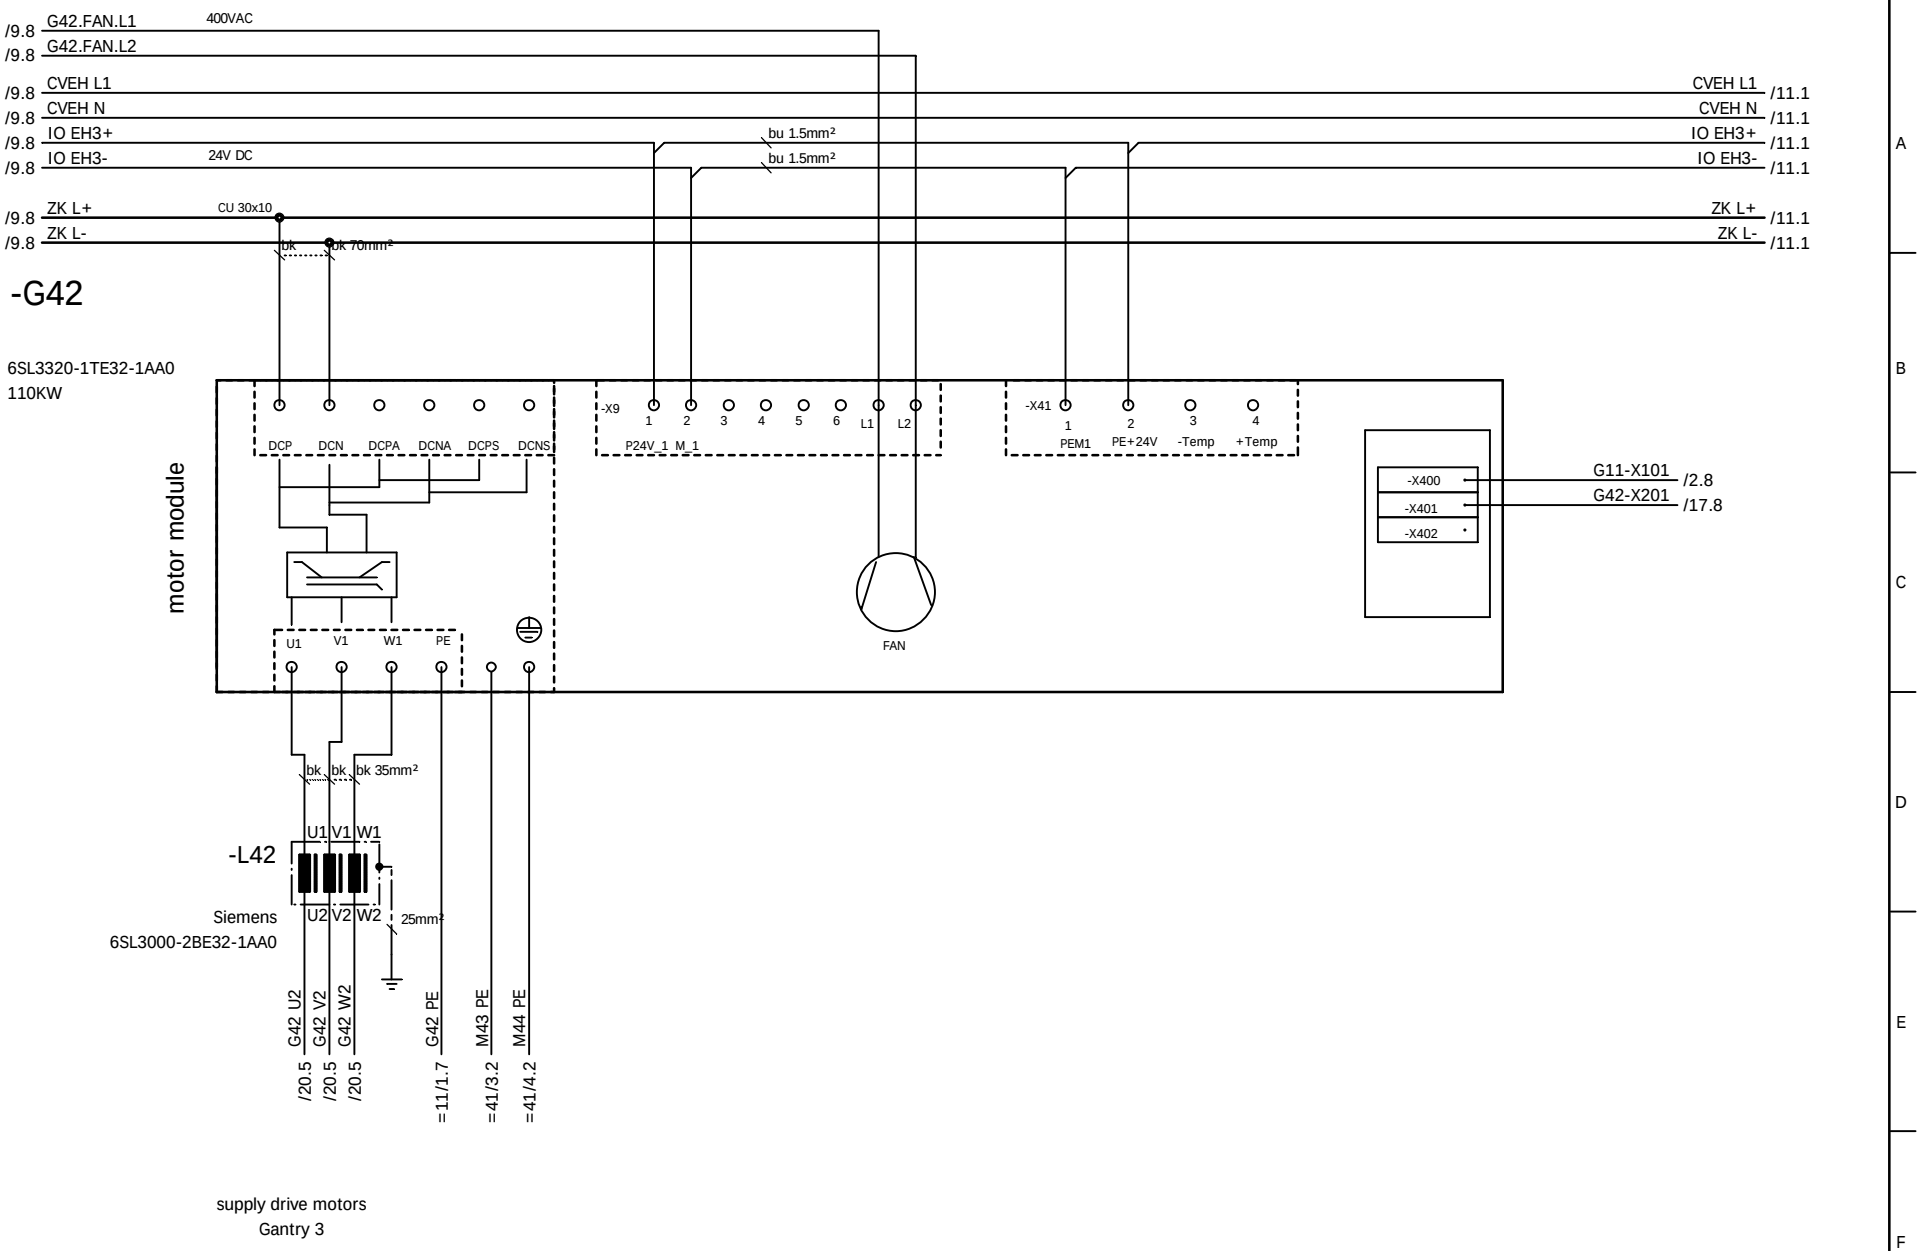

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

drives, feeding
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=20	
		+EH5	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	10
			20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

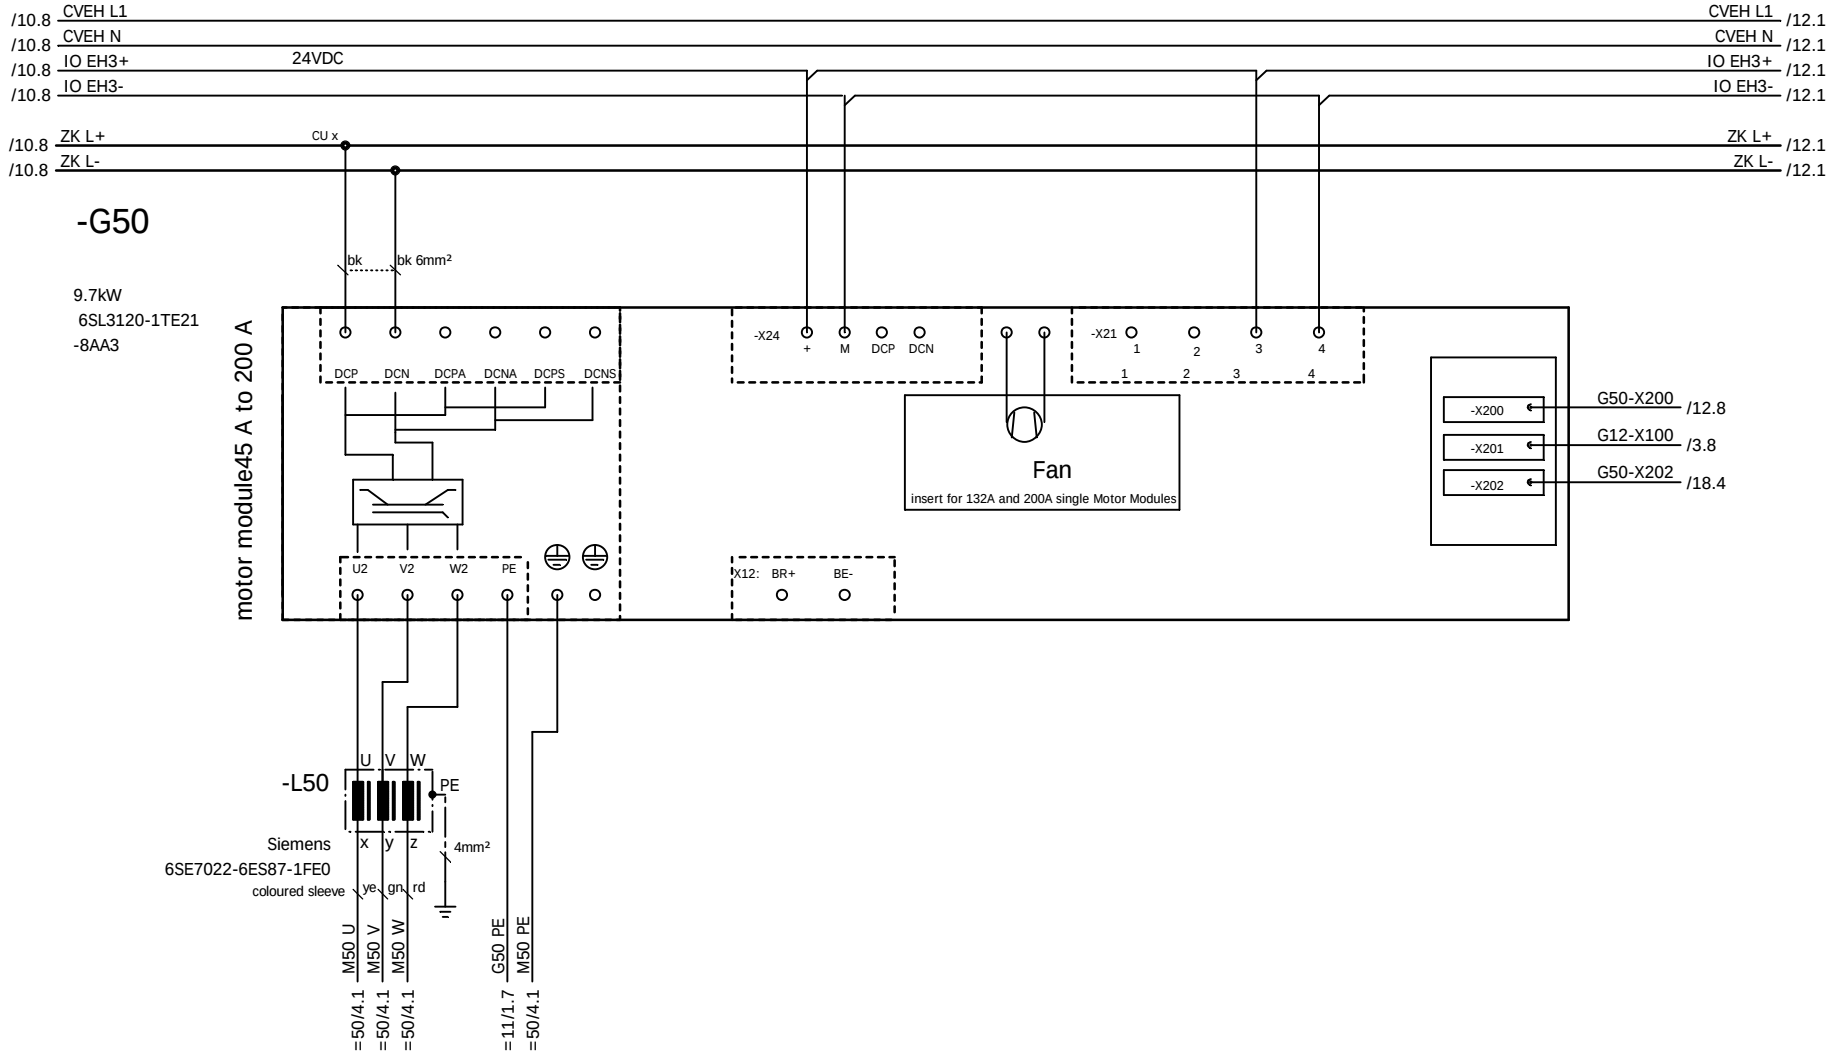

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC =20 +EH4
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255 Drawing No. 78.5692.60.00 Sheet 11 20 Sh.
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

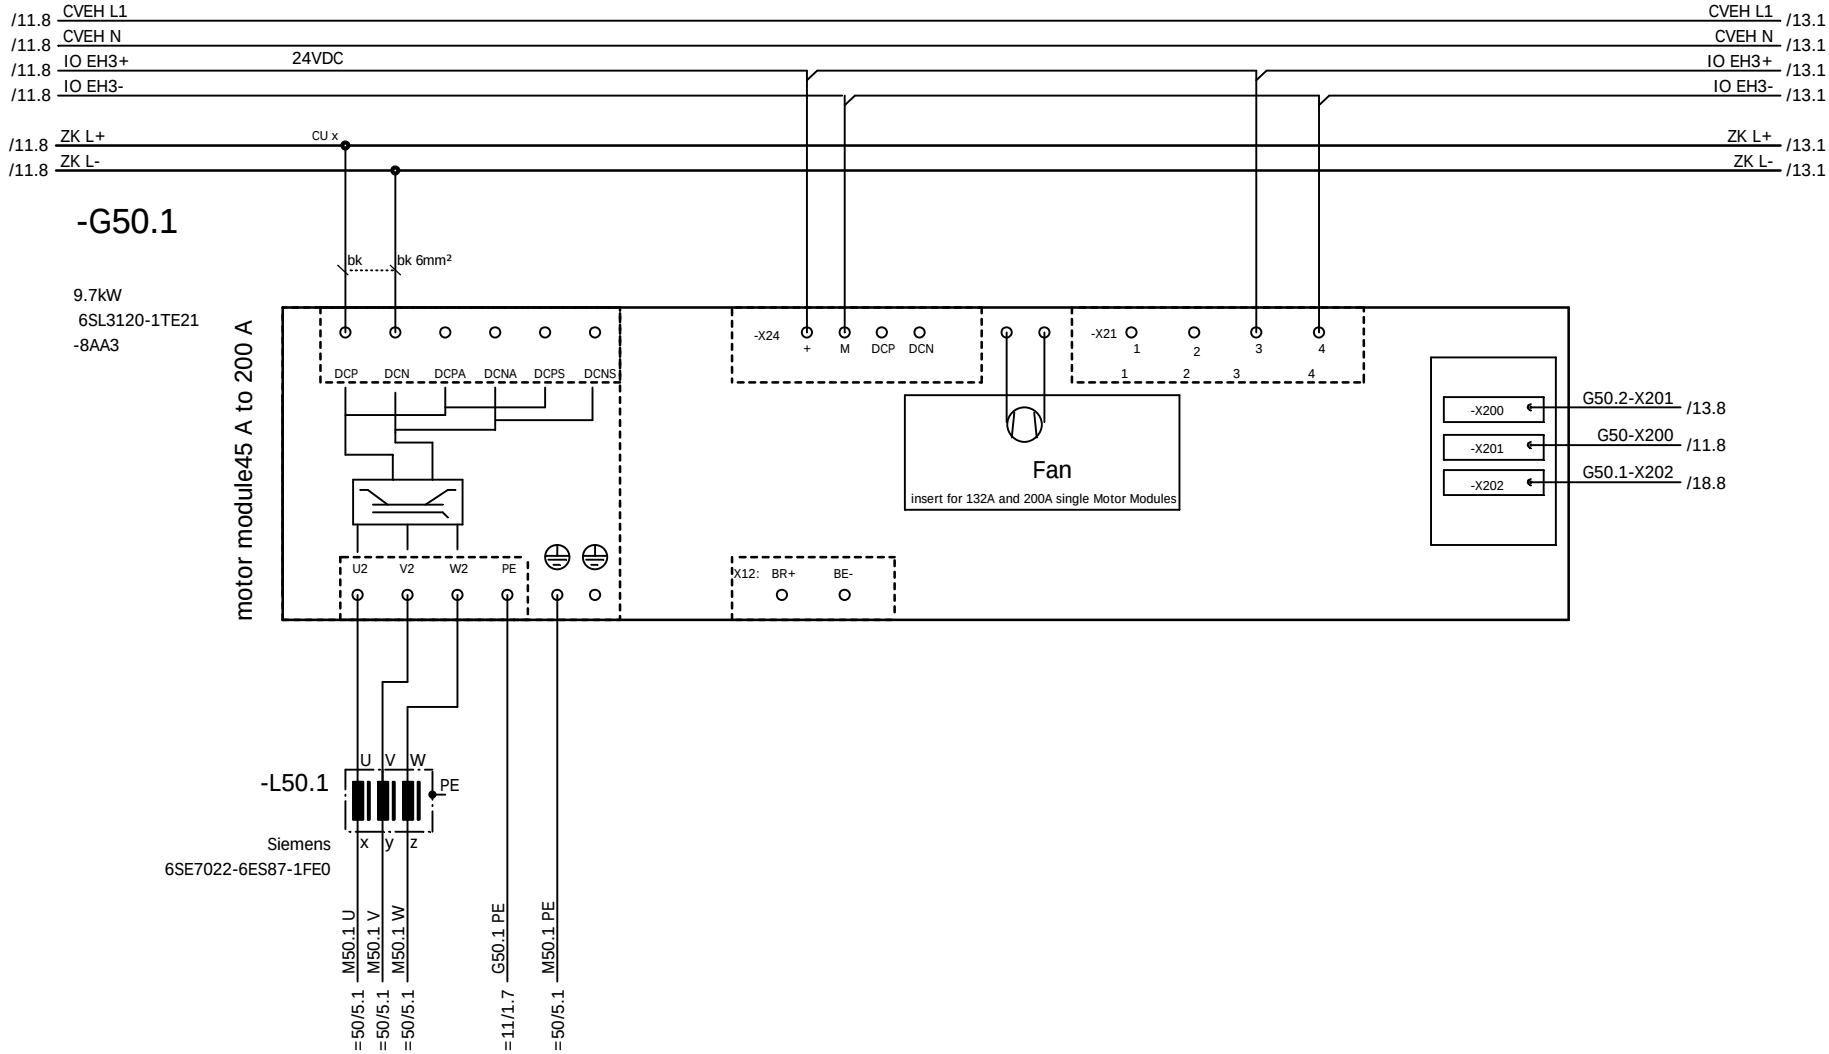


supply drive motors
antisway 2

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC =20 +EH4
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	drives, feeding Stromlaufplan / Circuit Diagram		Sheet 12 20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

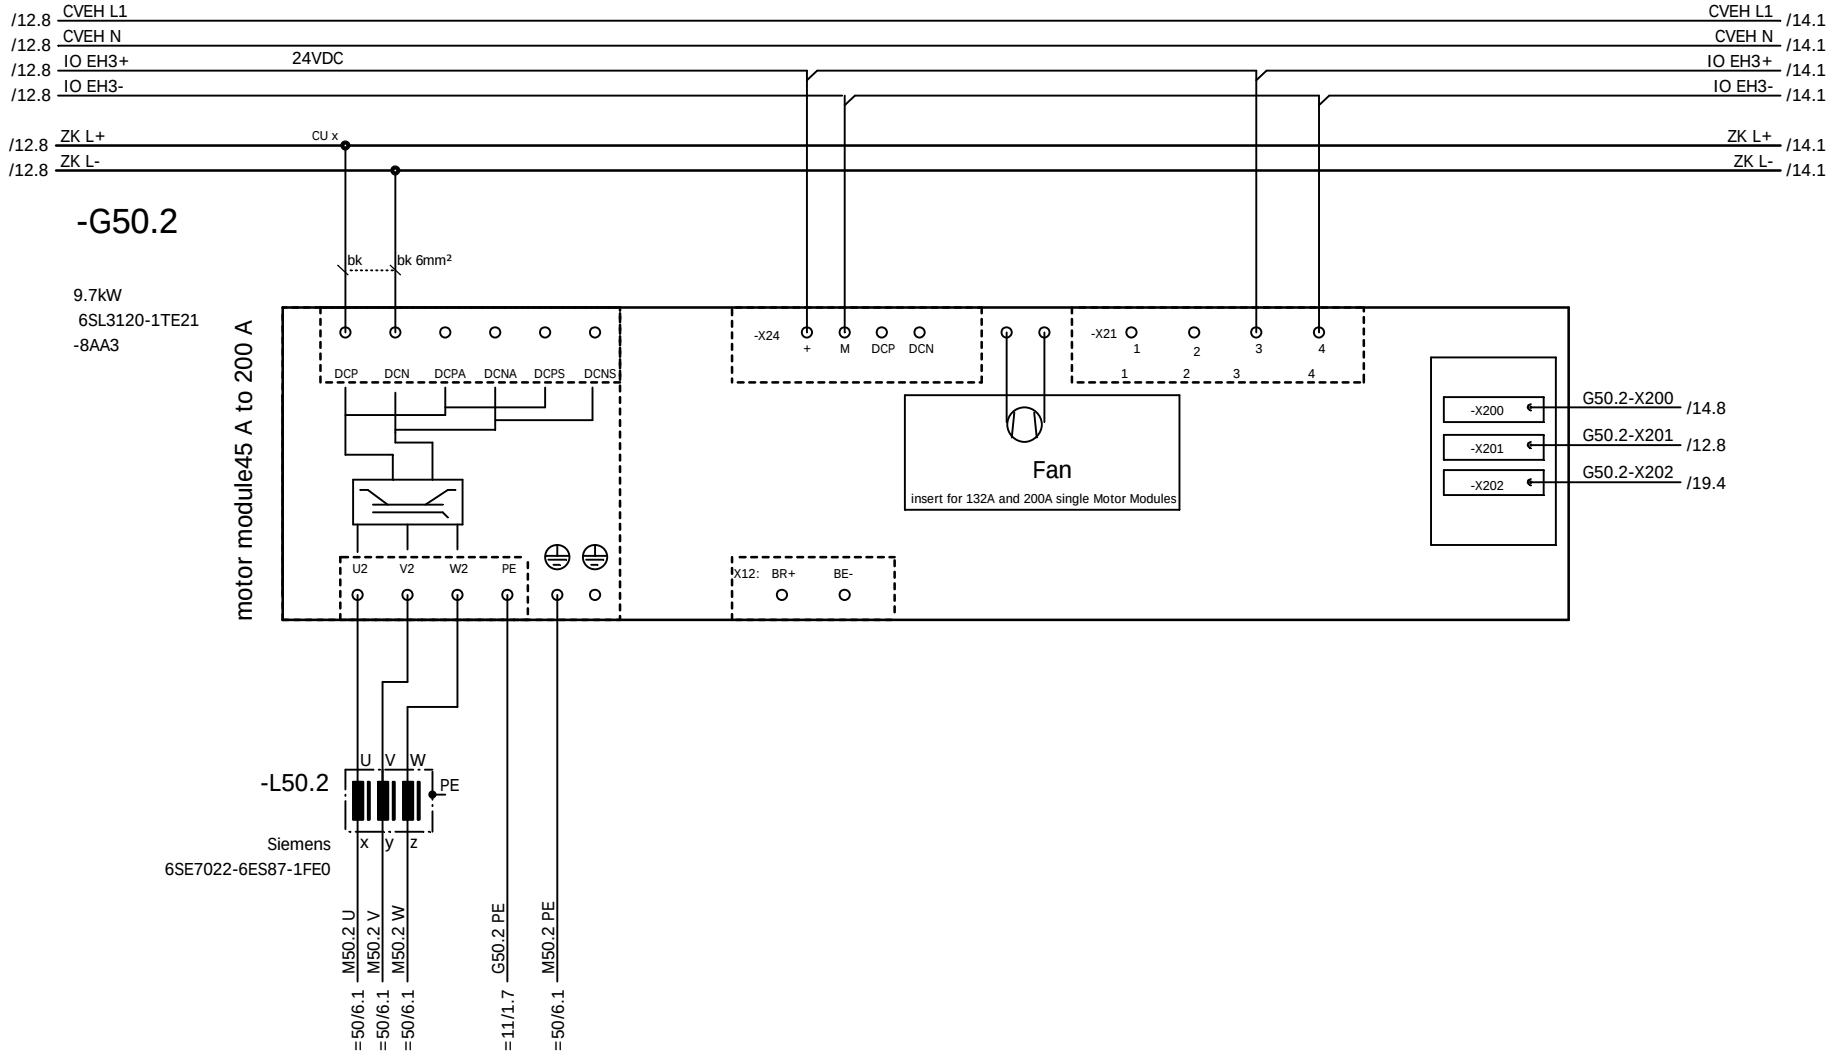


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

drives, feeding
Stromlaufplan / Circuit Diagram

=20
+EH4
Sheet 13
20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

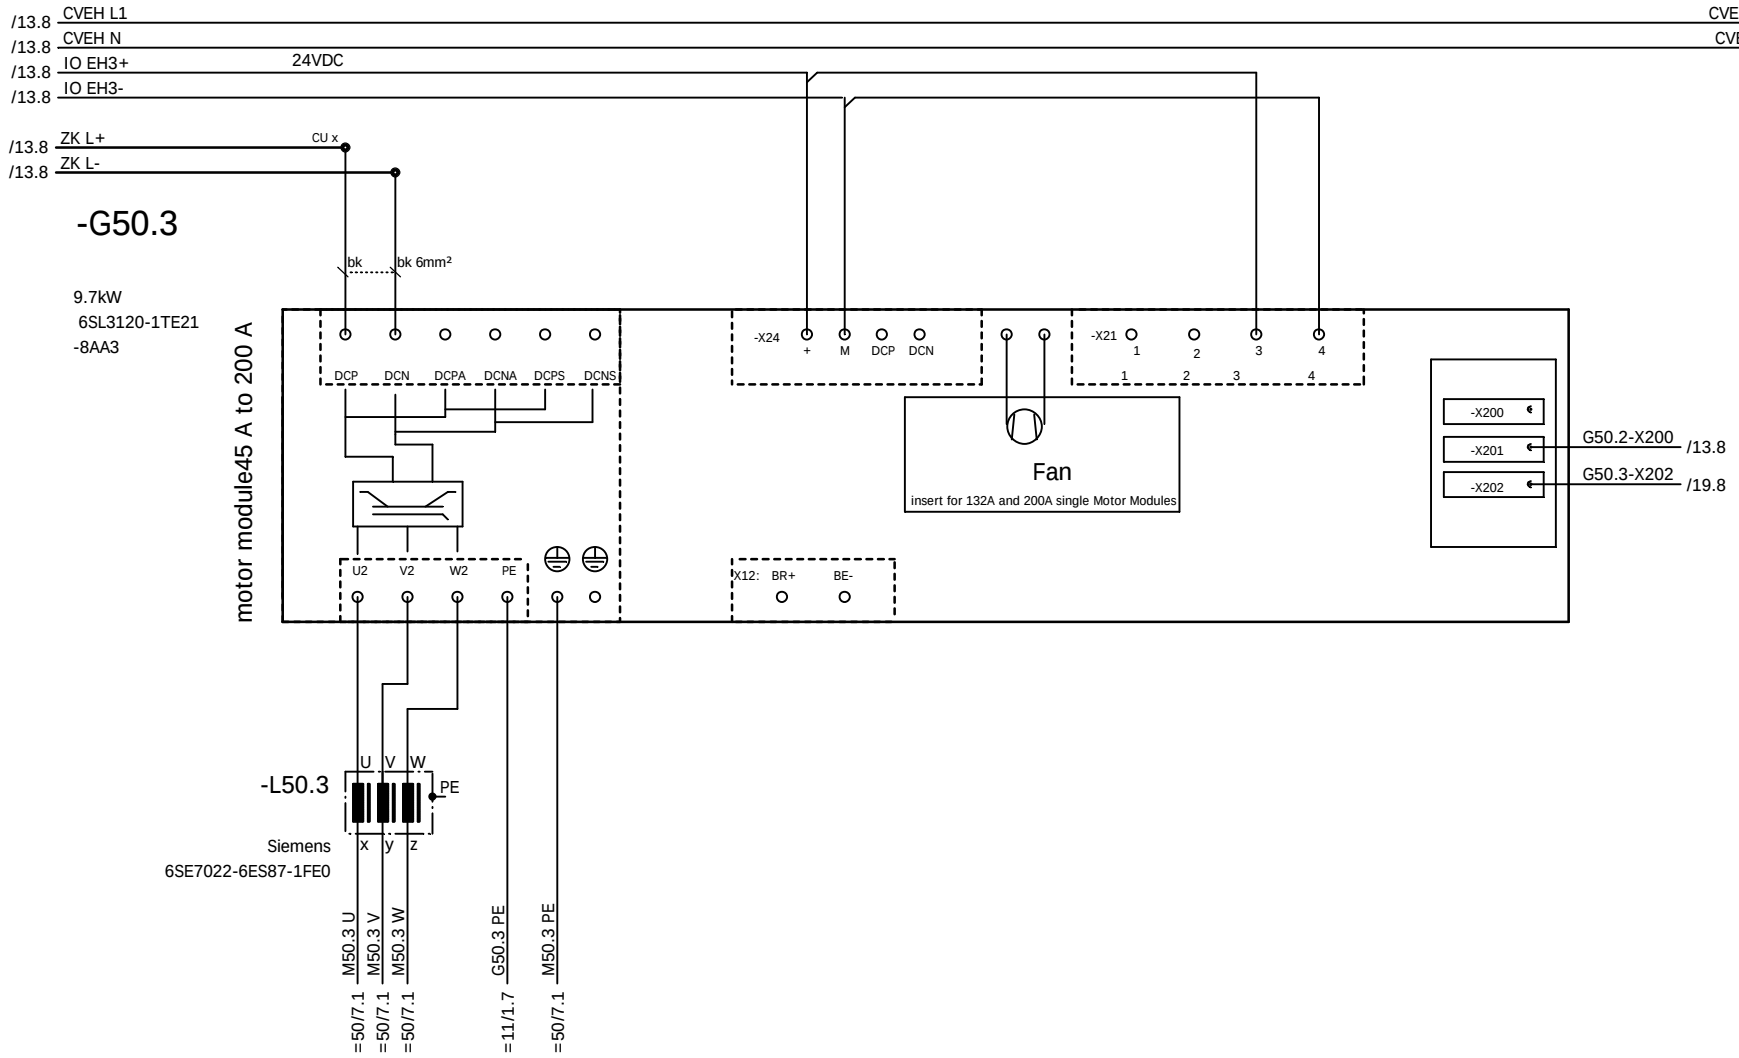

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL

drives, feeding
Stromlaufplan / Circuit Diagram

=20
+EH4

Sheet 14
20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.



				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=20
				Designer	XU HR		AMPT Egypt			+EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00	Sheet 15
Ind.	Revision	Date	Name	Standard		Source:				20 Sh.


NOELL

drives, feeding

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

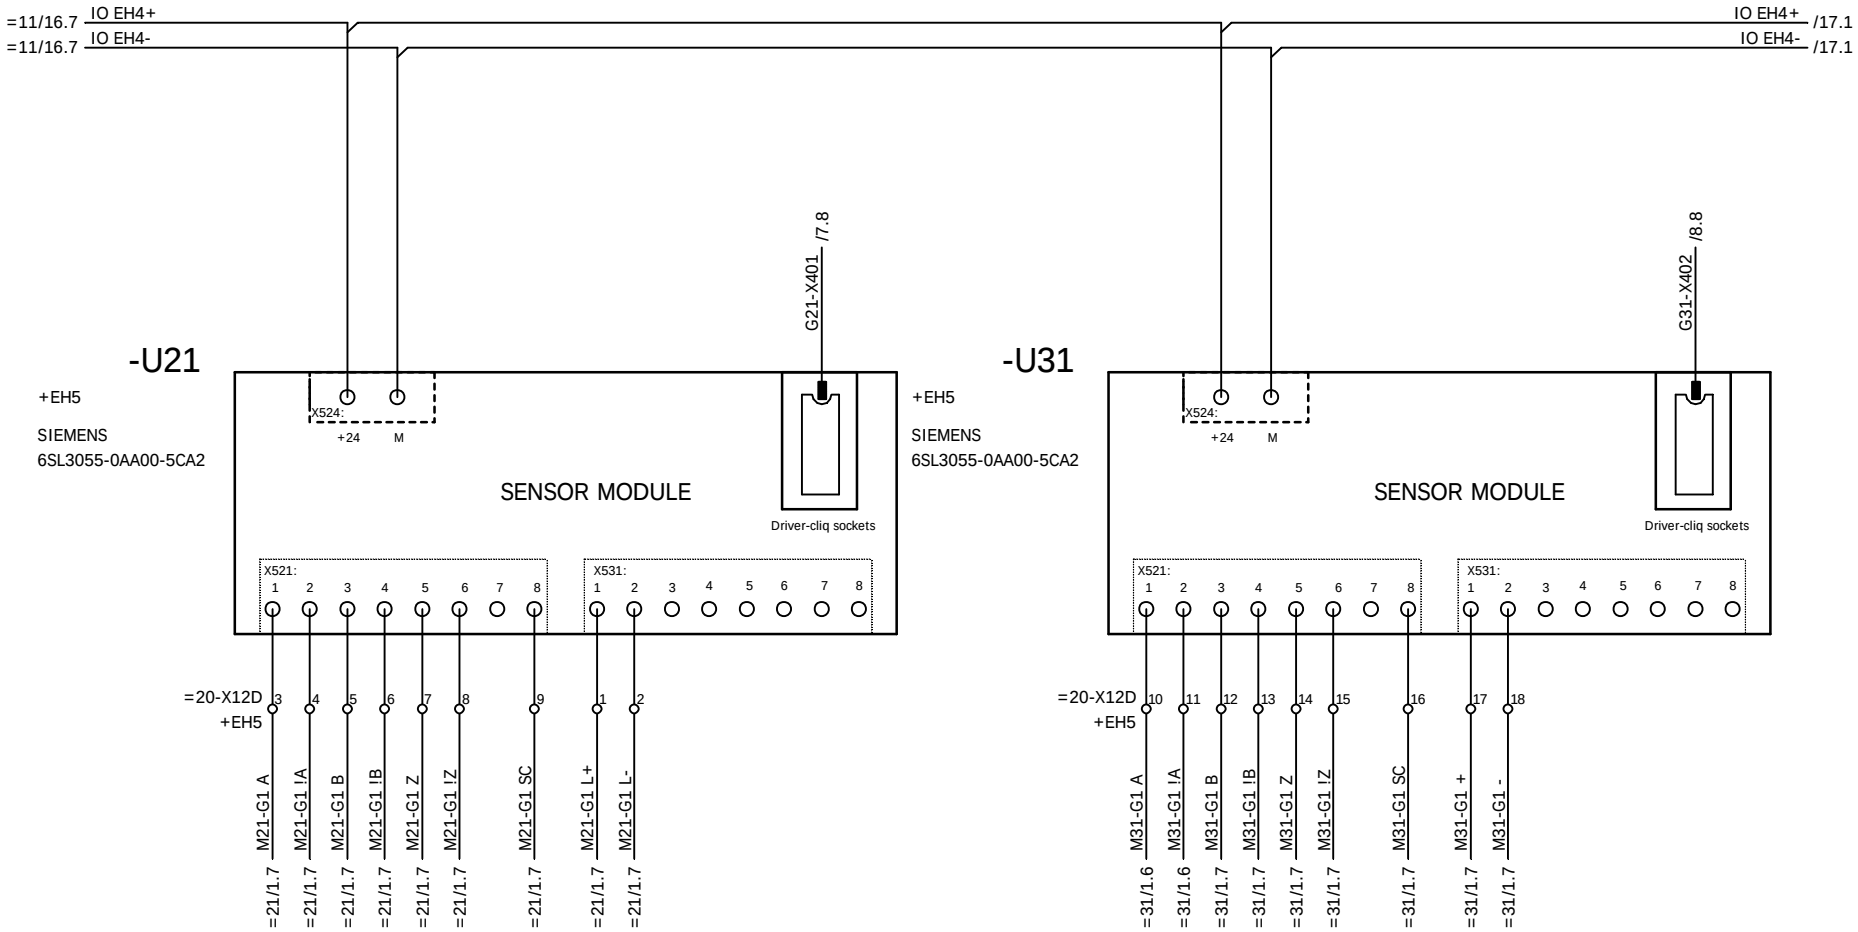

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00

NOELL


drives, feeding
Stromlaufplan / Circuit Diagram

=20
+EH3

Sheet 16
20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

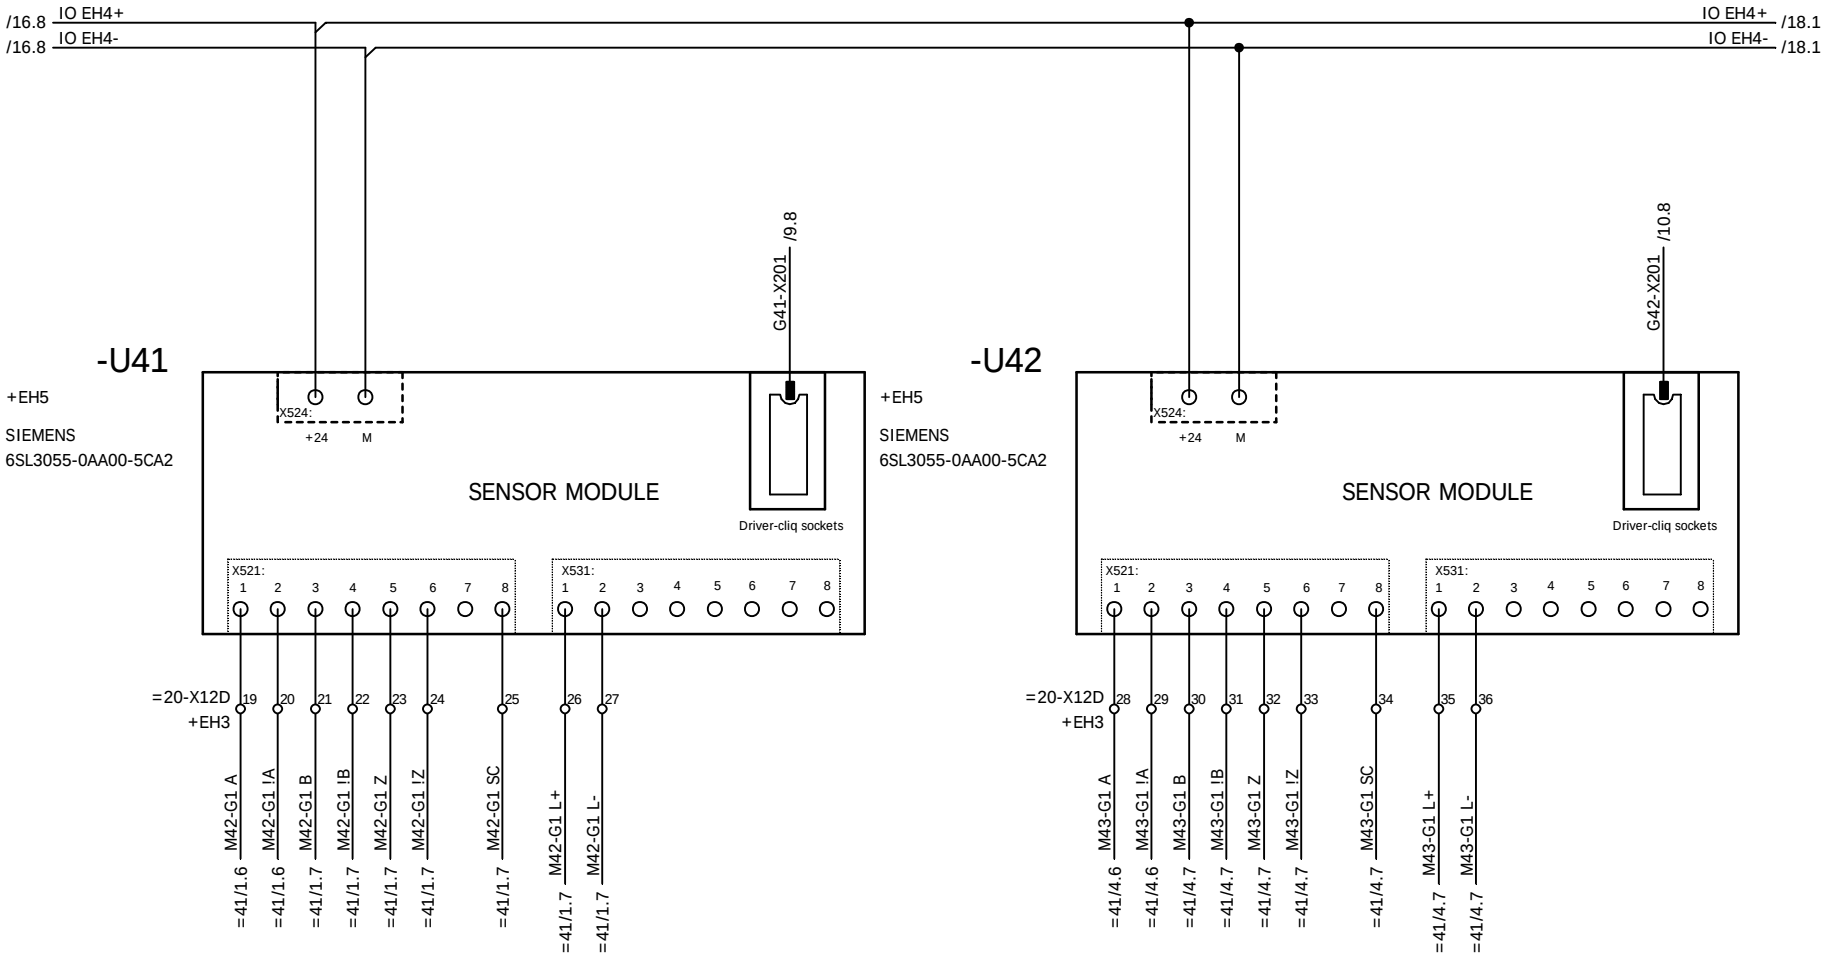

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH3
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 17
Ind.	Revision	Date	Name	Standard		Source:					20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

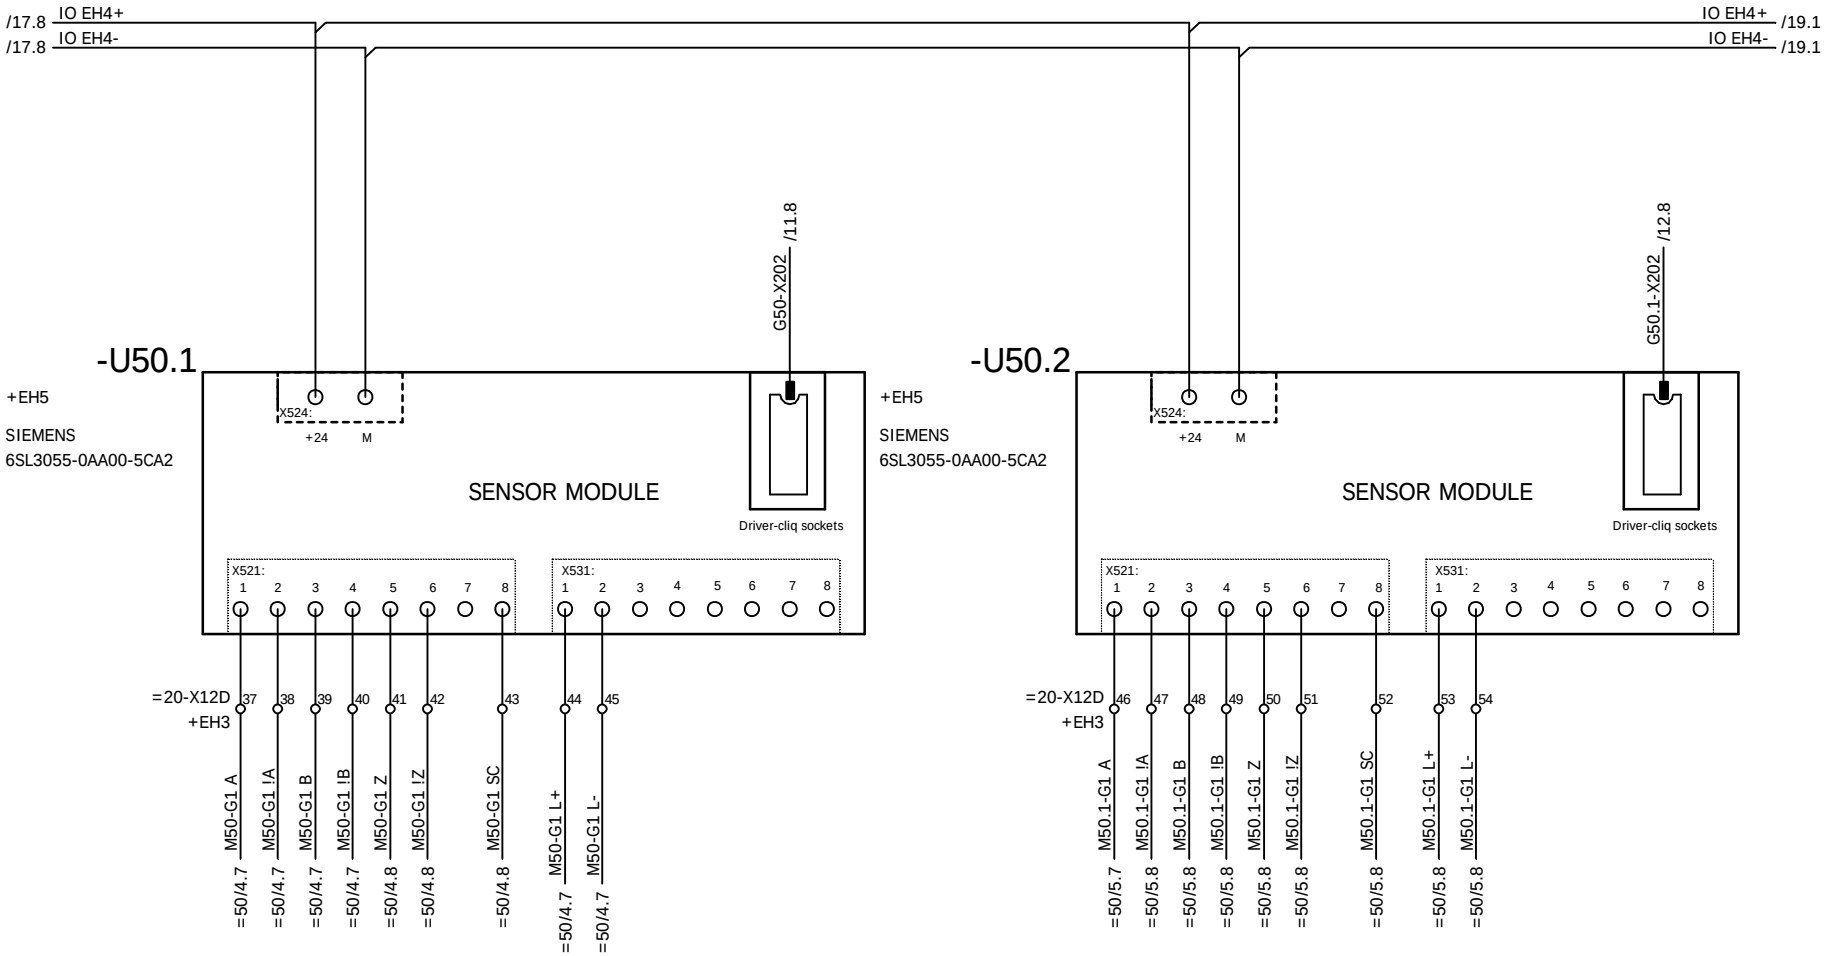


encoder interface
anti-sway motor 1

encoder interface
anti-sway motor 2

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH3
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 18
Ind.	Revision	Date	Name	Standard		Source:					20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

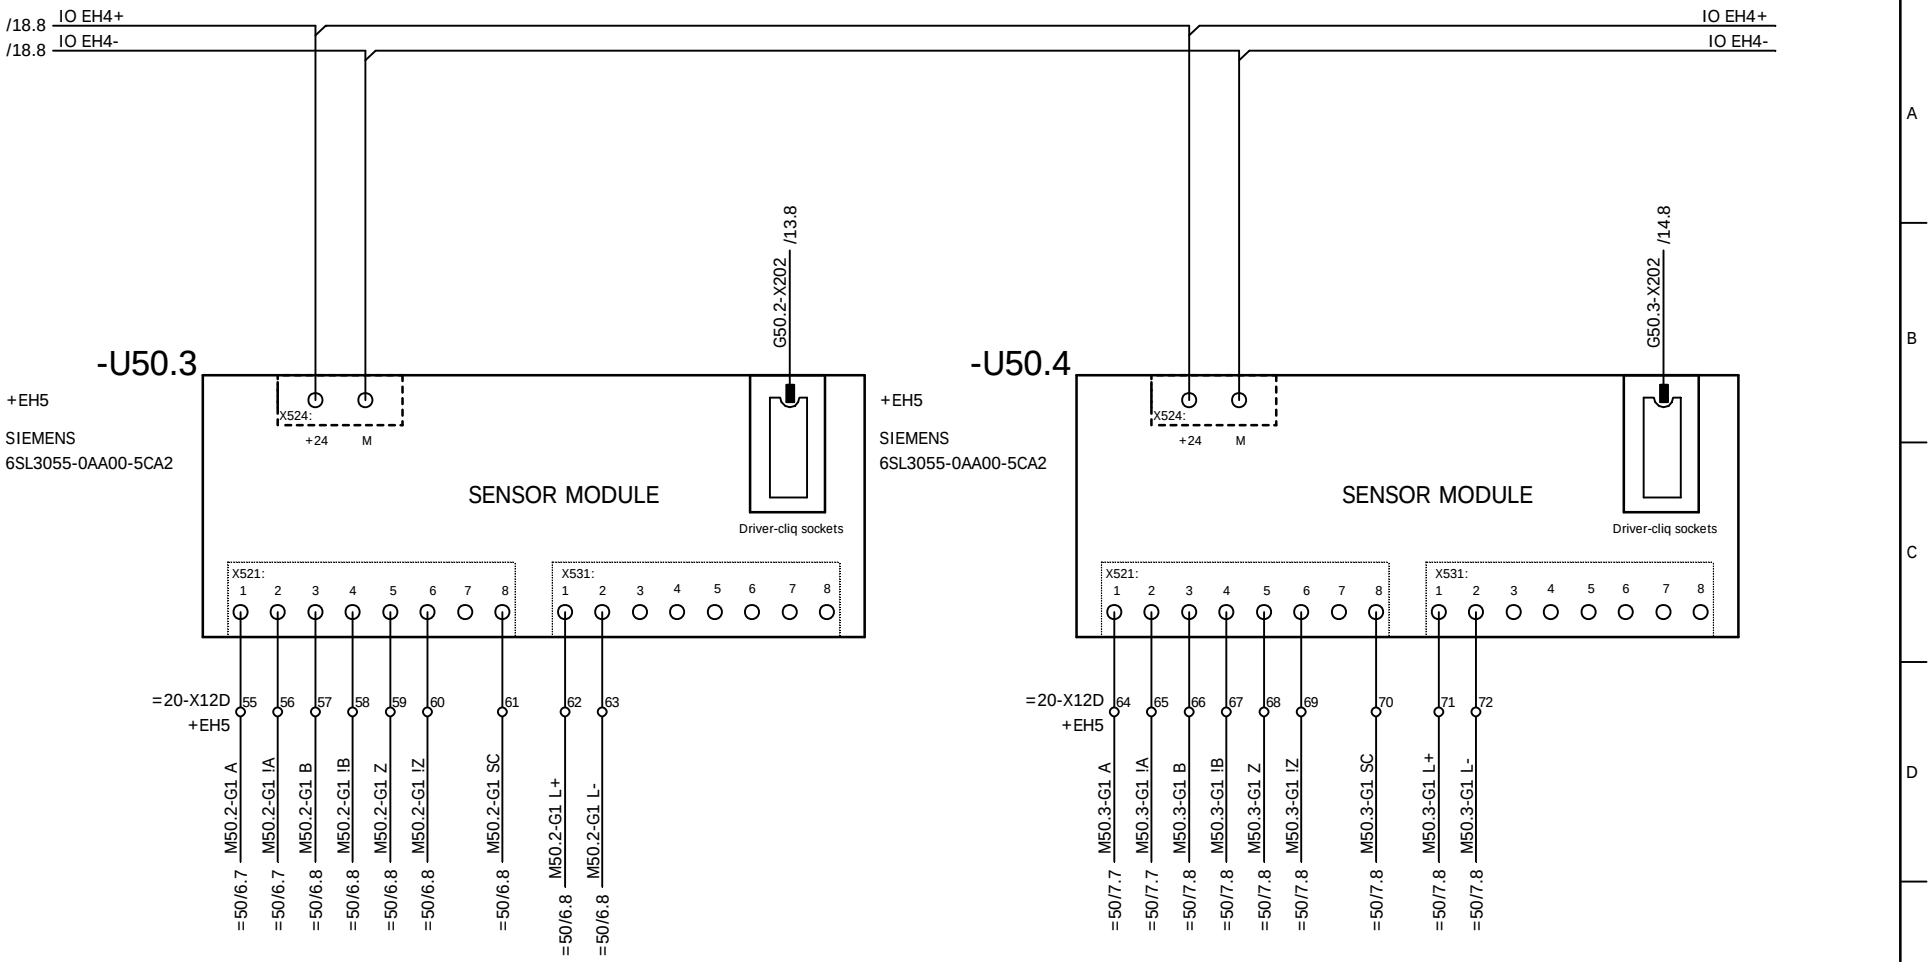


encoder interface
anti-sway motor 3

encoder interface
anti-sway motor 4

				Date		Costumer	AMPT Egypt	drives, feeding	Type RTG 50/26.50/5+1/AC	=20 +EH3
				Designer	XU HR			Stromlaufplan / Circuit Diagram		
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 19 20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

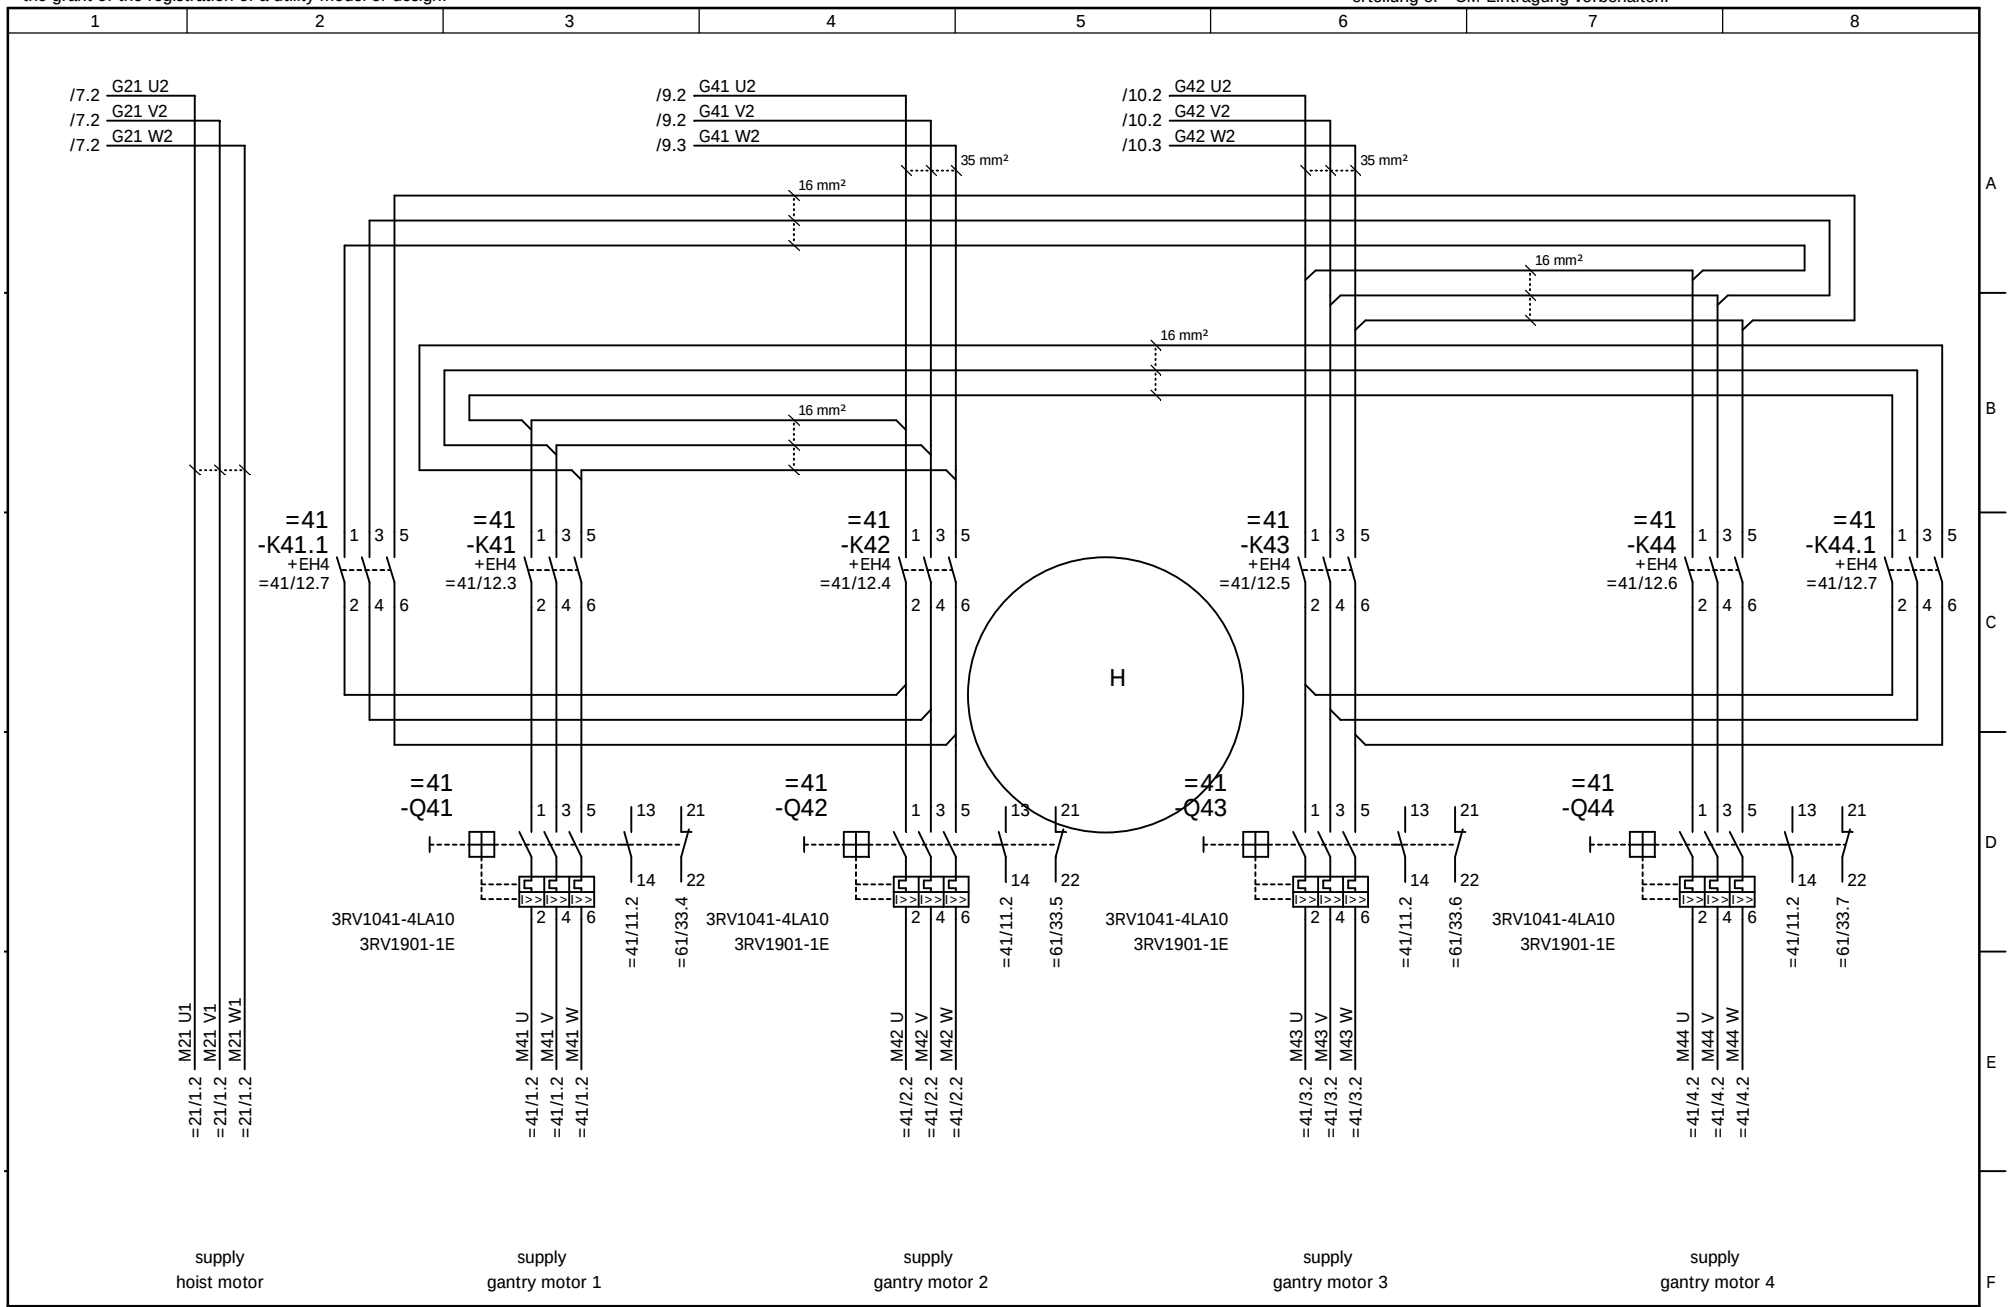

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=20 +EH5
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	drives, feeding Stromlaufplan / Circuit Diagram		Sheet 20 20 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

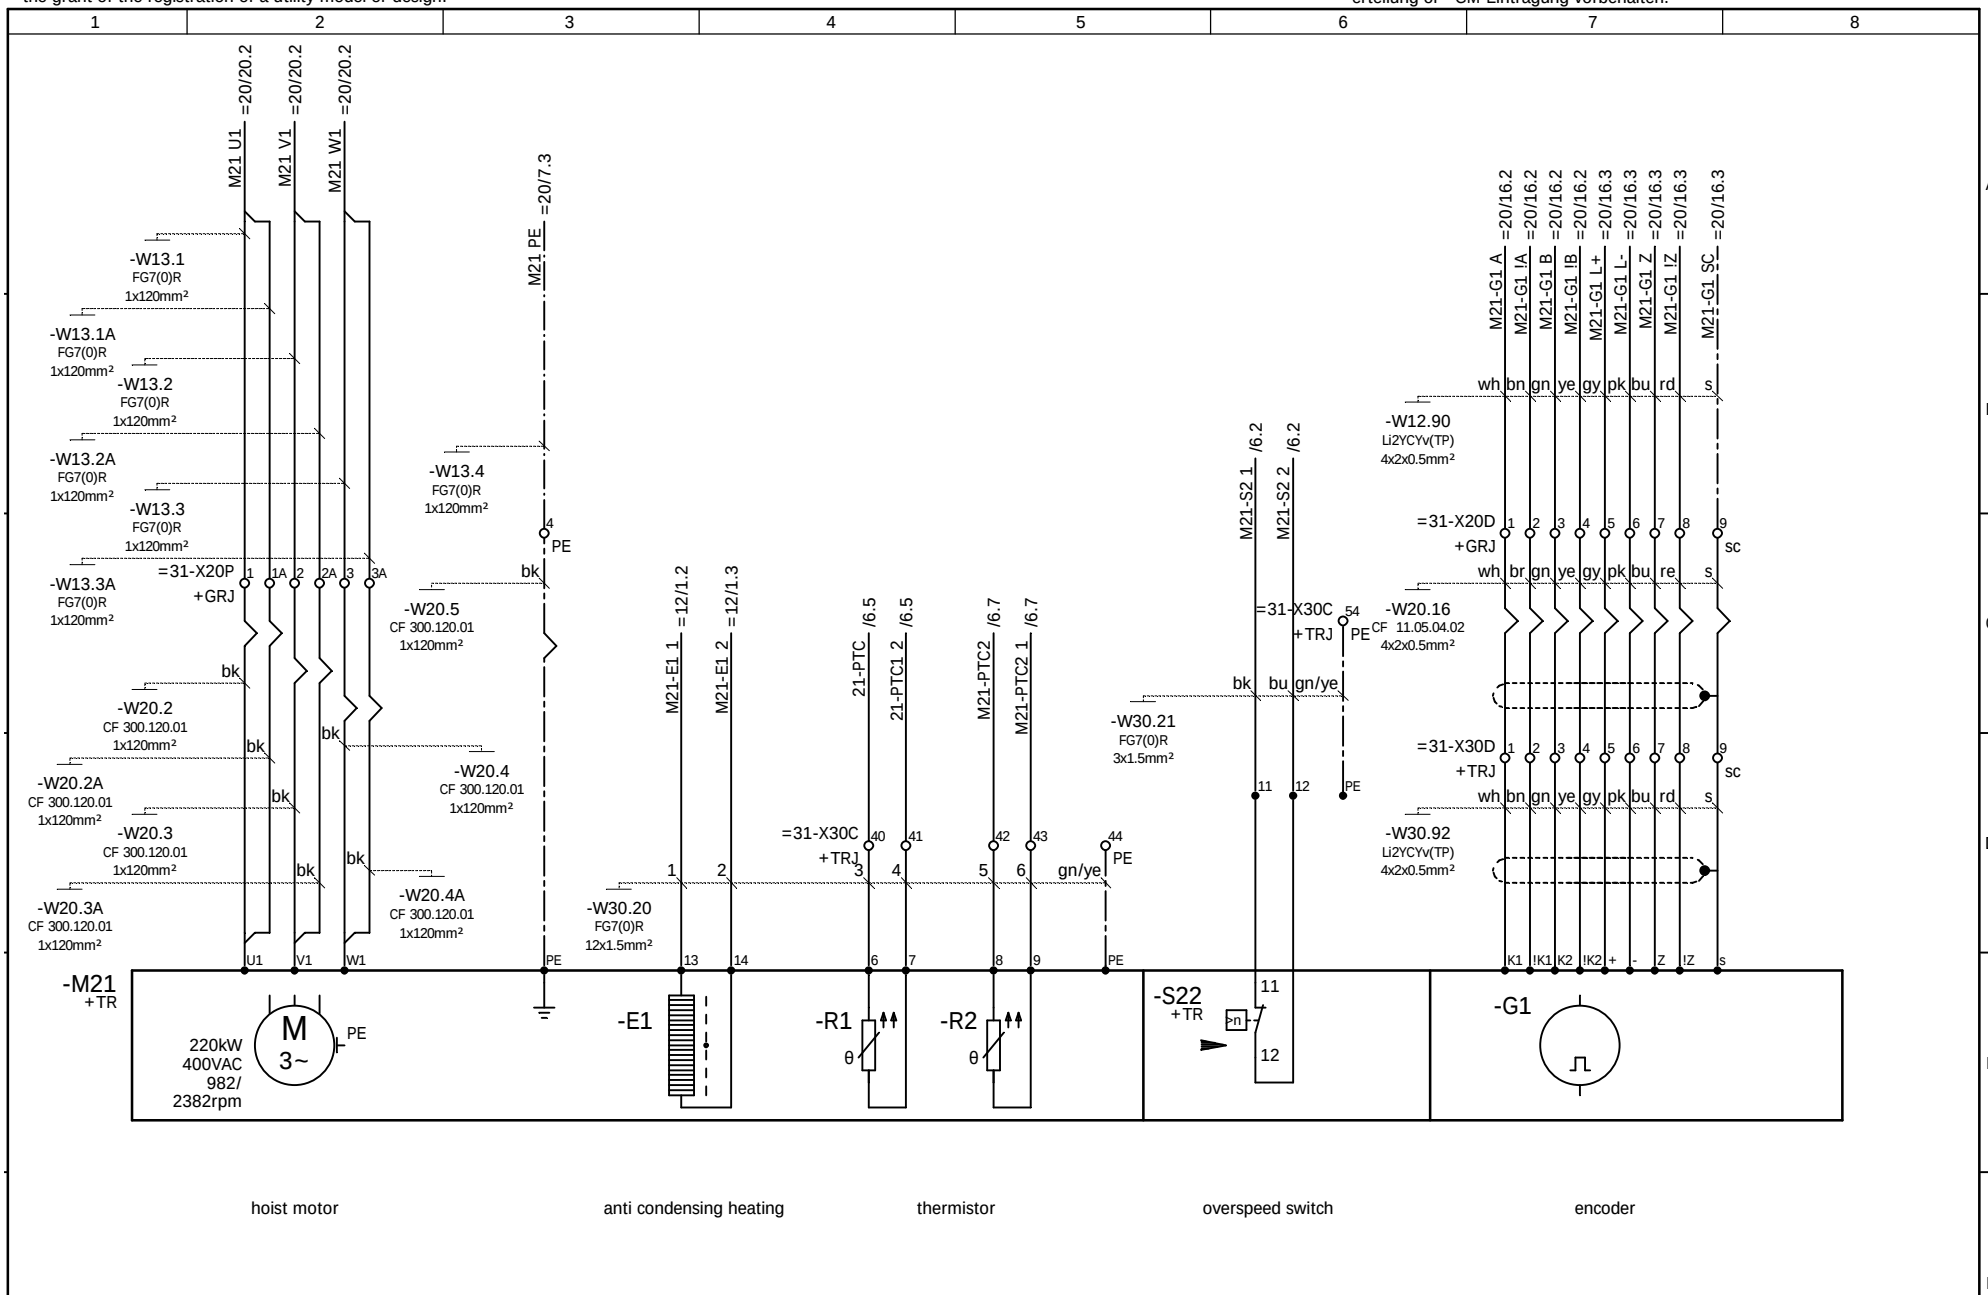

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=21 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram	Sheet 1 10 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

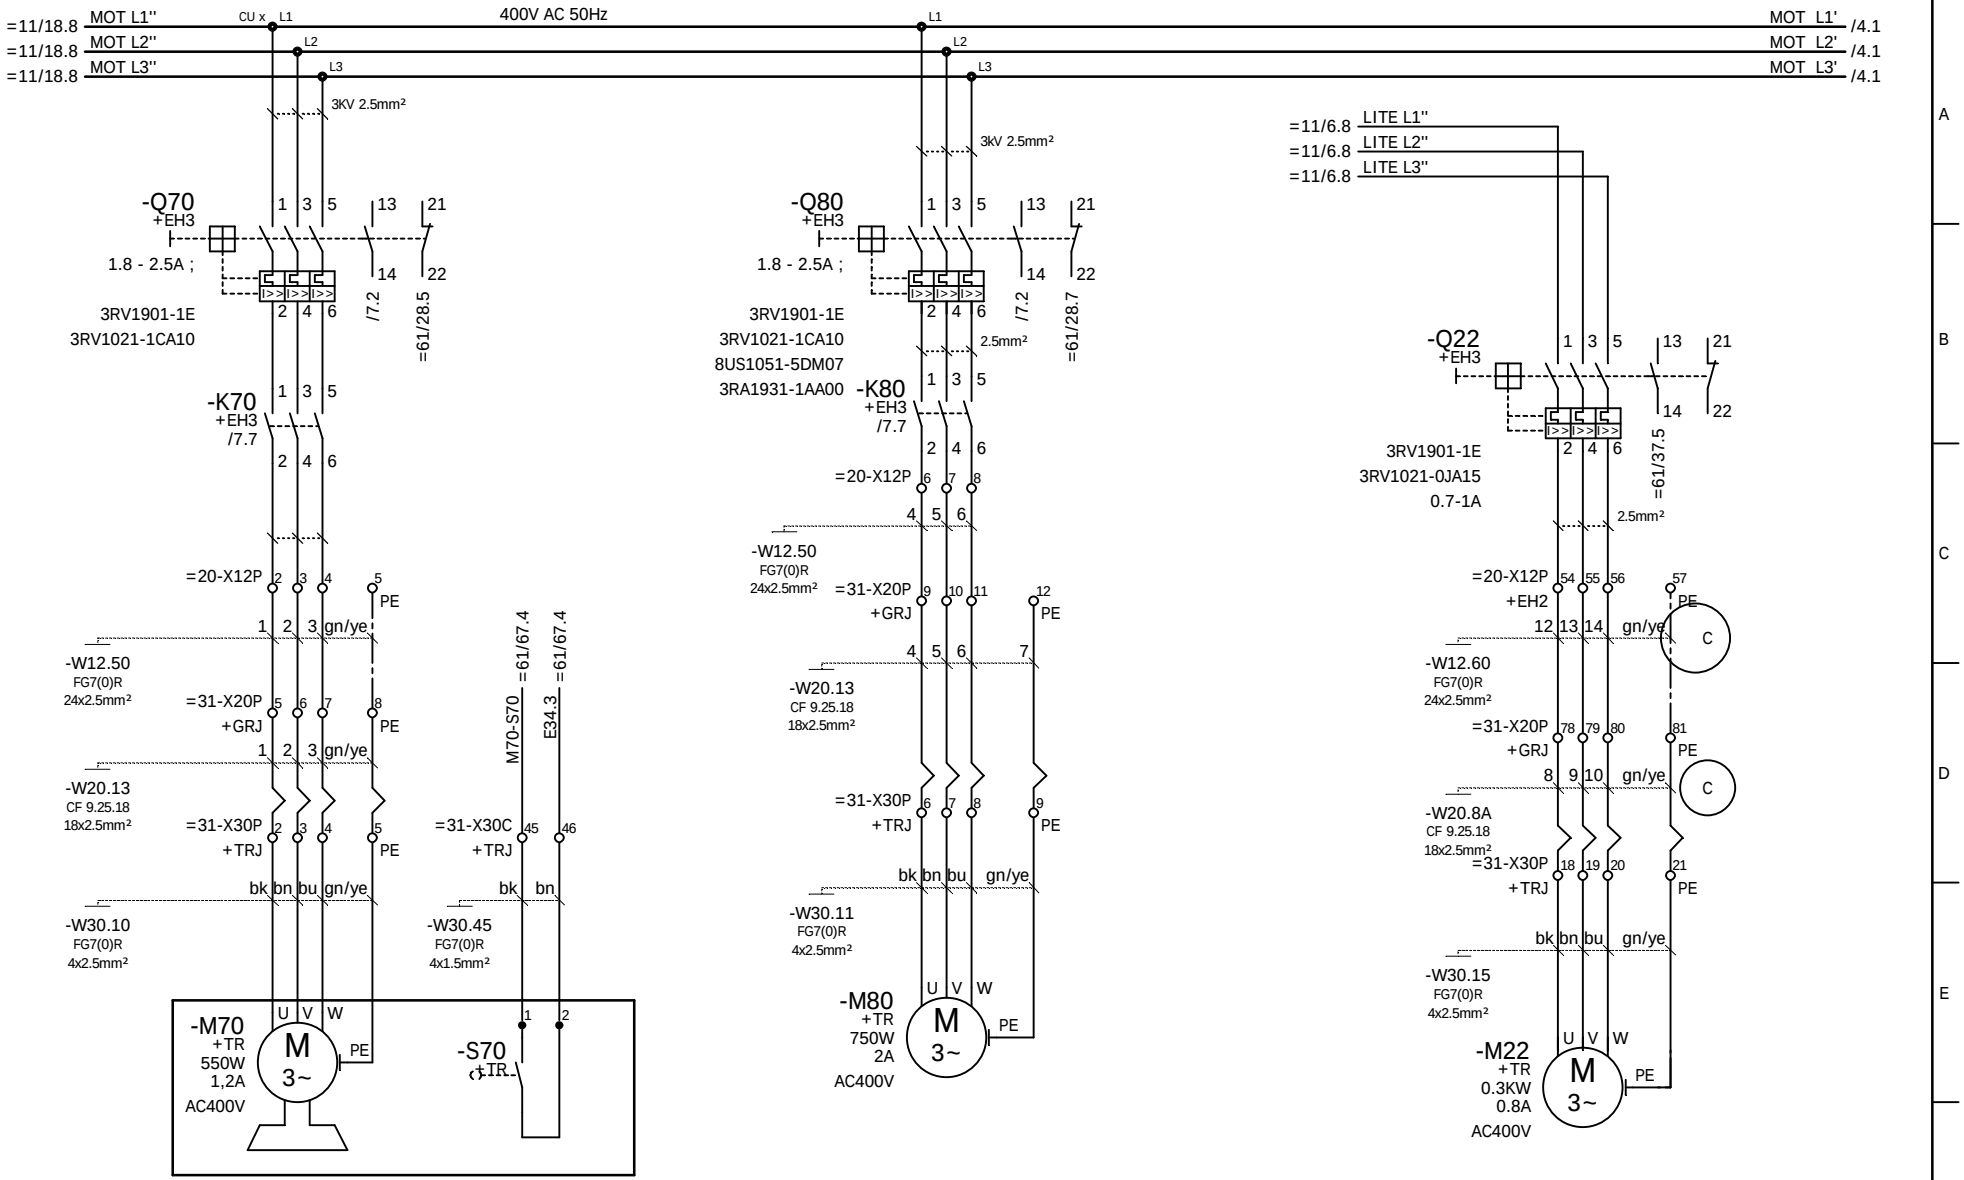

				Date		Costumer	AMPT Egypt	hoisting unit, hoist motor	Type RTG 50/26.50/5+1/AC	=21
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2
Ind.	Revision	Date	Name	Standard		Source:					10 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

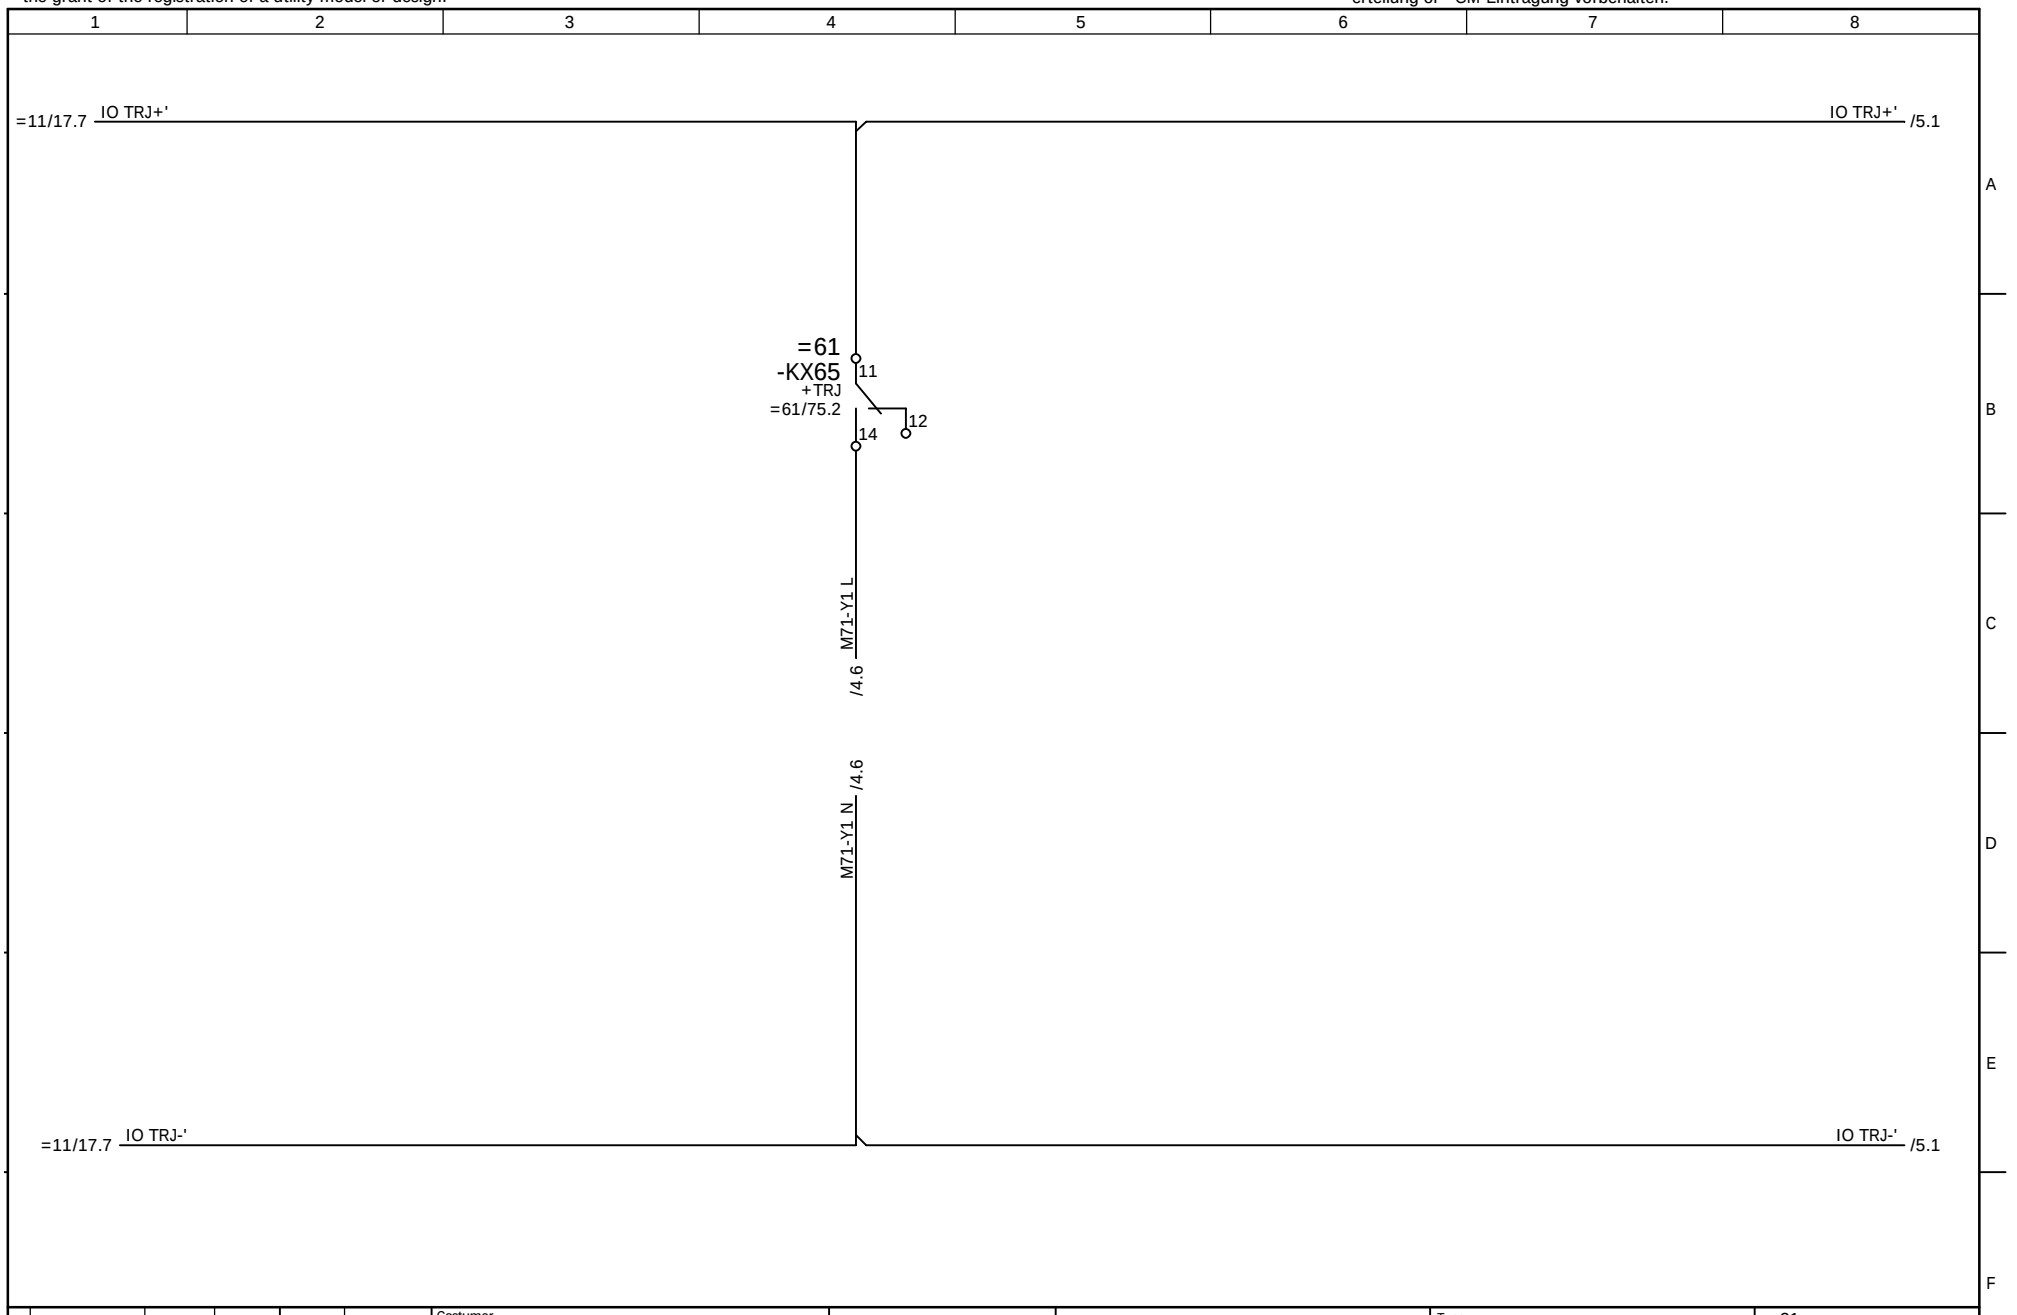

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=21
				Designer	XU HR		AMPT Egypt			+EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00	Sheet 3
Ind.	Revision	Date	Name	Standard		Source:				10 Sh.


NOELL

hoisting unit, emergency brake

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

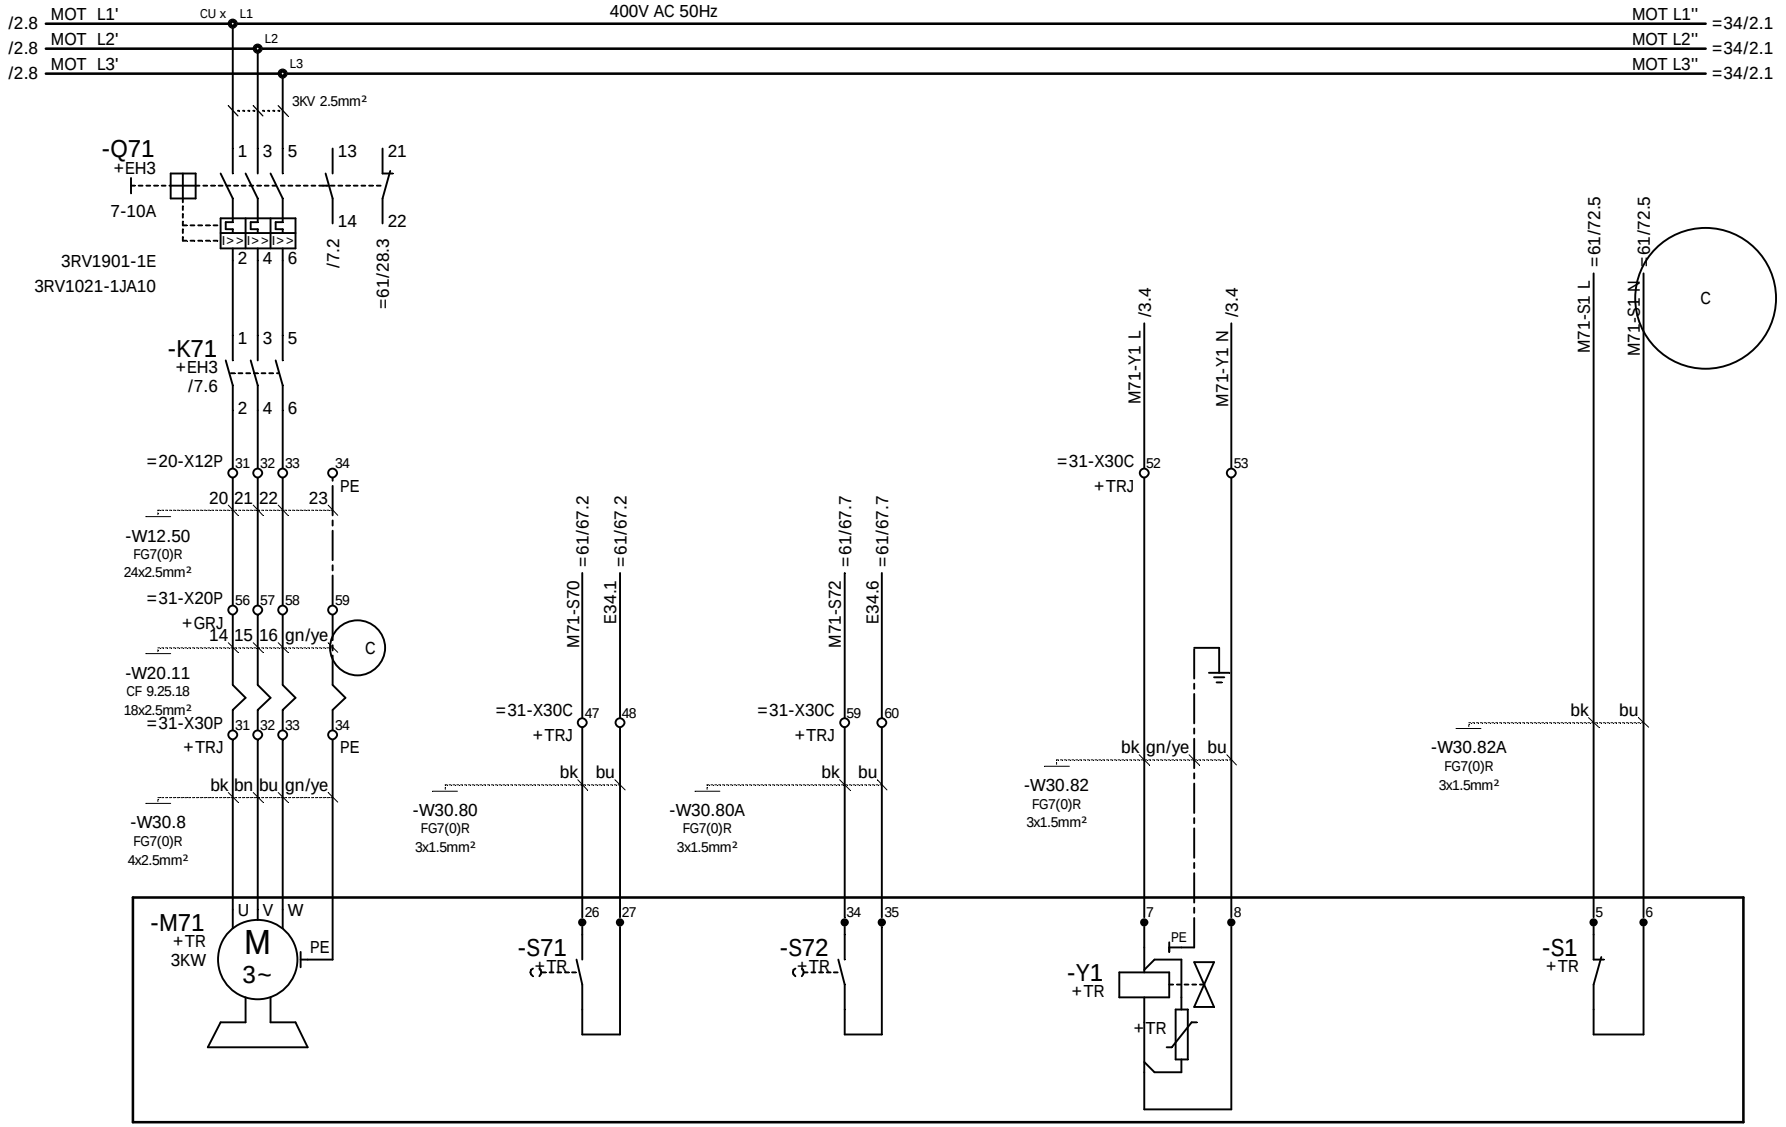


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=21 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 4 10 Sh.

NOELL

hoisting unit, emergency brake
Stromlaufplan / Circuit Diagram

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

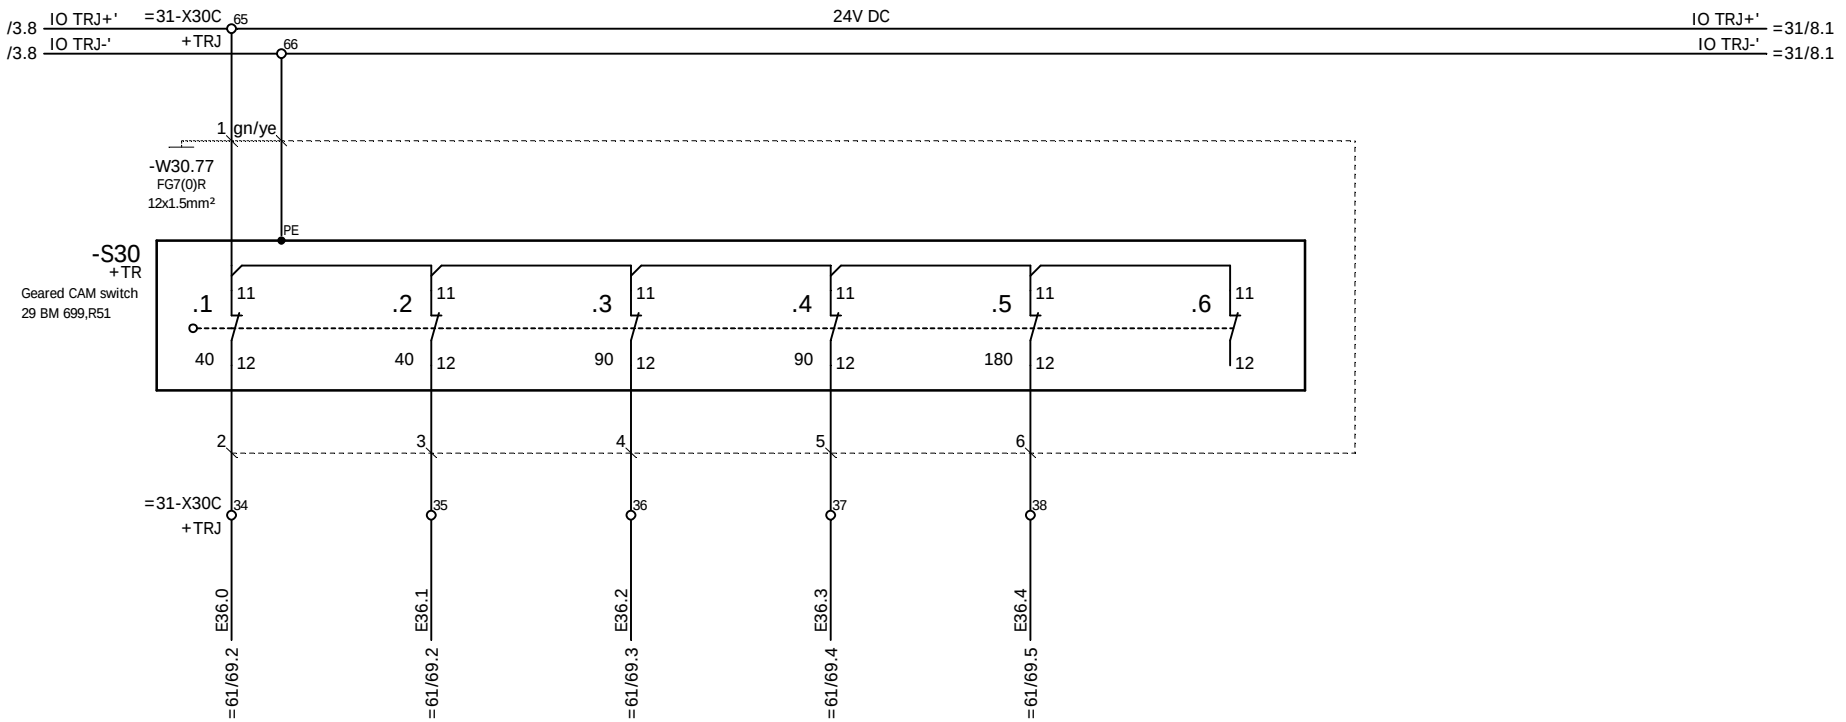


limit switch up	limit switch down	pre-limit switch up	hoist height reset signal	pre-limit switch down	spare

				Date		Costumer	AMPT Egypt	NOELL	hoisting unit, limit switches Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=21 +EH2
Job No. 1255	Drawing No. 78.5692.60.00	Sheet 5 10 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

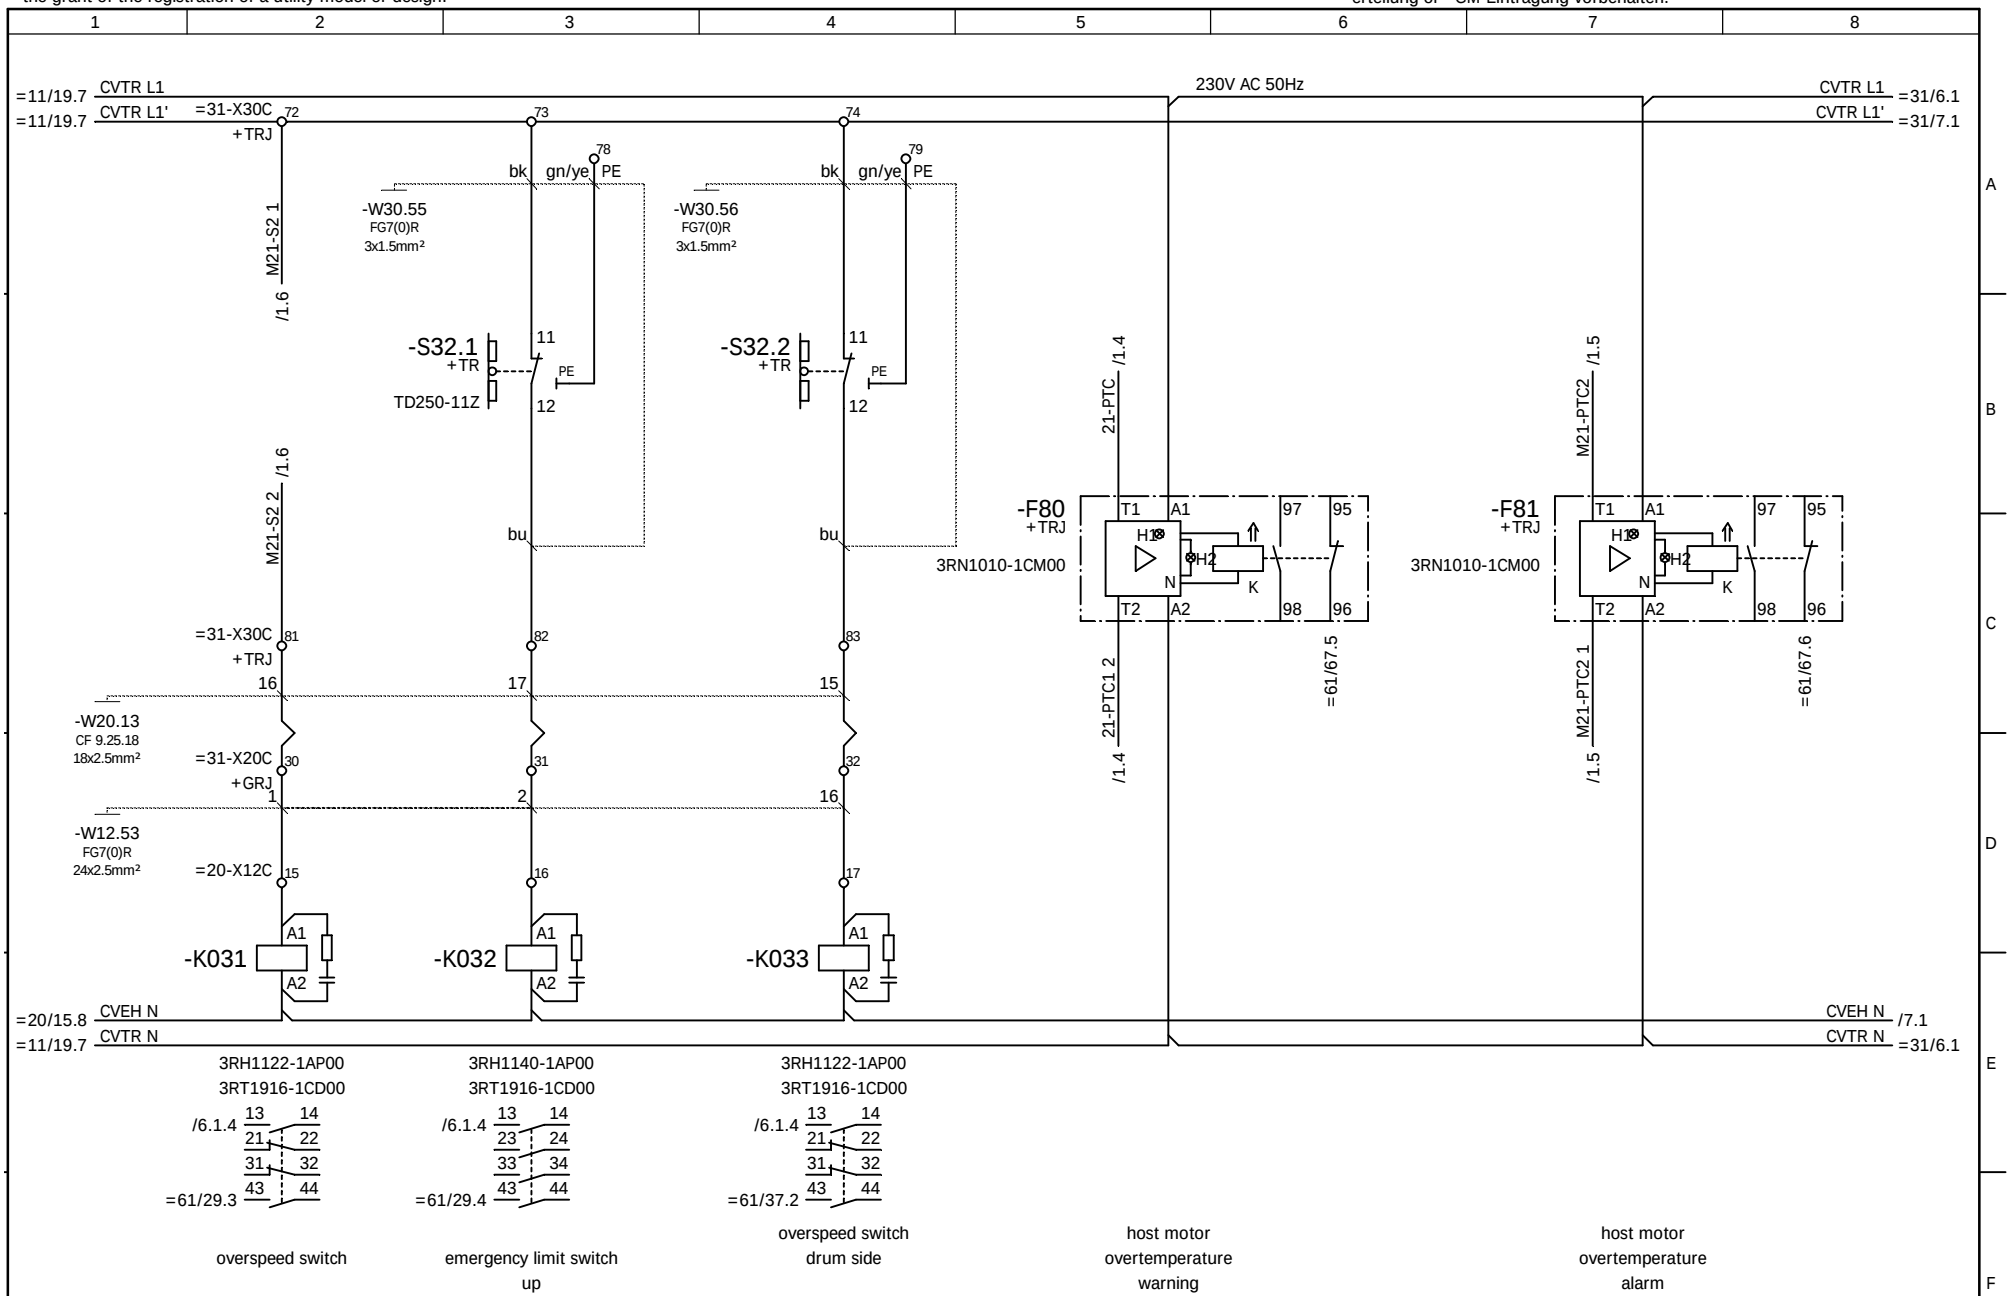

				Date		Costumer	AMPT Egypt	hoisting unit, control Stromlaufplan / Circuit Diagram	Type RTG 50/26.50/5+1/AC	=21 +EH2
				Designer	XU HR				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 6 10 Sh.
				Checked	LIU KP						
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

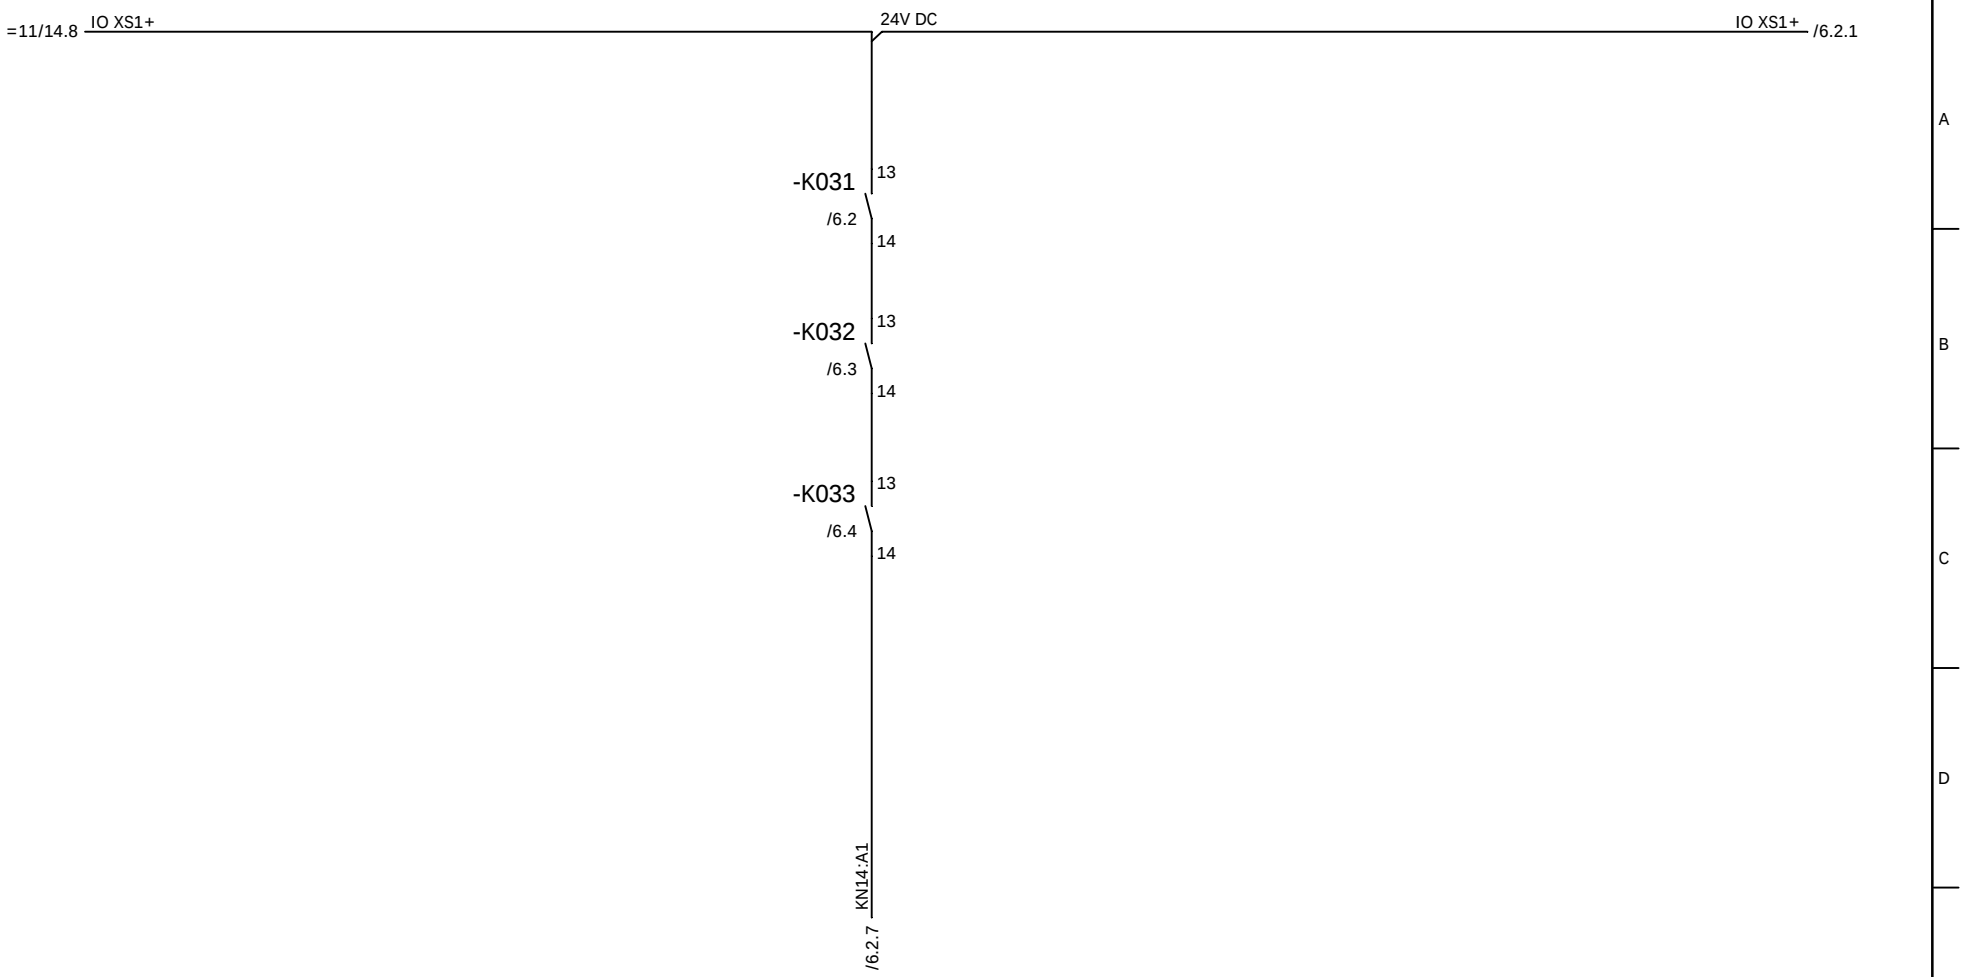

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=21 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 6.1 10 Sh.


NOELL

hoisting unit, control

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

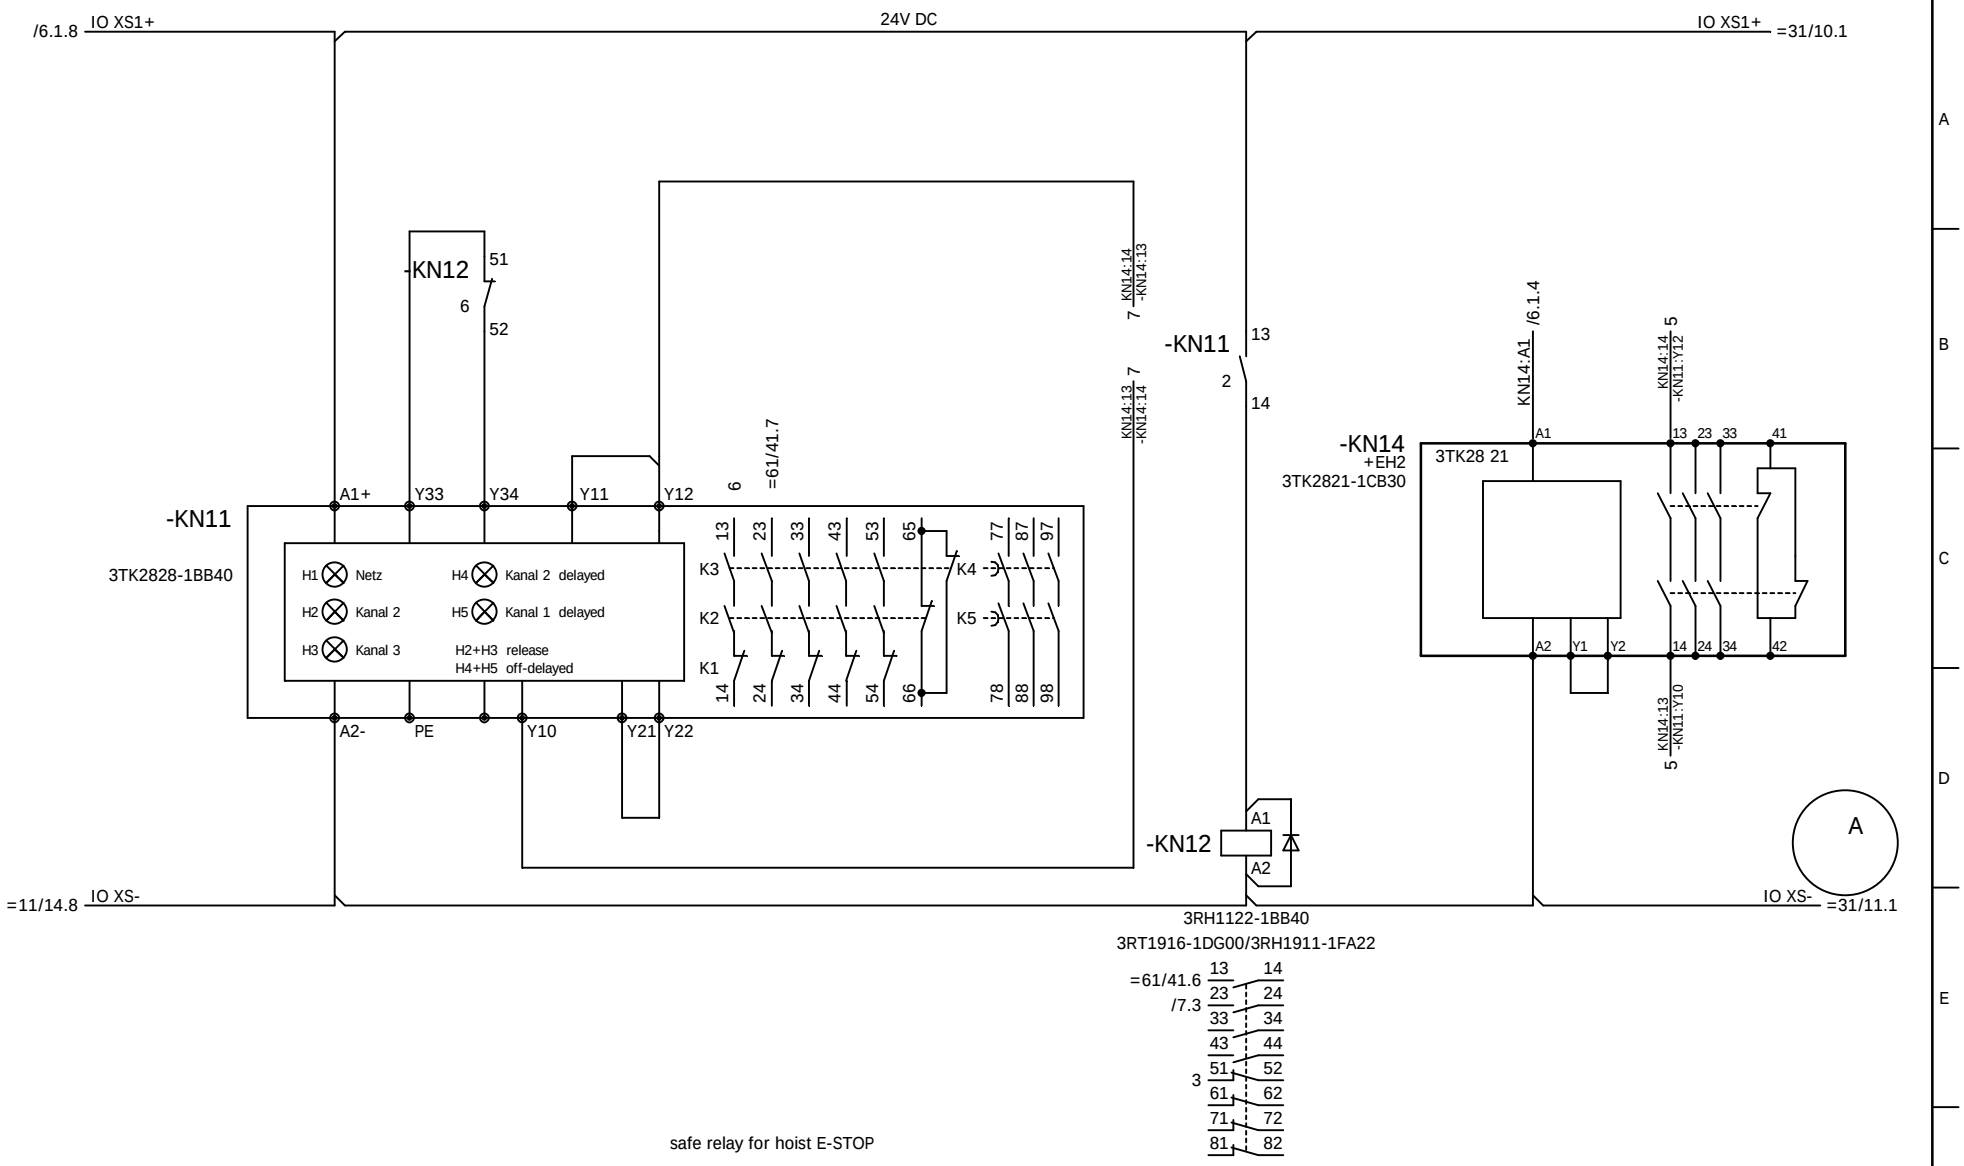


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=21 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
ind.	Revision	Date	Name	Standard		Source:			Sheet 6.2 10 Sh.

NOELL

hoisting unit, control
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

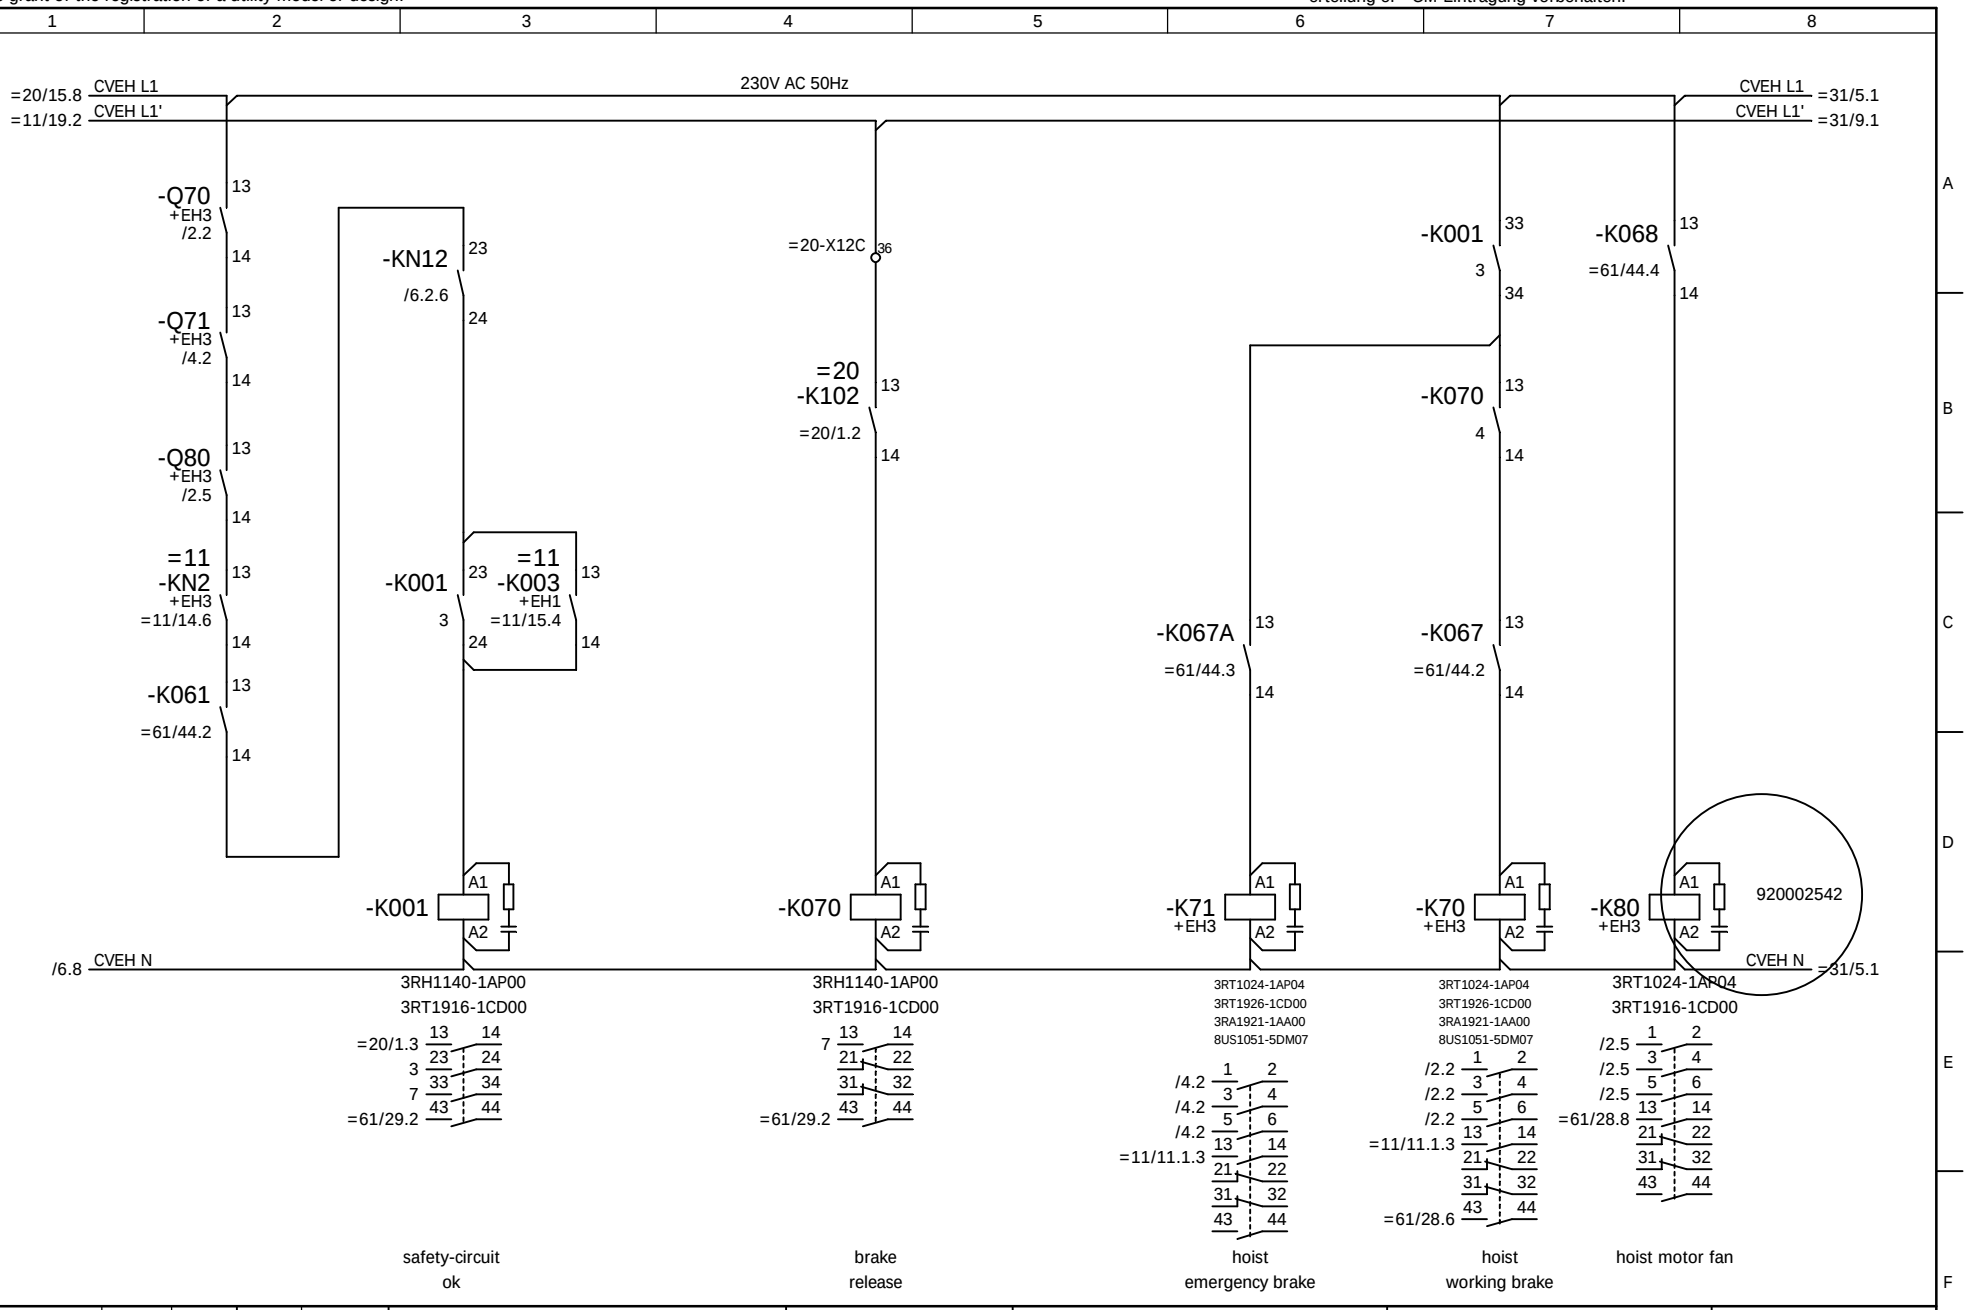

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=21 +EH2
				Designer	XU HR	AMPT Egypt	NOELL	hoisting unit, control		
				Checked	LIU KP			Stromlaufplan / Circuit Diagram	Job No. 1255 / Drawing No. 78.5692.60.00	Sheet 7 10 Sh.
Ind.	Revision	Date	Name	Standard		Source:				

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

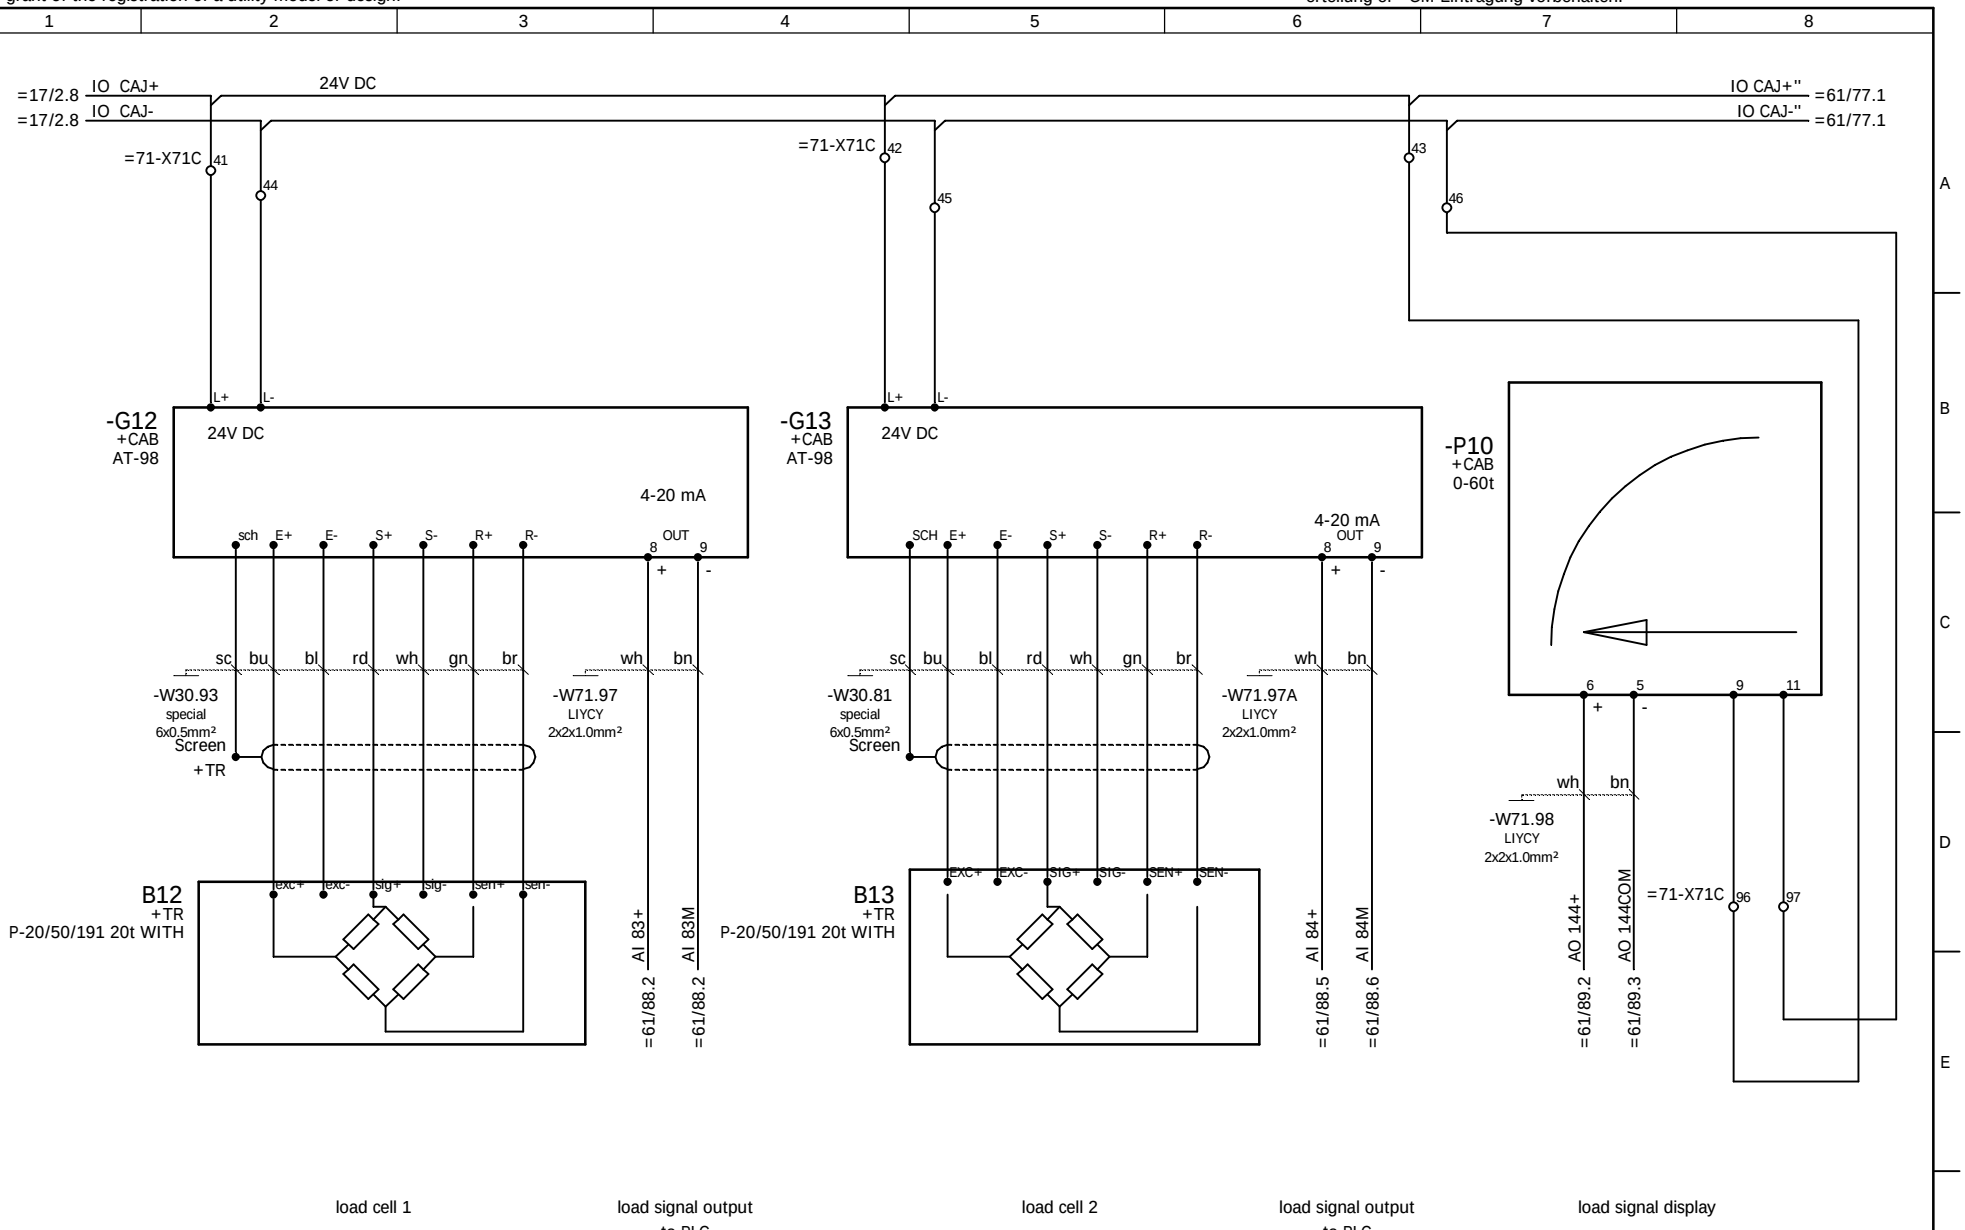

load cell 1 | load signal output to PLC | load cell 2 | load signal output to PLC | load signal display


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=21 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 8 10 Sh.

NOELL

hoisting, safe load indicator
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

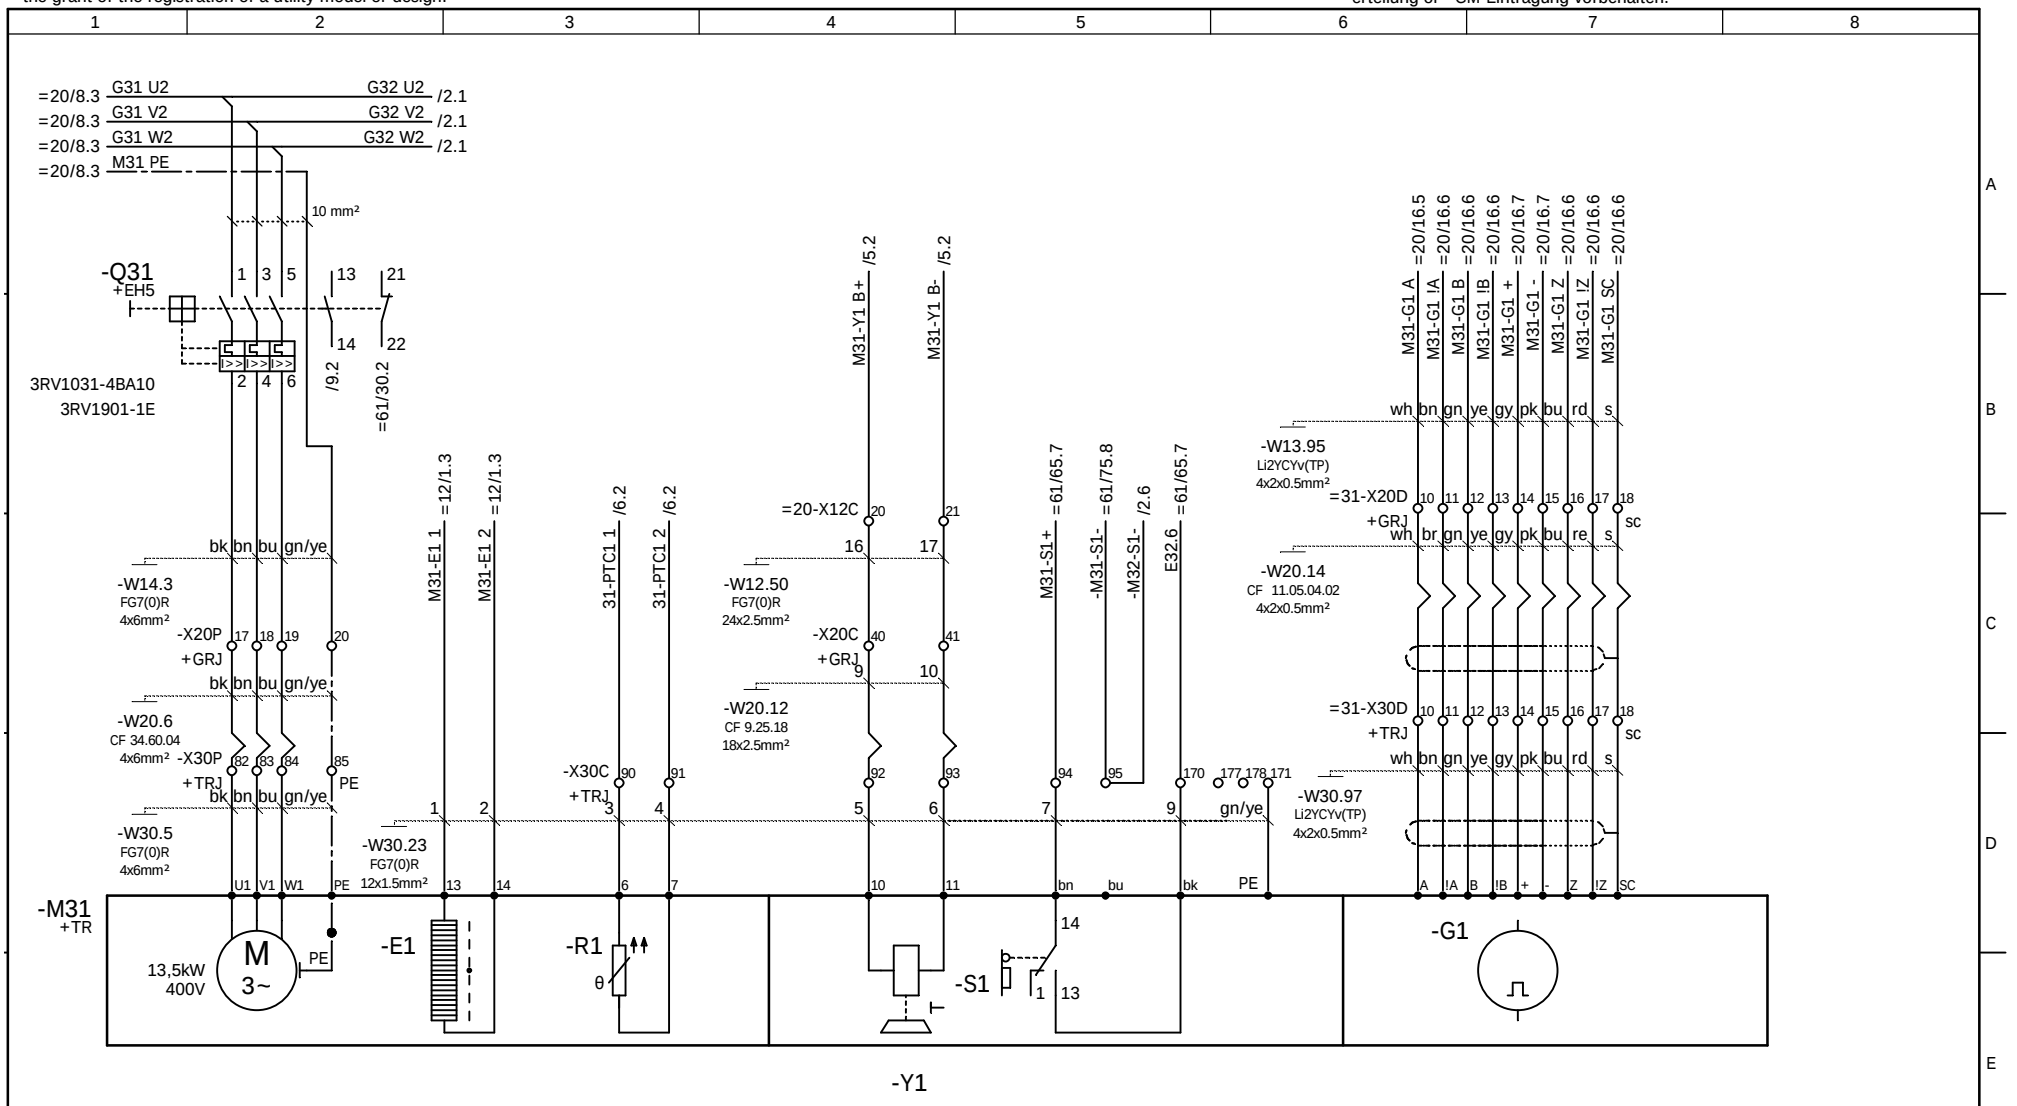

				Date		Costumer	AMPT Egypt	NOELL	trolley travelling motor 1	Type RTG 50/26.50/5+1/AC	=31
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1
Ind.	Revision	Date	Name	Standard		Source:						11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

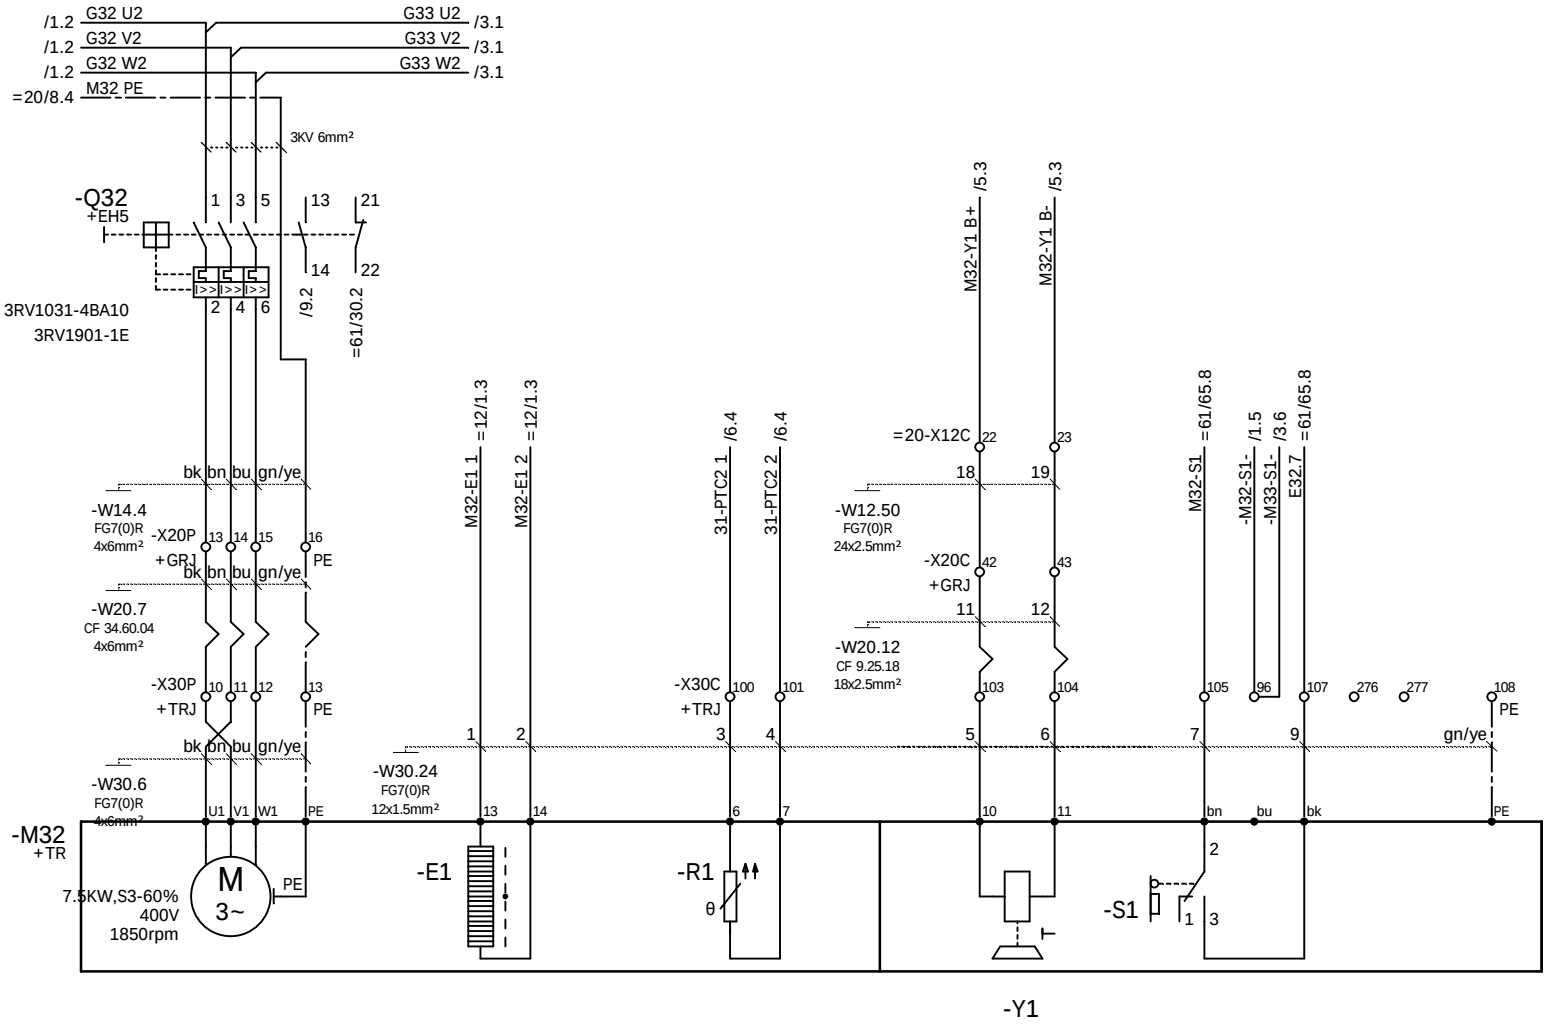


motor | anti condensing heating | thermistor | brake | brake sensor

				Date		Costumer	AMPT Egypt	NOELL	trolley travelling motor 2	Type	RTG 50/26.50/5+1/AC	=31
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2
Ind.	Revision	Date	Name	Standard		Source:						11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

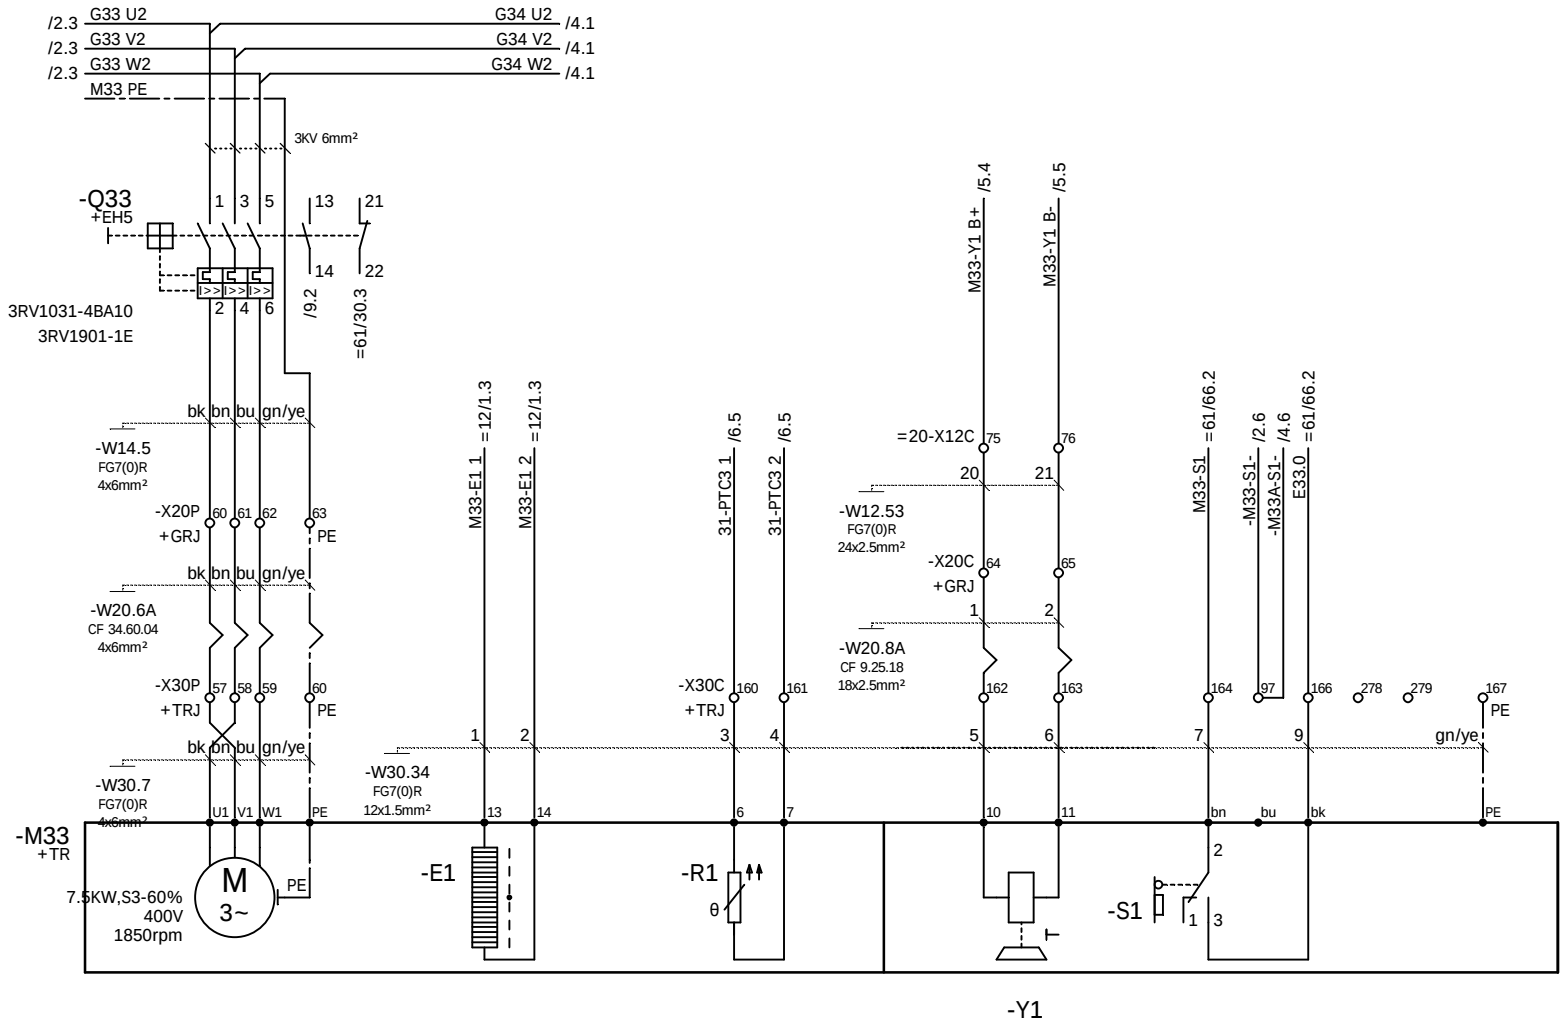


motor | anti condensing heating | thermistor | brake | brake sensor

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

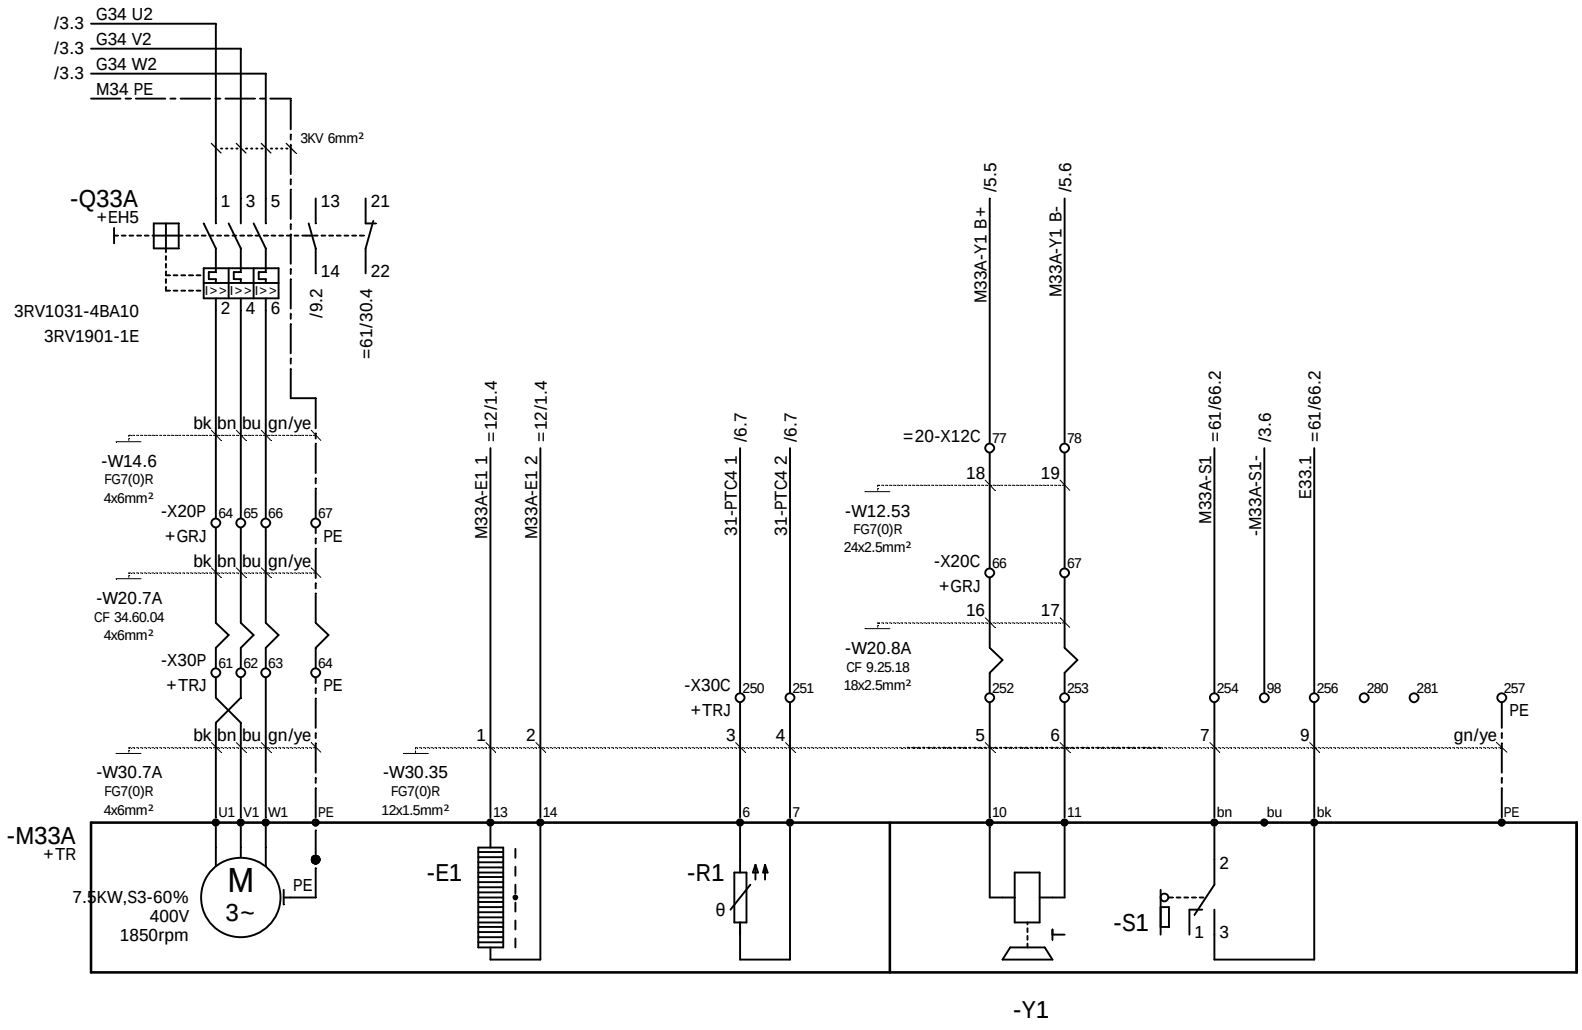


motor | anti condensing heating | thermistor | brake | brake sensor

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=31 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 4 / 11 Sh.

trolley travelling motor 4
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

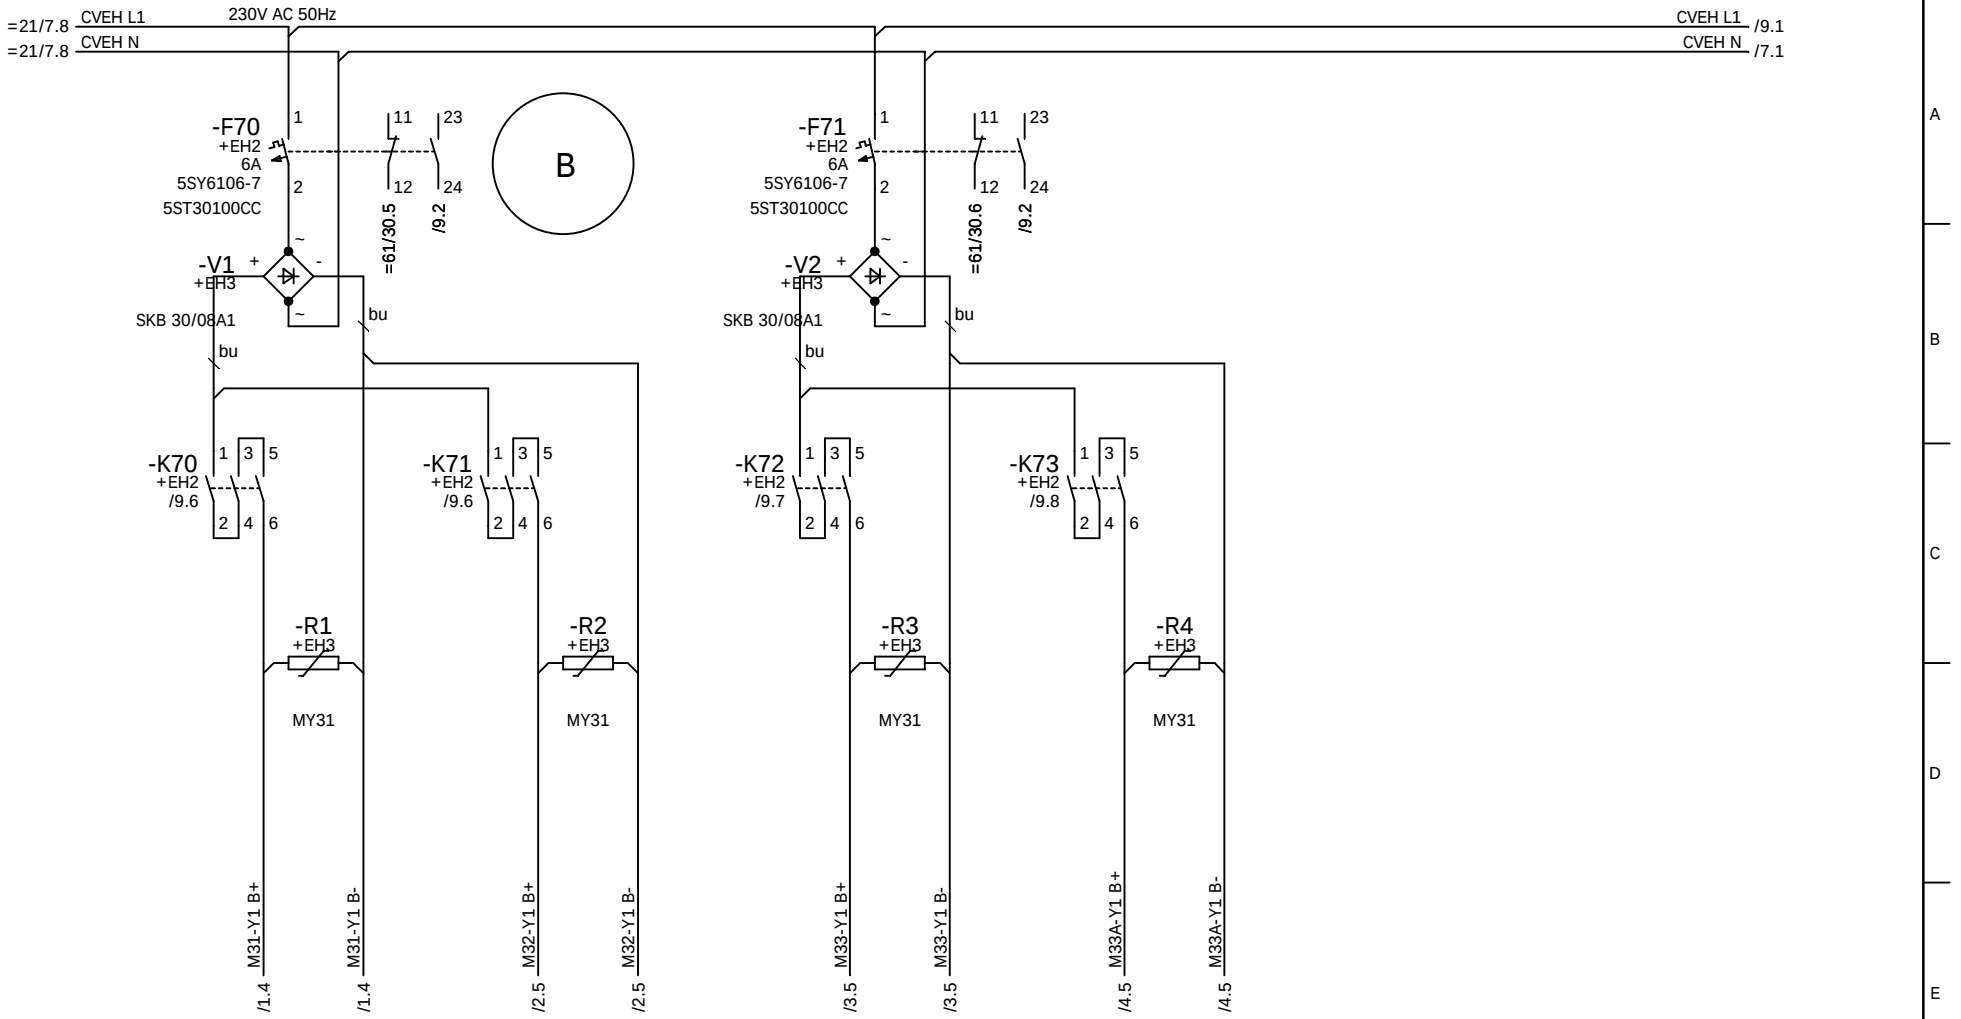

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=31	+TRJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	trolley travelling, control Stromlaufplan / Circuit Diagram	Sheet 5	11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

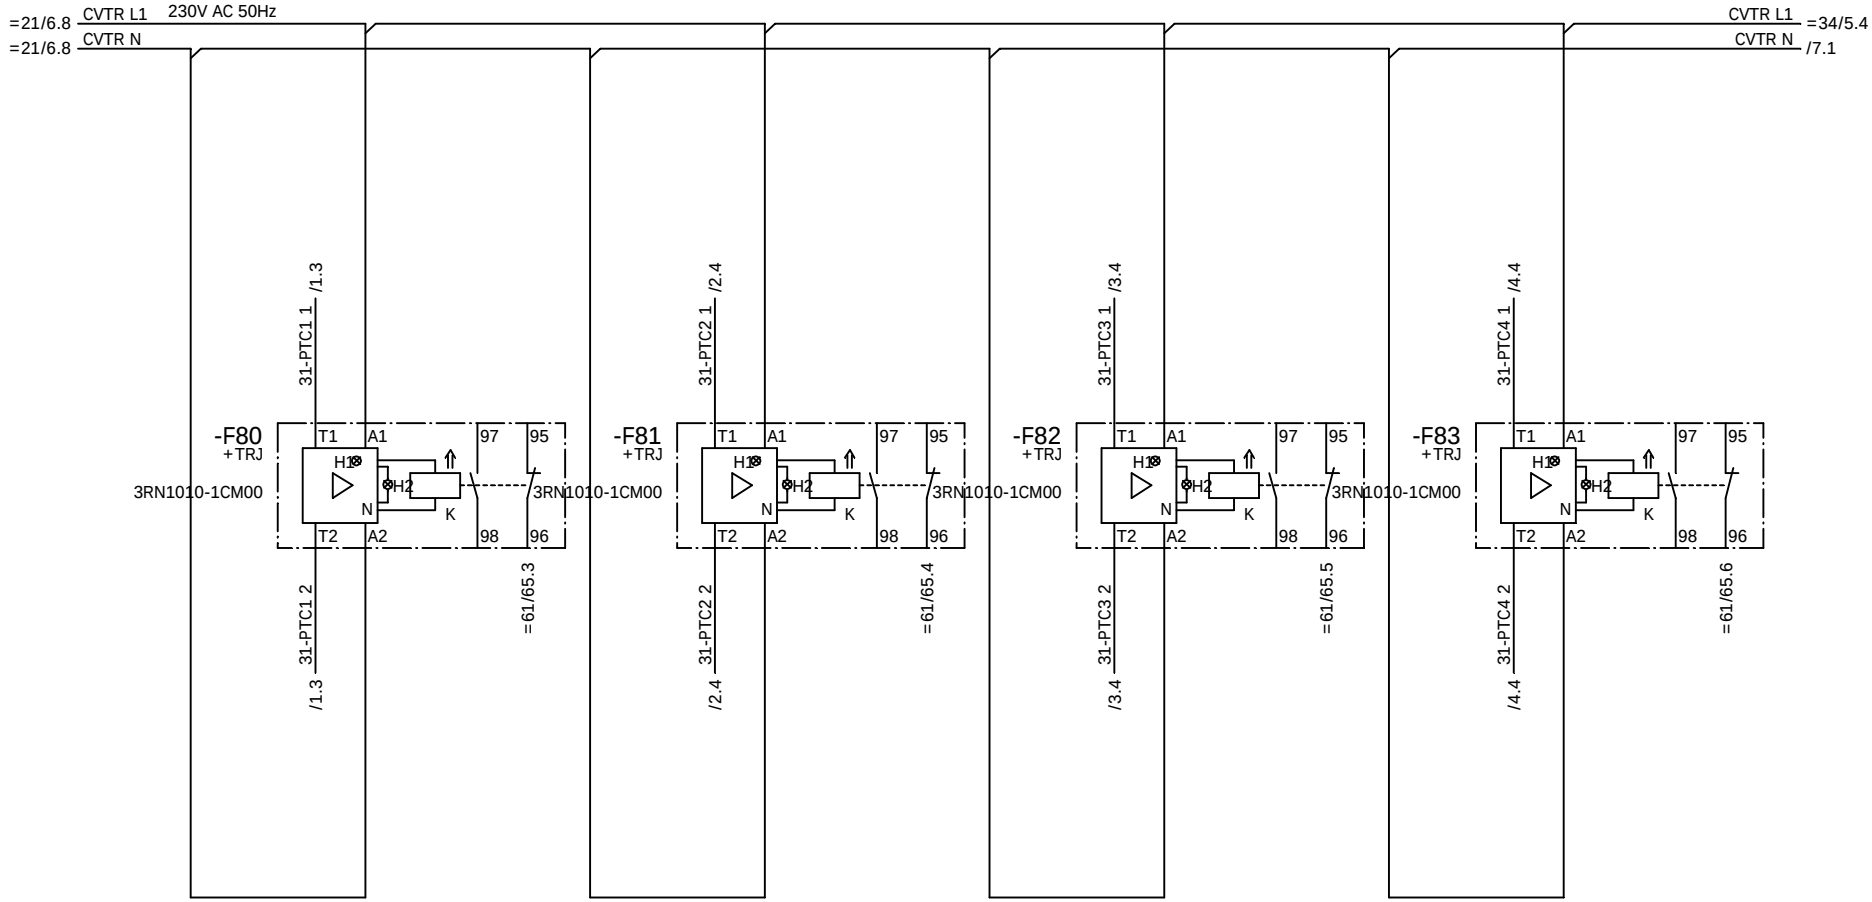

Trolley motor 1
no overtemperature

Trolley motor 2
no overtemperature

Trolley motor 3
no overtemperature

Trolley motor 4
no overtemperature

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL


trolley travelling, control
Stromlaufplan / Circuit Diagram

=31
+EH2

Sheet 6
11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

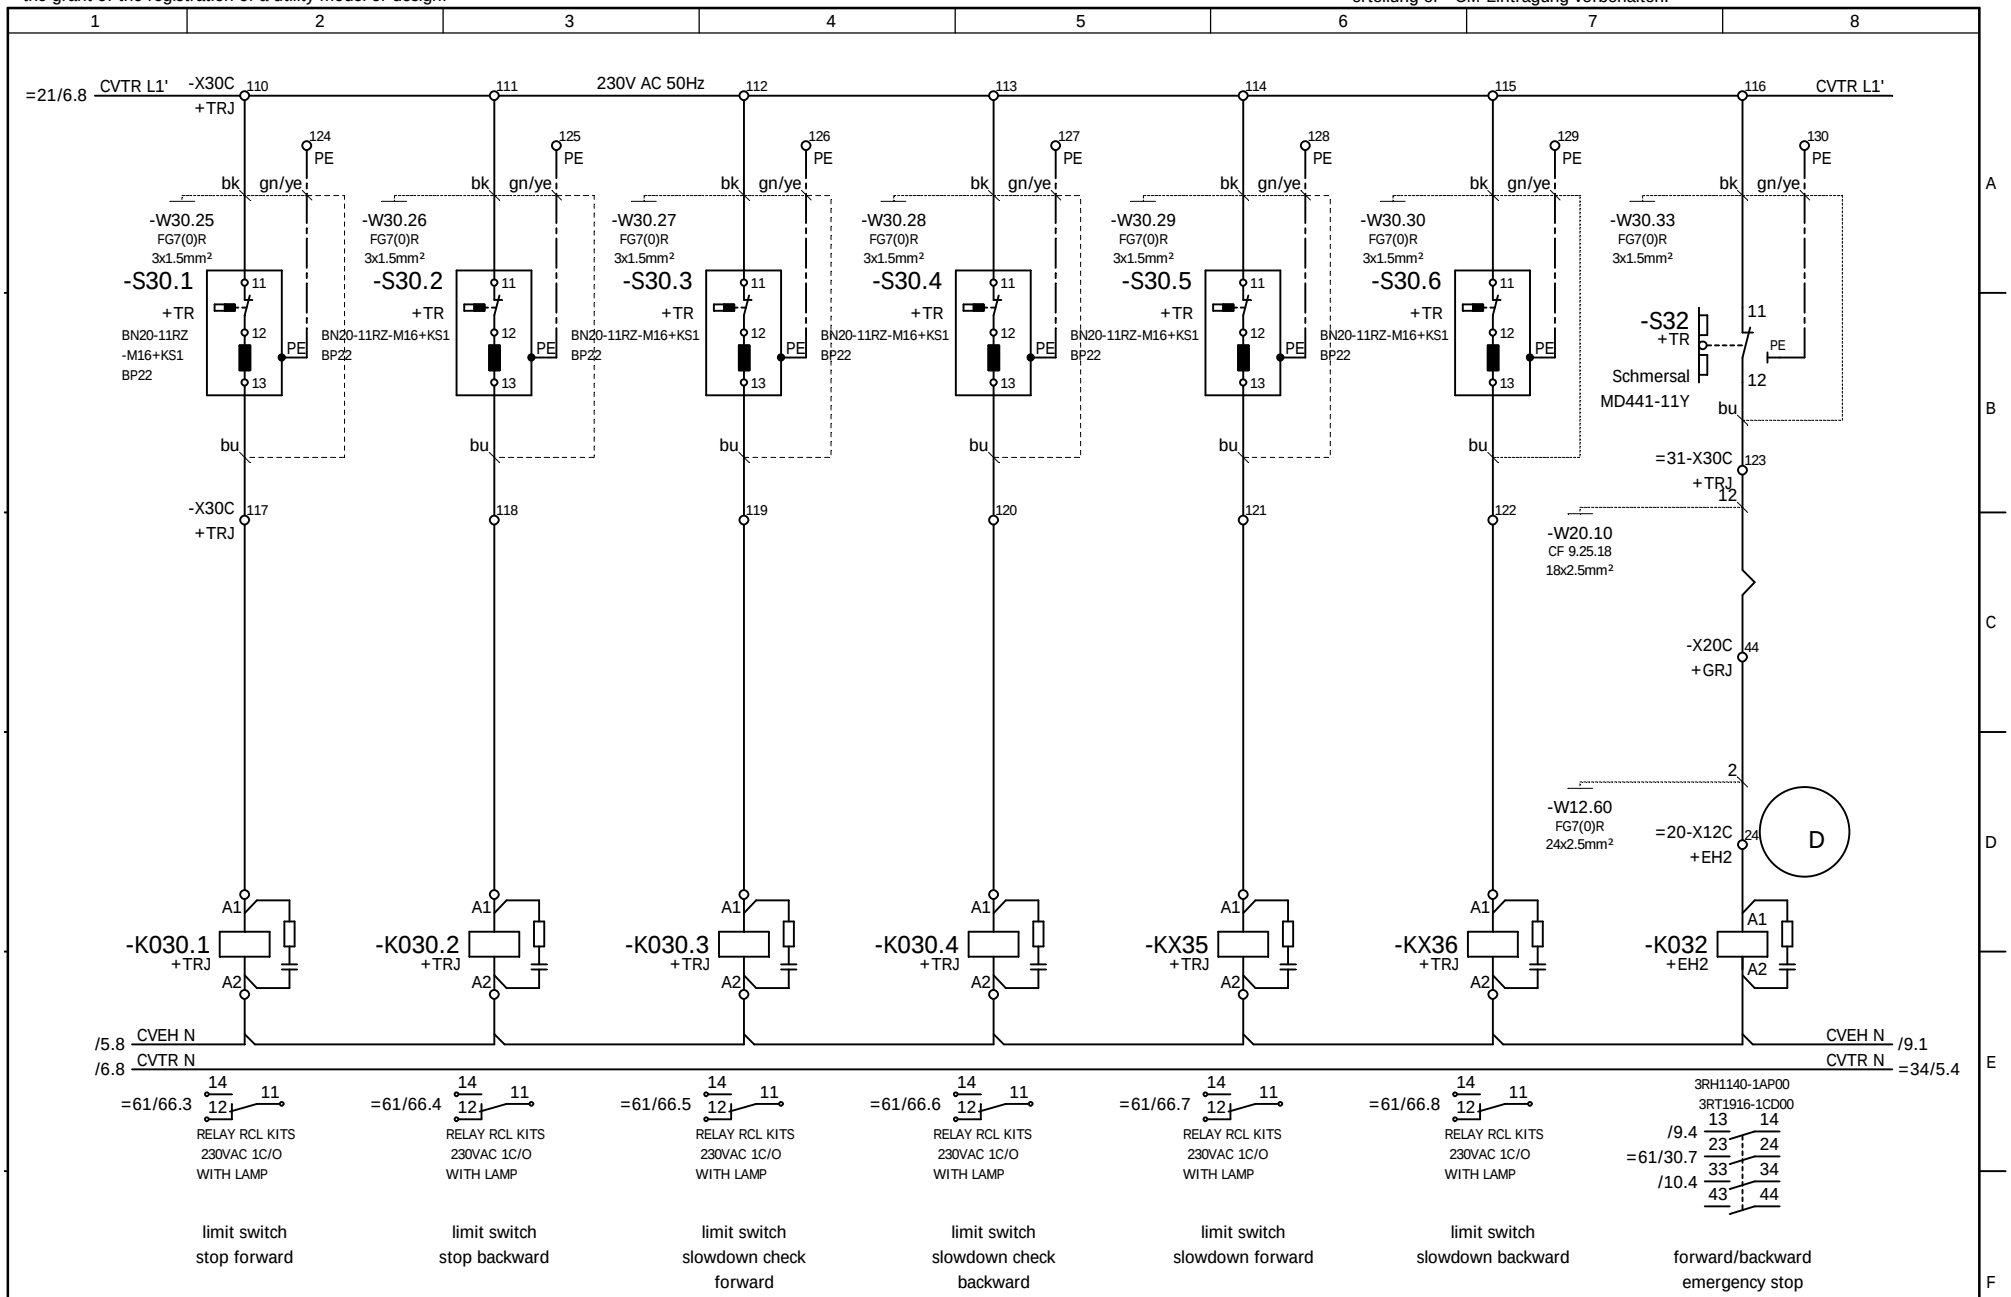

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=31 +TRJ	
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00
							trolley travelling, control		Sheet 7 11 Sh.
							Stromlaufplan / Circuit Diagram		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

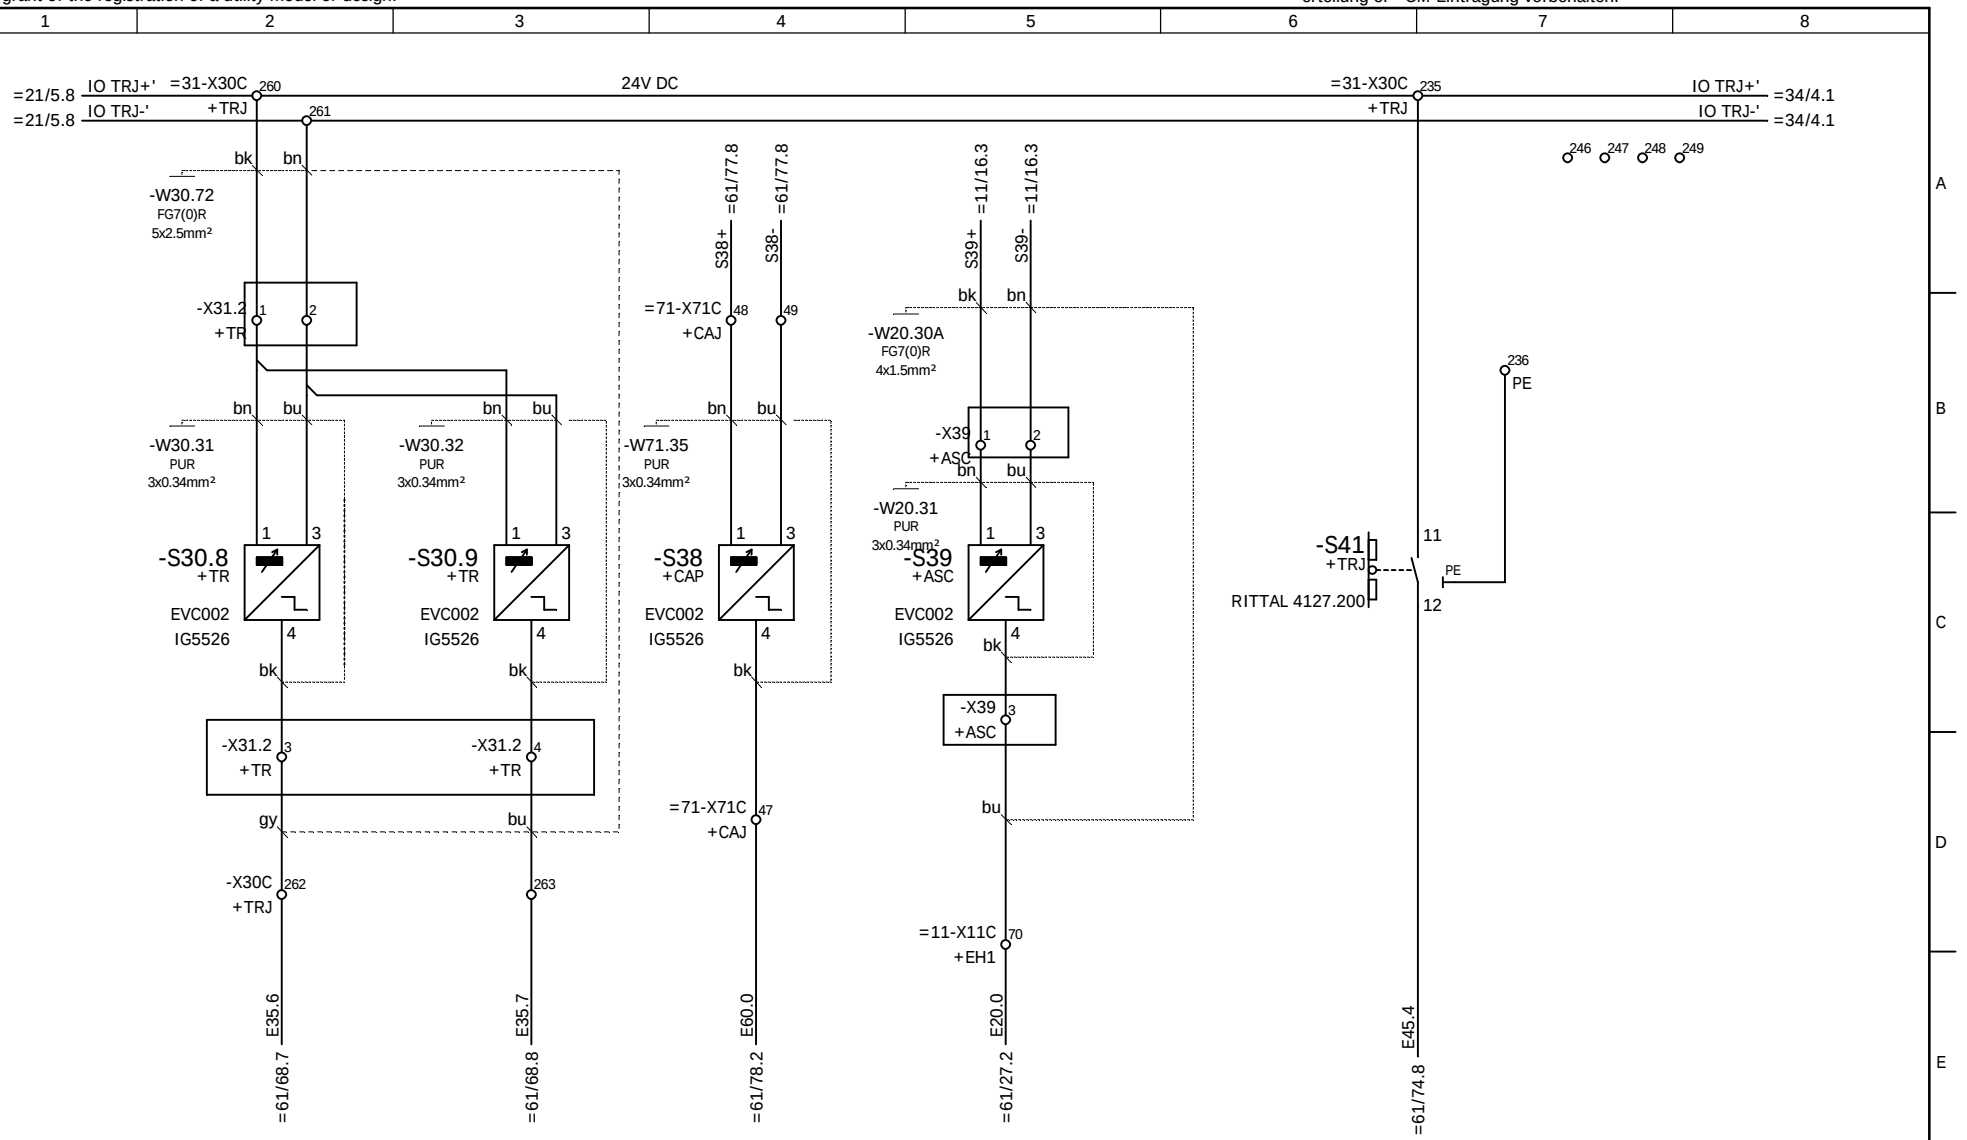

				Date		Costumer	AMPT Egypt	NOELL	trolley travelling, control	Type RTG 50/26.50/5+1/AC	=31
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 8
Ind.	Revision	Date	Name	Standard		Source:						11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

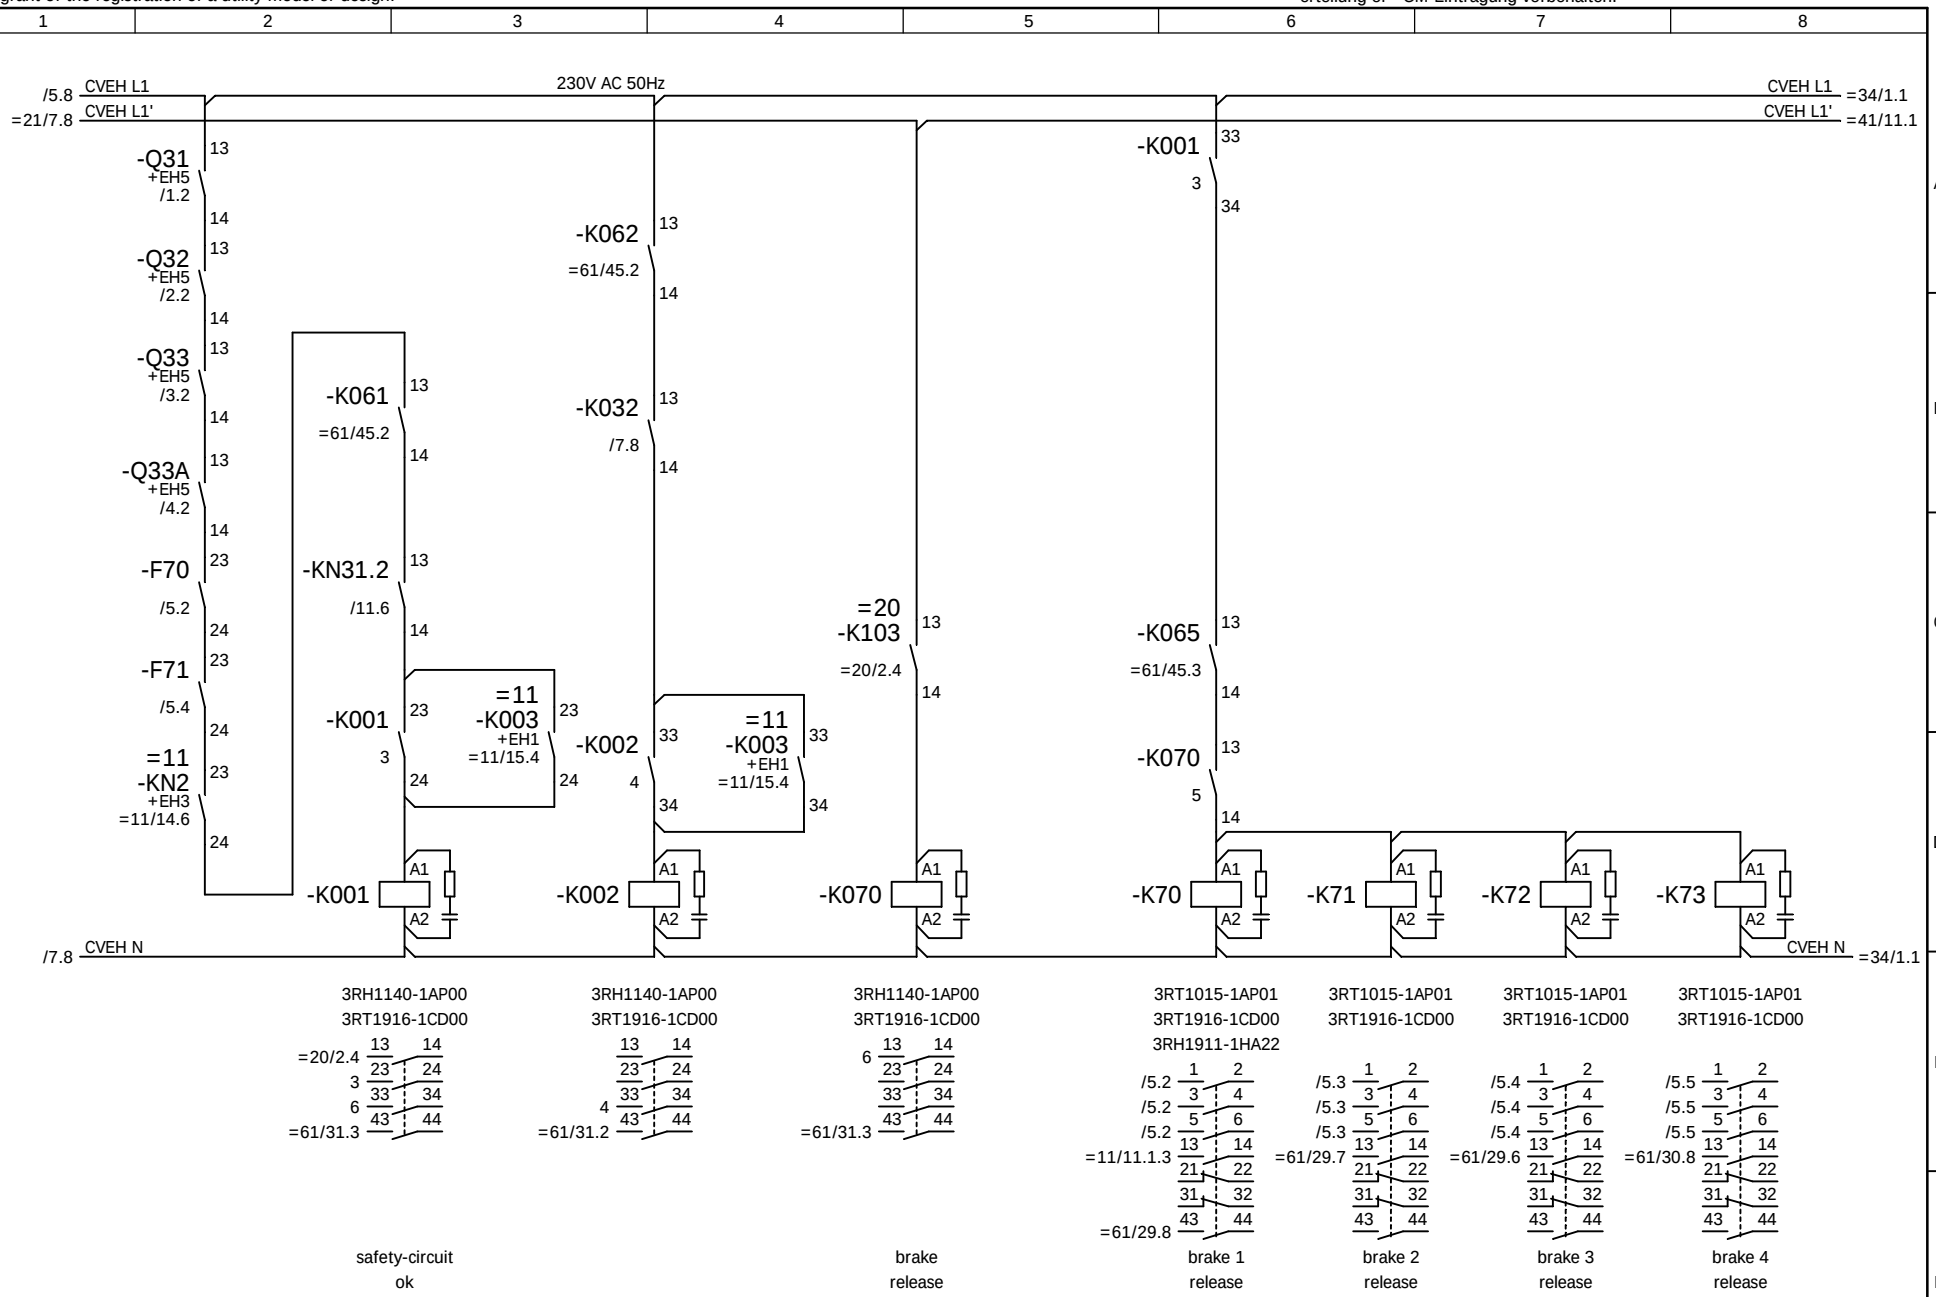

				Date		Costumer	AMPT Egypt	trolley travelling, control	Type RTG 50/26.50/5+1/AC	=31
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 9
Ind.	Revision	Date	Name	Standard		Source:					11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

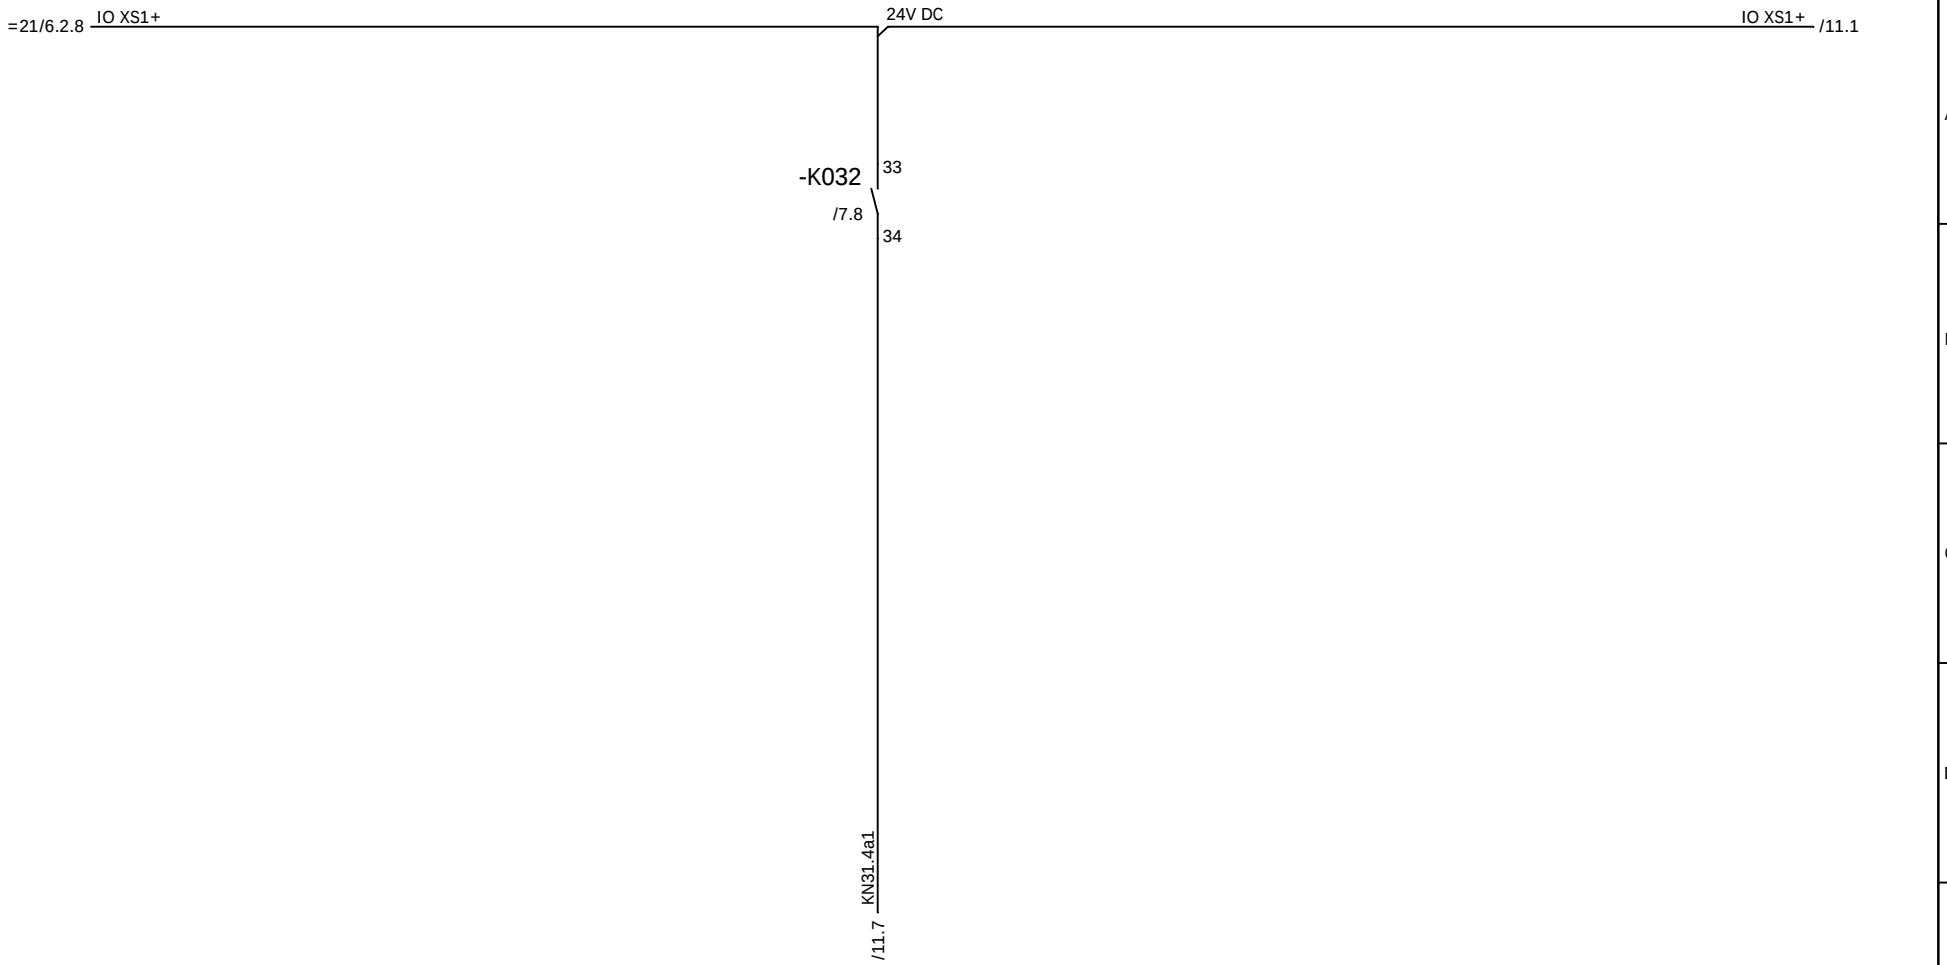

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


trolley travelling, control

Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=31	
		+EH2	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	10		
	11 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

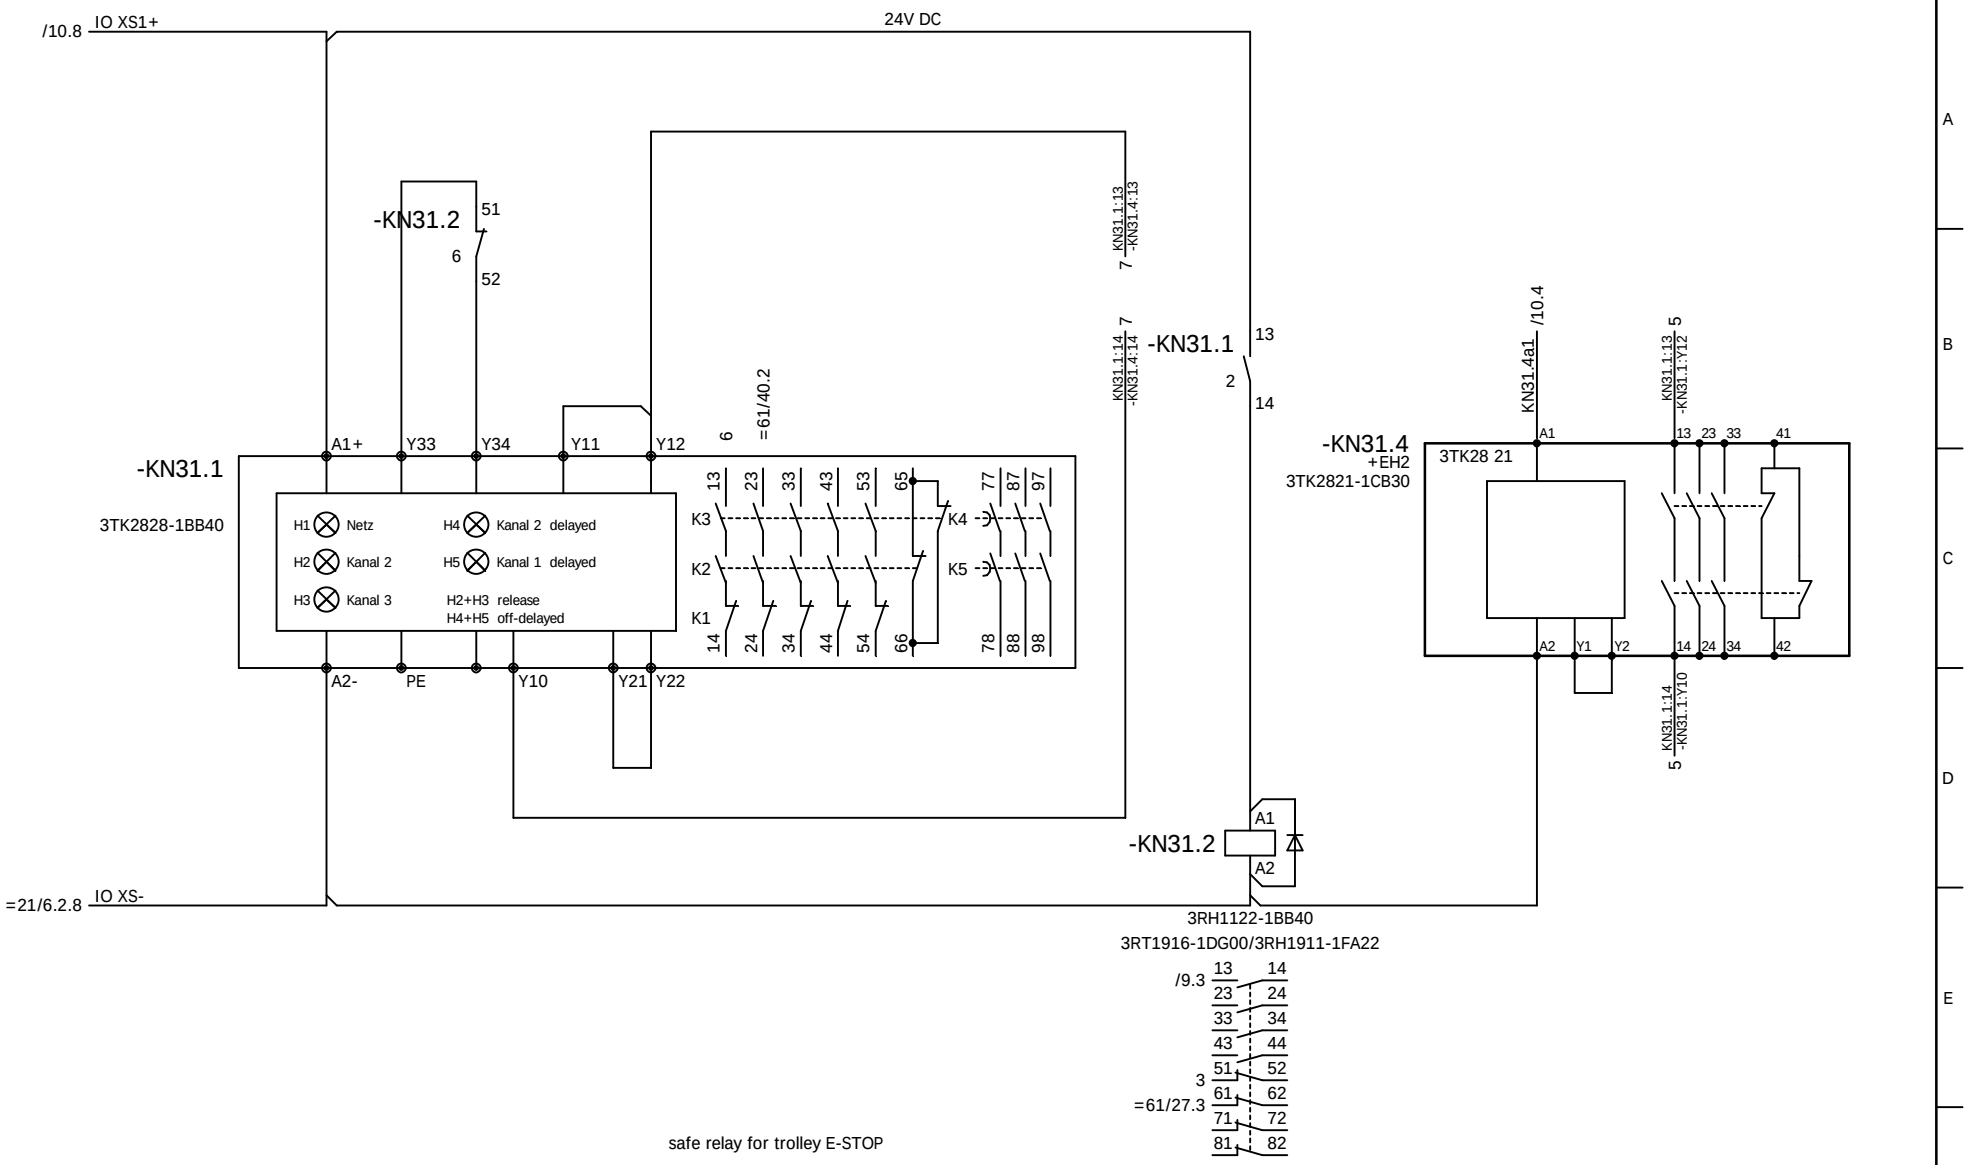

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=31 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	trolley travelling, control Stromlaufplan / Circuit Diagram		Sheet 11 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

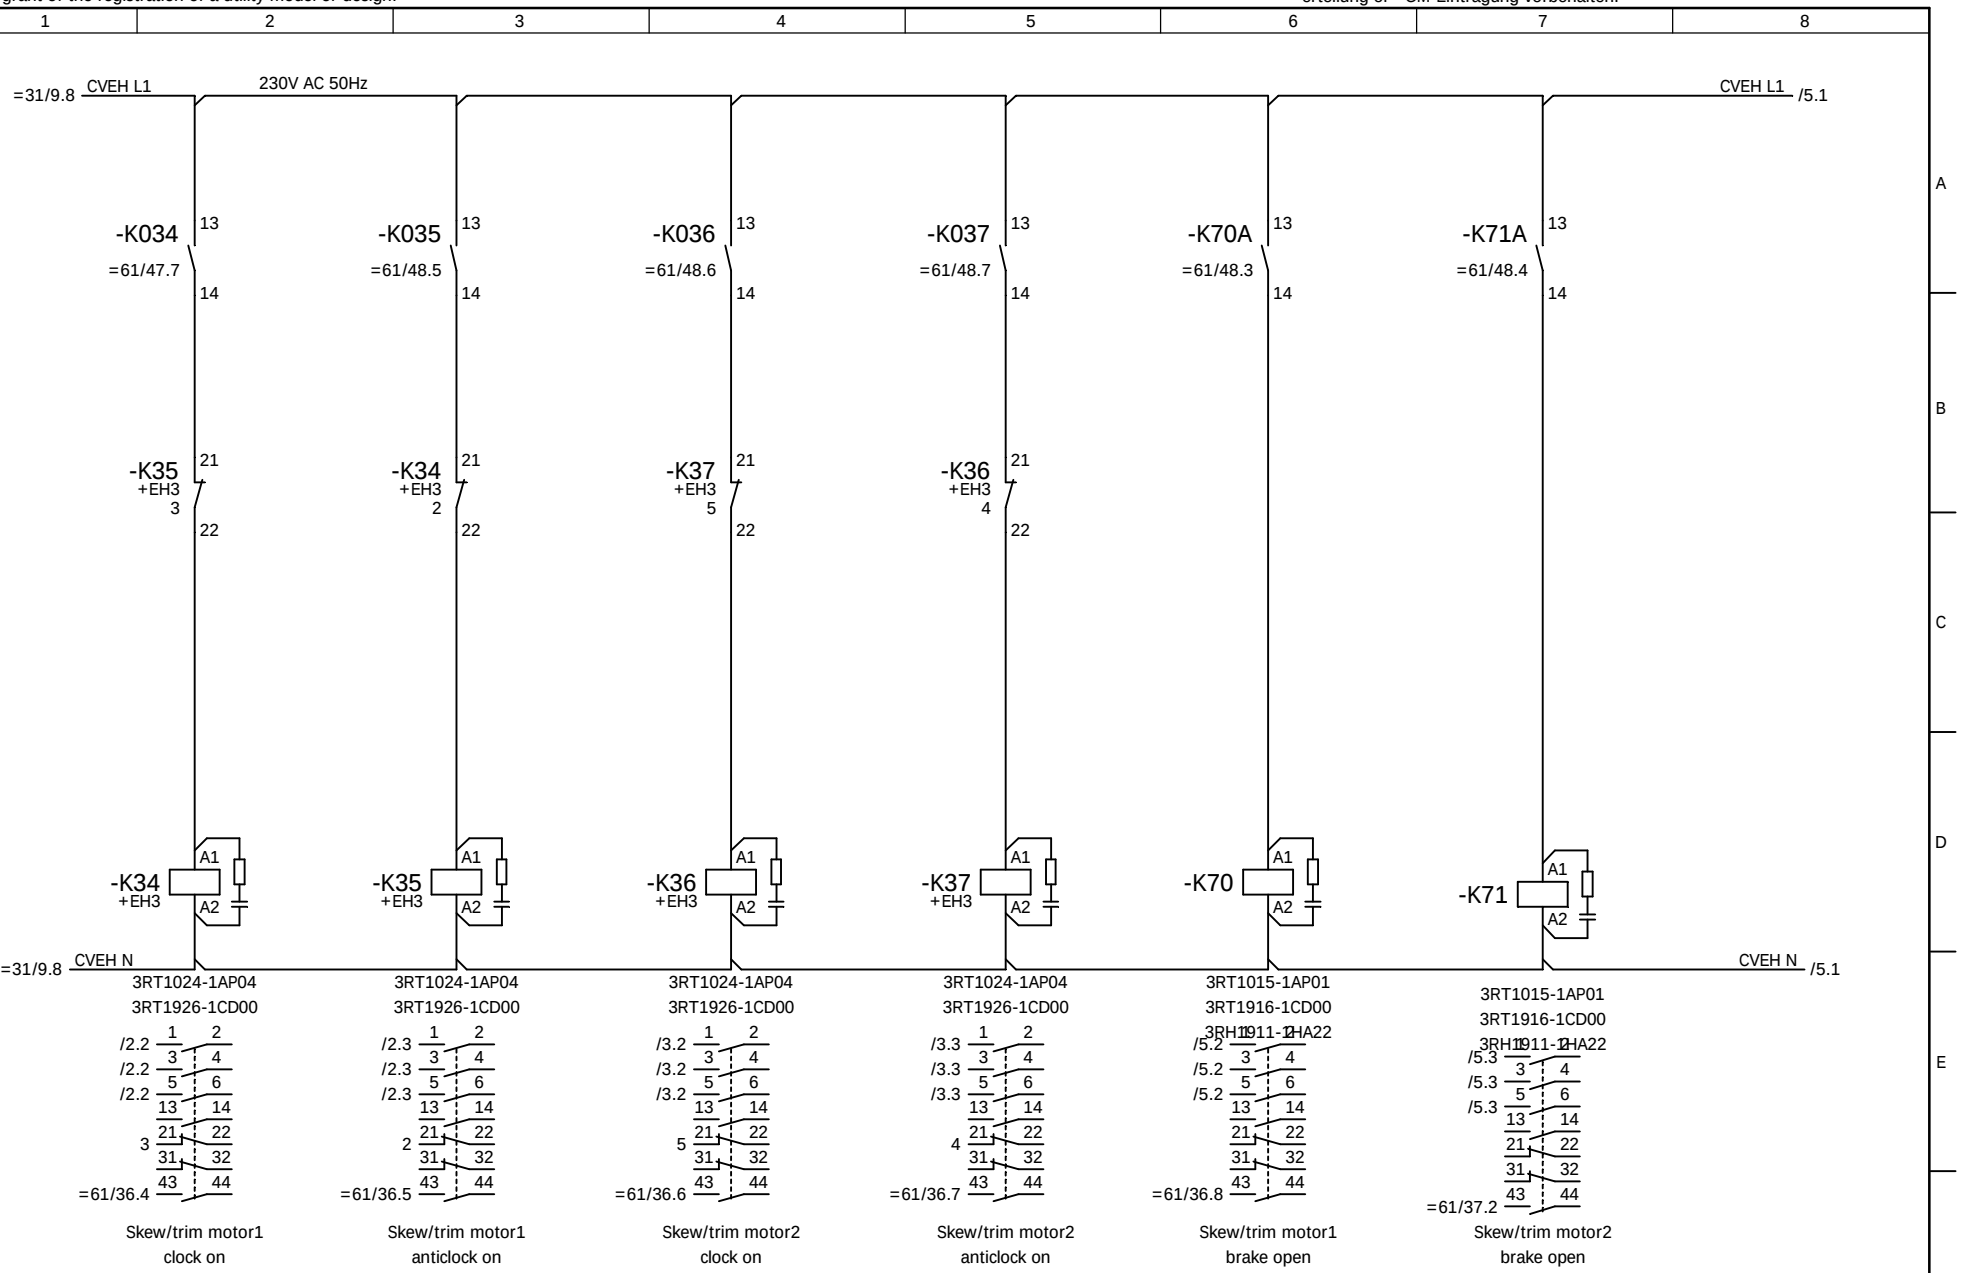

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL

Skew/trim system on trolley


Stromlaufplan / Circuit Diagram

=34
+EH2

Sheet 1
5 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

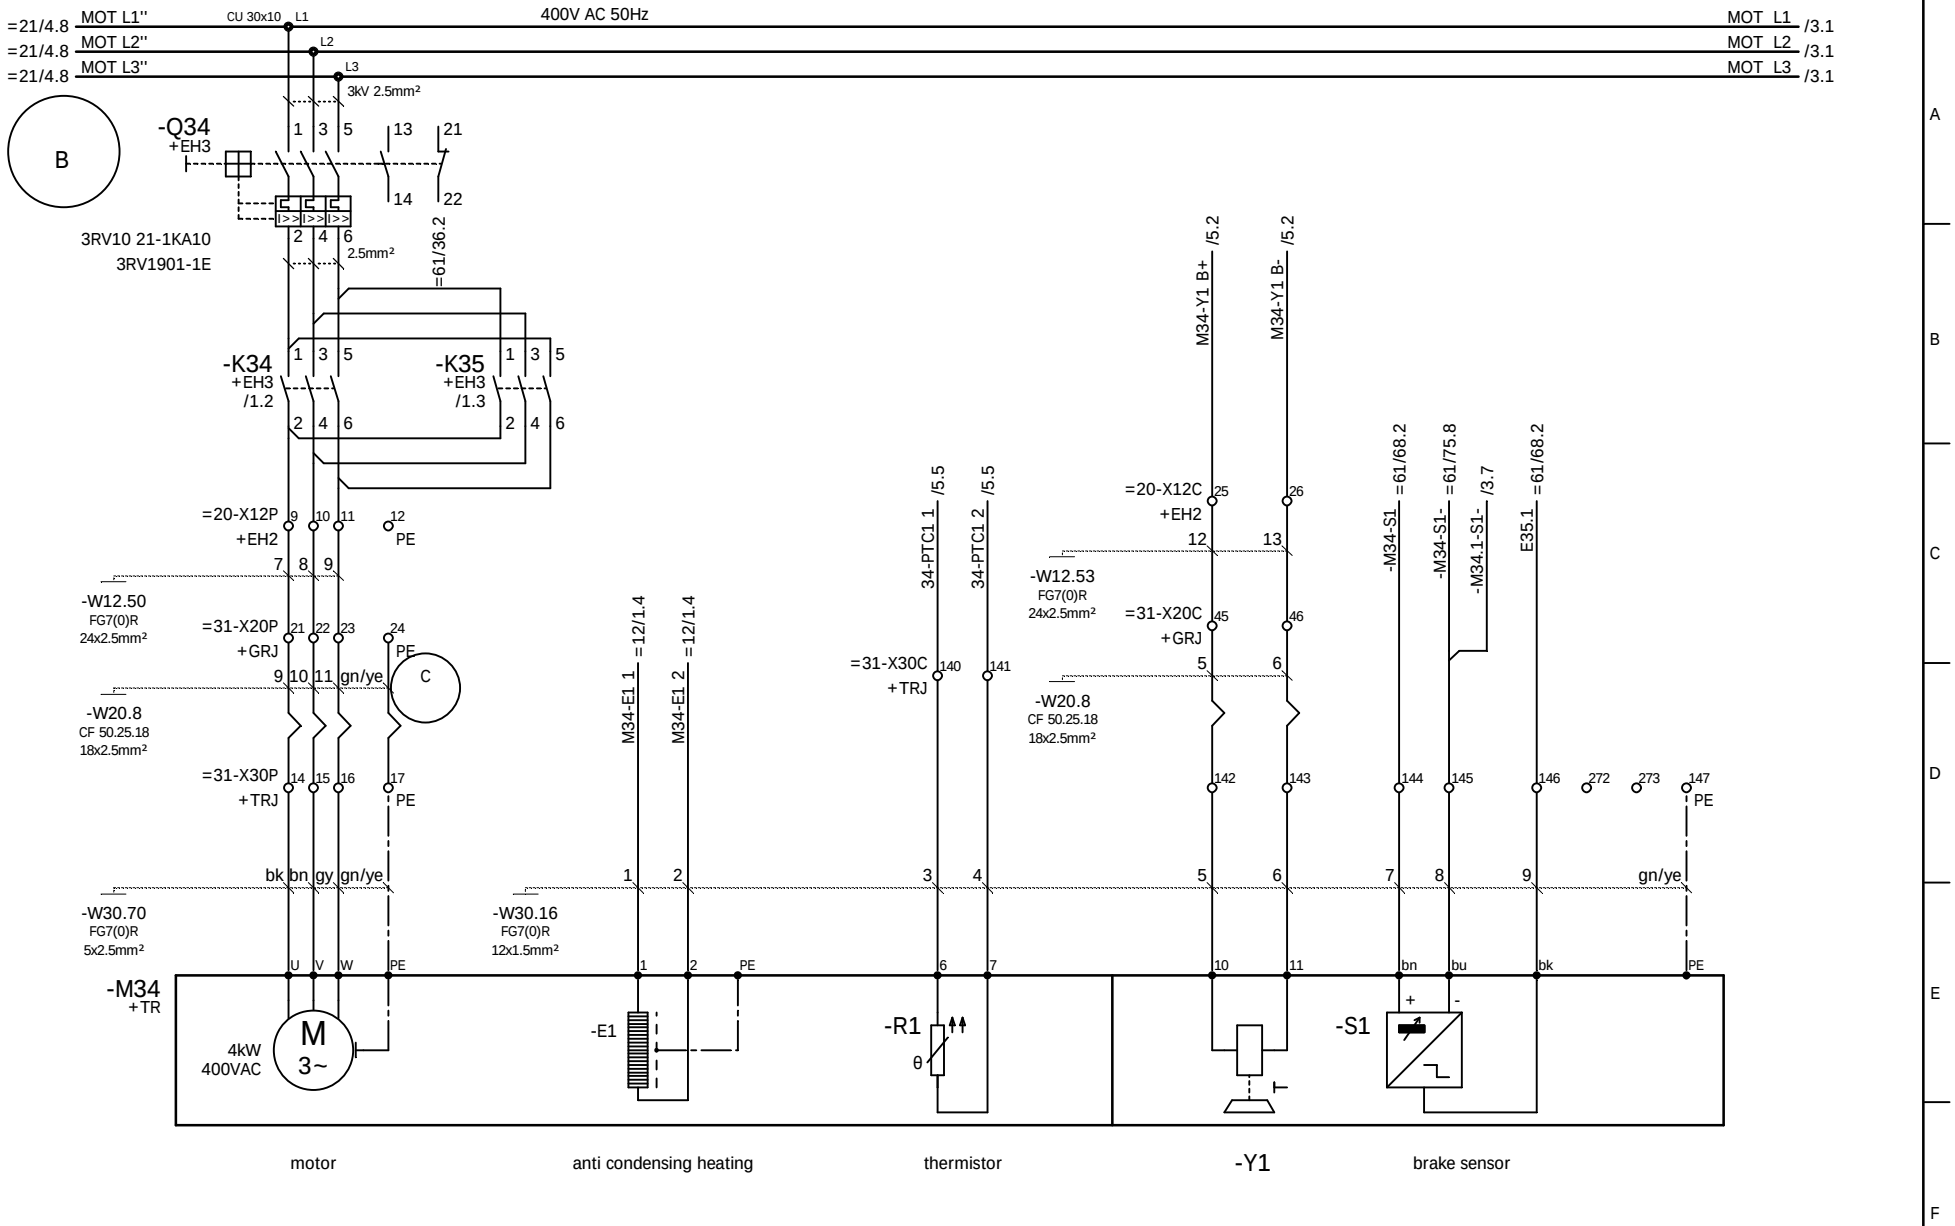

				Date		Costumer	AMPT Egypt	NOELL	Skew/trim system motor 1	Type RTG 50/26.50/5+1/AC	=34
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+TRJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2
Ind.	Revision	Date	Name	Standard		Source:						5 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

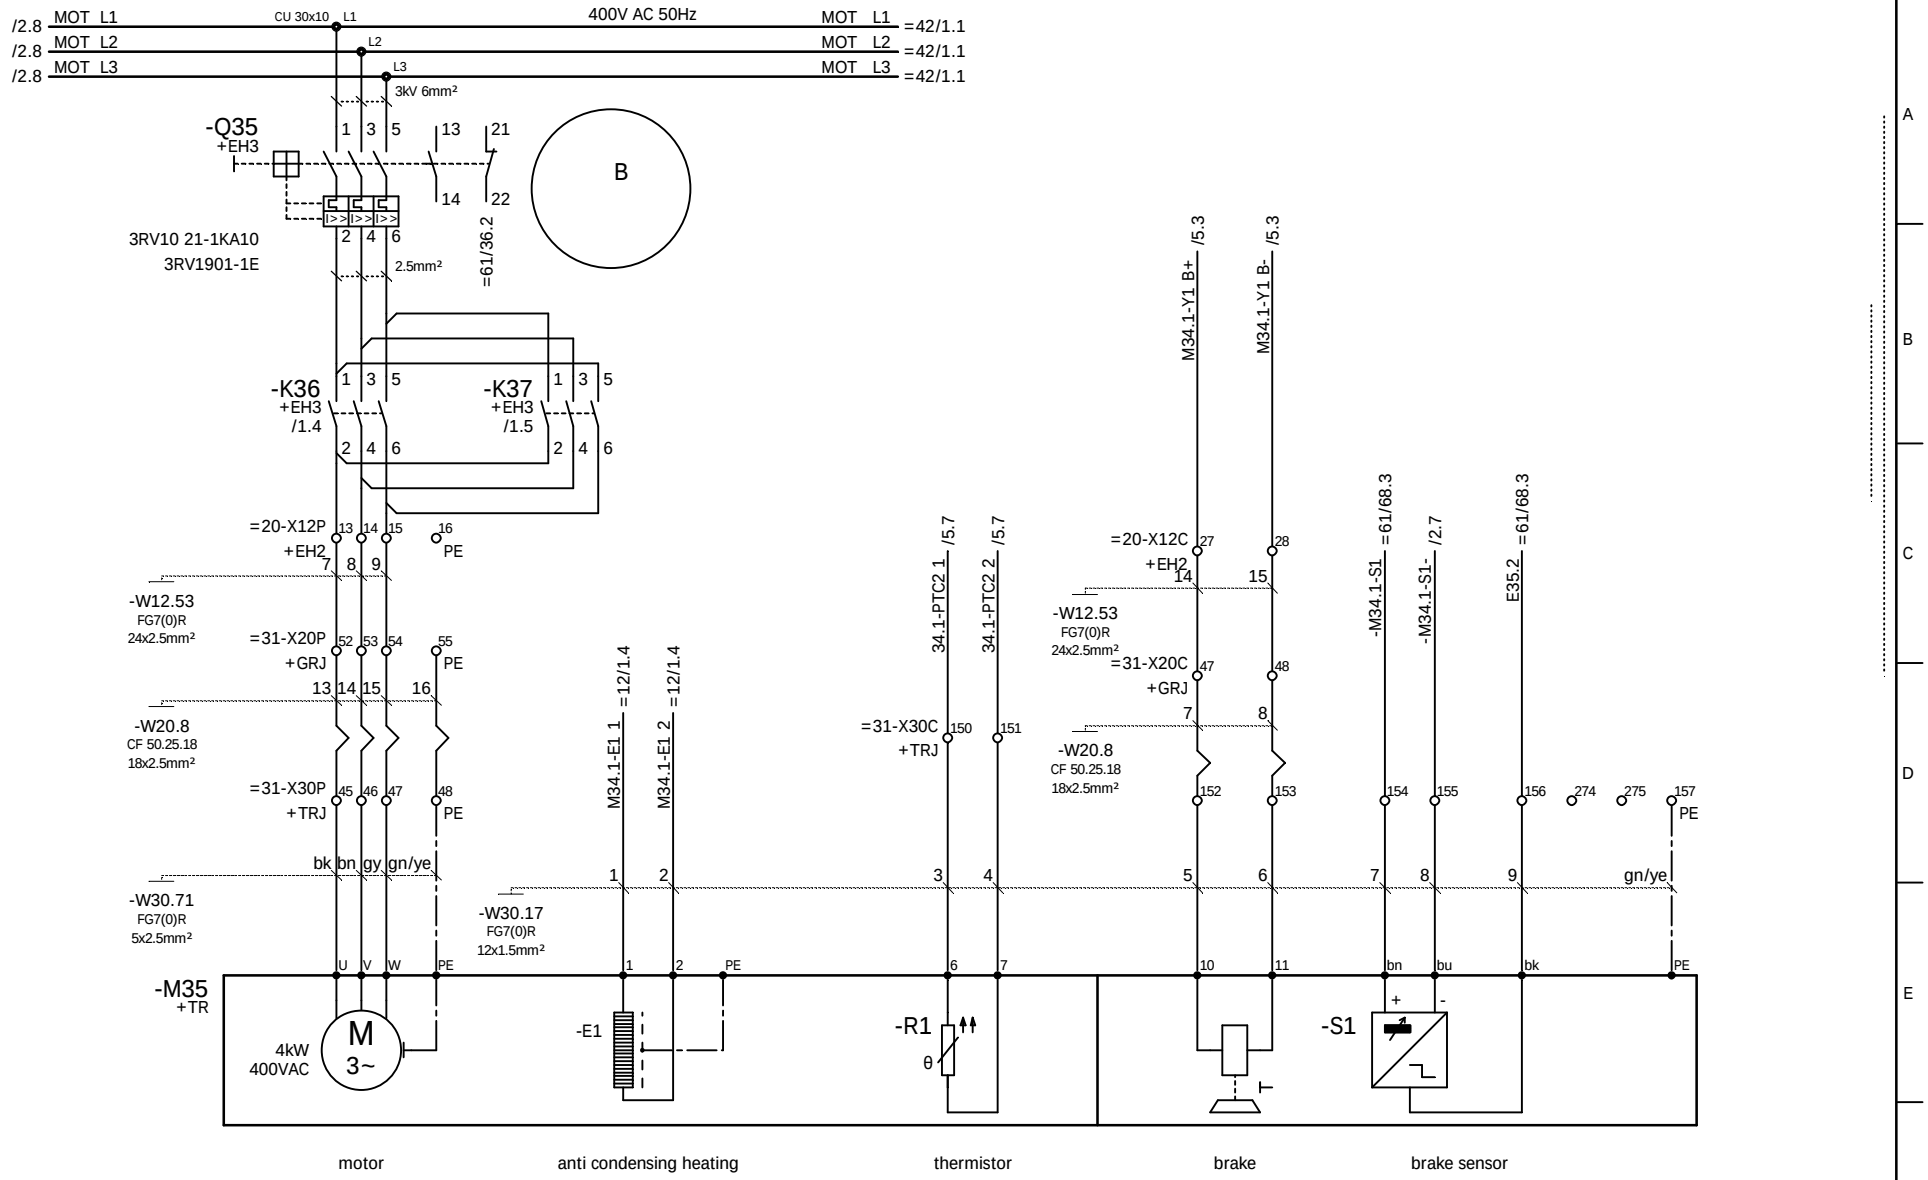

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=34 +TR
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 3 5 Sh.


NOELL

Skew/trim system motor 2

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

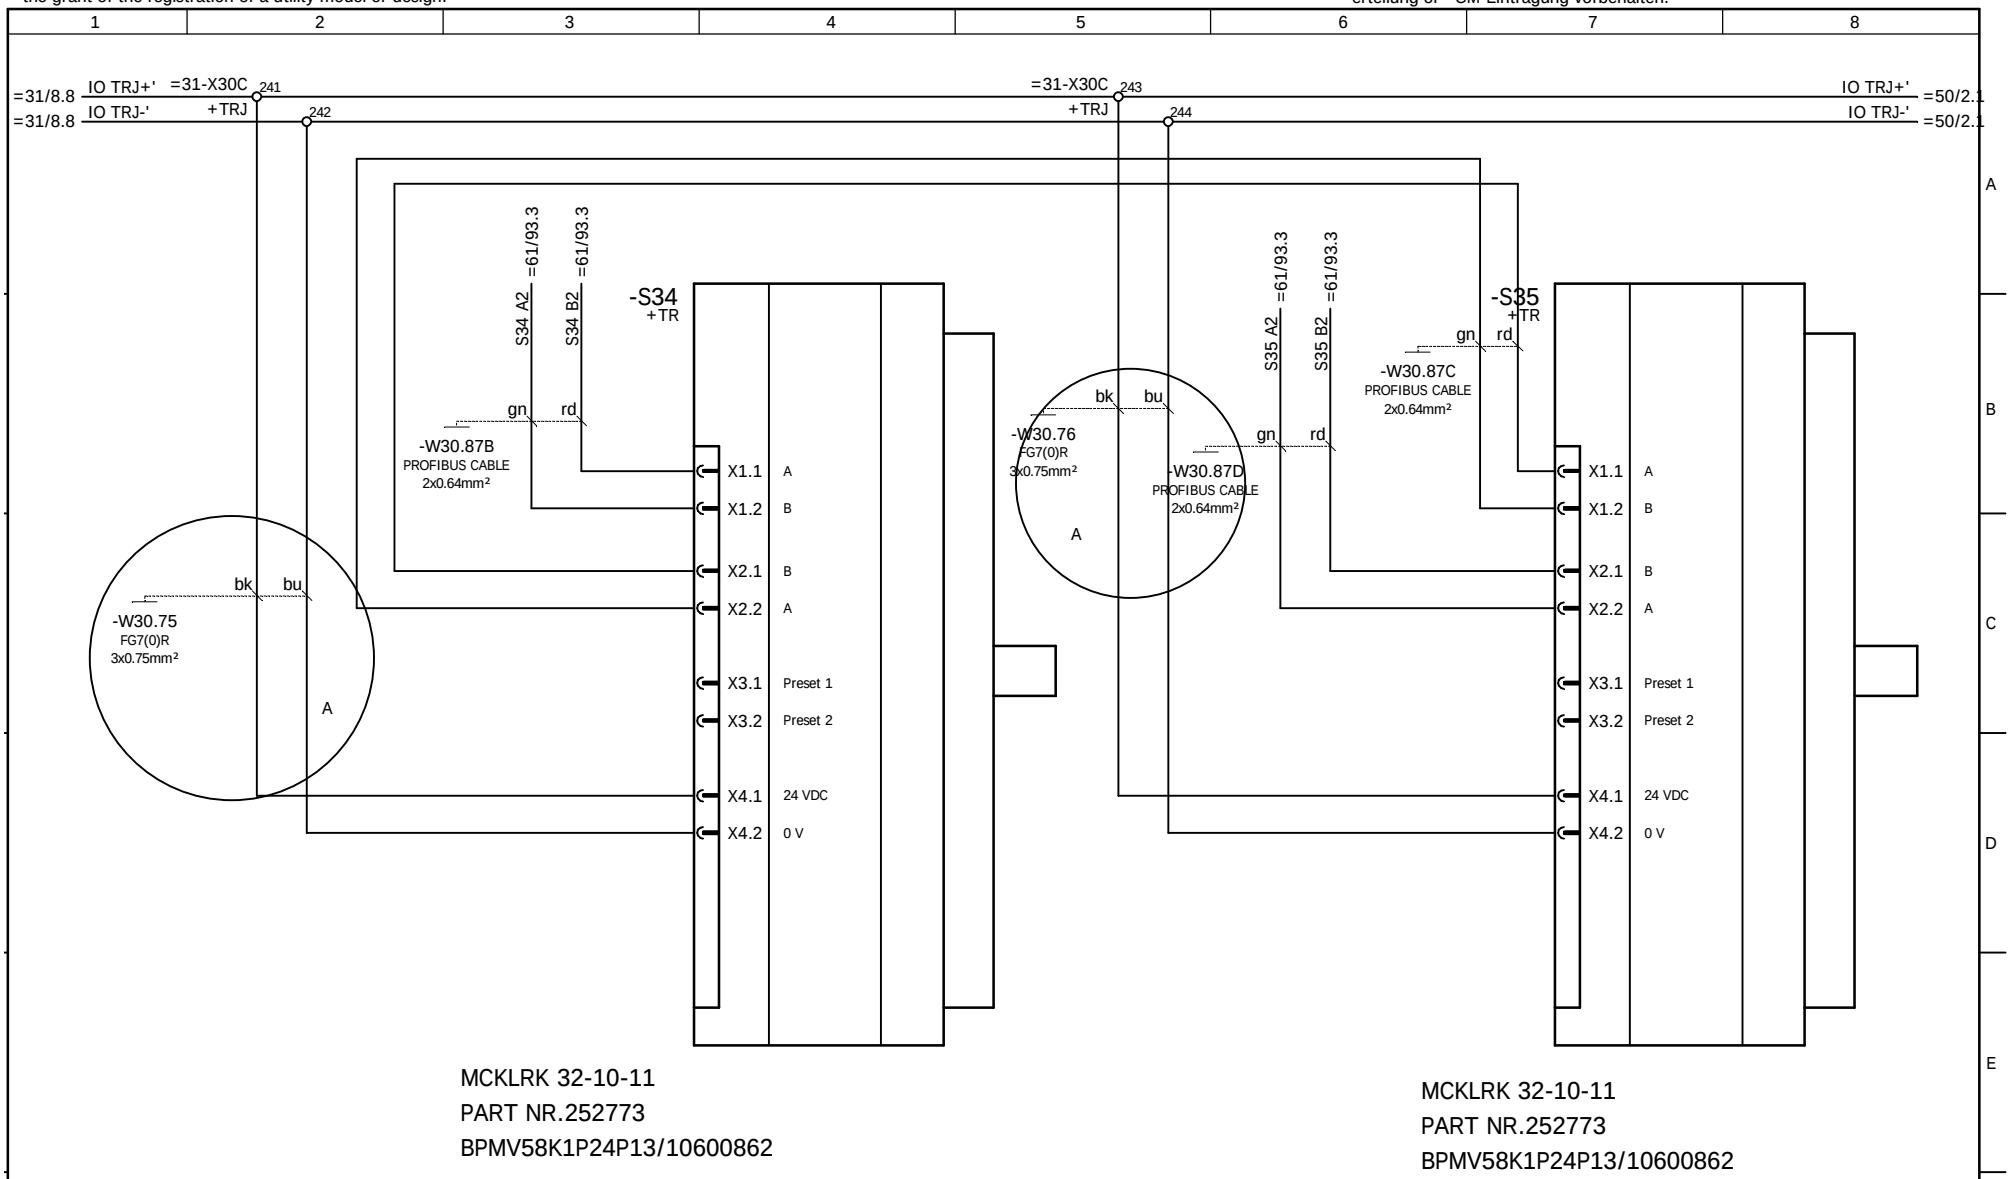

				Date		Costumer	AMPT Egypt	Skew/trim Absolute encoder Stromlaufplan / Circuit Diagram	Type RTG 50/26.50/5+1/AC	=34 +TR
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 4 5 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

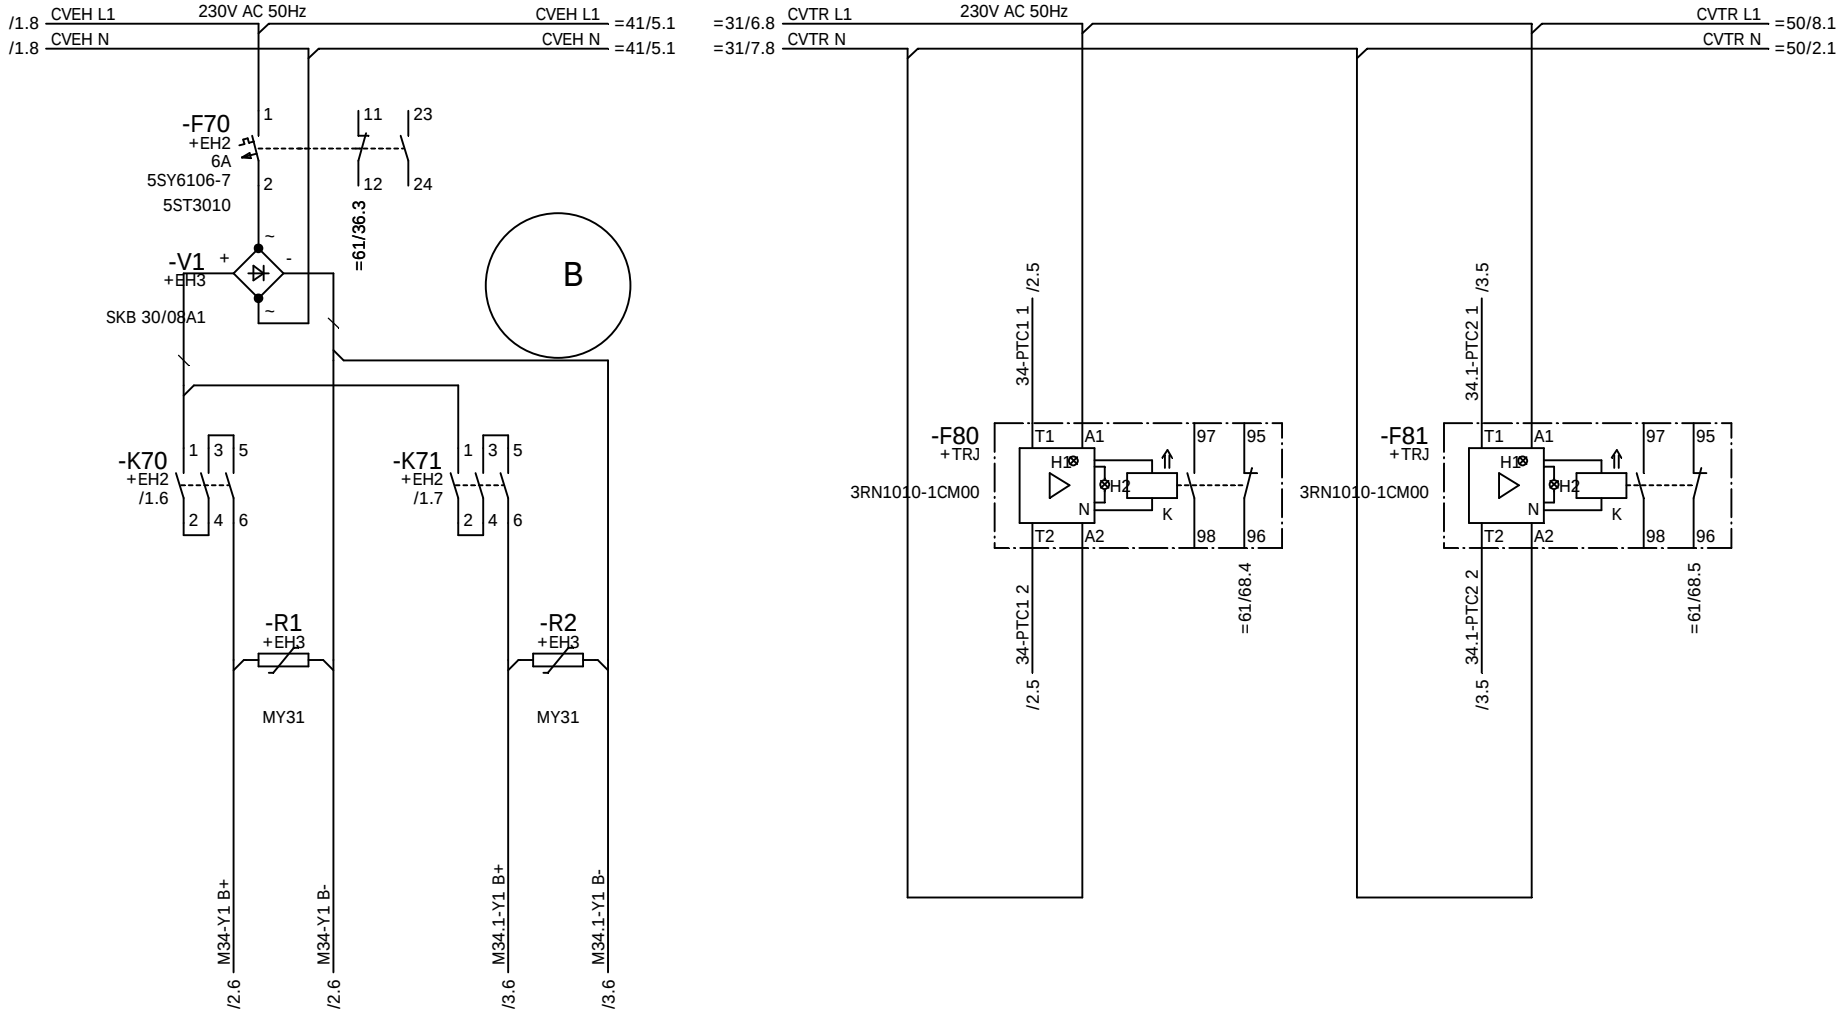

supply brake 1

supply brake 2

overtemperature motor 1

overtemperature motor 2

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL

Skew/trim system control


Stromlaufplan / Circuit Diagram

=34
+TR

Sheet 5
5 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

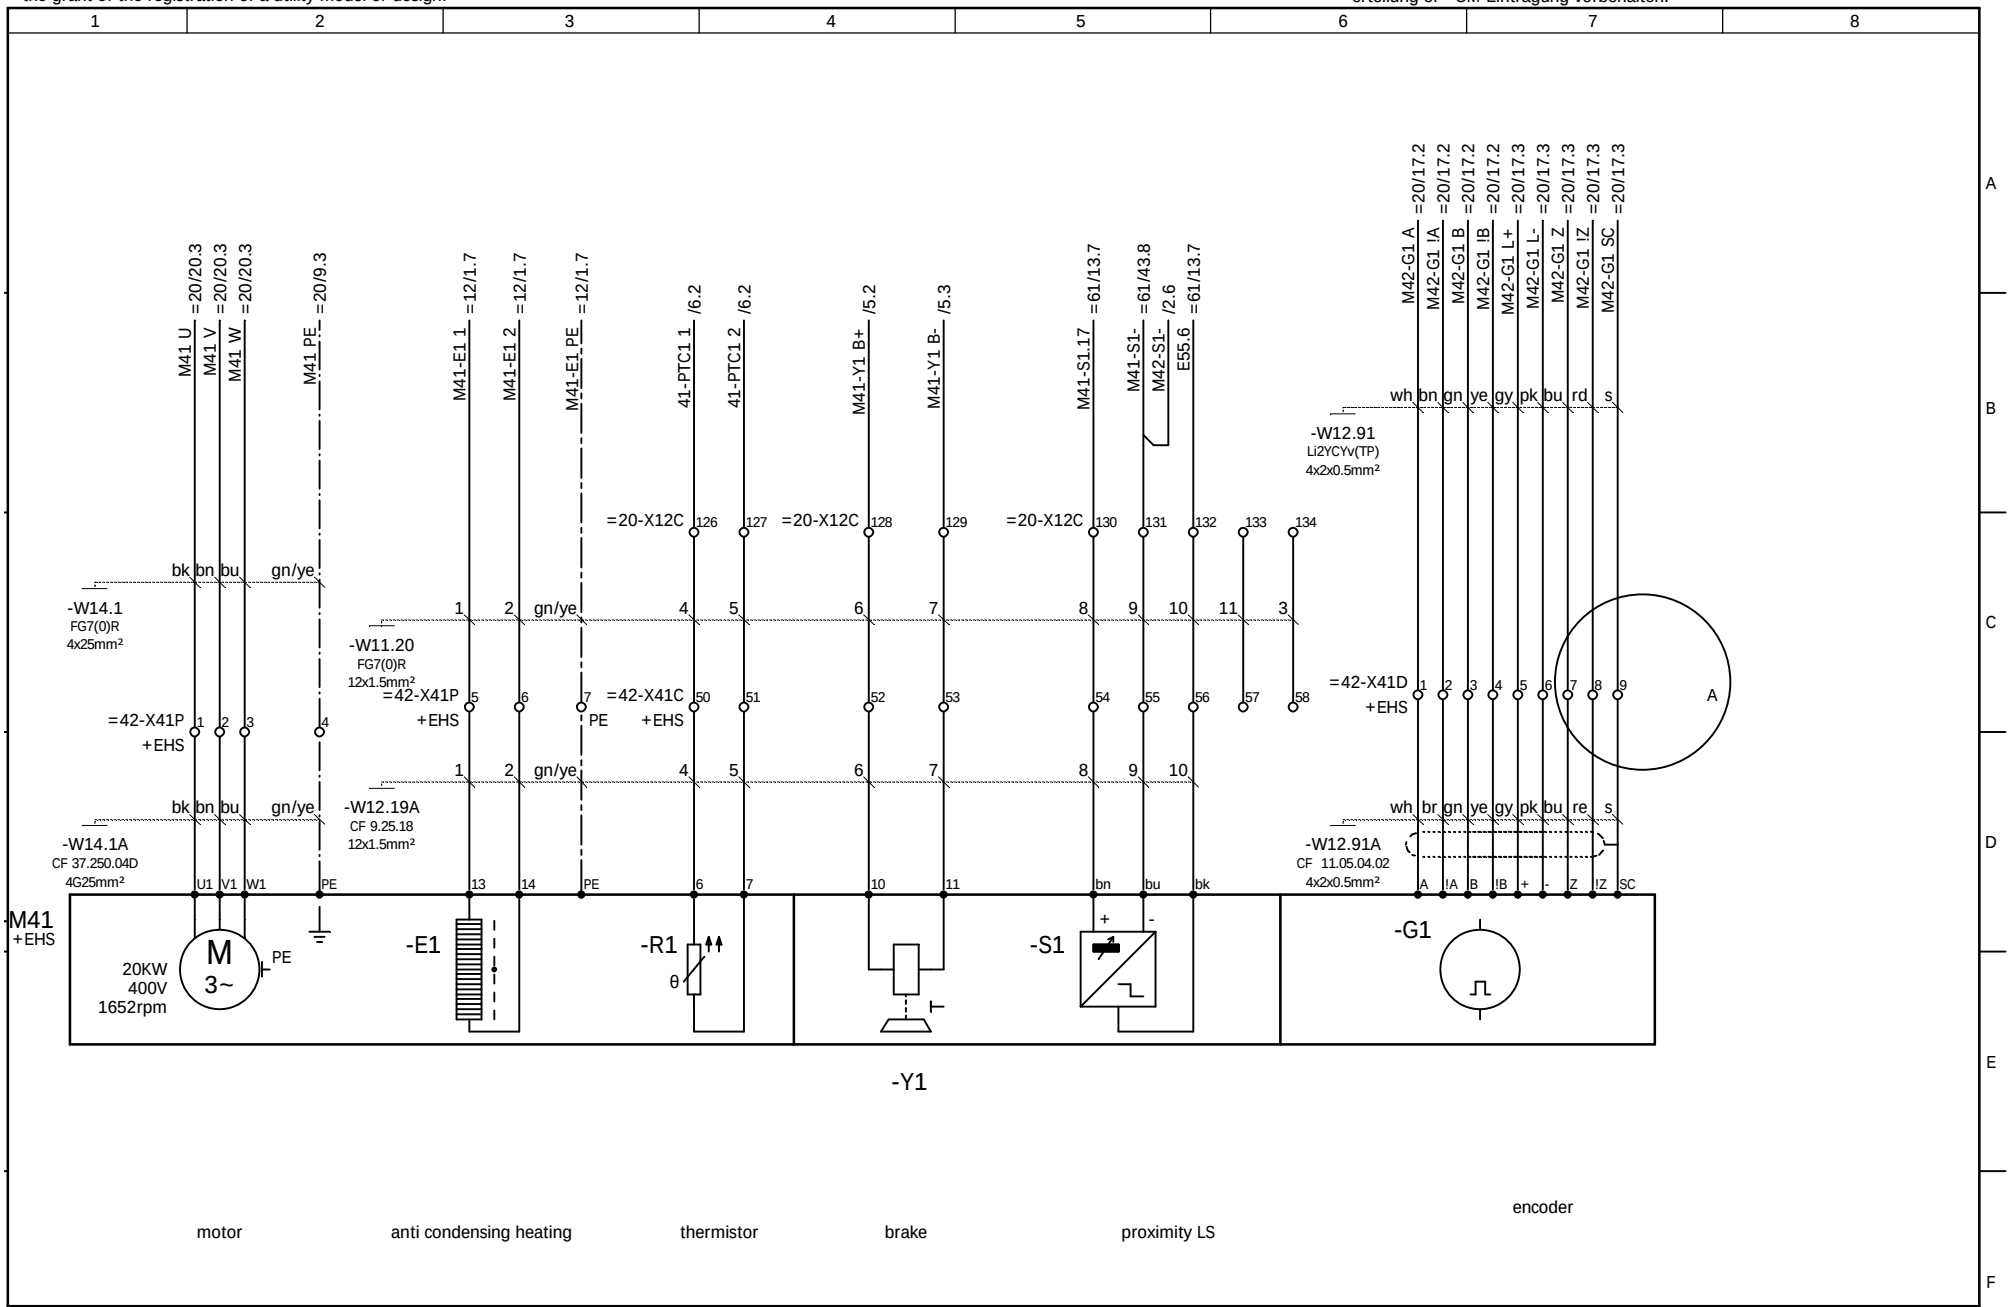

				Date		Costumer	AMPT Egypt	gantry travelling, motor 1 Stromlaufplan / Circuit Diagram	Type RTG 50/26.50/5+1/AC	=41 +EH2
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 1 13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

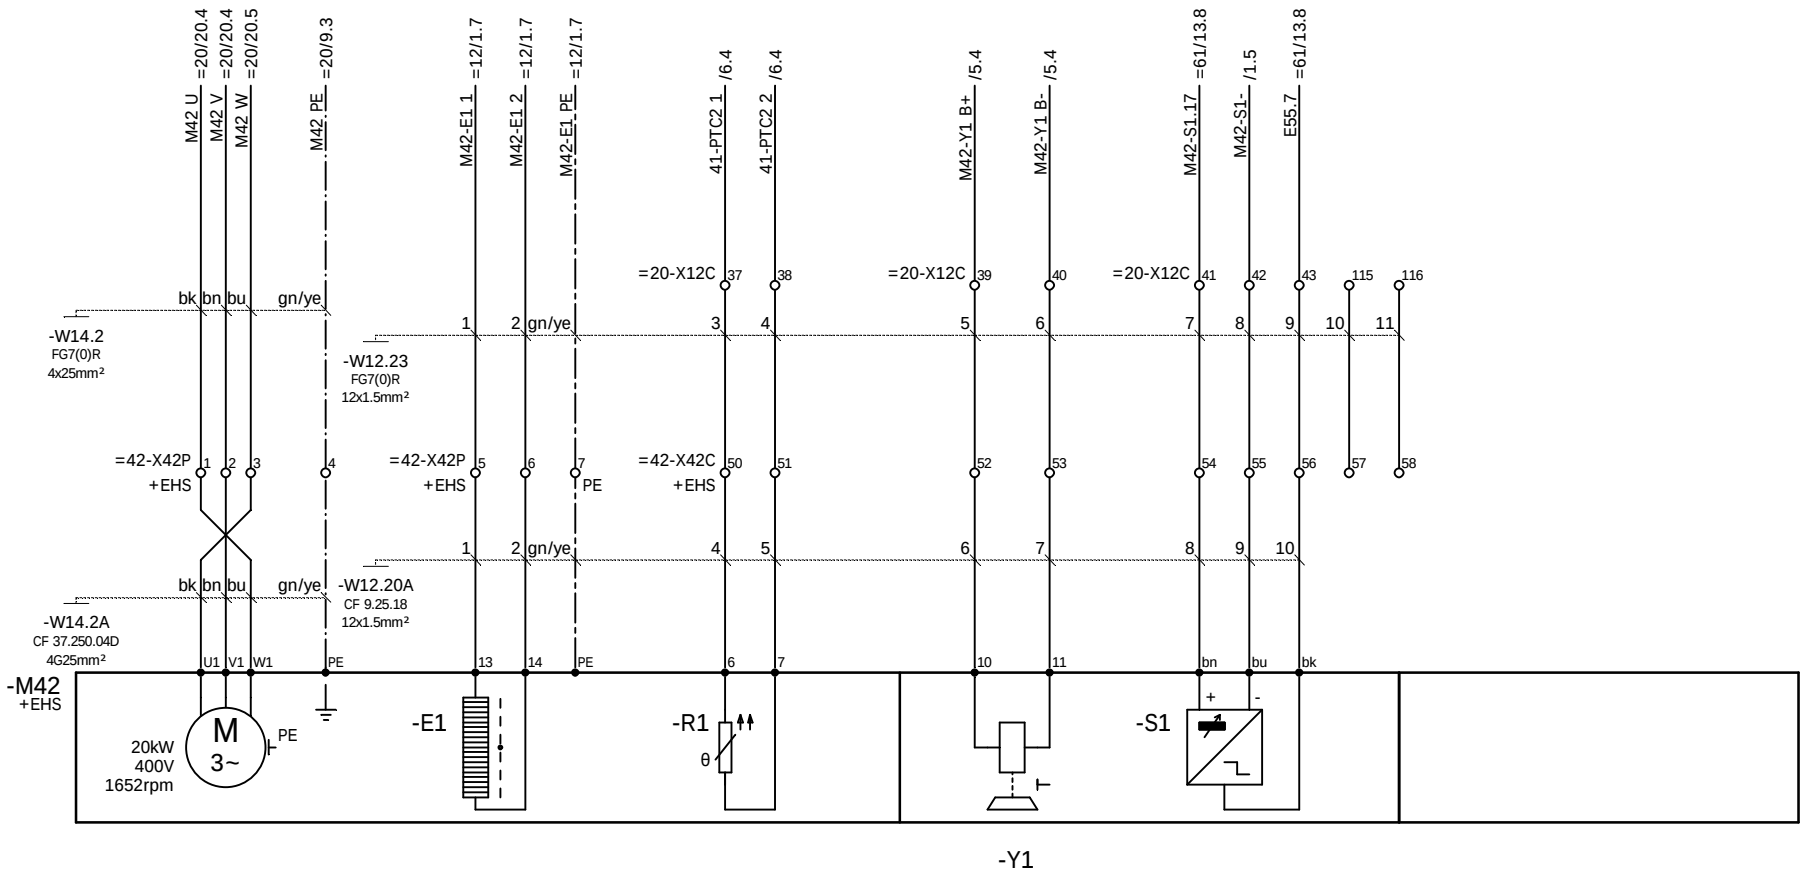


motor | anti condensing heating | thermistor | brake | proximity LS | encoder

				Date		Costumer	AMPT Egypt	NOELL	gantry travelling, motor 2
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=41	+EH2
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	2	13 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

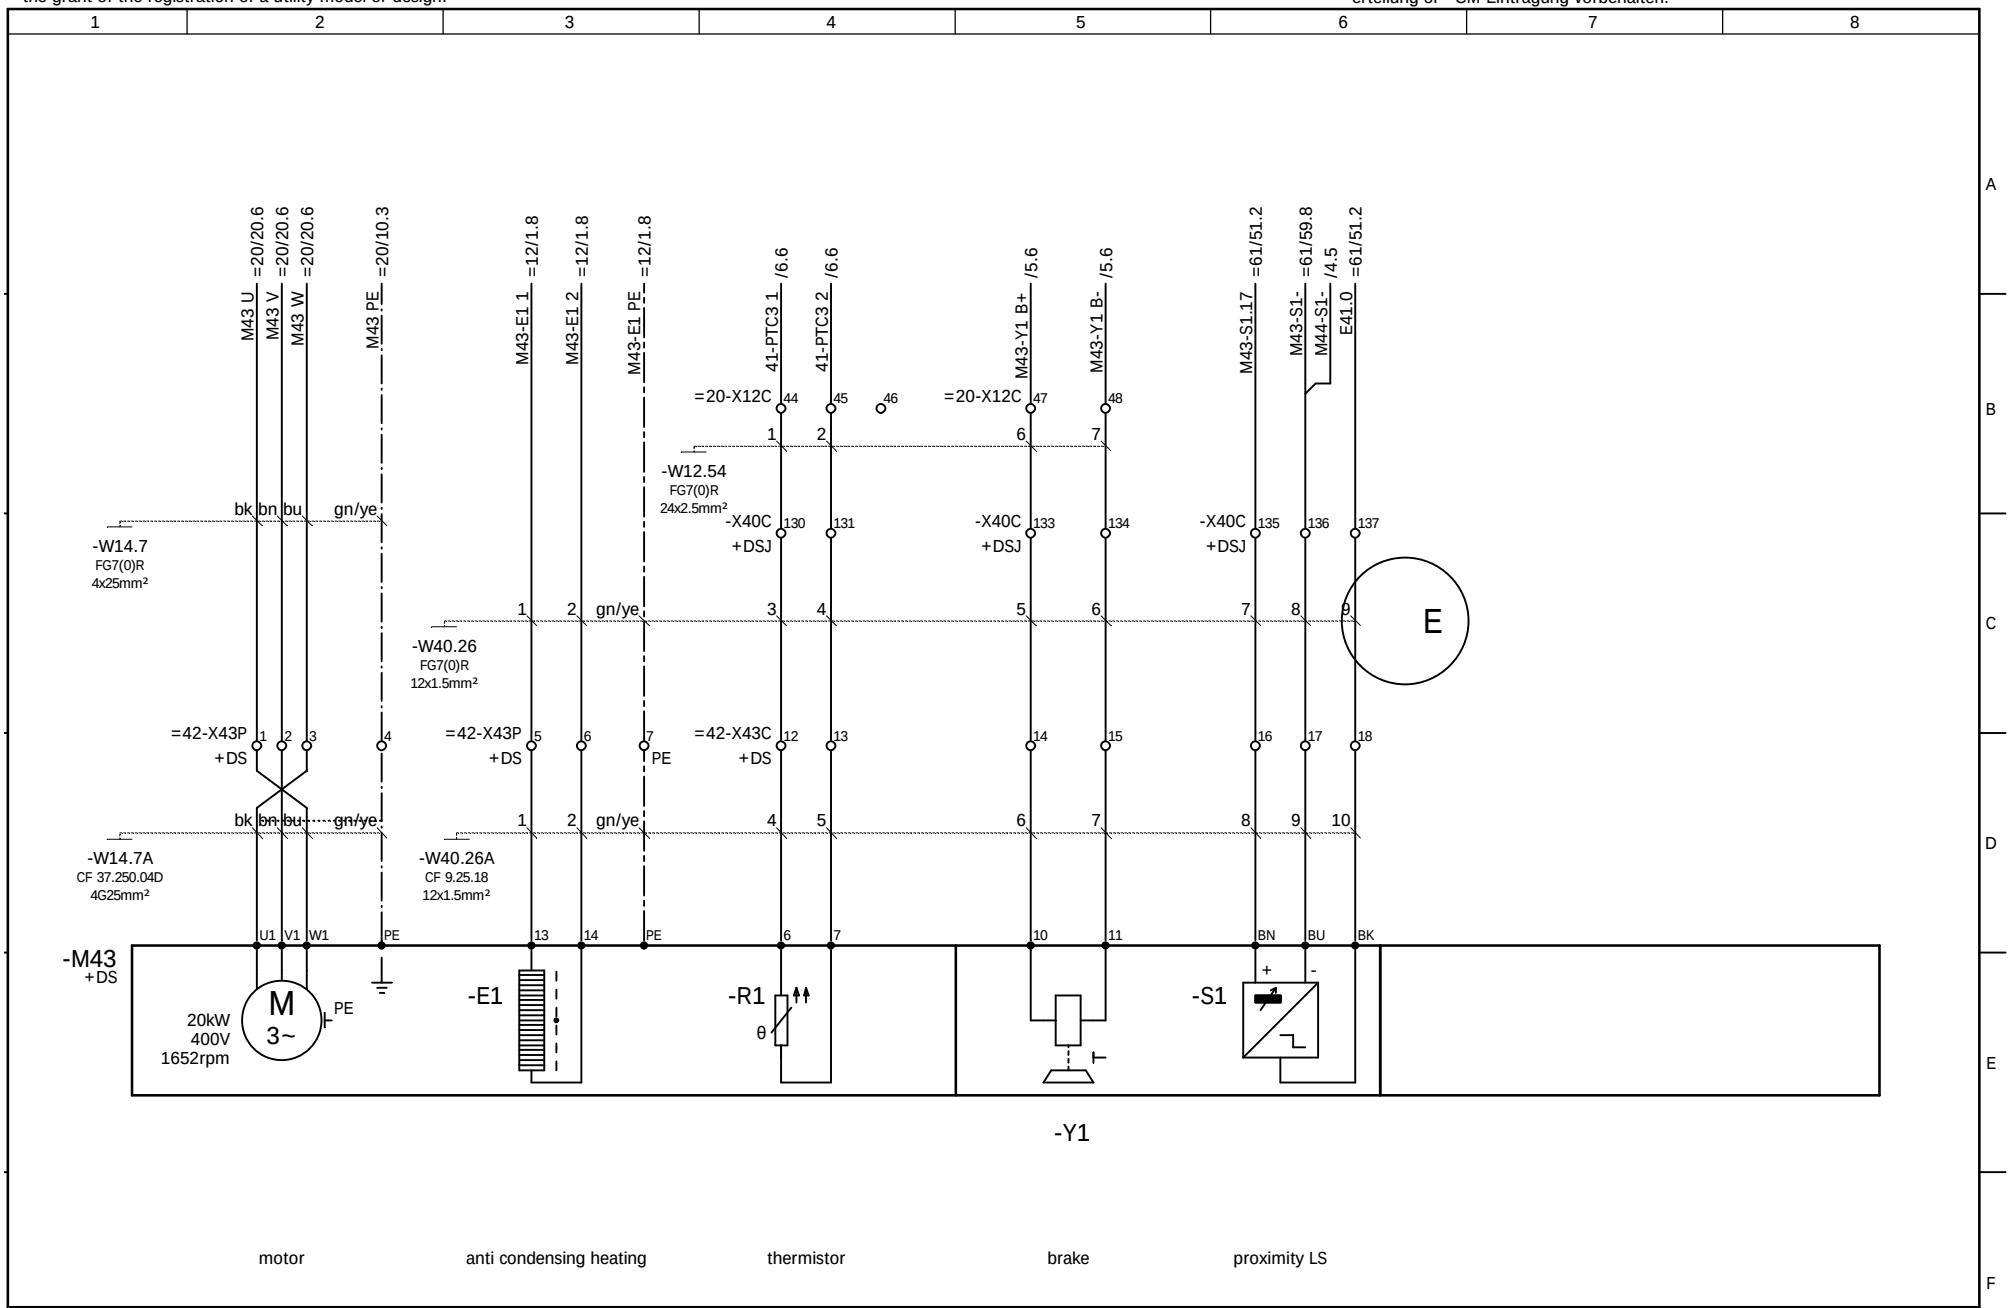

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=41 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 3 13 Sh.


NOELL

gantry travelling, motor 3

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

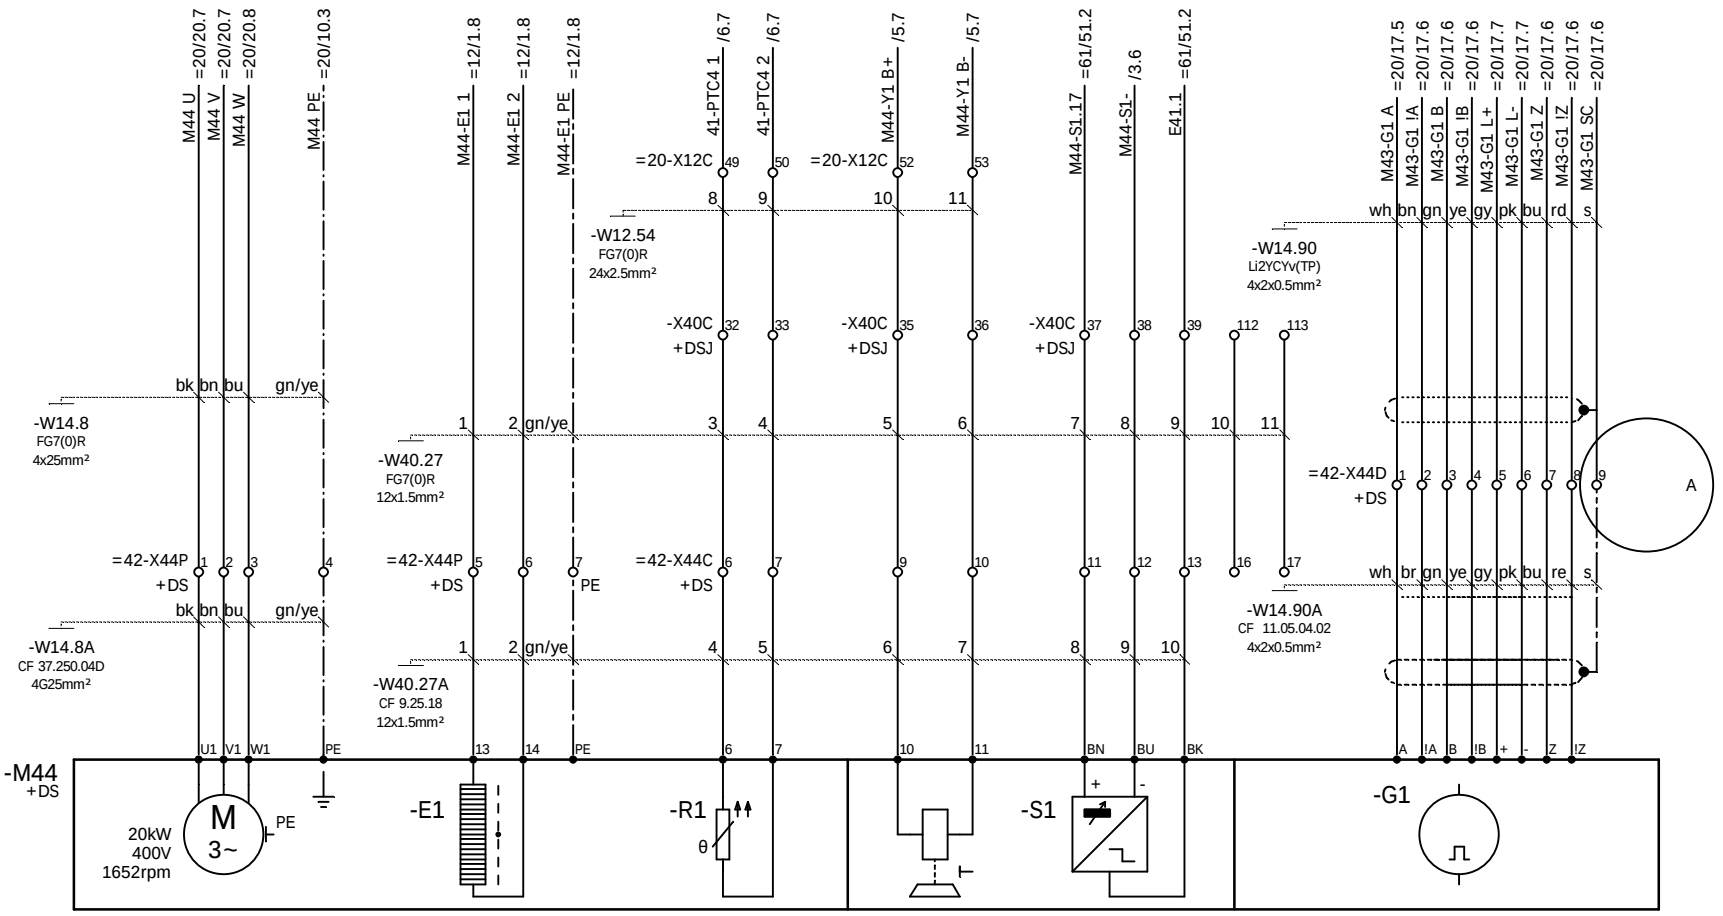

				Date		Costumer	AMPT Egypt	NOELL	gantry travelling, motor 4	Type	RTG 50/26.50/5+1/AC	=41
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 4 / 13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

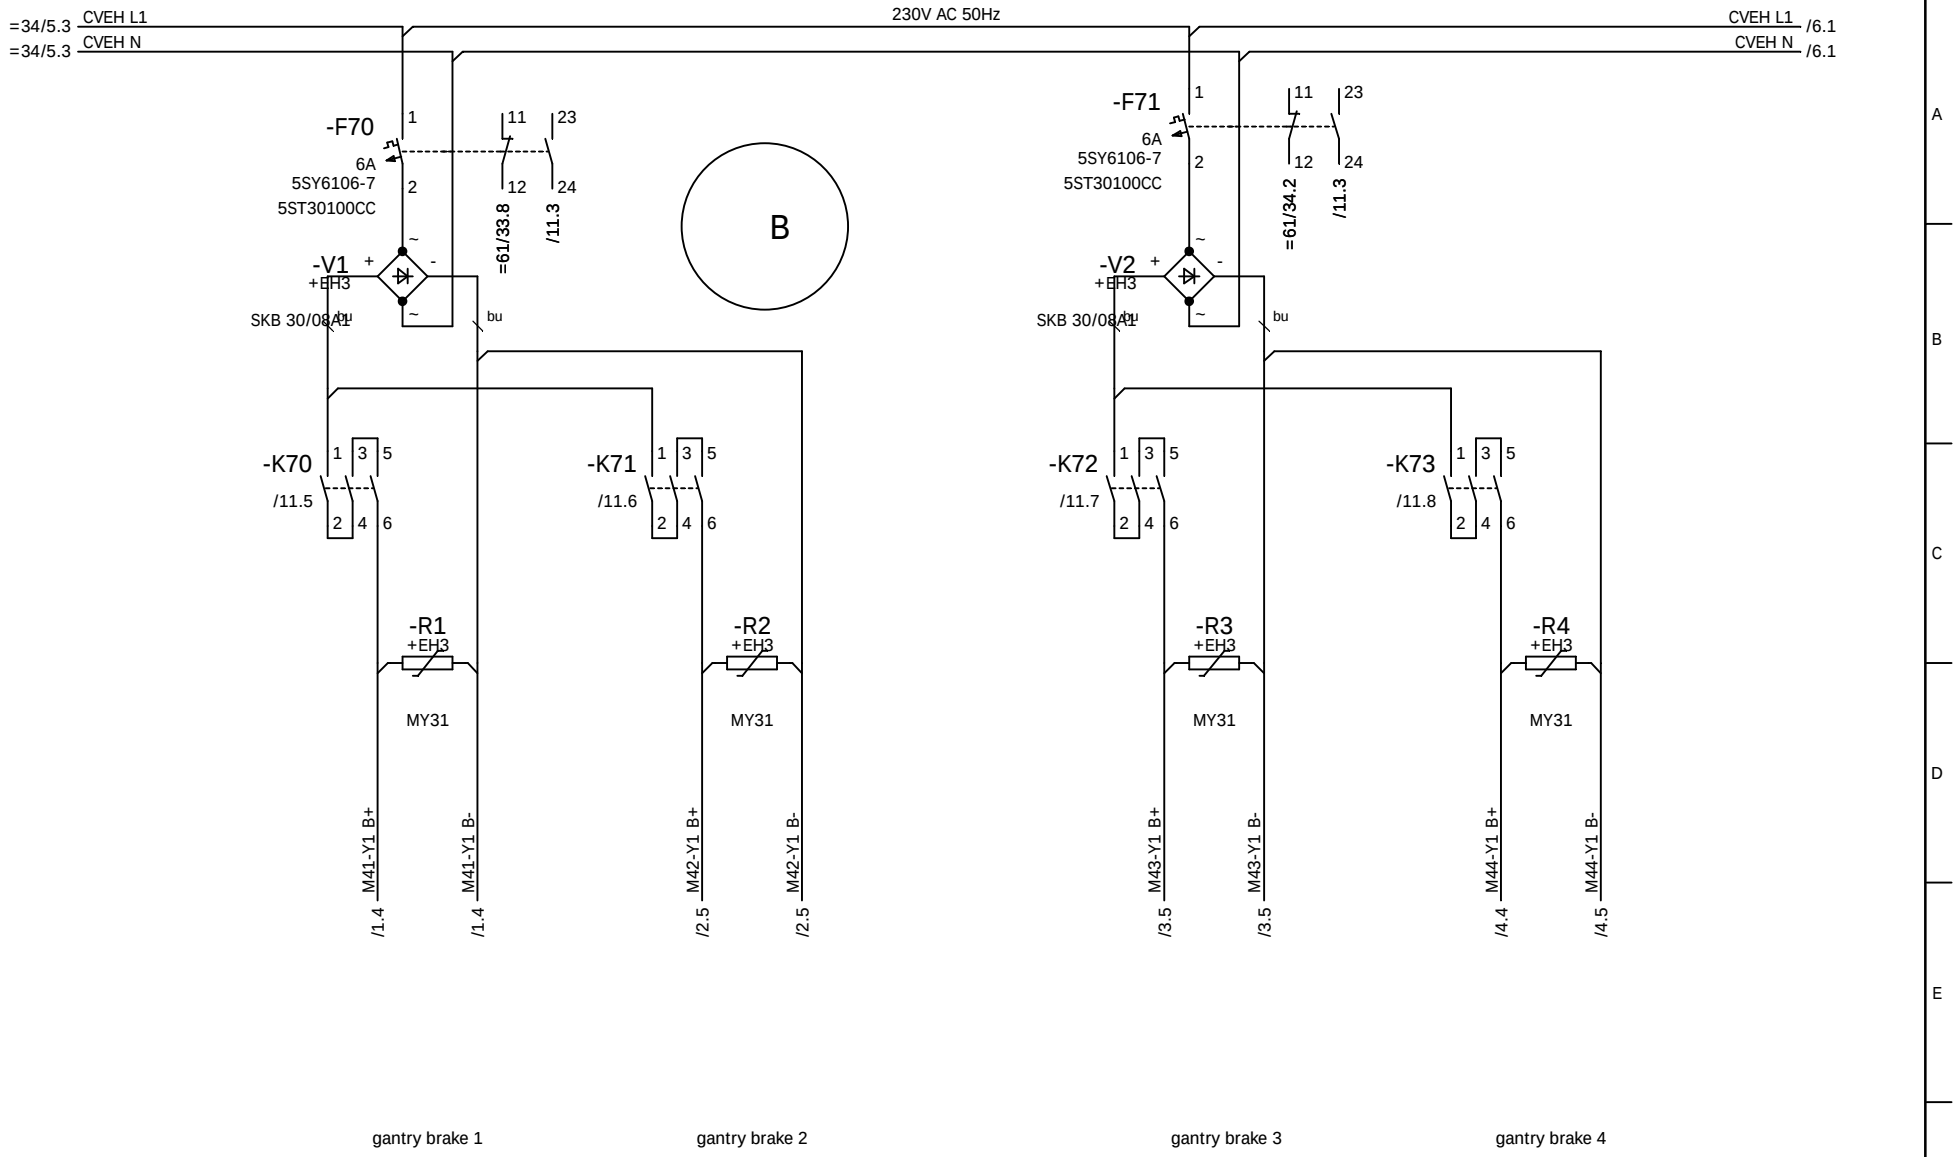


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=41 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 5 13 Sh.

gantry travelling, feeding
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

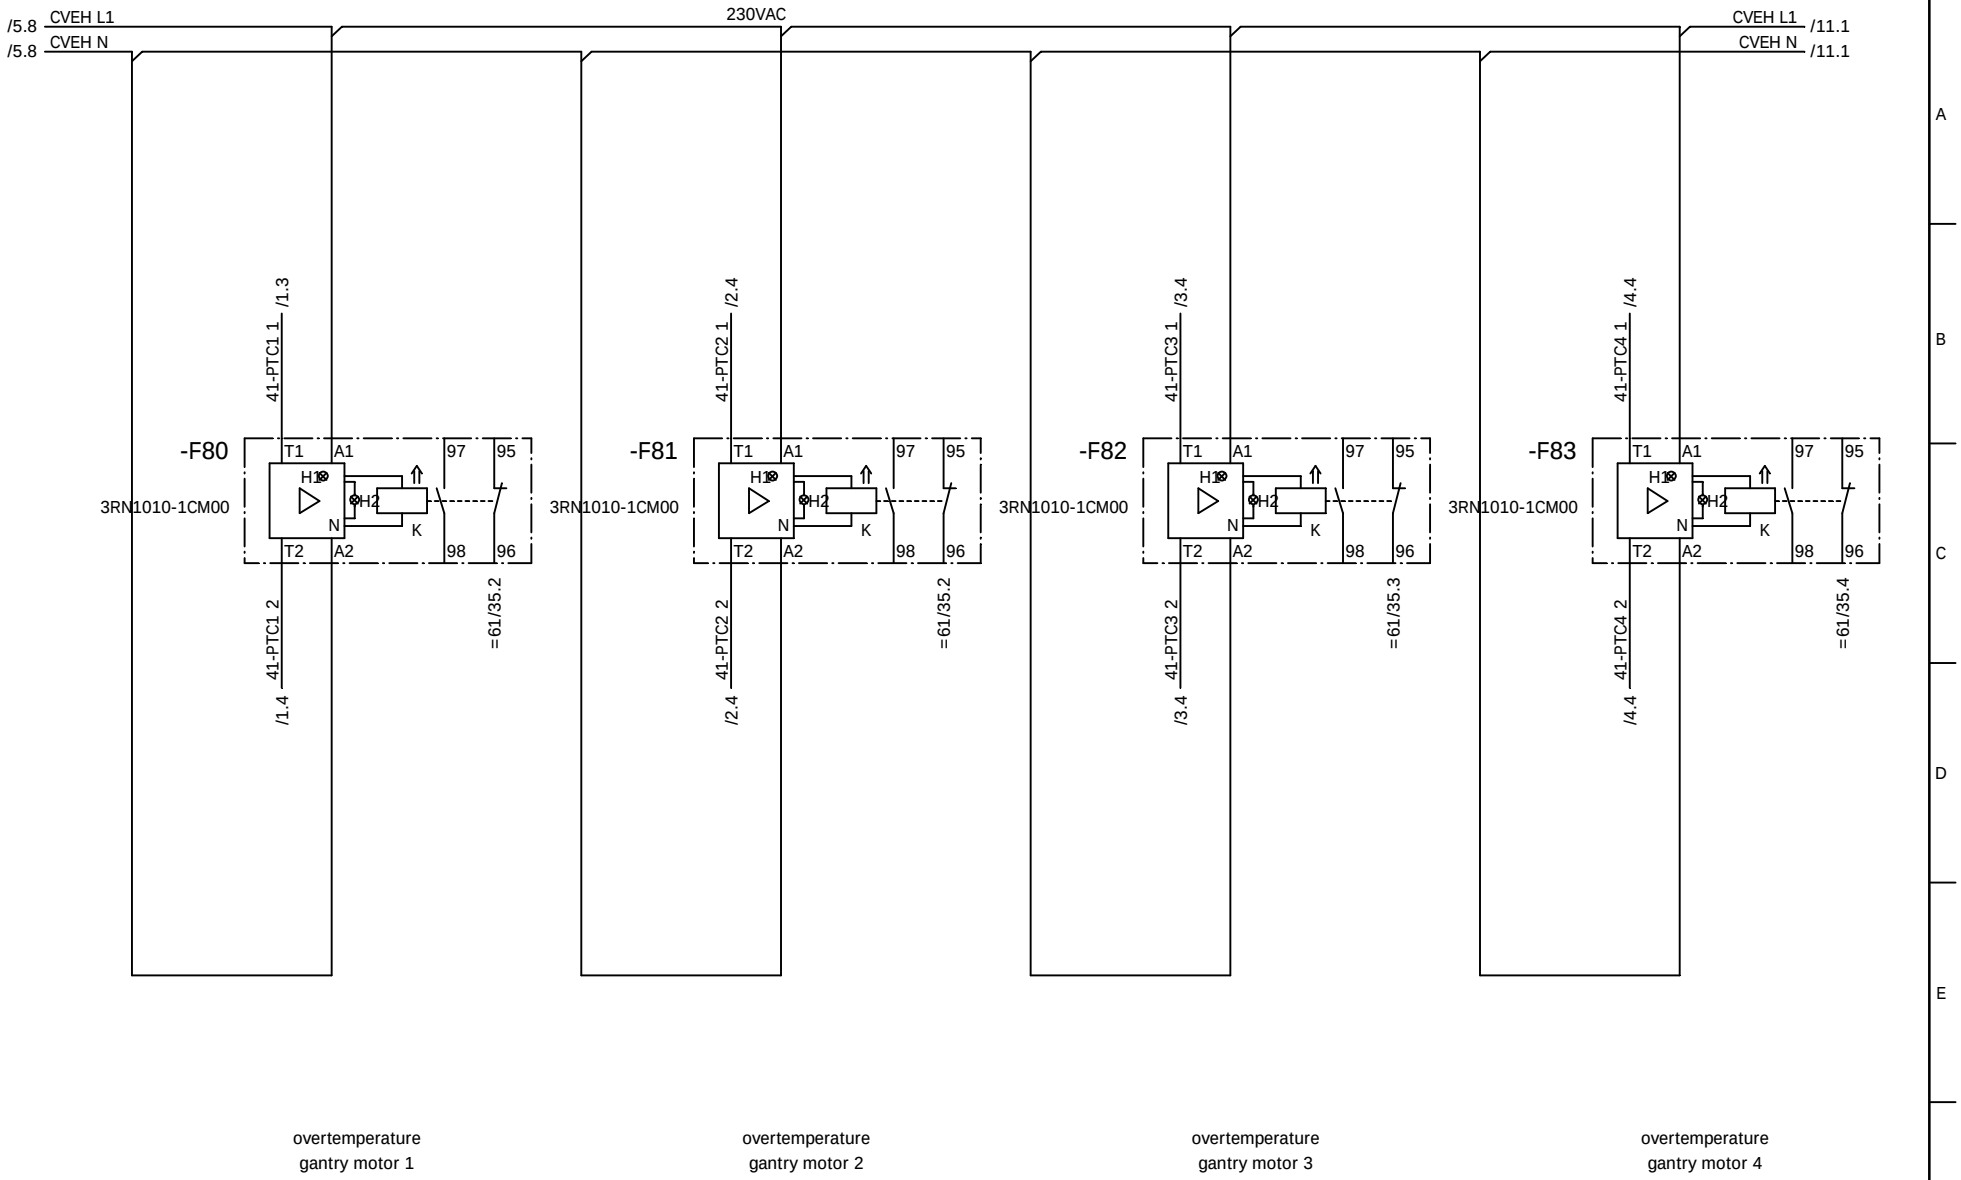

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			

NOELL

gantry travelling motor temperature


Stromlaufplan / Circuit Diagram

=41
+EH2

Sheet 6
13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

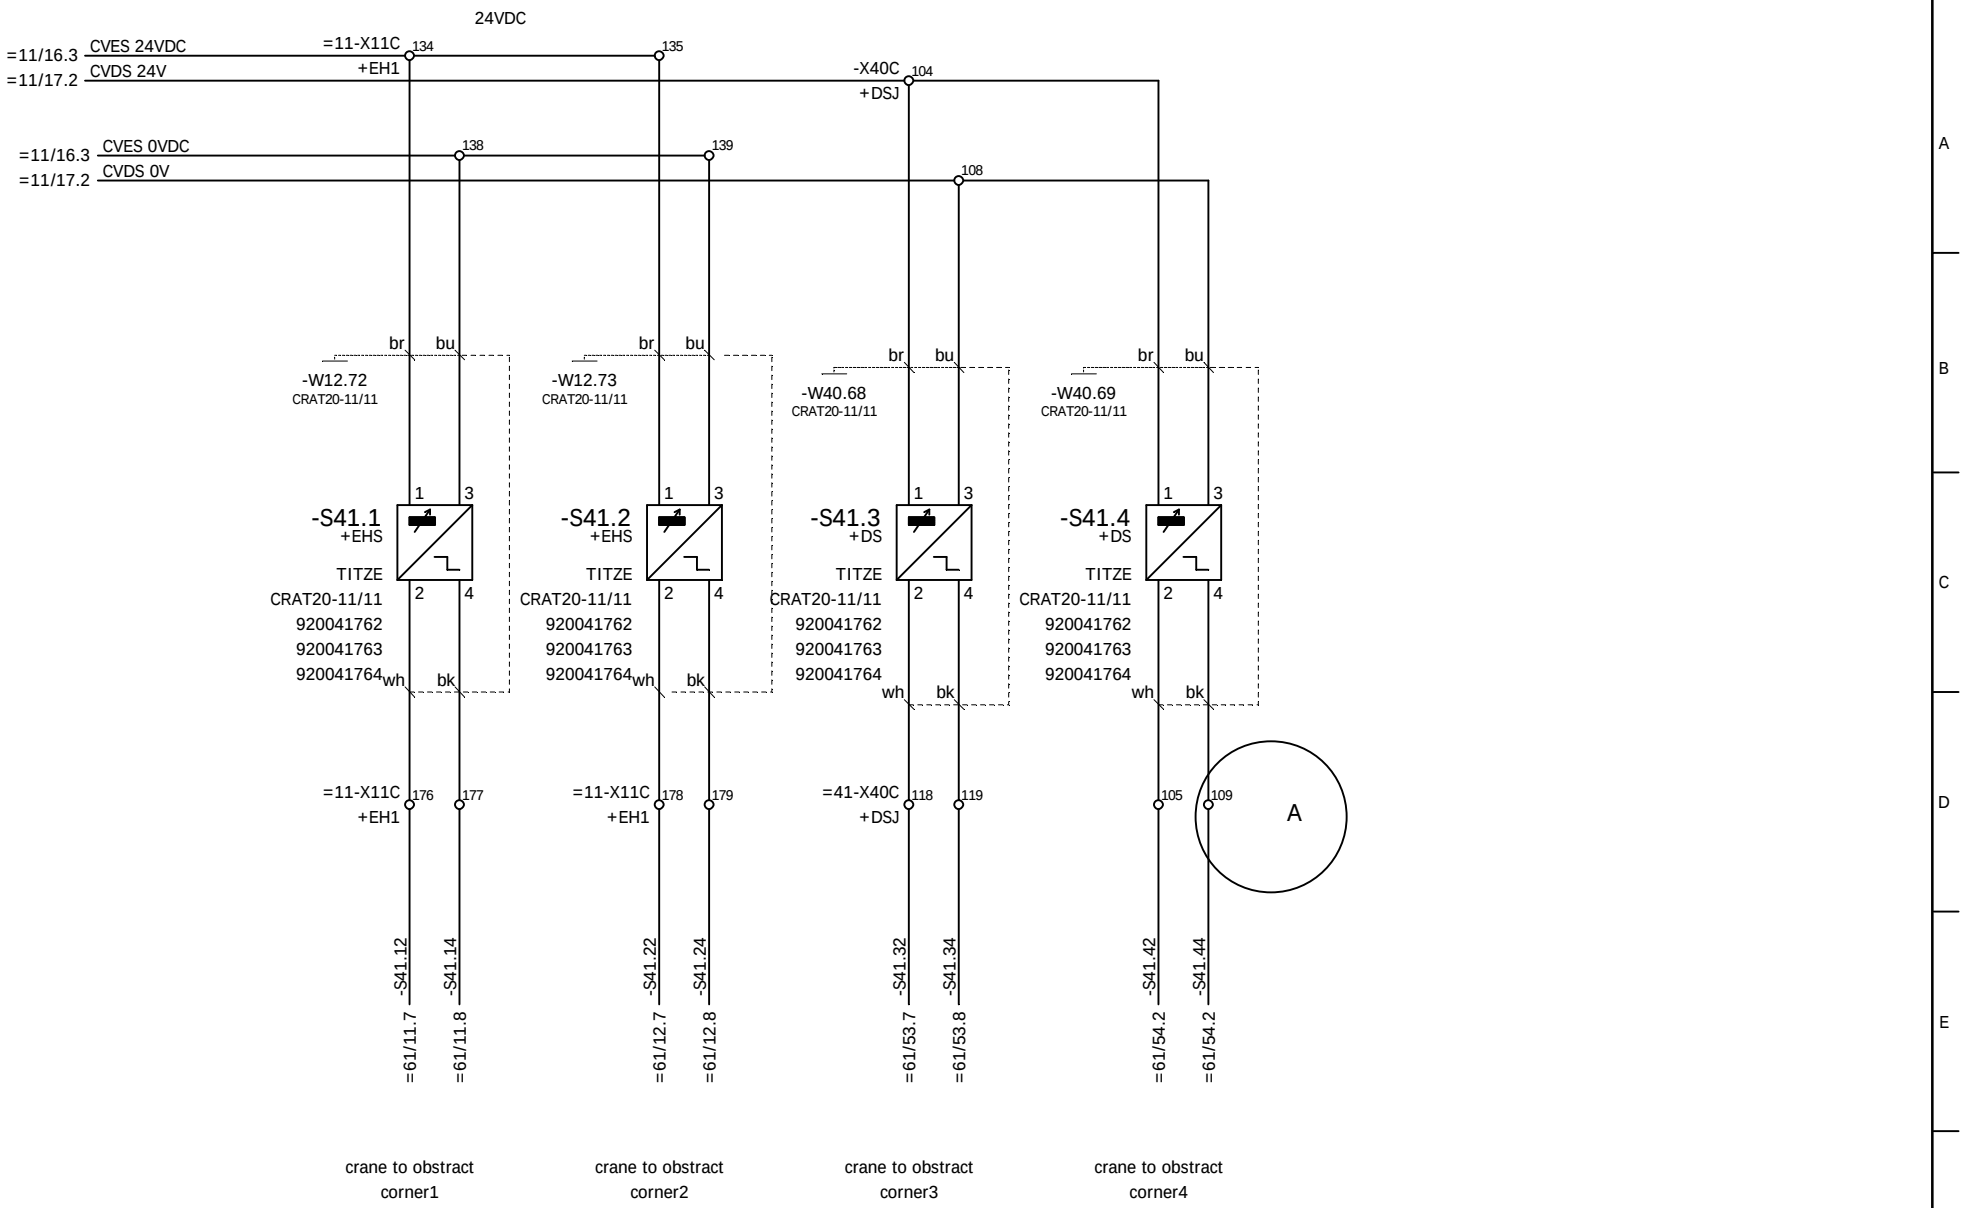


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=41 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 7 13 Sh.

gantry travelling, limit switch
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

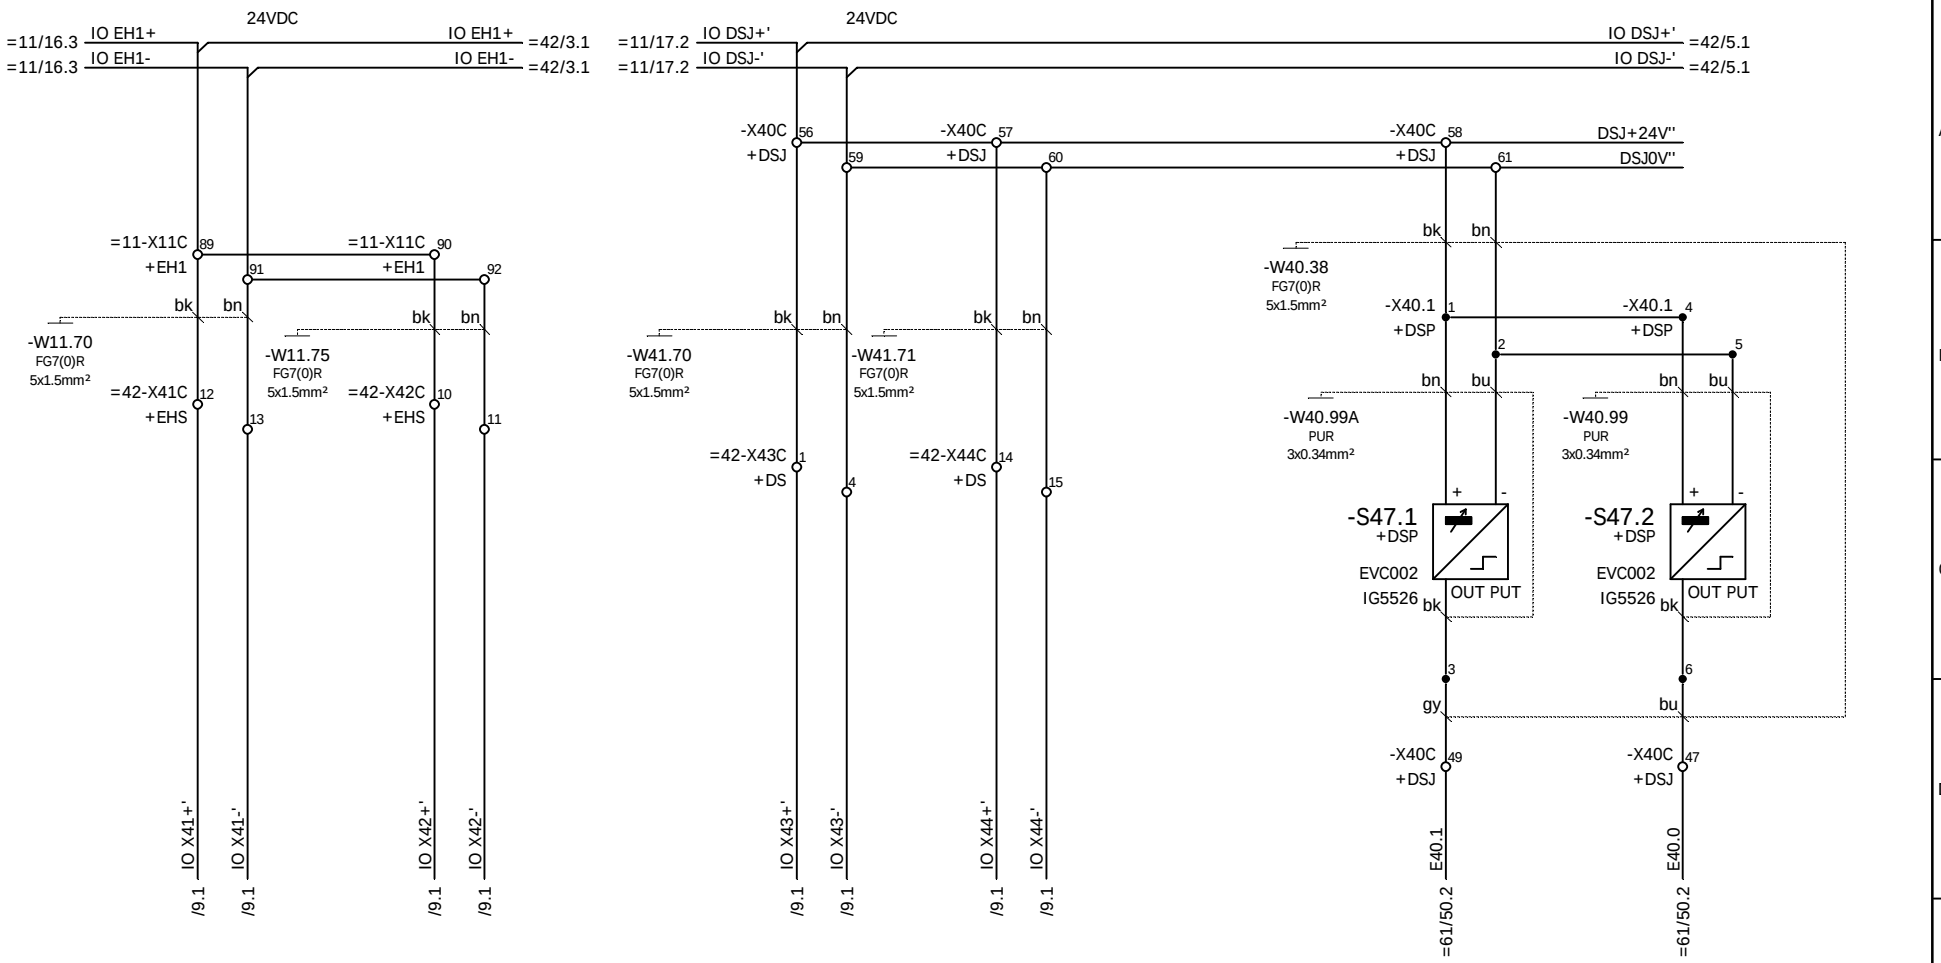

power for crane->container eh side

power for crane->container diesel side

sliding platform diesel-generator expand


foldable platform diesel-generator retracted

				Date		Costumer	AMPT Egypt	NOELL	gantry travelling, limit switch Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=41 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	8 13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

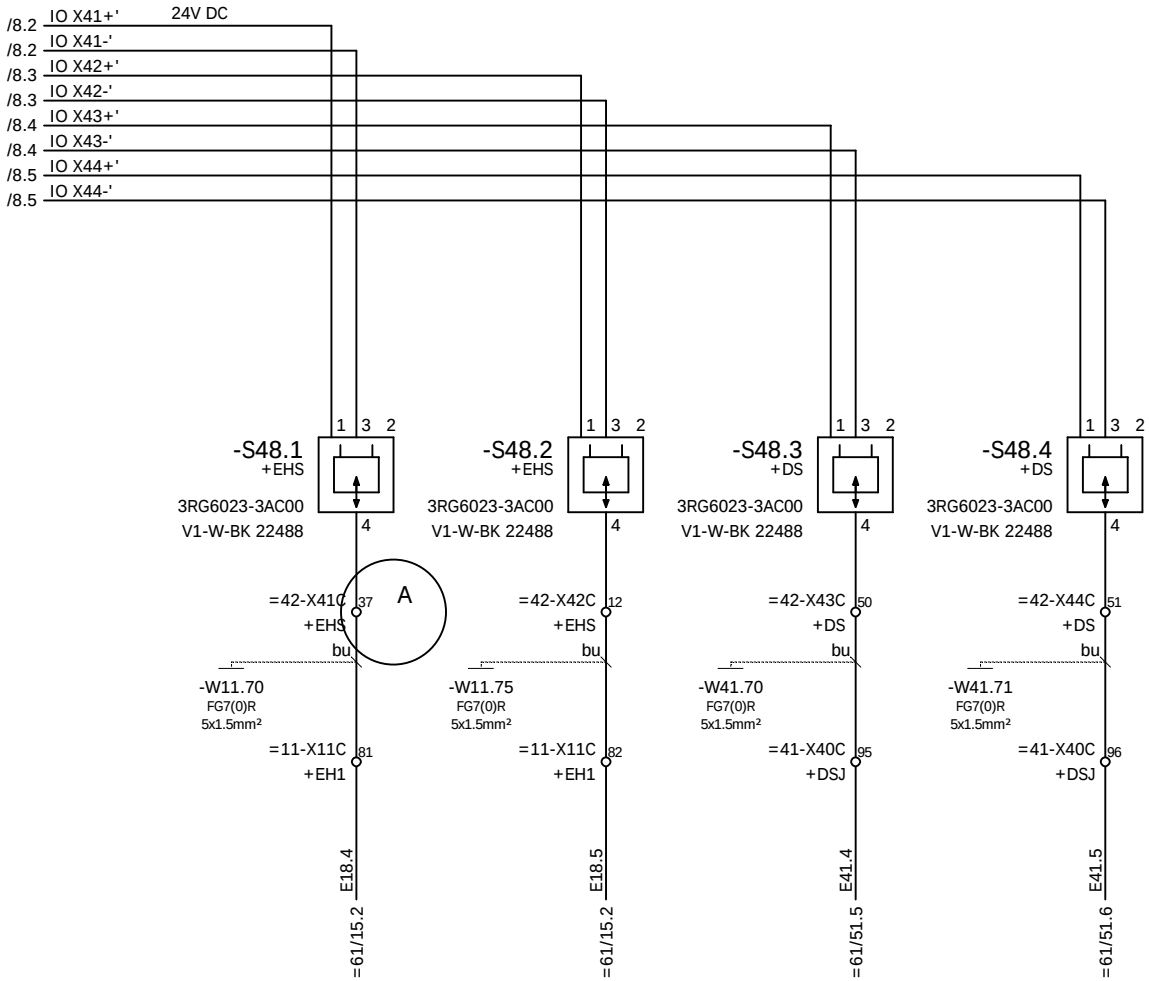

crane->container corner 1 | crane->container corner 2 | crane->container corner 3 | crane->container corner 4

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			


NOELL

gantry travelling, anti collision
Stromlaufplan / Circuit Diagram

=41
+EH2
Sheet 9
13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

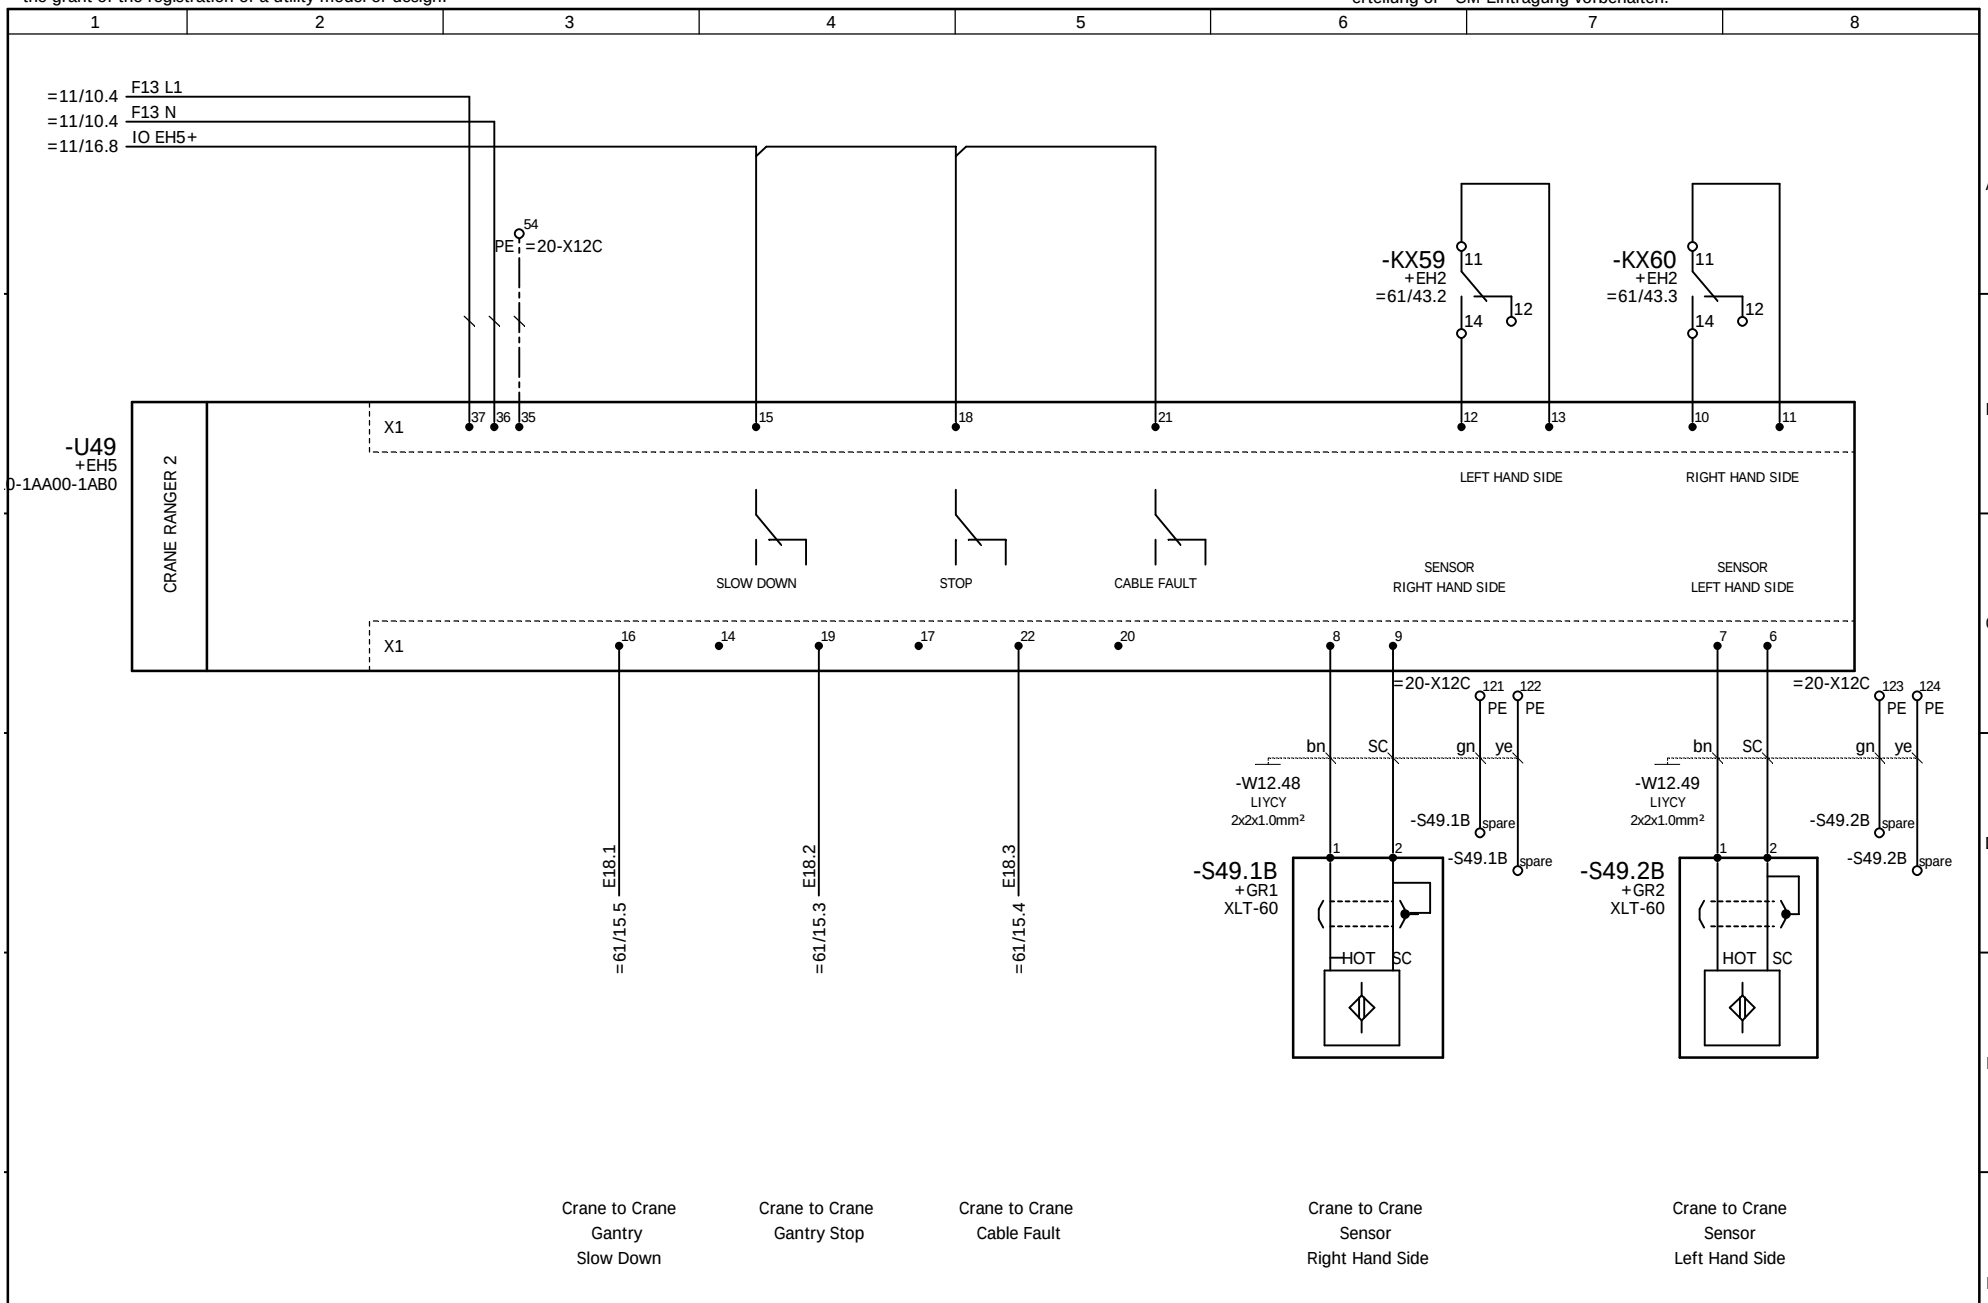

Crane to Crane Gantry Slow Down

Crane to Crane Gantry Stop

Crane to Crane Cable Fault

Crane to Crane Sensor Right Hand Side

Crane to Crane Sensor Left Hand Side

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=41 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 10 13 Sh.


NOELL

gantry travelling, anti collision

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

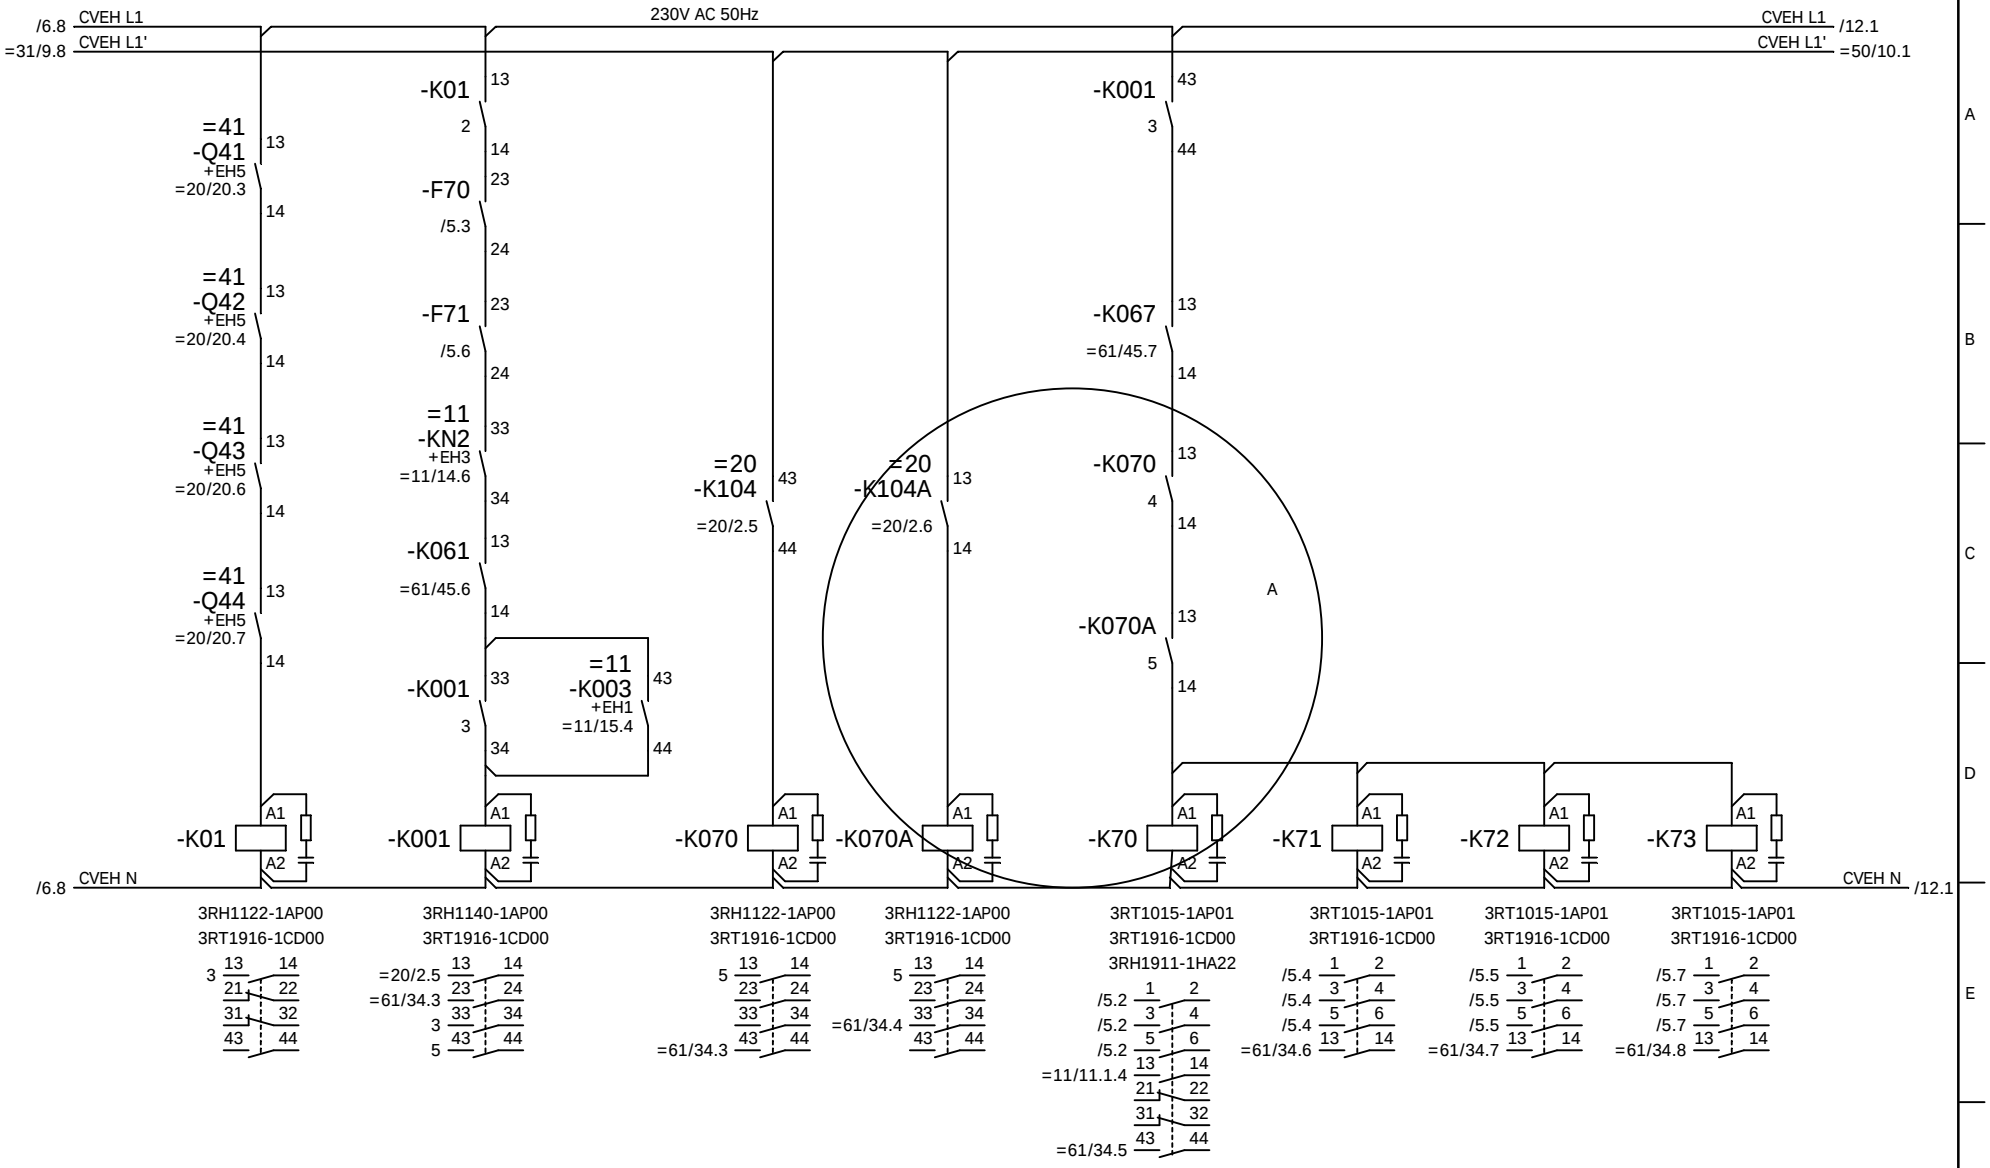

				Date		Costumer	AMPT Egypt	NOELL	gantry travelling, control	Type	RTG 50/26.50/5+1/AC	=41
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11
nd.	Revision	Date	Name	Standard		Source:						13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

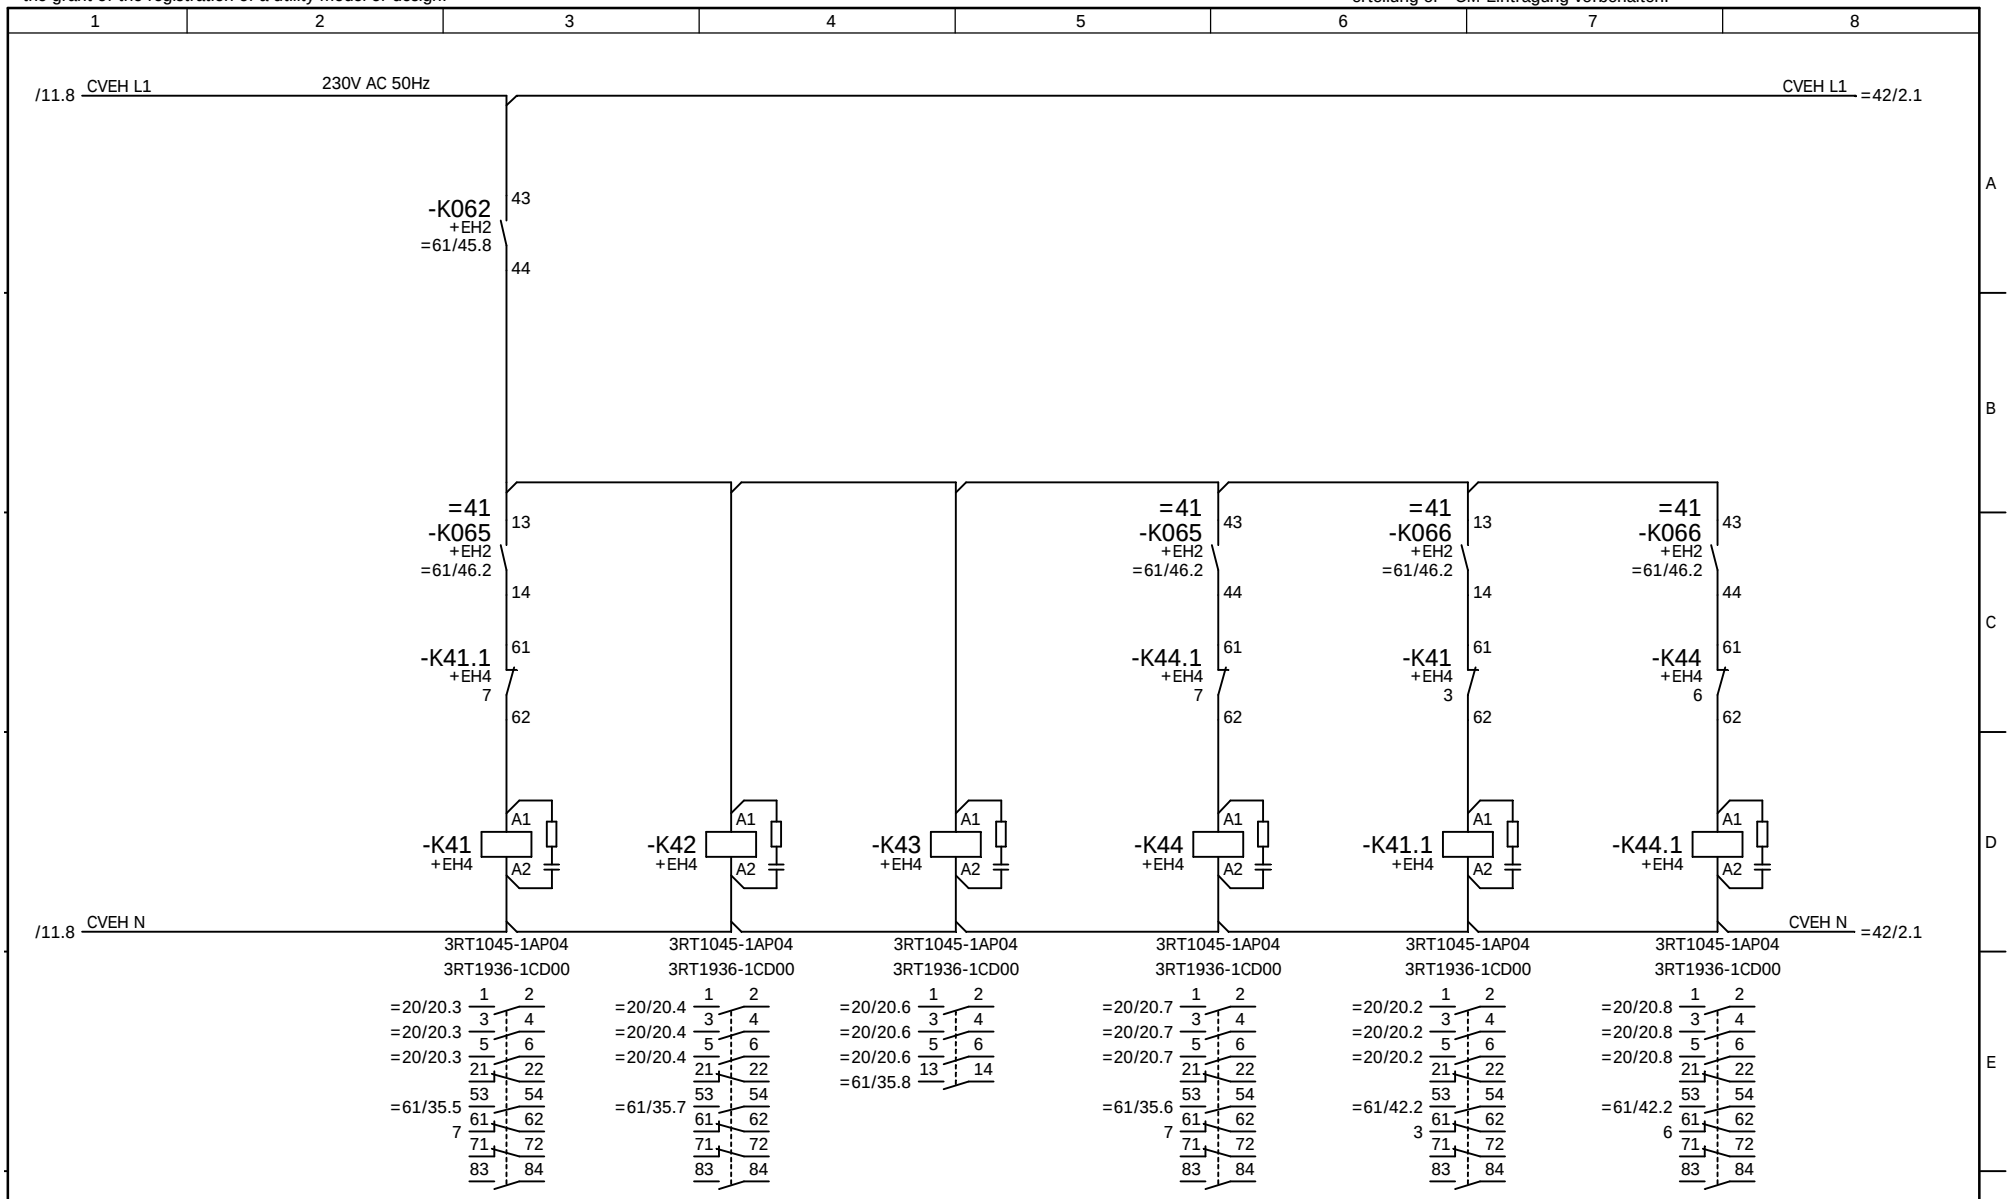


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=41 +EH4
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
nd.	Revision	Date	Name	Standard		Source:			Sheet 12 13 Sh.

NOELL

gantry travelling control
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

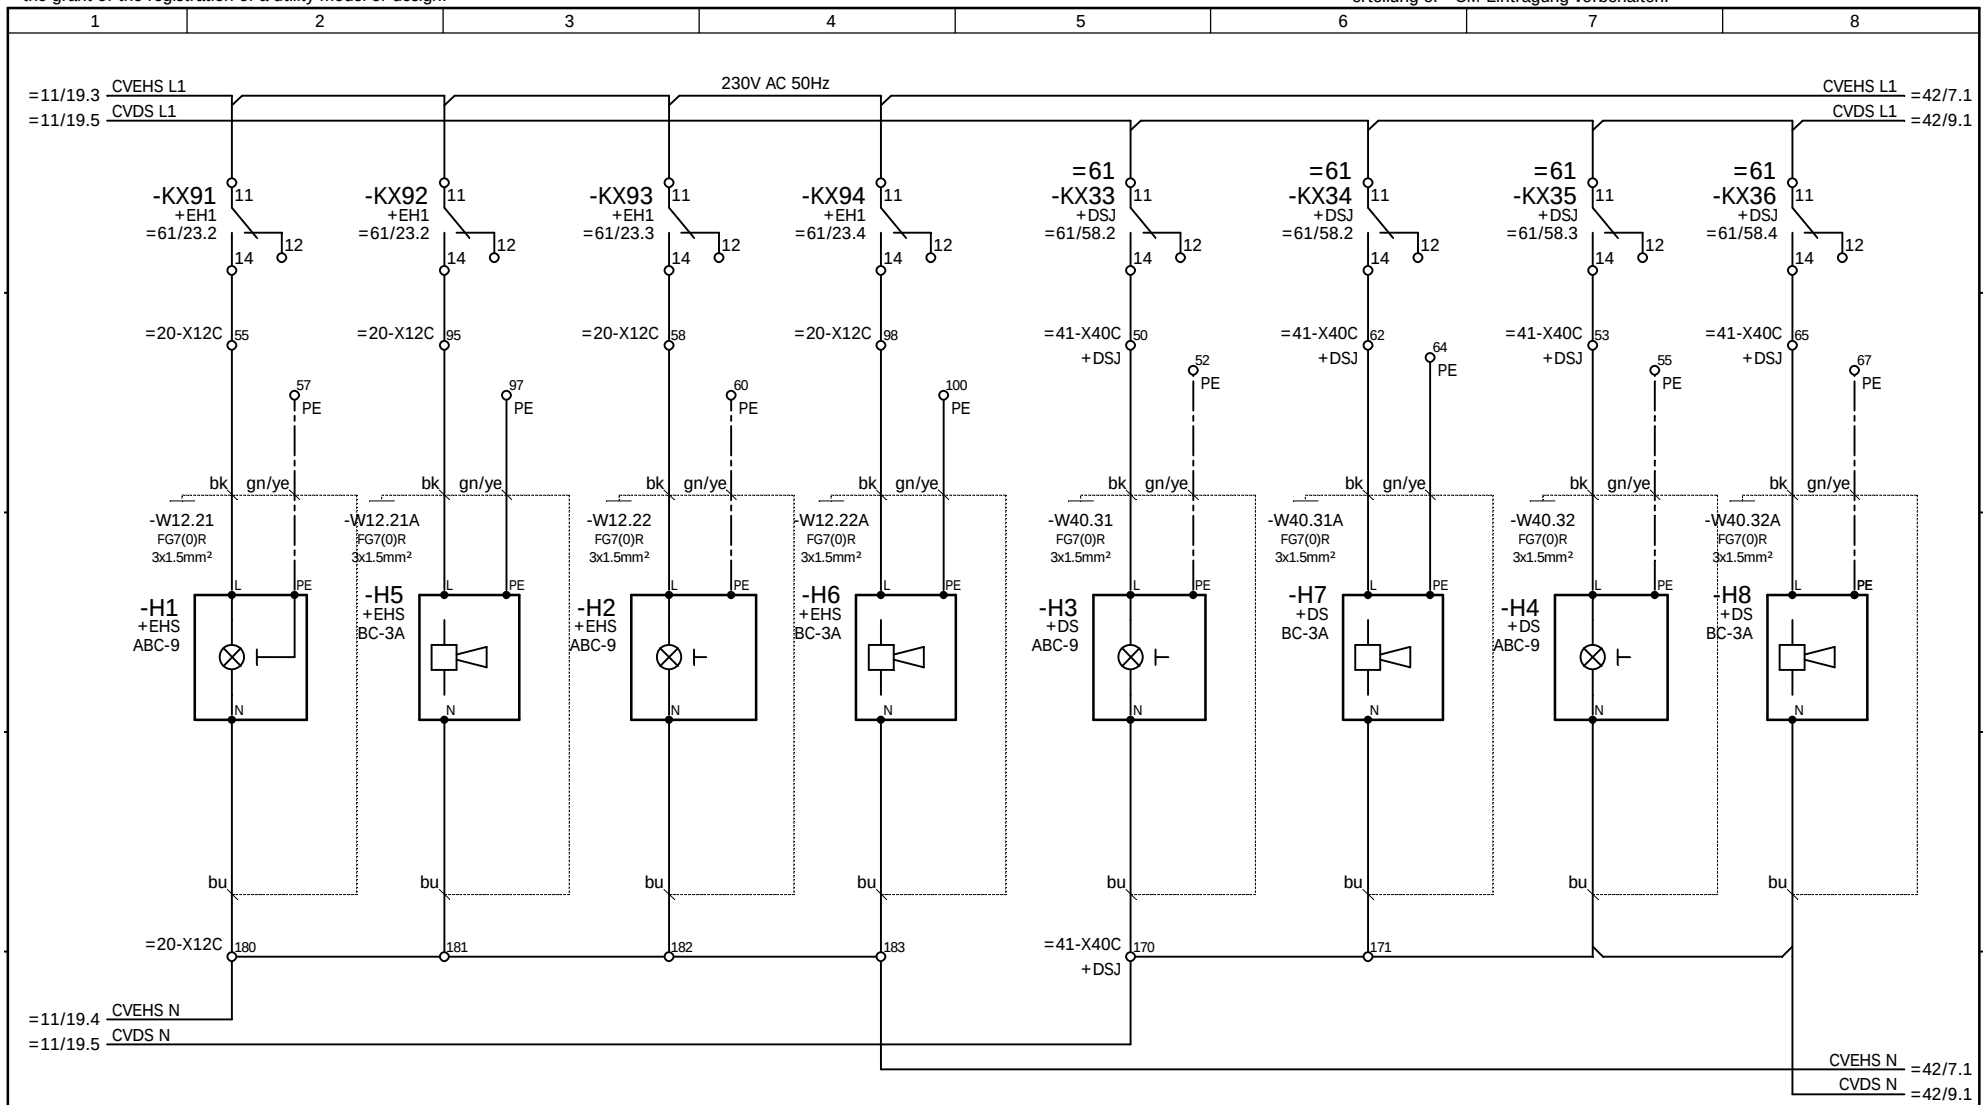

				Date		Costumer	AMPT Egypt		Type	RTG 50/26.50/5+1/AC	=41
				Designer	XU HR						+EH2
				Checked	LIU KP			wheel brake, controls	Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram			Sheet 13 / 13 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

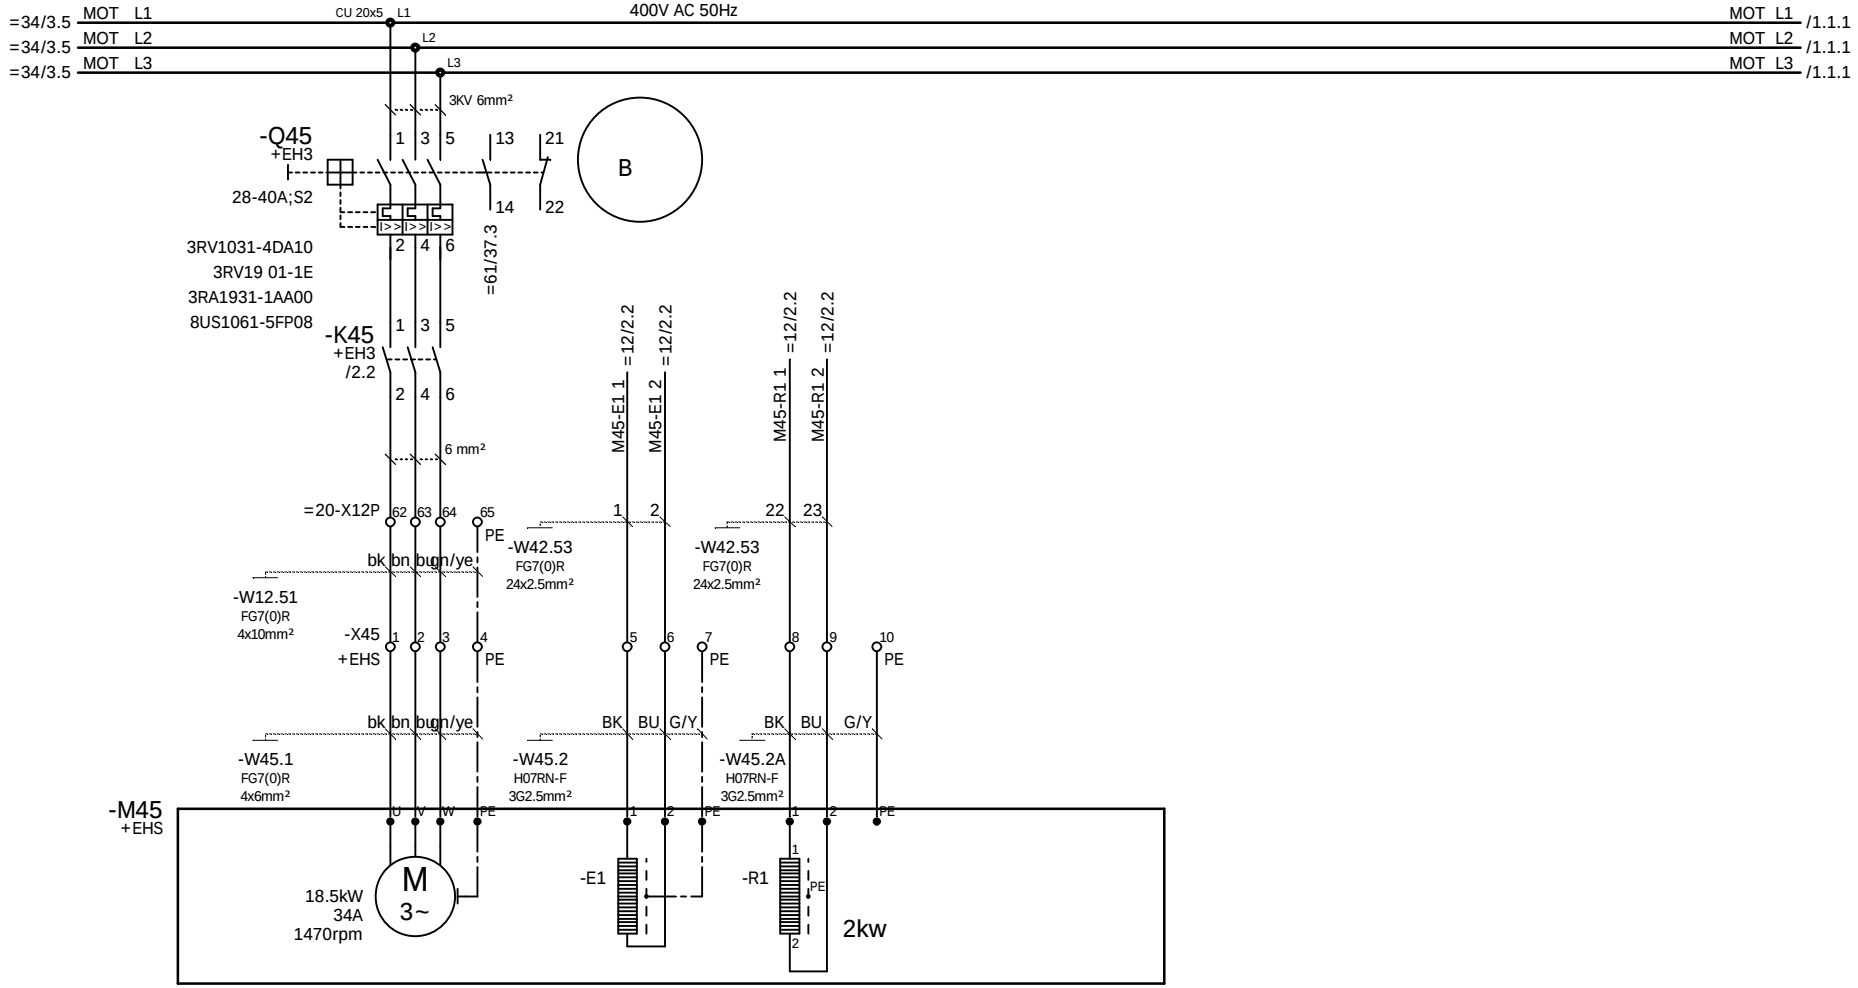

hydraulic pump
e-house side

anti condensing heating
e-house side
50W

oil tank
heater


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=42 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 1 19 Sh.

NOELL

wheel turning, motors
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

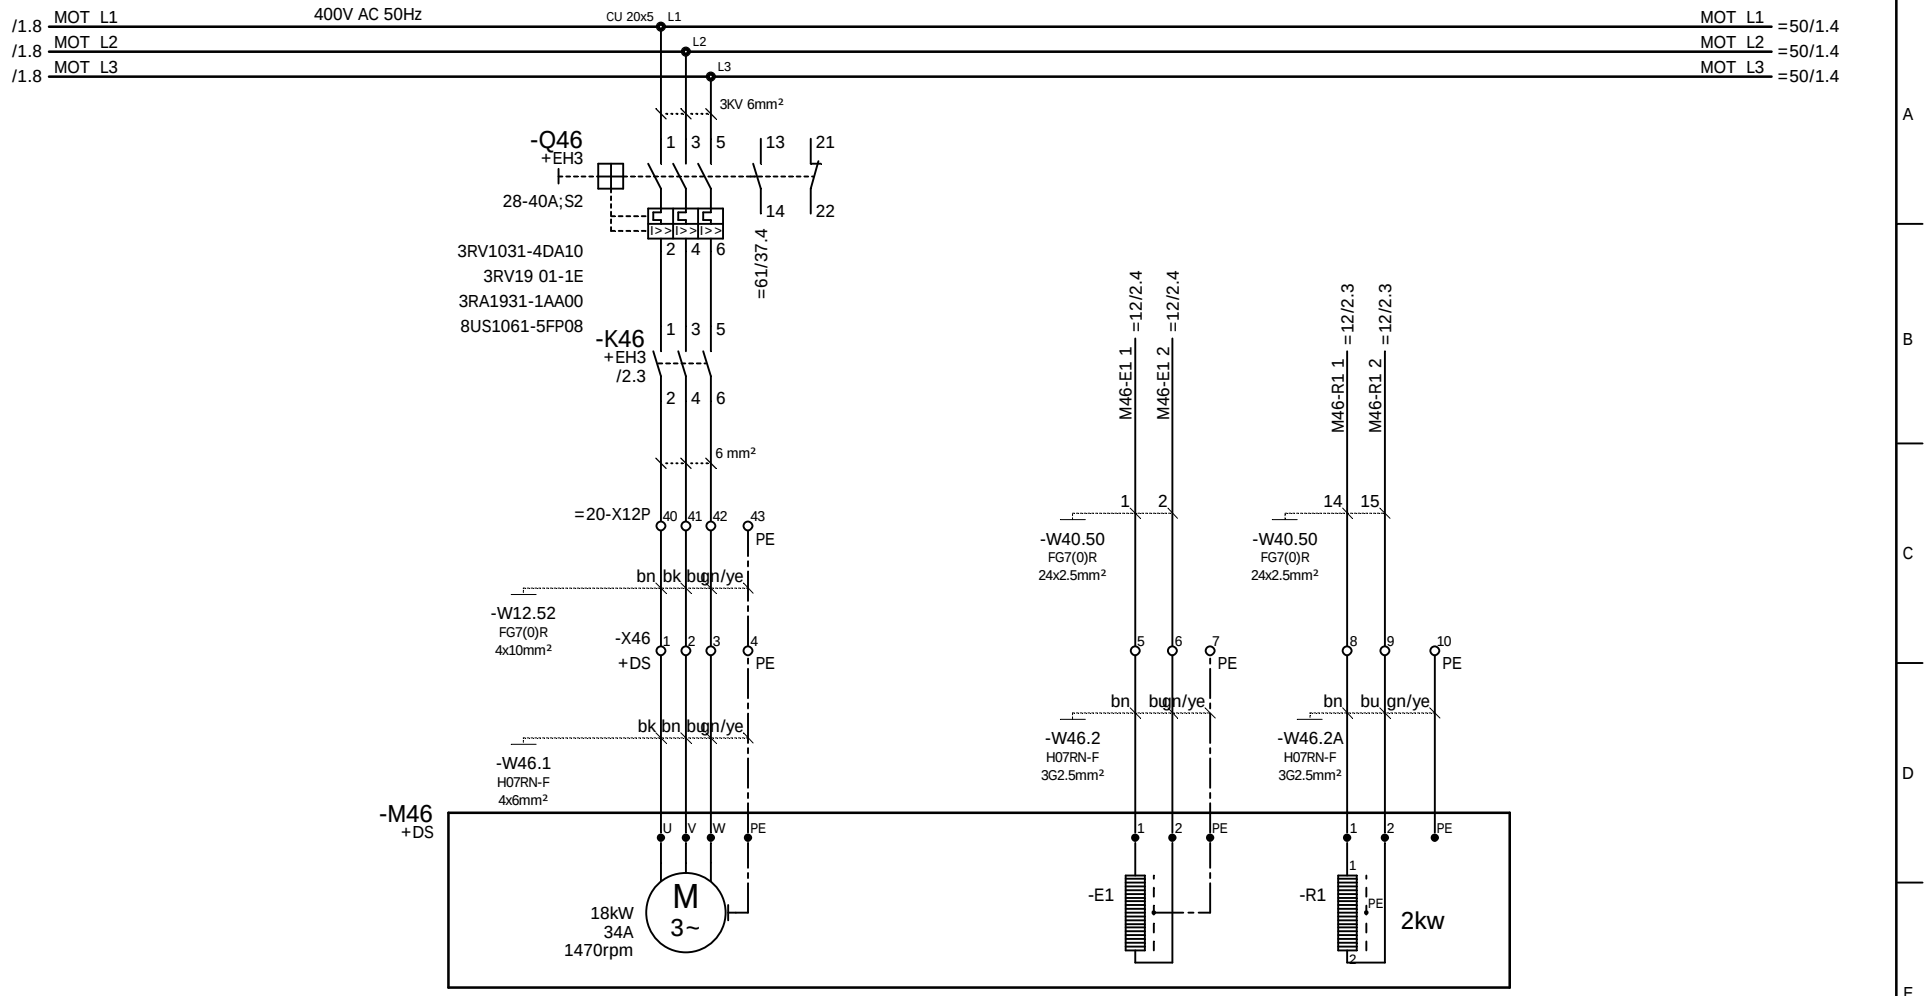

hydraulic pump
dieselside

anti condensing heating
dieselside

oil tank
heater


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=42 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
nd.	Revision	Date	Name	Standard		Source:			Sheet 1.1 19 Sh.

NOELL

wheel turning, motors
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

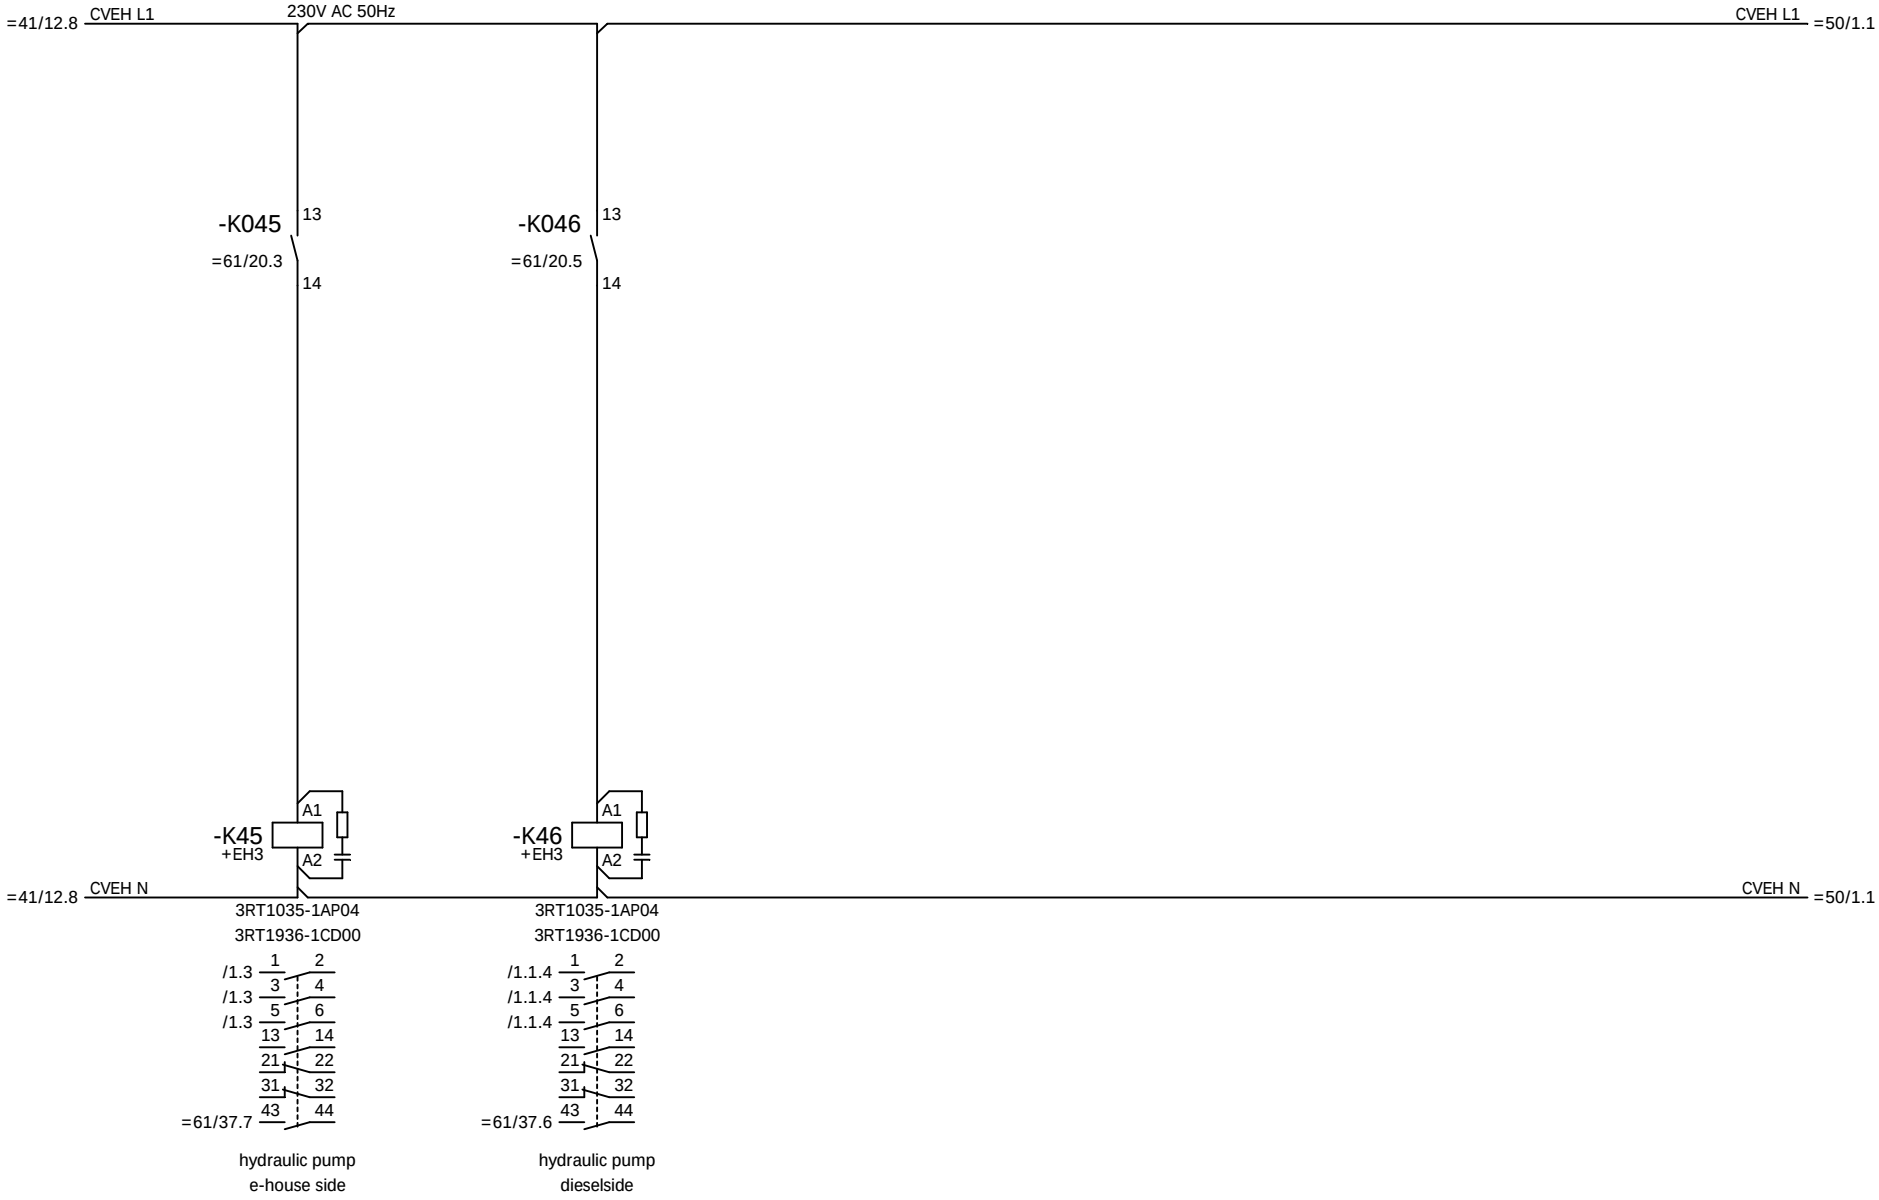

				Date		Costumer	AMPT Egypt	wheel turning, control	Type RTG 50/26.50/5+1/AC	=42
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2
Ind.	Revision	Date	Name	Standard		Source:					19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

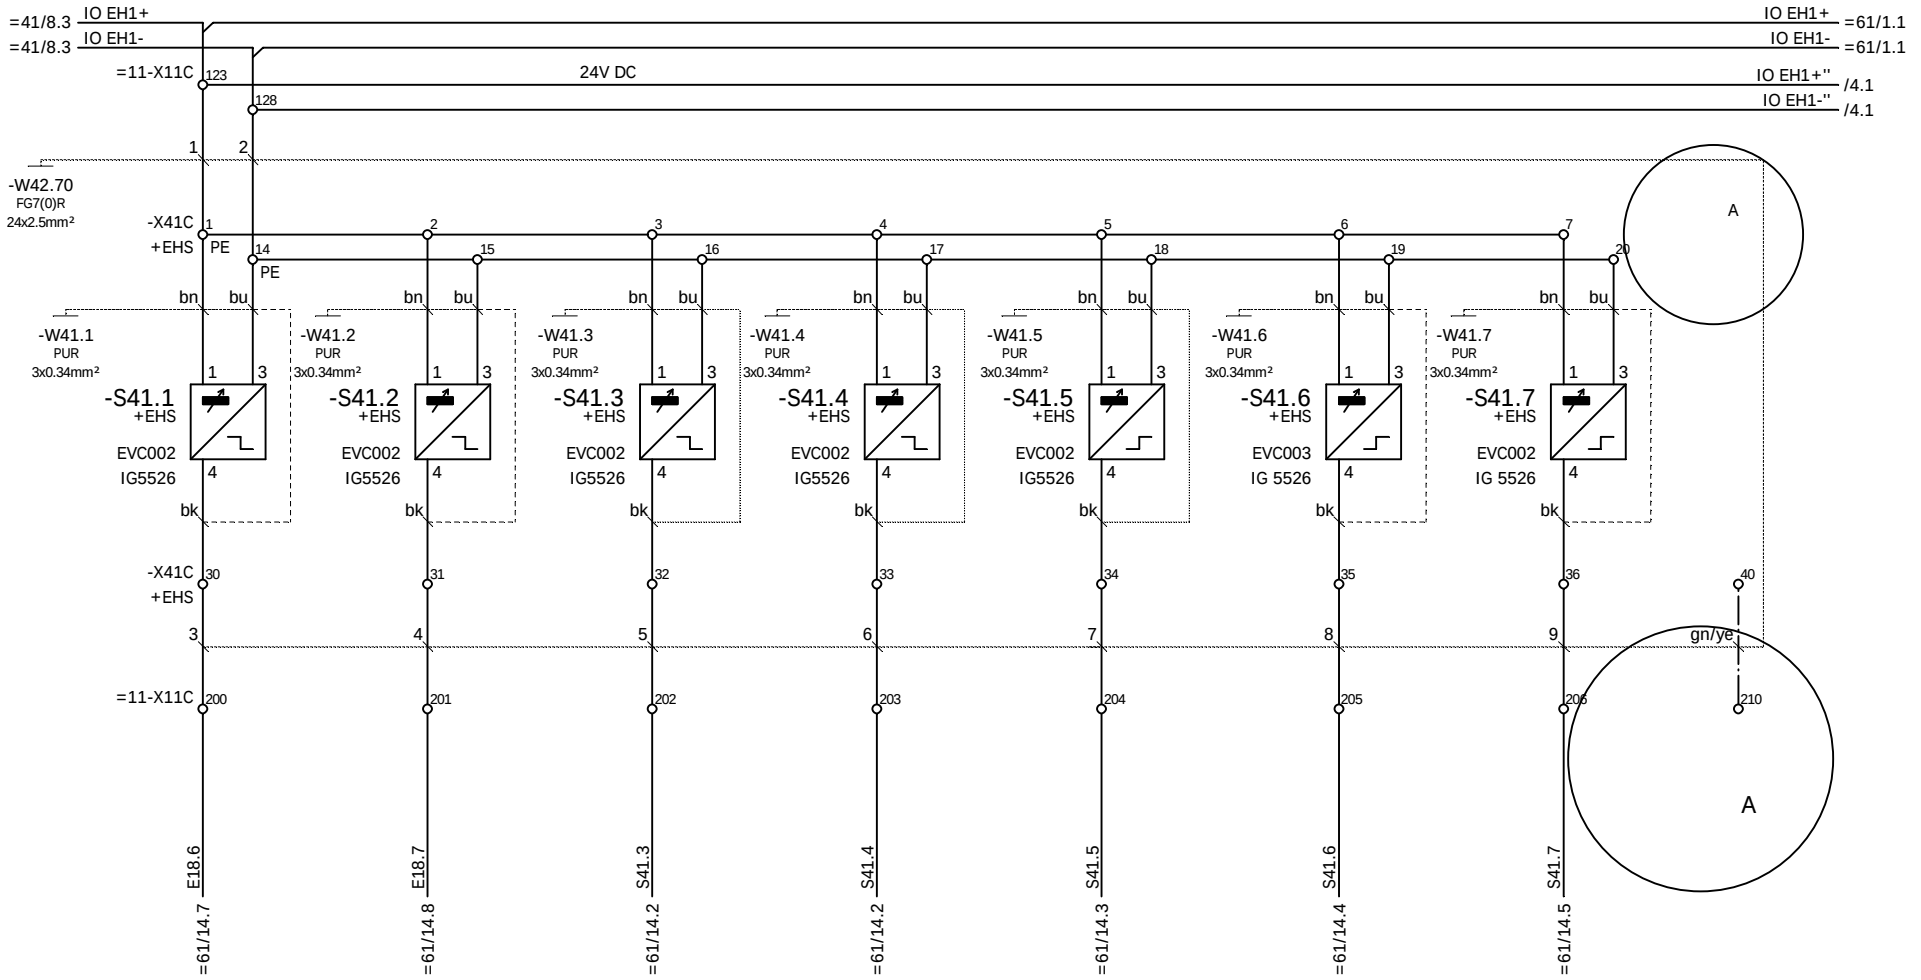


corner 1 turning cylinder locked	corner 1 turning cylinder unlocked	corner 1 wheels in 0	corner 1 wheels in 90	corner 1 wheels in spin turn position	corner 1 jack system 1 up position	corner 1 jack system 1 down position

				Date		Costumer	AMPT Egypt	NOELL	wheel turning, limit switches
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=42 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	3 19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

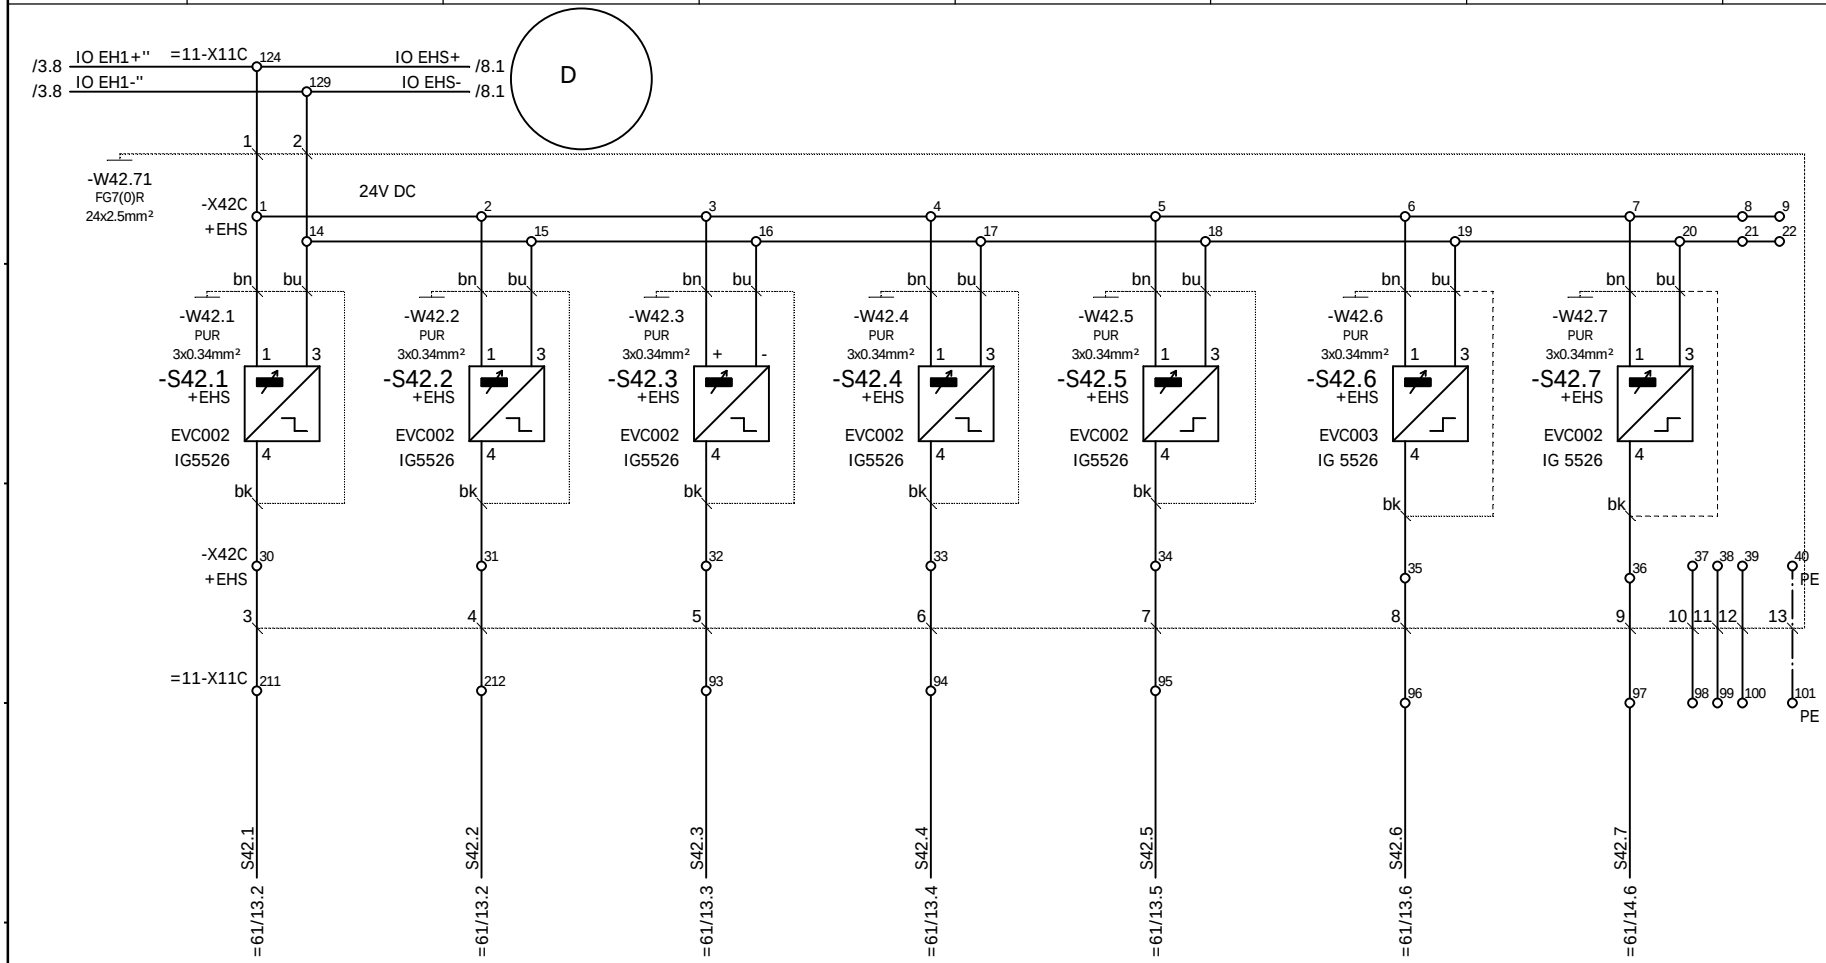

corner2 turning cylinder locked	corner2 turning cylinder unlocked	corner2 wheels in 0	corner2 wheels in 90	corner2 wheels in spin turn position	corner2 jack system 2 up position	corner2 jack system 2 down position

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=42 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 4 19 Sh.


NOELL

wheel turning, limit switches

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

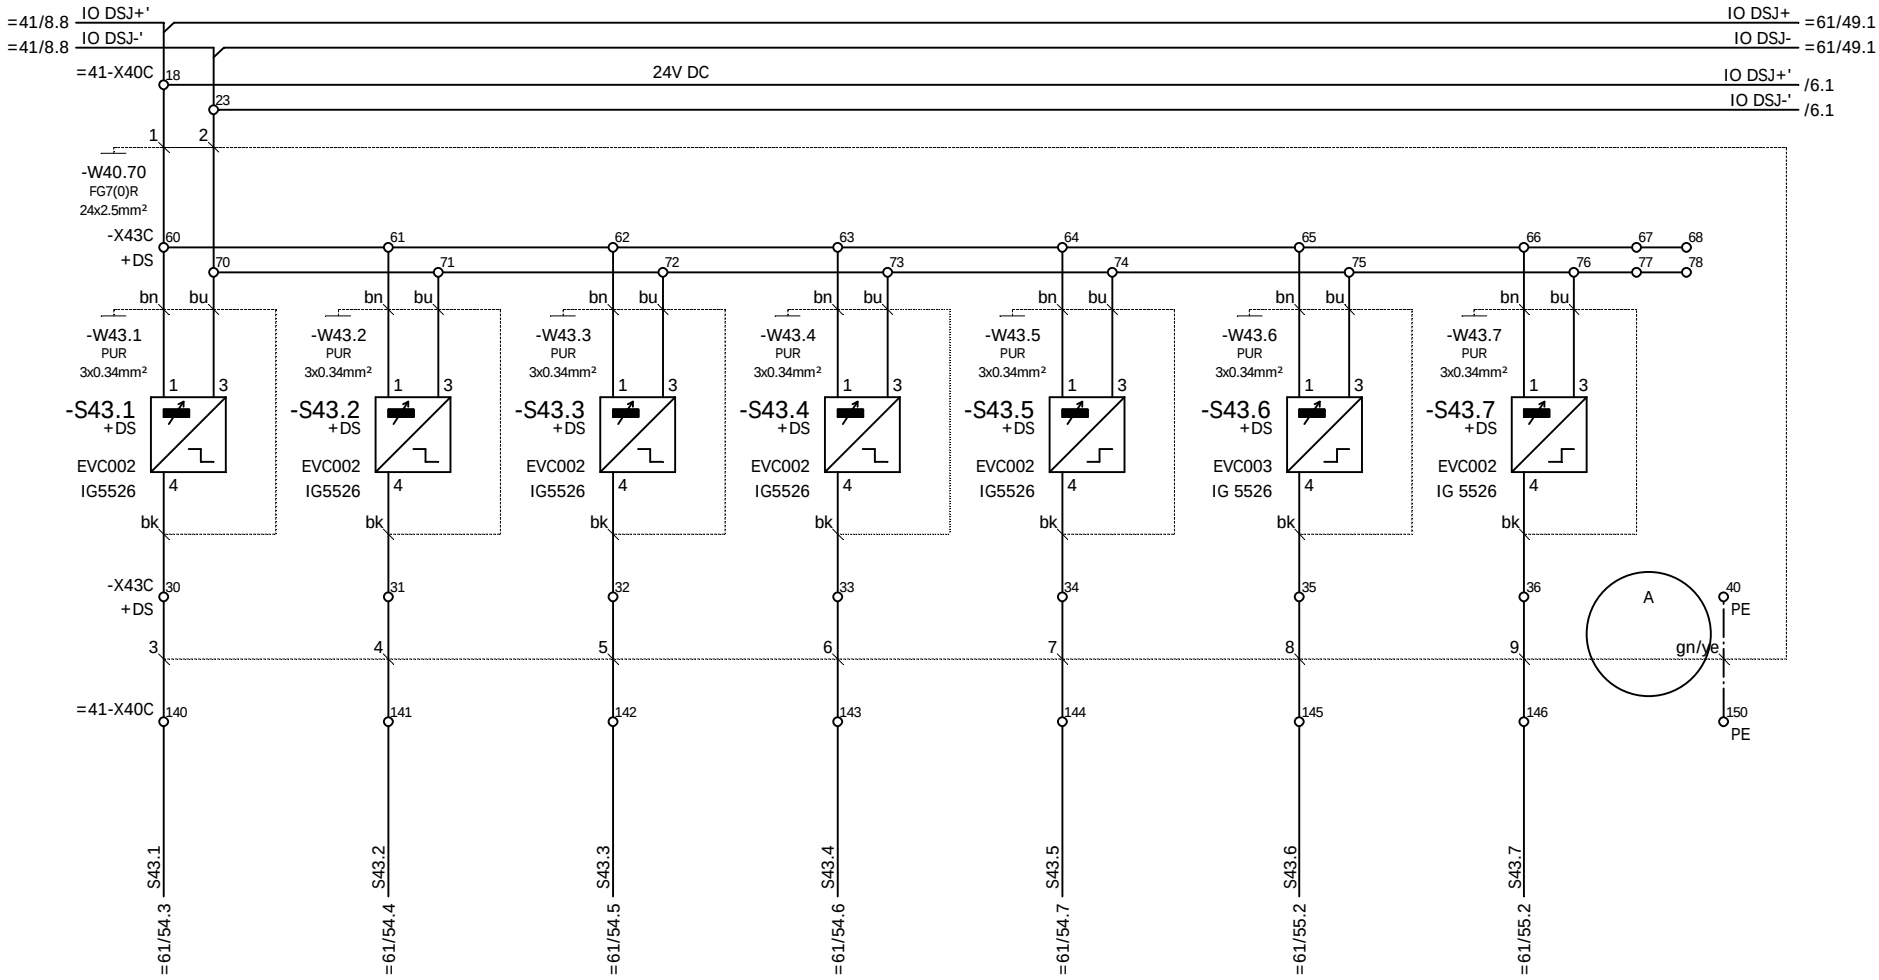


corner3 turning cylinder locked	corner3 turning cylinder unlocked	corner3 wheels in 0	corner3 wheels in 90	corner3 wheels in spin turn position	corner3 jack system up position	corner3 jack system down position

				Date		Costumer	AMPT Egypt	NOELL	wheel turning, limit switches	Type	RTG 50/26.50/5+1/AC	=42	
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+DSJ	
				Checked	LIU KP					Job No.	1255	Drawing No.	78.5692.60.00	Sheet	5
Ind.	Revision	Date	Name	Standard		Source:								19	Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

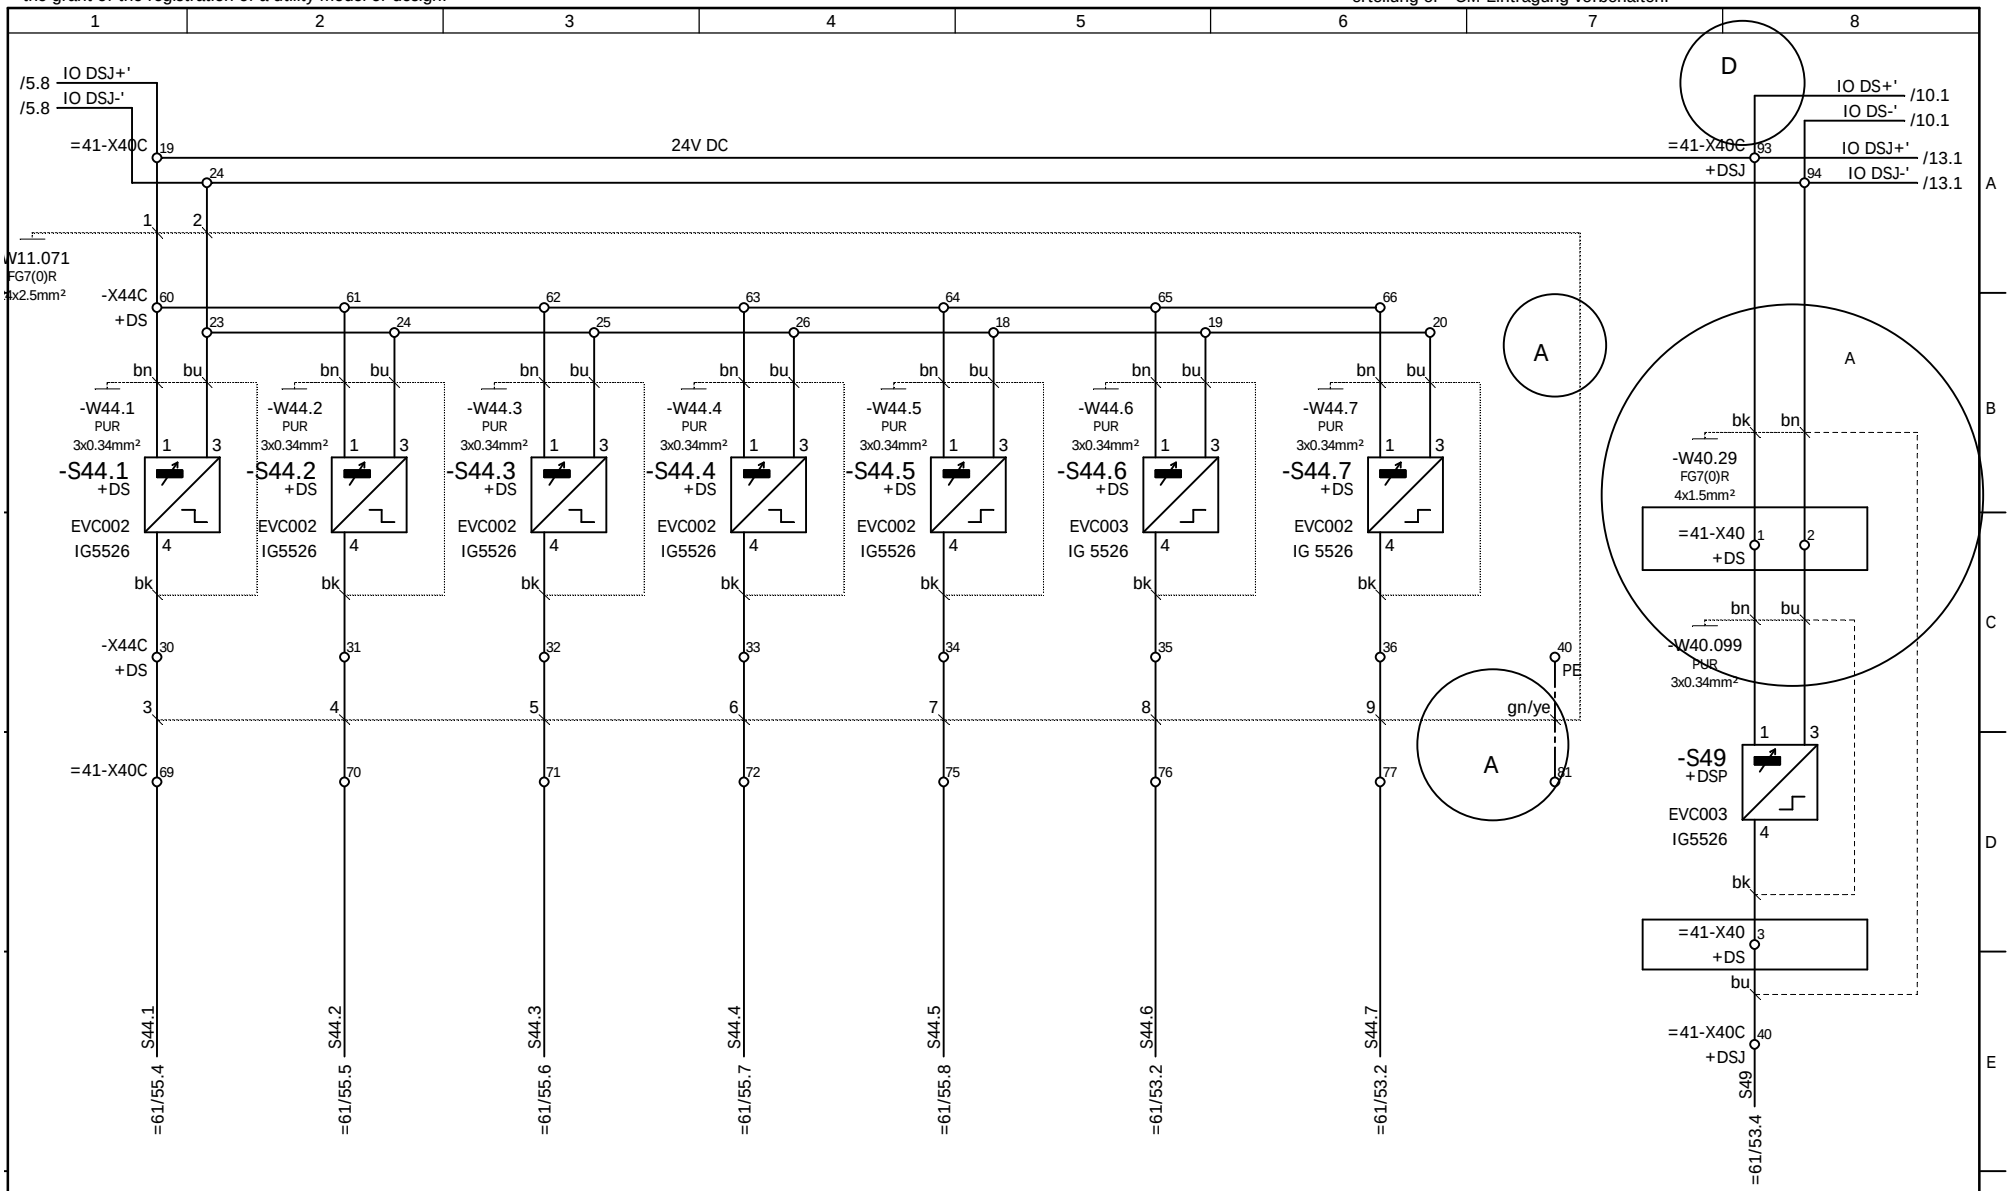

				Date		Costumer	AMPT Egypt	wheel turning, limit switches	Type	RTG 50/26.50/5+1/AC	=42 +DSJ
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 6 19 Sh.
				Checked	LIU KP						
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

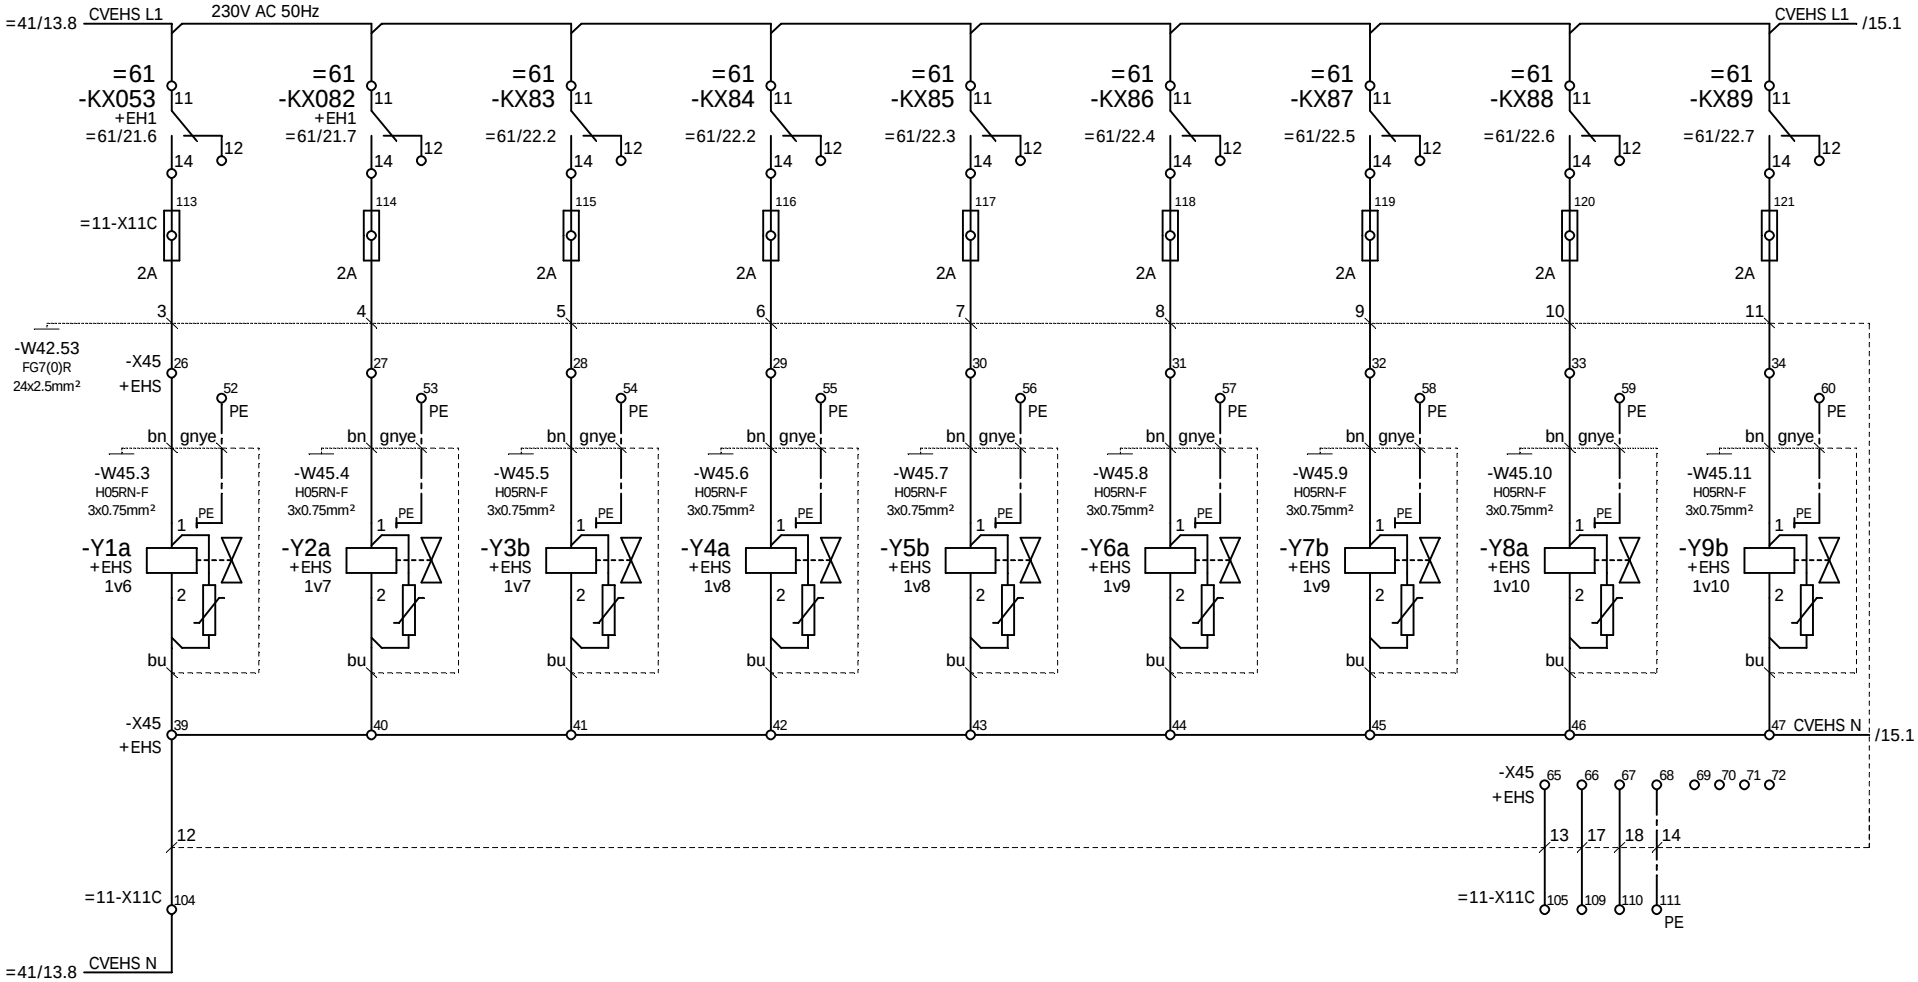


circulation valve	steering cylinder 2	steering cylinder 2	steering cylinder 2	steering cylinder 2	steering cylinder 1	steering cylinder 1	steering cylinder 1	steering cylinder 1
e-house side	90	0	unlock	lock in	unlock	lock in	90	0

				Date		Costumer	AMPT Egypt	NOELL	wheel turning,solenoid valves	Type RTG 50/26.50/5+1/AC	=42
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:					Sheet 7 19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

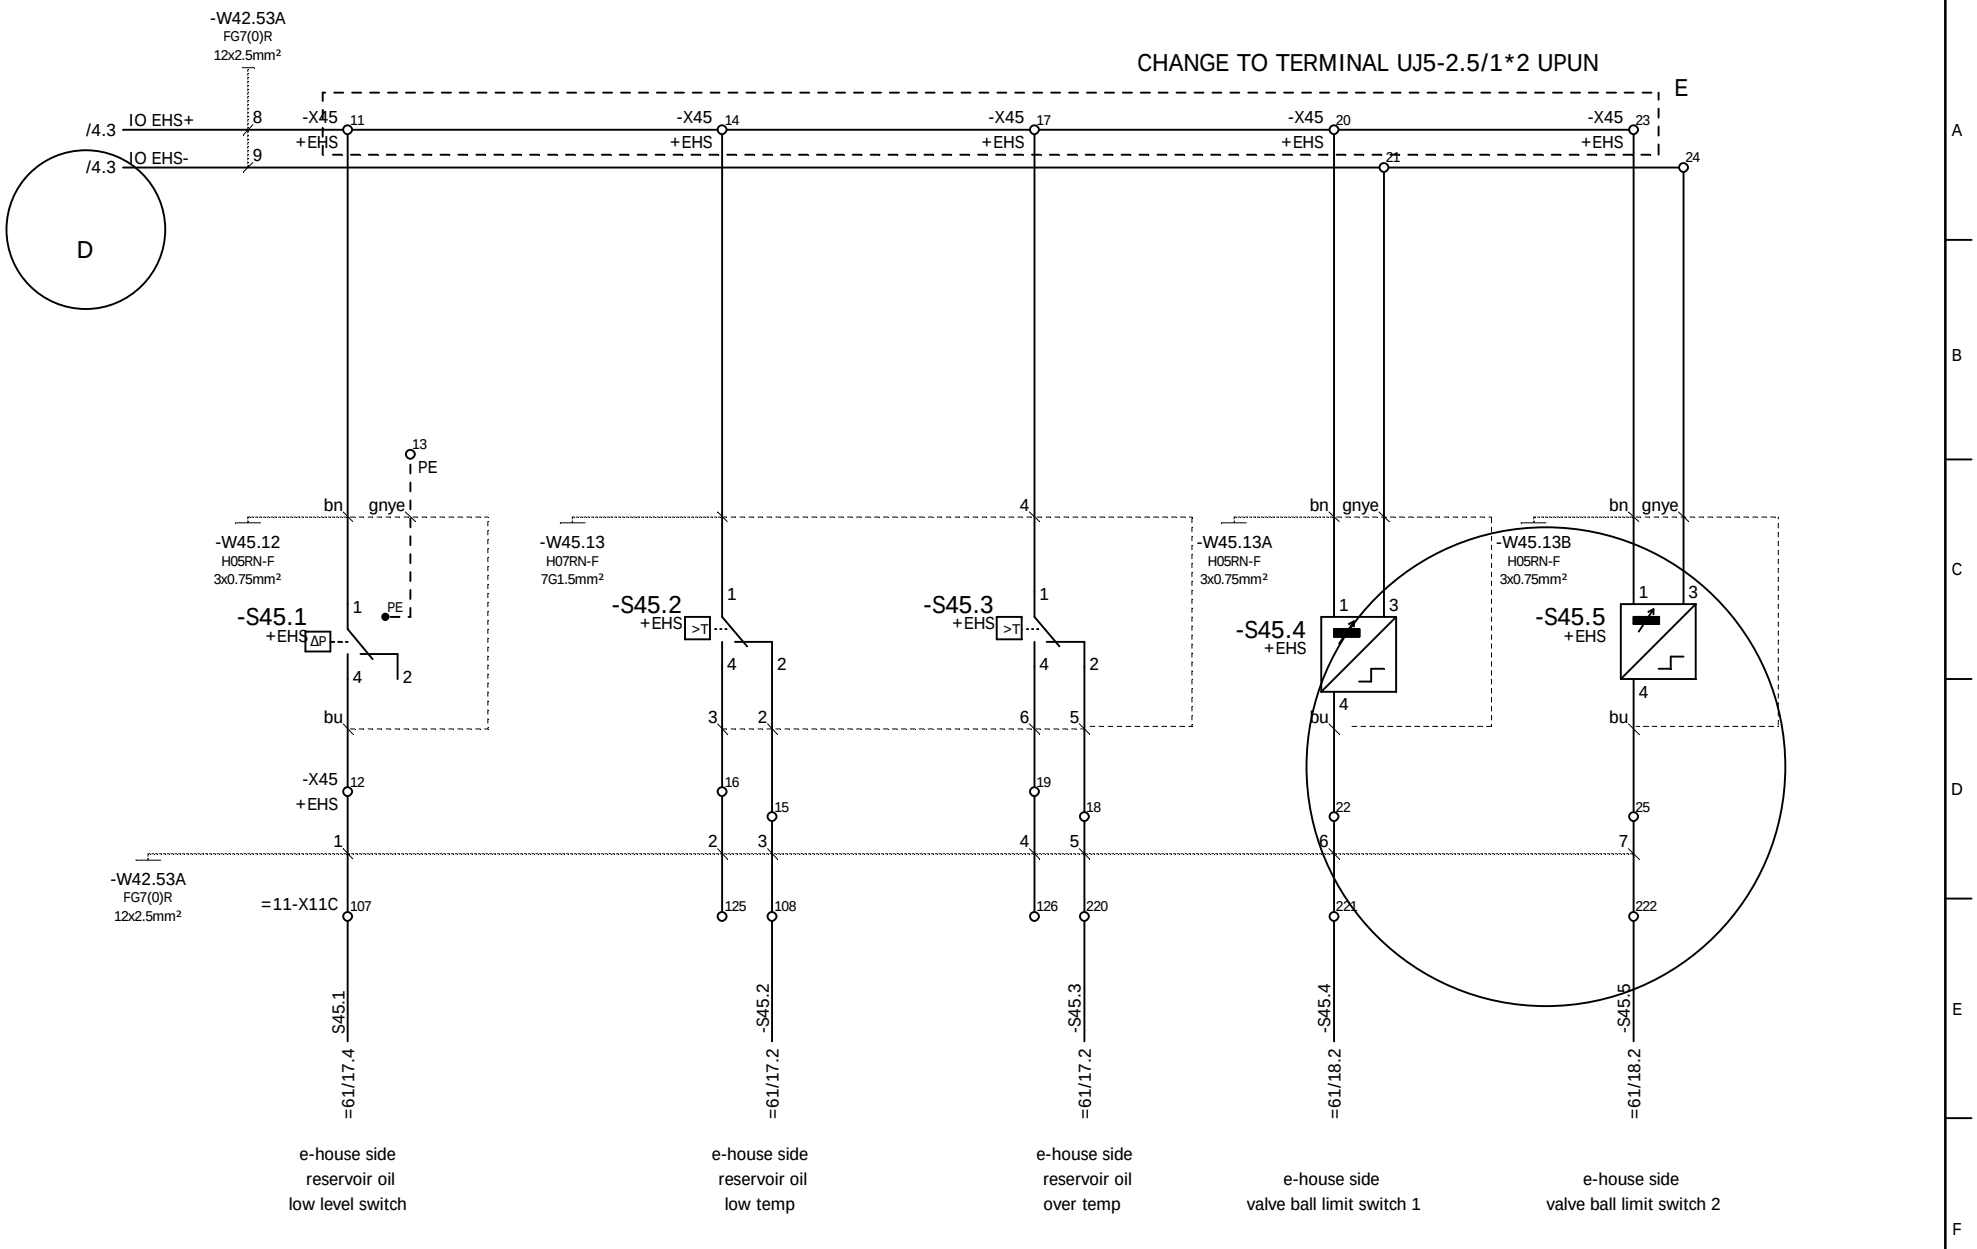

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP				
ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00


NOELL

wheel turning,sensors
Stromlaufplan / Circuit Diagram

=42
+EH1
Sheet 8
19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

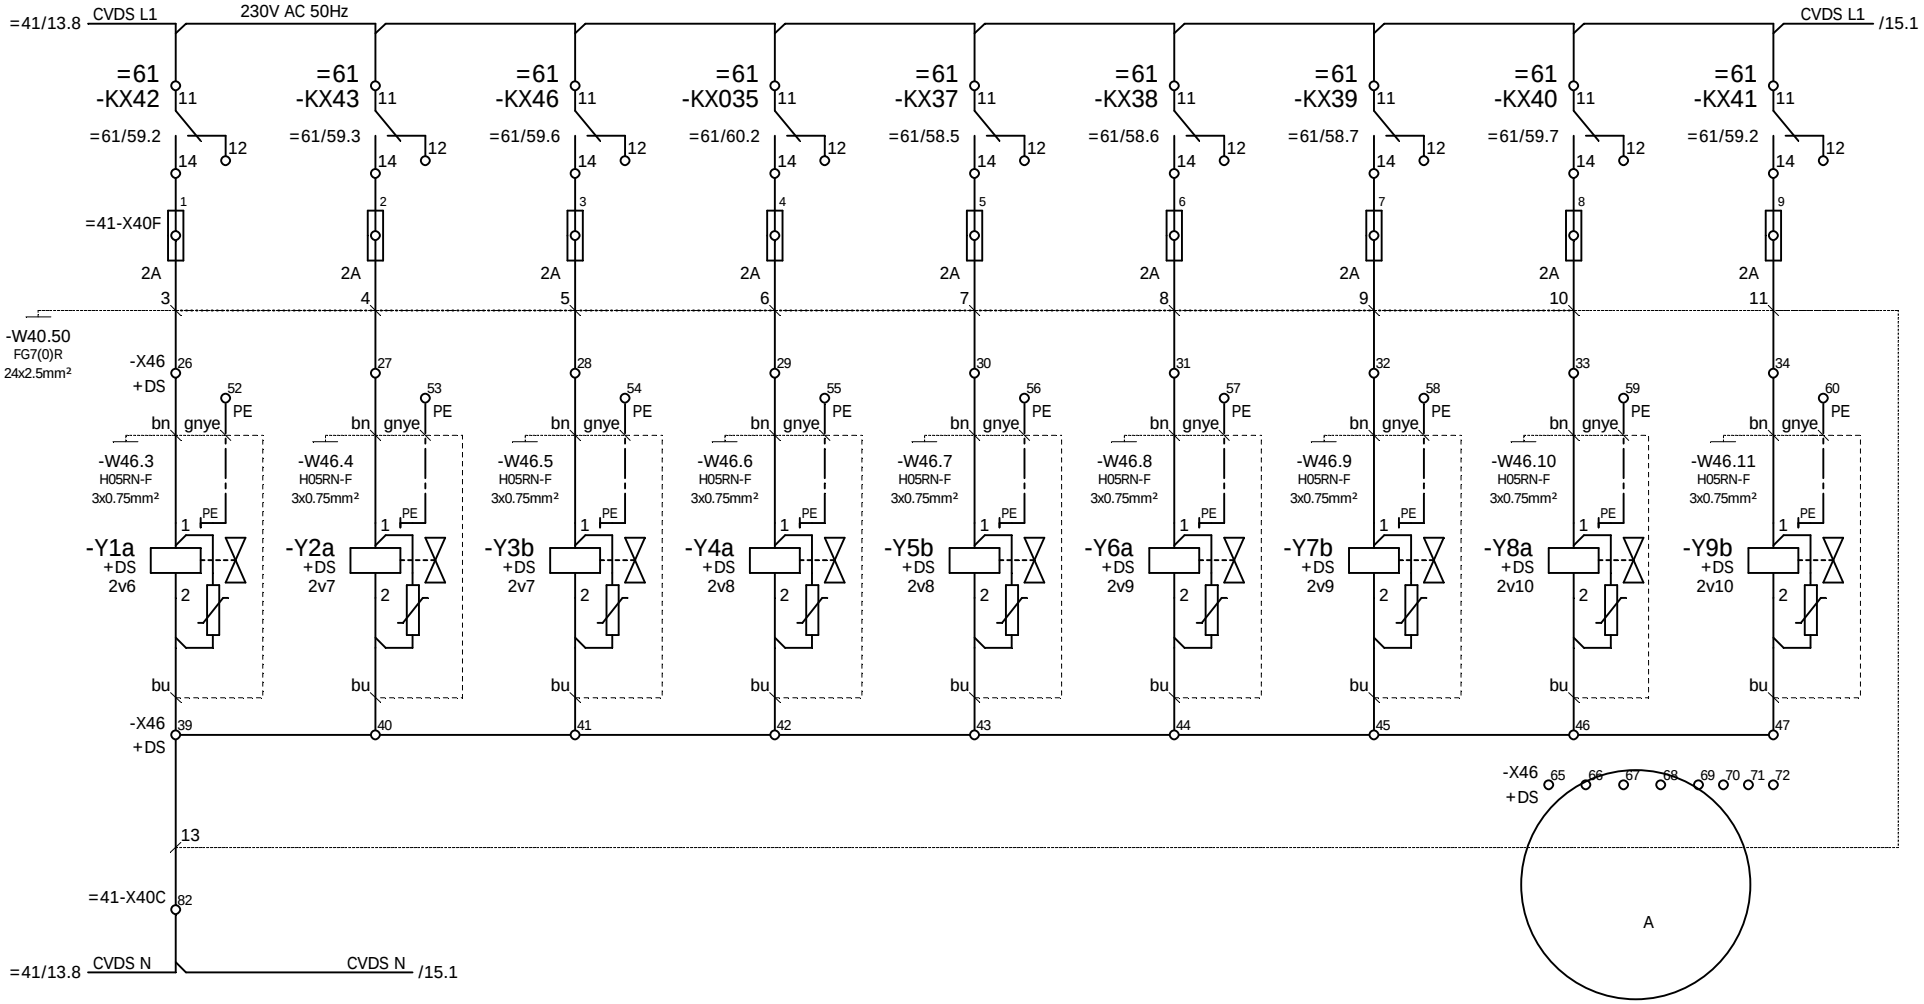

circulation valve diesel side	steering cylinder 3 90	steering cylinder 3 0	steering cylinder 3 unlock	steering cylinder 3 lock in	steering cylinder 4 unlock	steering cylinder 4 lock in	steering cylinder 4 90	steering cylinder 4 0

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			Job No.	1255
				Checked	LIU KP			Drawing No.	78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Sheet	9 / 19 Sh.

NOELL


wheel turning, solenoid valves
Stromlaufplan / Circuit Diagram

=42
+DSJ

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

CHANGE TO TERMINAL UJ5-2.5/1*2 UPUN

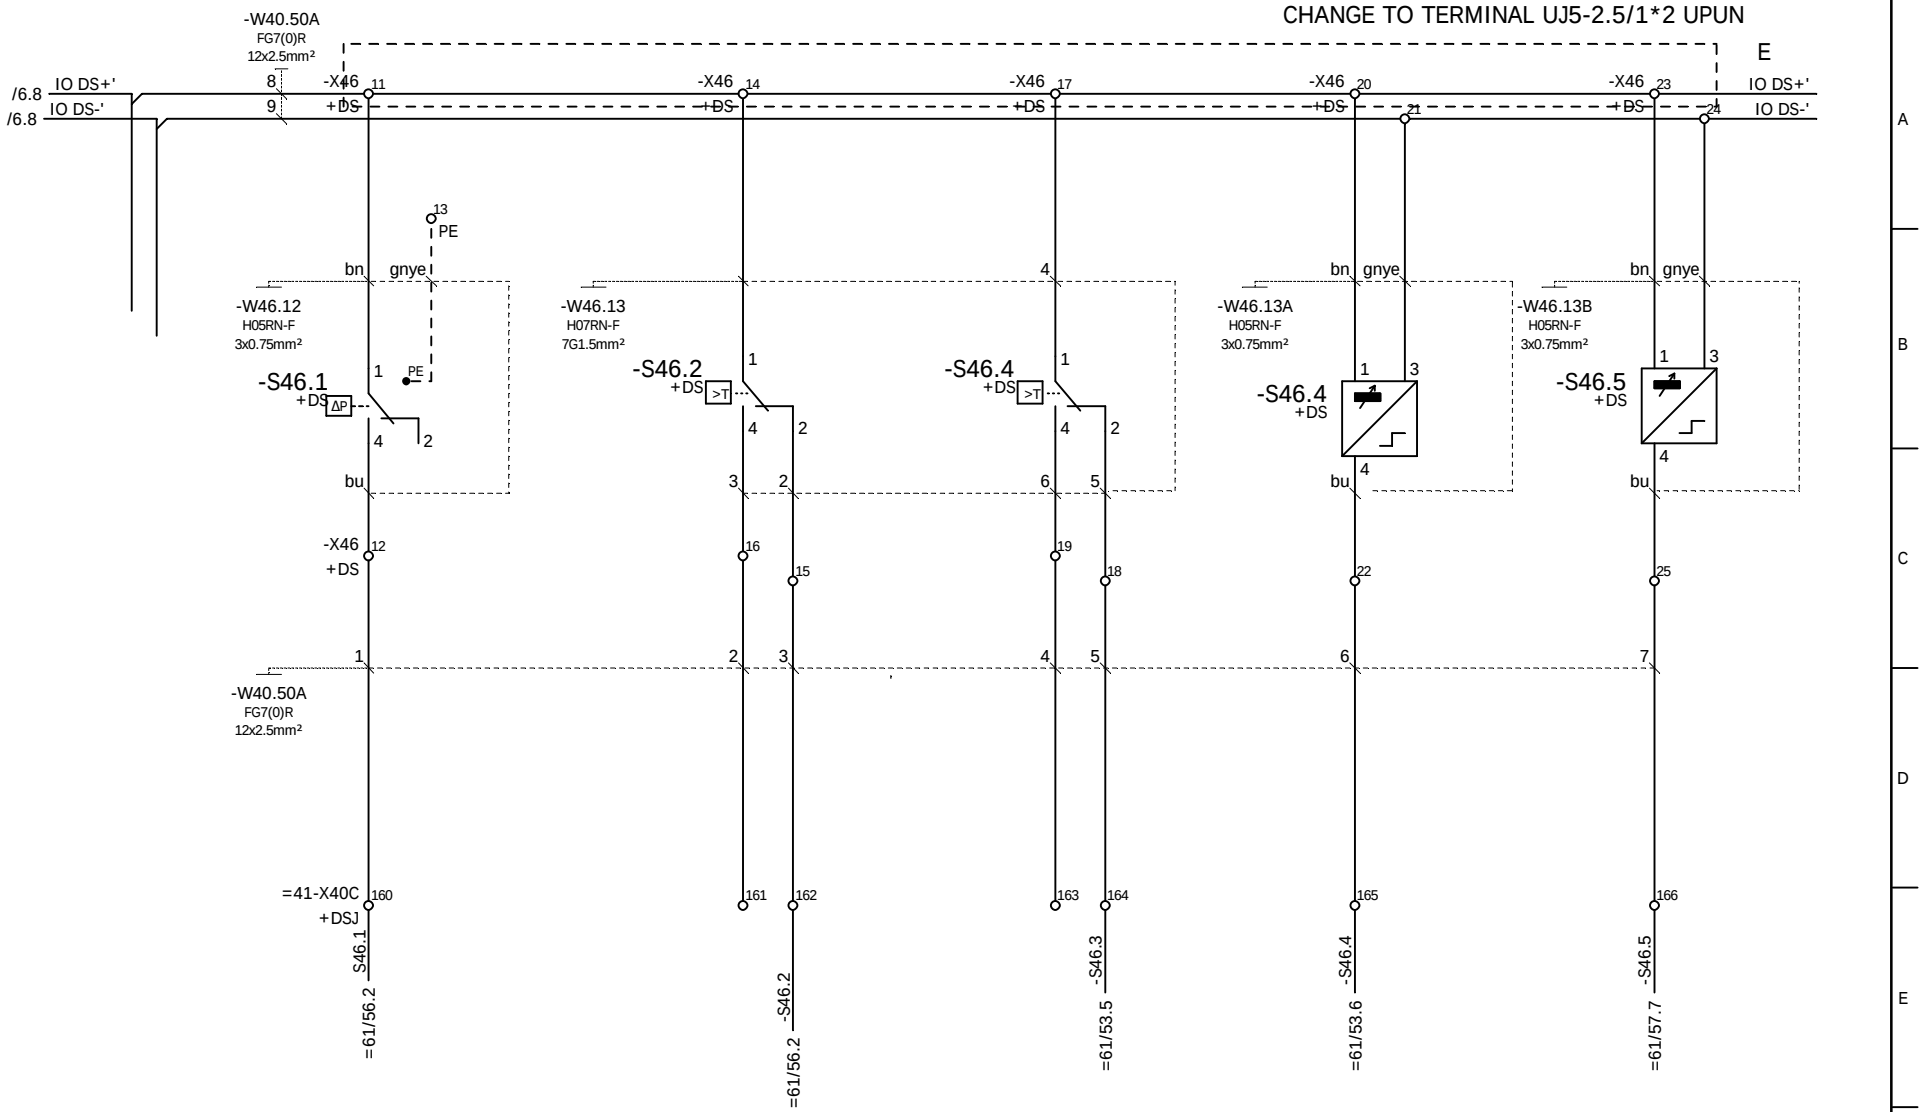

diesel side reservoir oil low level switch

diesel side reservoir oil low temp

diesel side reservoir oil over temp


diesel side valve ball limit switch 1

diesel side valve ball limit switch 2

				Date		Costumer	AMPT Egypt	Type RTG 50/26.50/5+1/AC	=42 +DSJ
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
nd.	Revision	Date	Name	Standard		Source:	wheel turning,sensors Stromlaufplan / Circuit Diagram		Sheet 10 19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

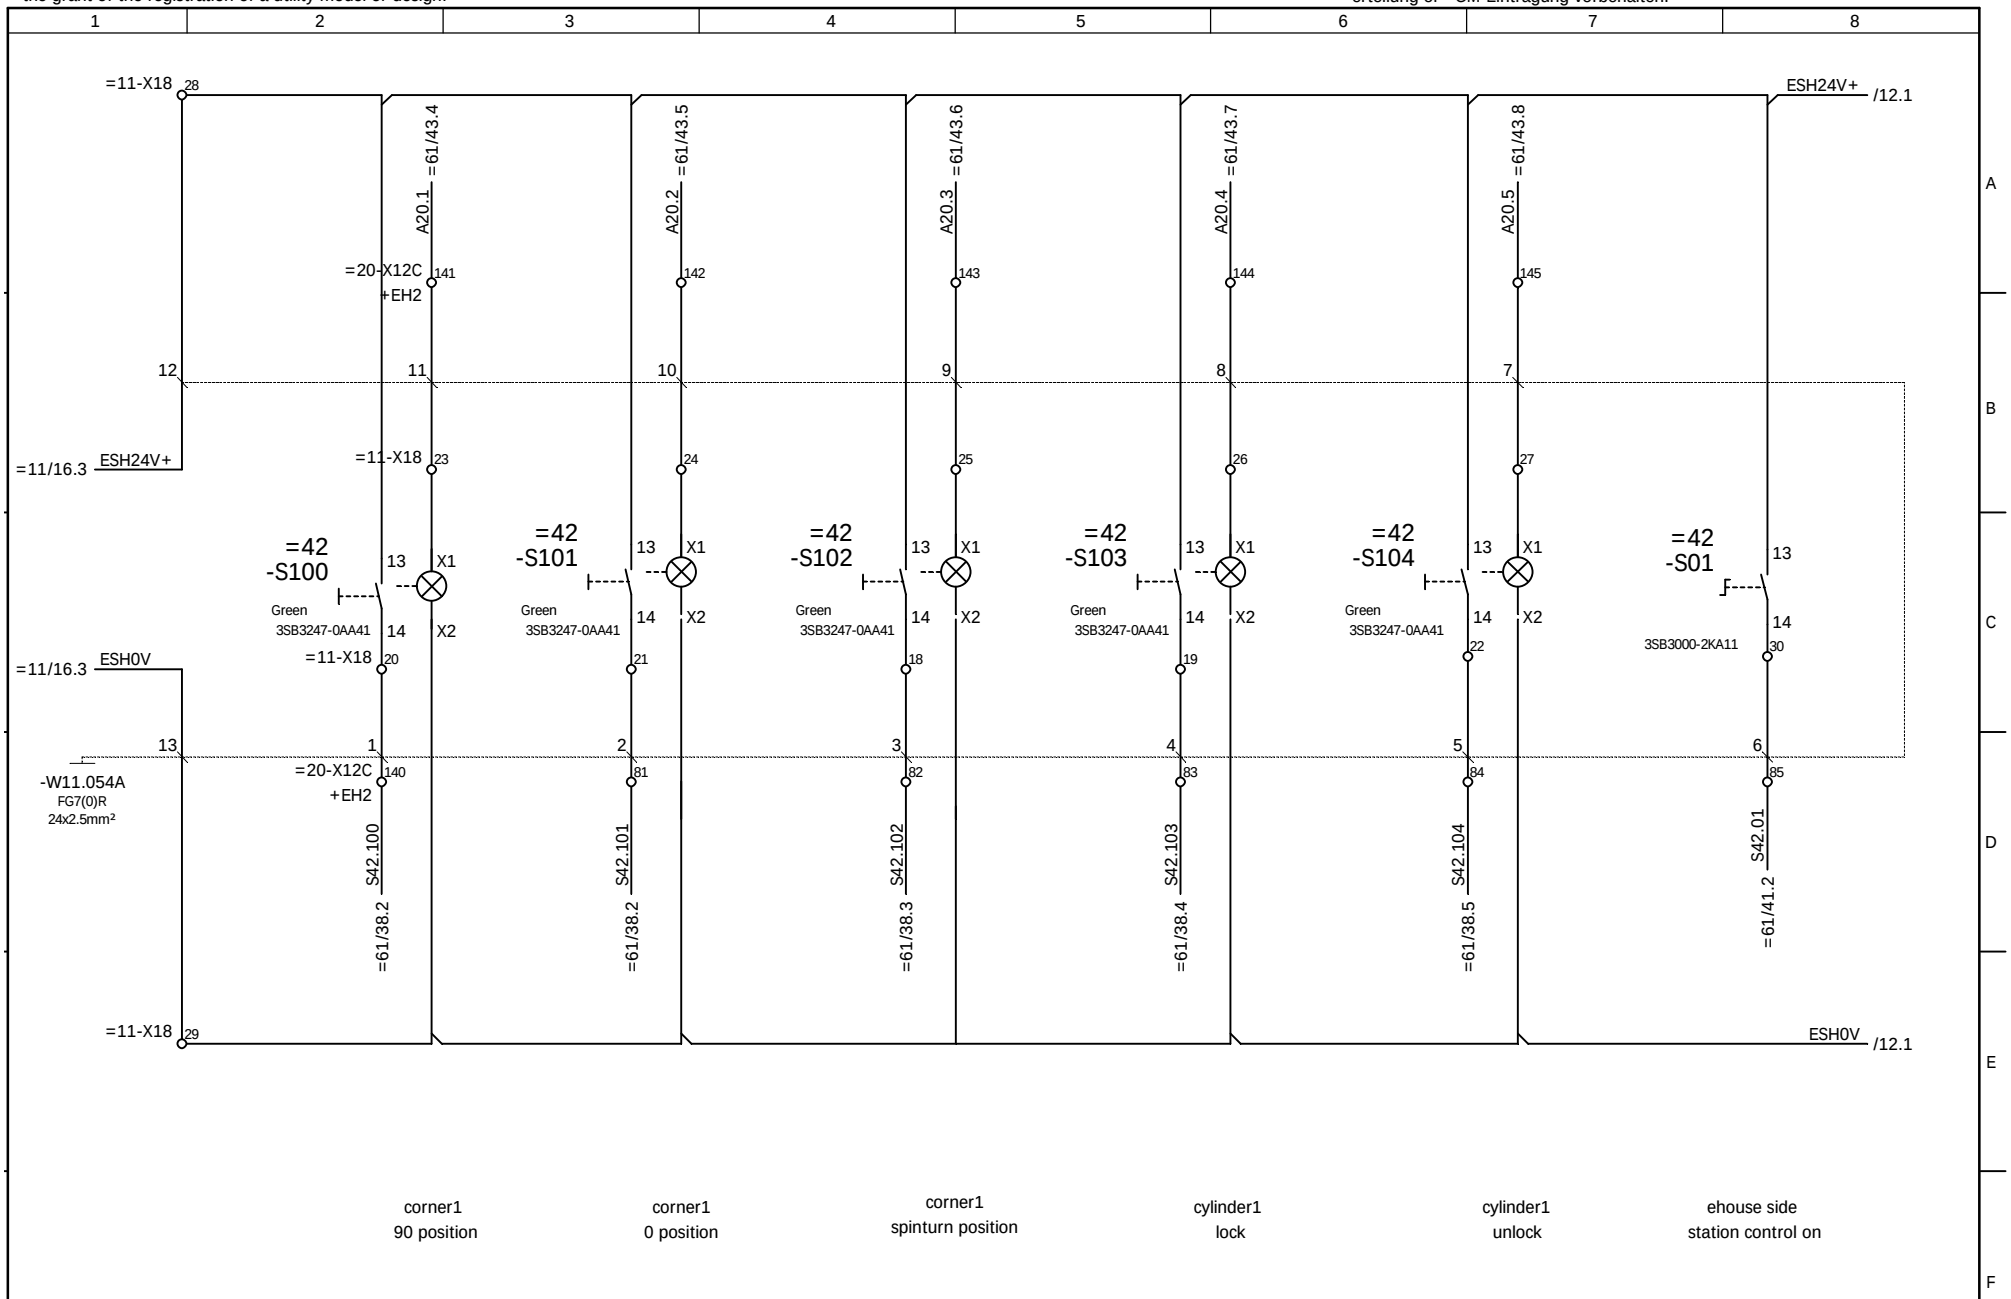

				Date		Costumer	AMPT Egypt	NOELL	wheel turning,control station	Type RTG 50/26.50/5+1/AC	=42
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+ESJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11
Ind.	Revision	Date	Name	Standard		Source:						19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

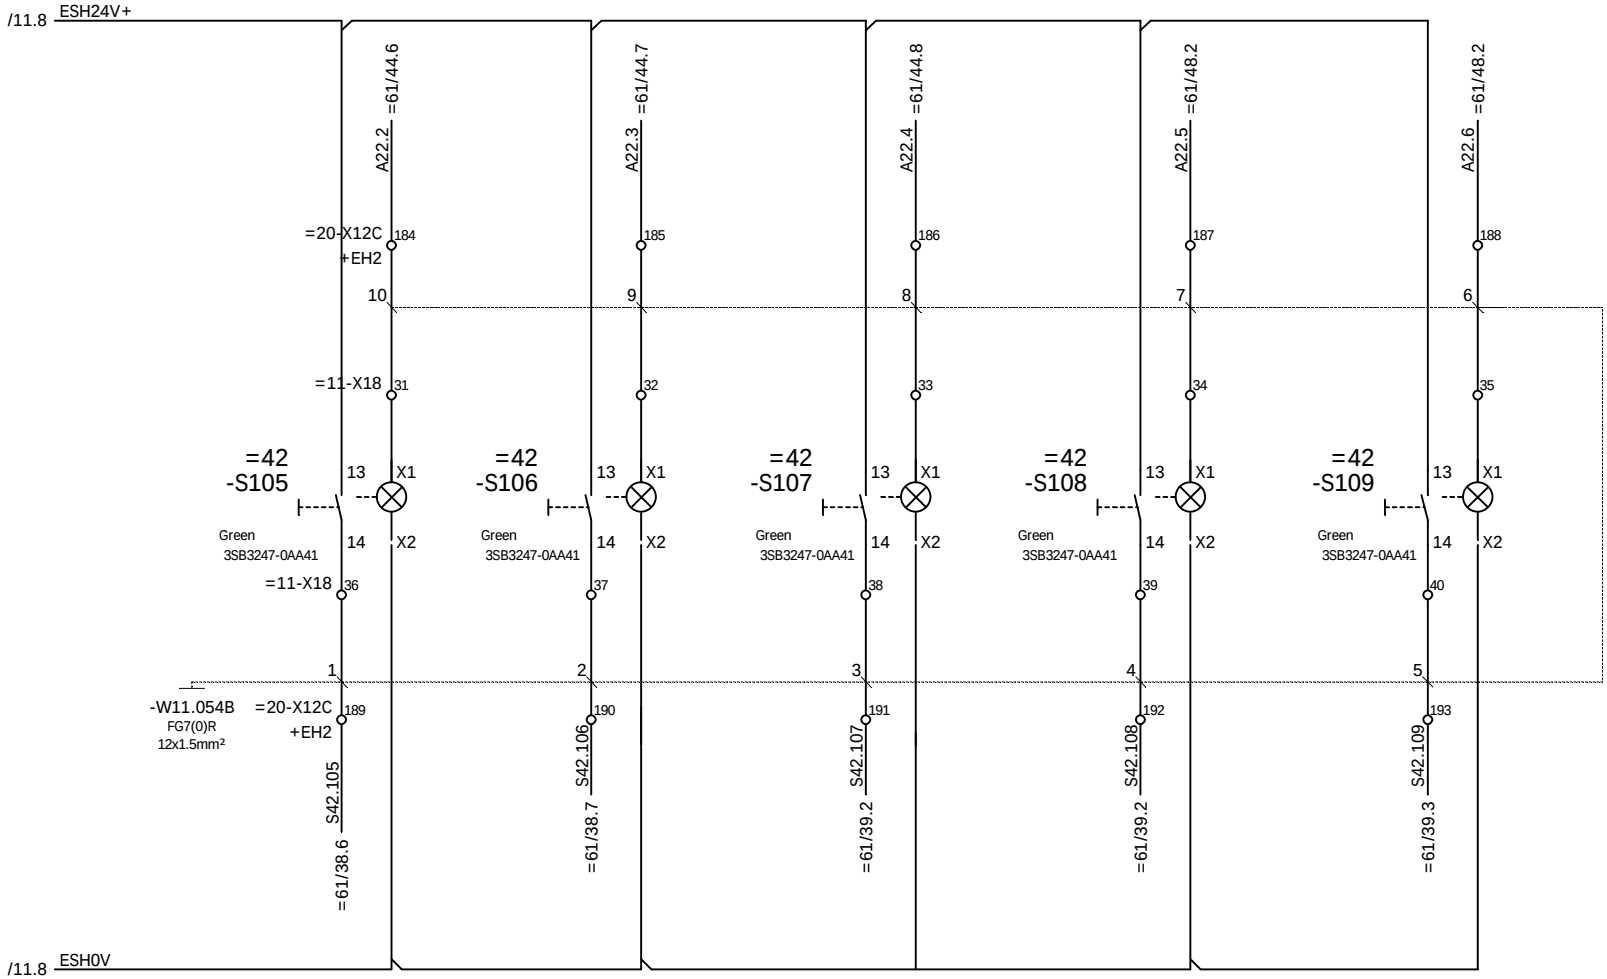


corner2	corner2	corner2	cylinder2	cylinder2
90 position	0 position	spinturn position	lock	unlock

				Date		Costumer	AMPT Egypt	NOELL	wheel turning,control station Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=42 +ESJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 12	19 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

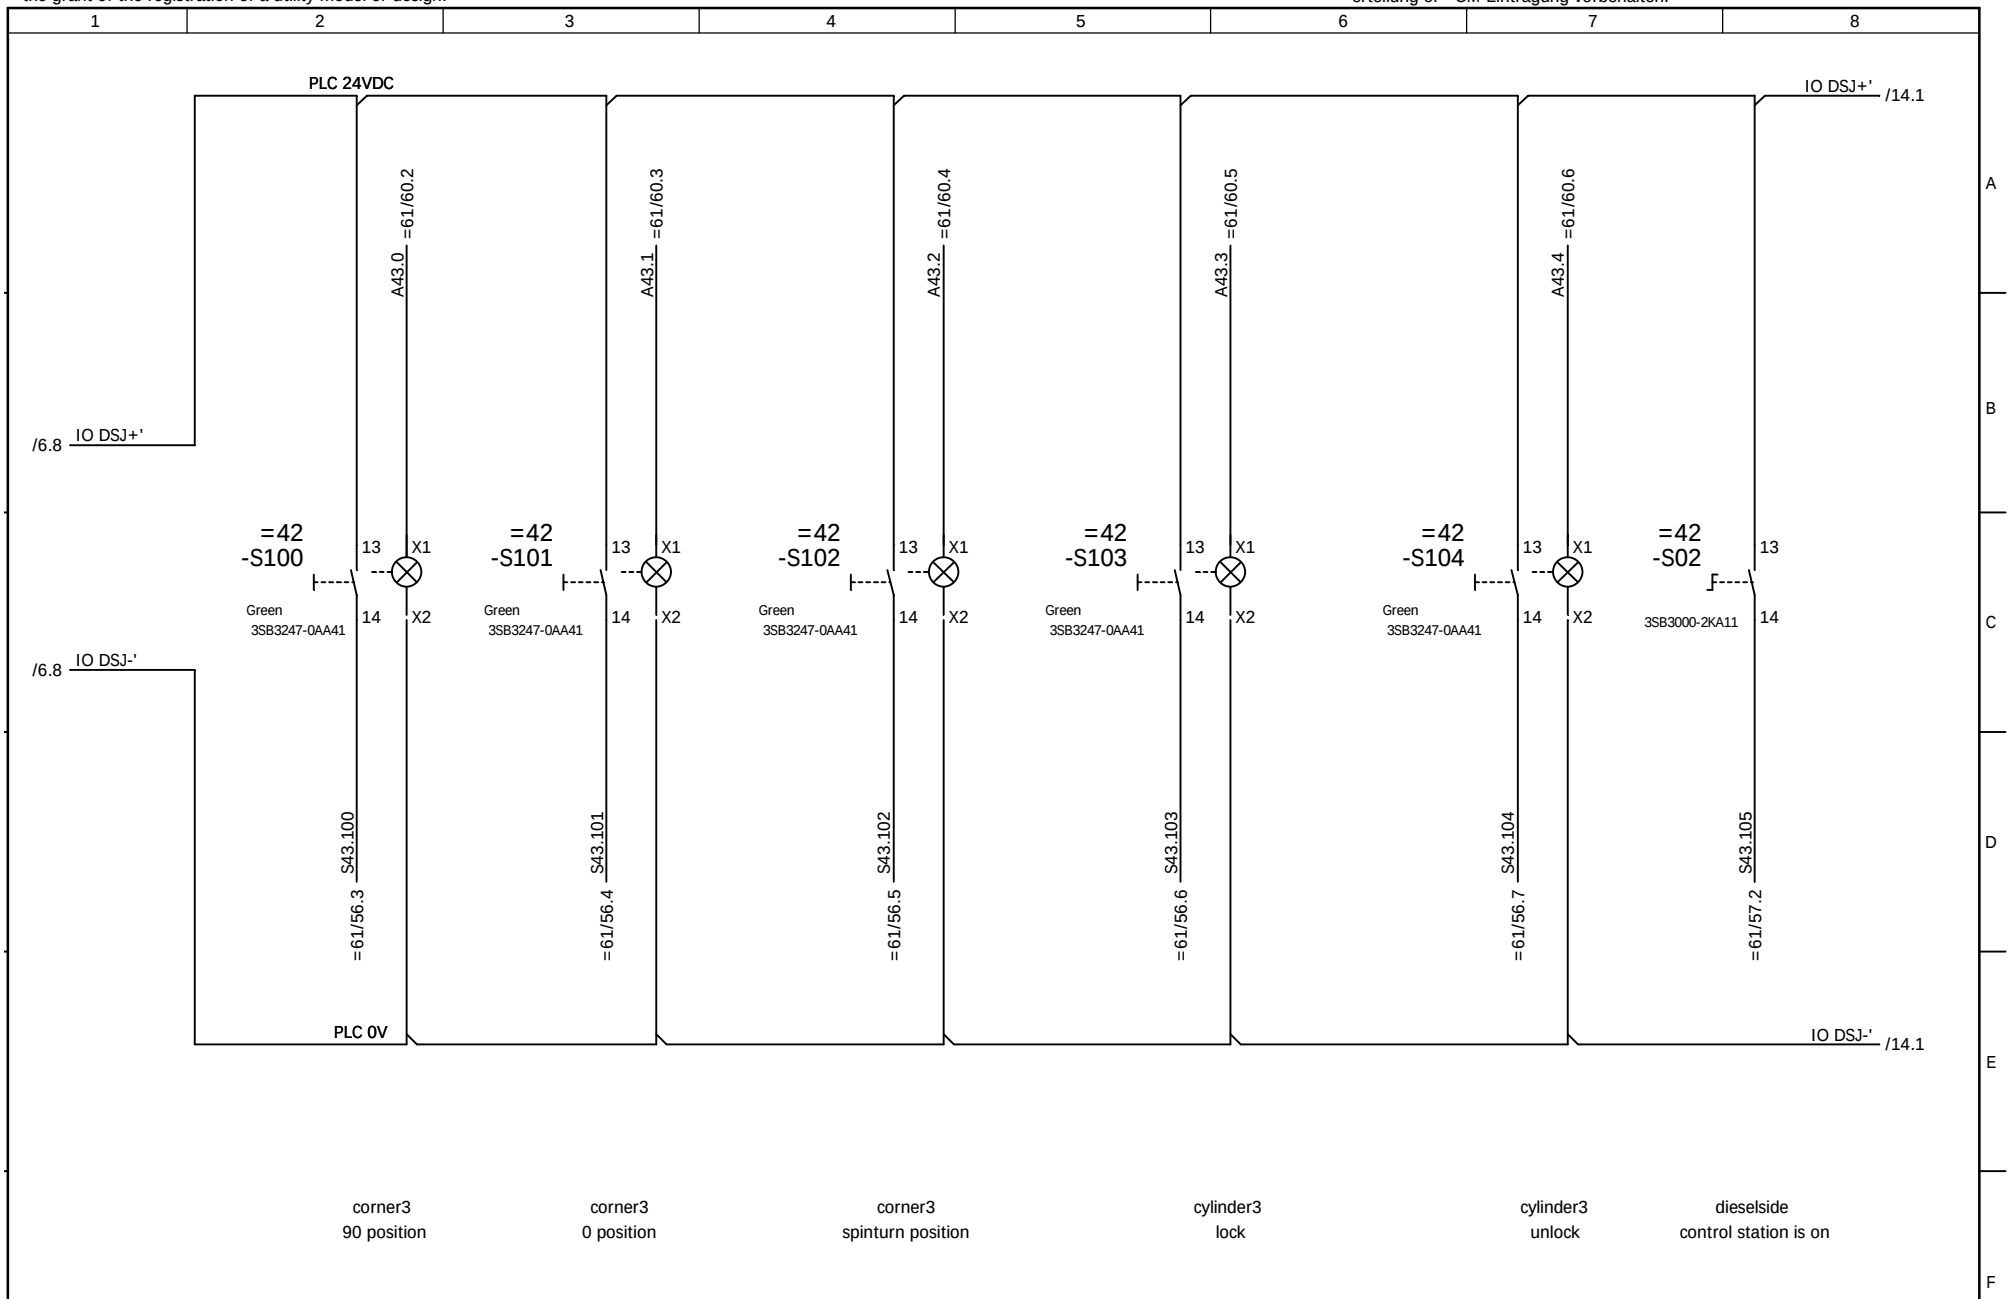

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			

NOELL

wheel turning,control station
Stromlaufplan / Circuit Diagram

=42
+DSJ

Sheet 13
19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.



corner4	corner4	corner4	cylinder4	cylinder4
90 position	0 position	spinturn position	lock	unlock

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
nd.	Revision	Date	Name	Standard		Source:		


NOELL

wheel turning,control station
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=42 +DSJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	14 19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

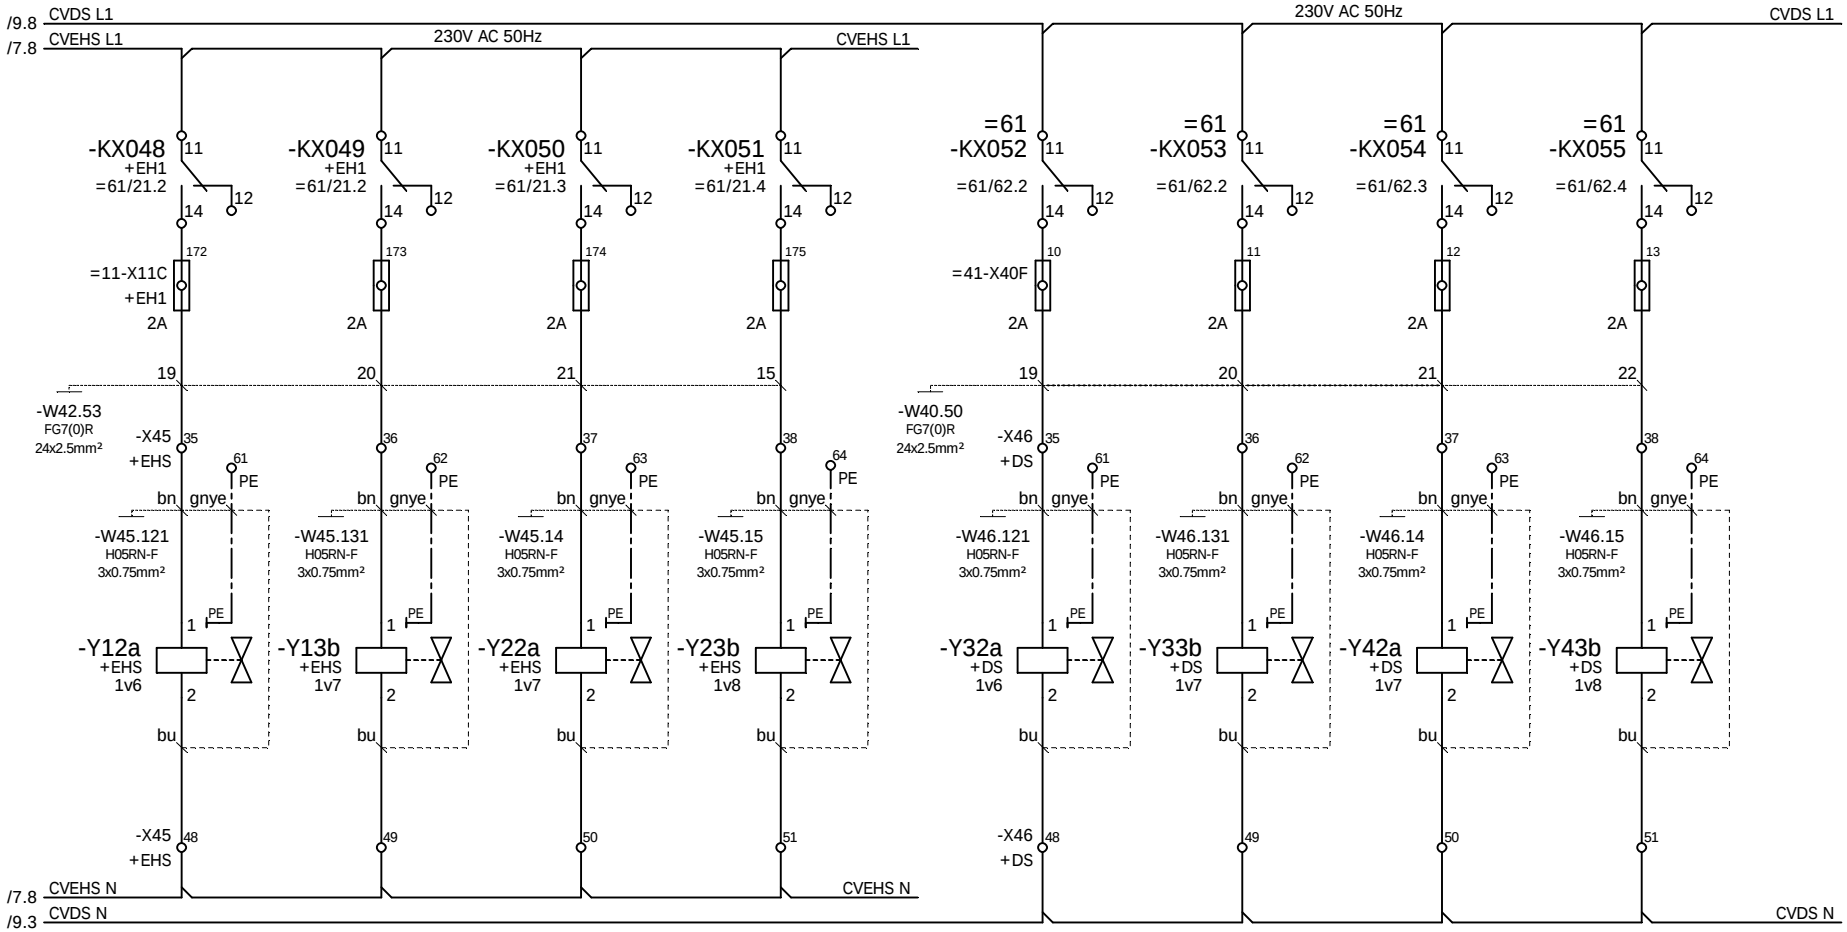


jack cylinder 1 up e-house side	jack cylinder 1 down e-house side	jack cylinder 2 up e-house side	jack cylinder 2 down e-house side	jack cylinder 1 up diesel side	jack cylinder 1 down diesel side	jack cylinder 2 up diesel side	jack cylinder 2 down diesel side

				Date		Costumer	AMPT Egypt	NOELL	jack systems, solenoid valves	Type	RTG 50/26.50/5+1/AC	=42
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+DSJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 15 19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

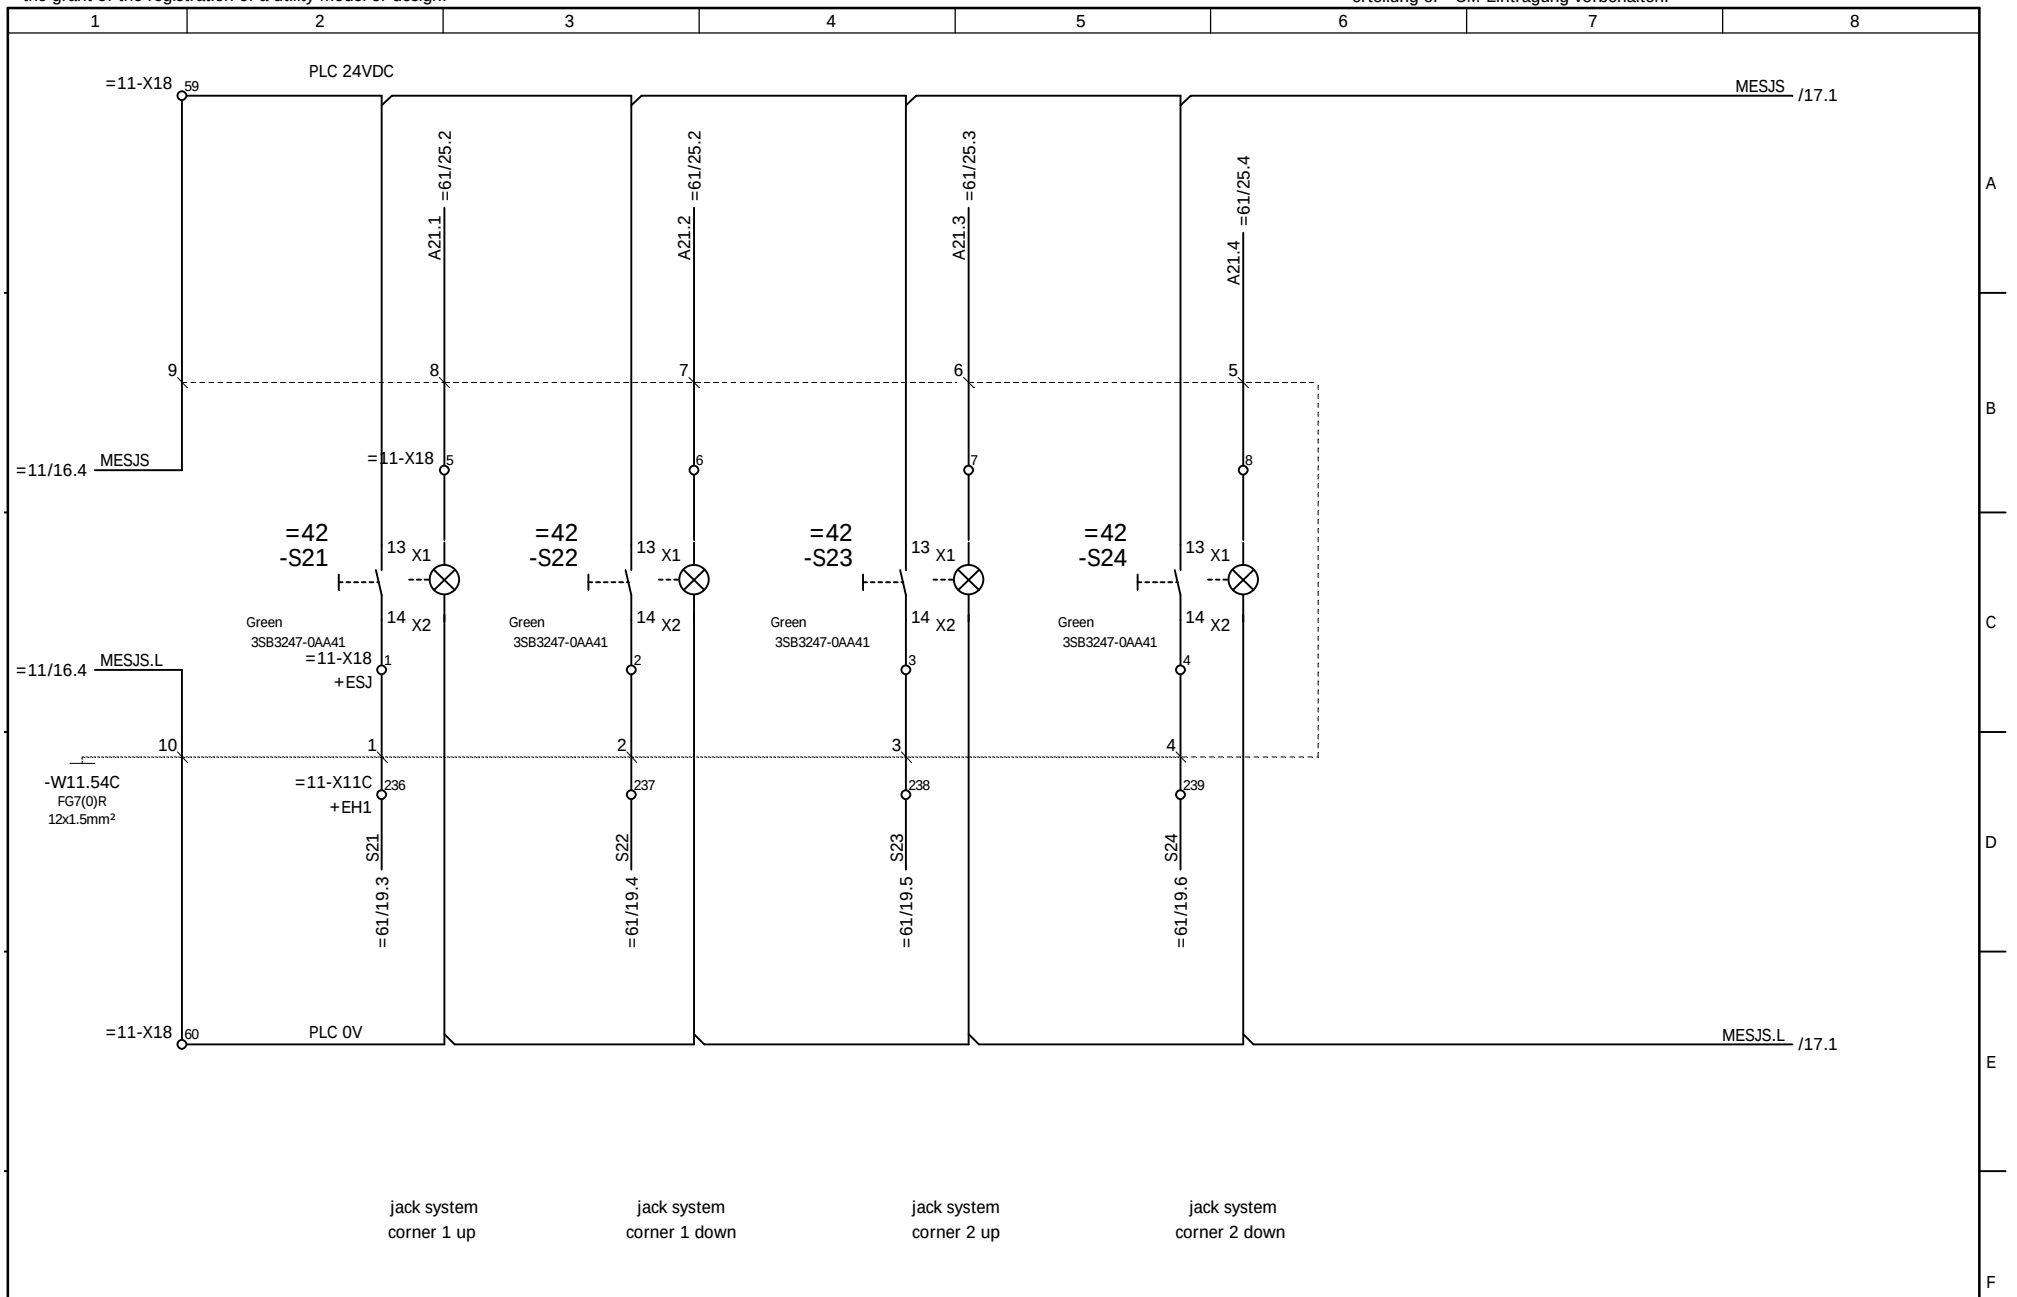

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00


NOELL

wheel turning,control station
Stromlaufplan / Circuit Diagram

=42
+ESJ
Sheet 16
19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

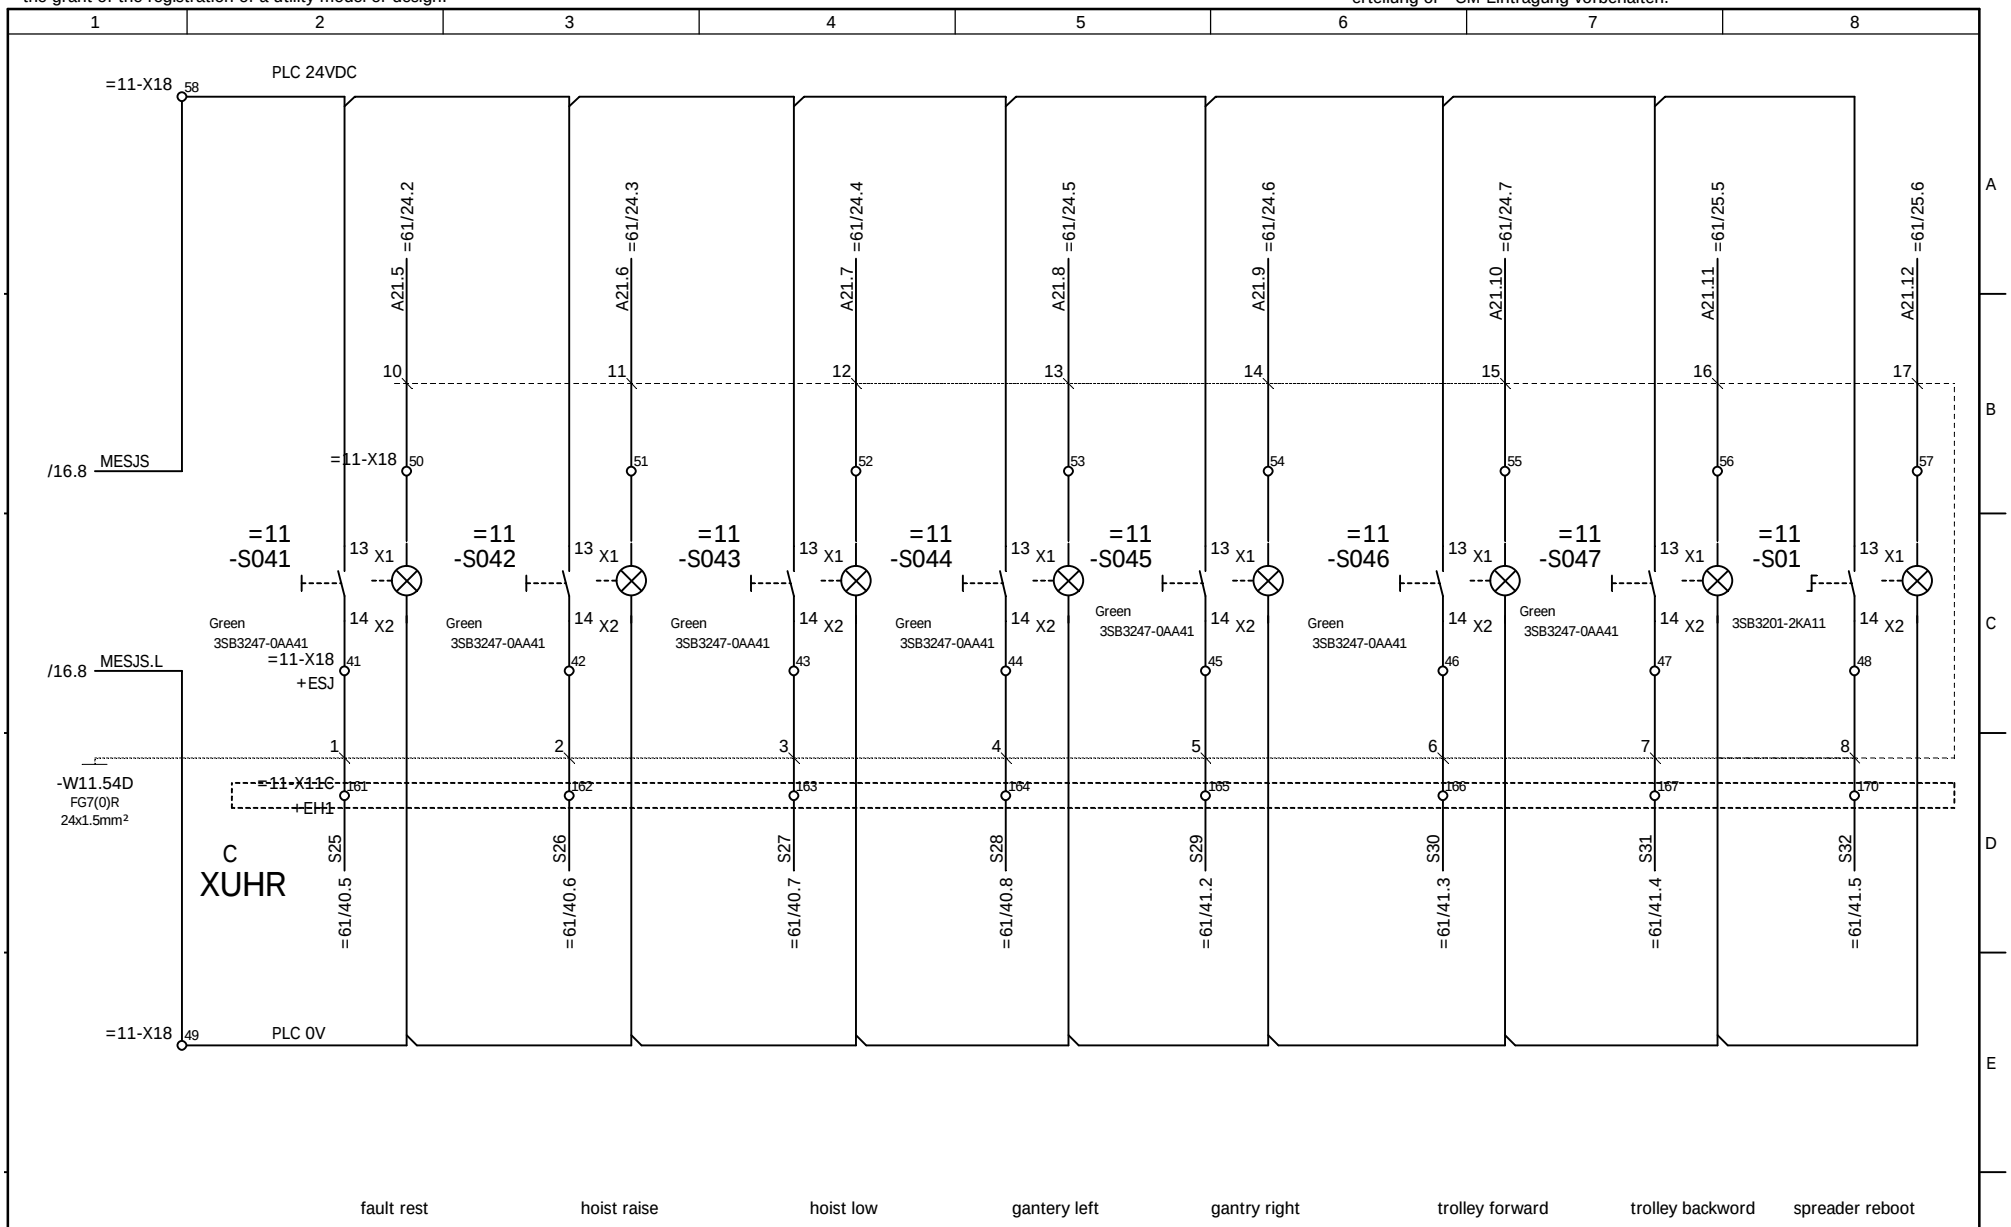

				Date		Costumer	AMPT Egypt	NOELL	wheel turning,control station	Type	RTG 50/26.50/5+1/AC	=42
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+ESJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 17
Ind.	Revision	Date	Name	Standard		Source:						19 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

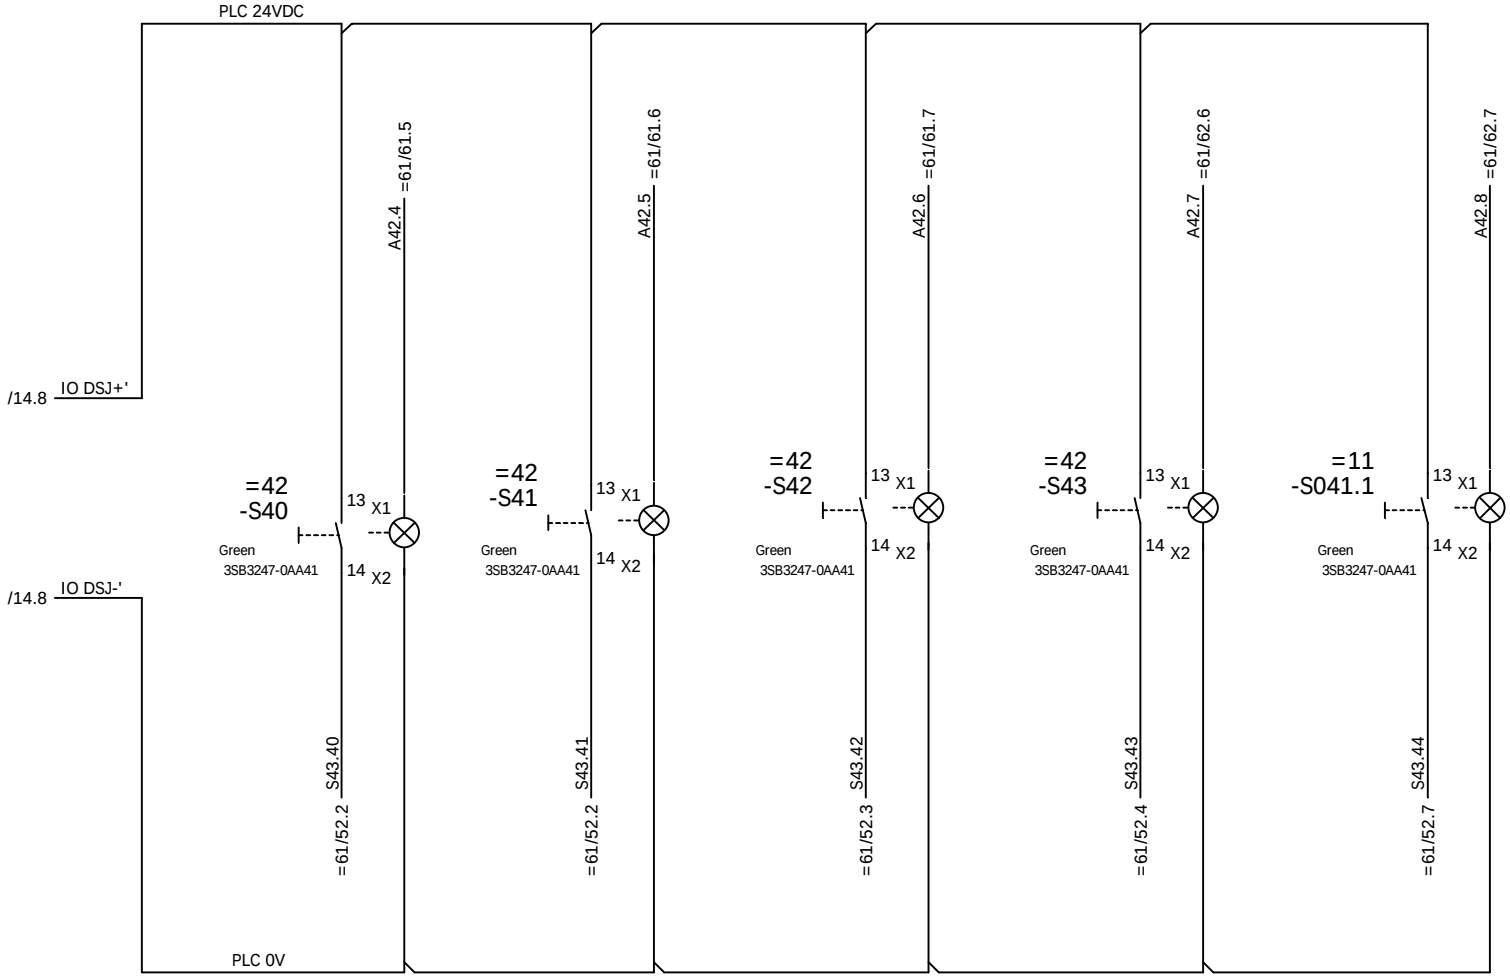


jack system corner 3 up | jack system corner 3 down | jack system corner 4 up | jack system corner 4 down | gault reset

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=42 +DSJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	wheel turning,control station		Sheet 18 19 Sh.

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

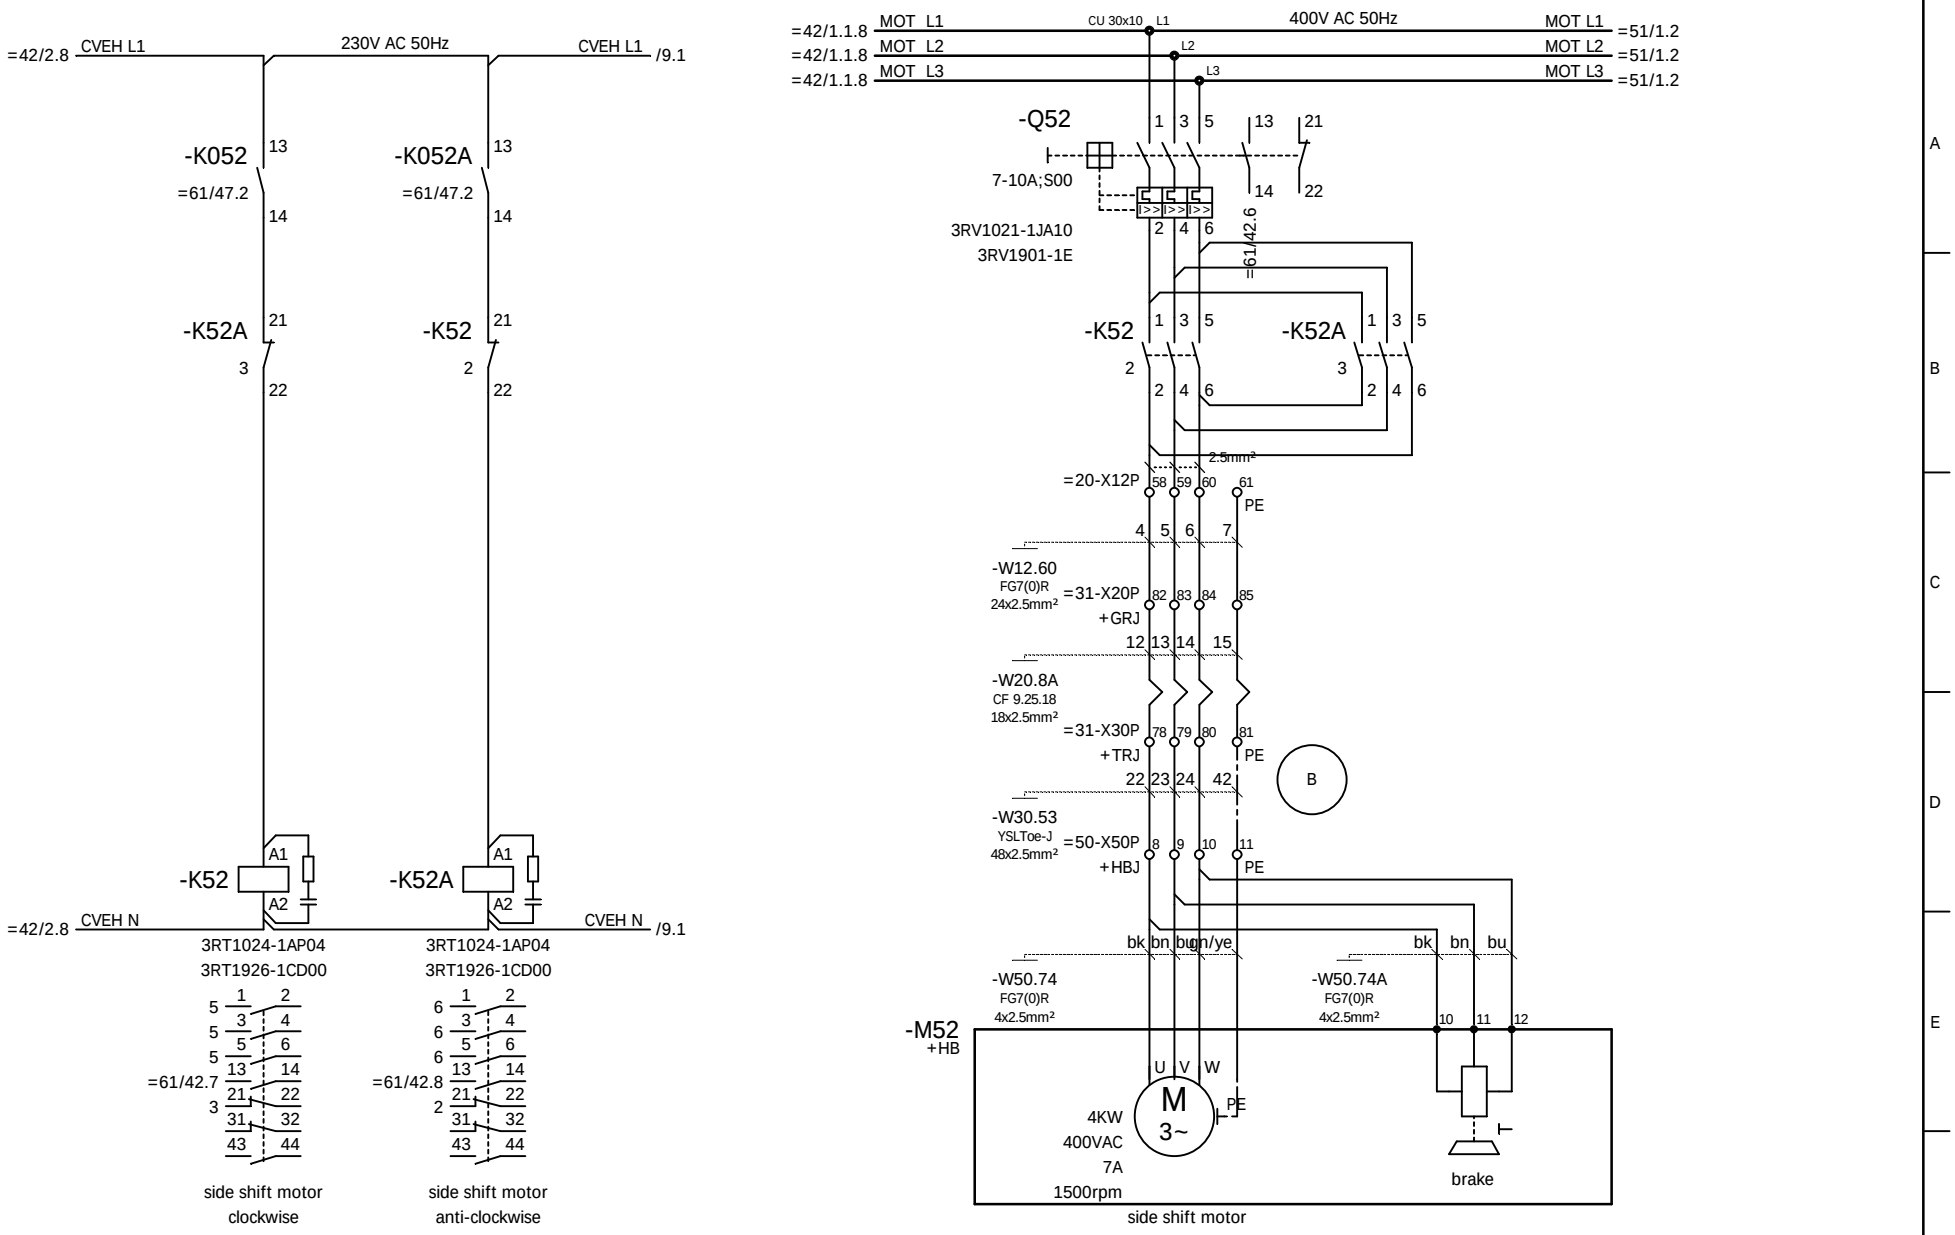

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
nd.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00


NOELL

Side shift motor
Stromlaufplan / Circuit Diagram

=50
+EH2
Sheet 1
11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

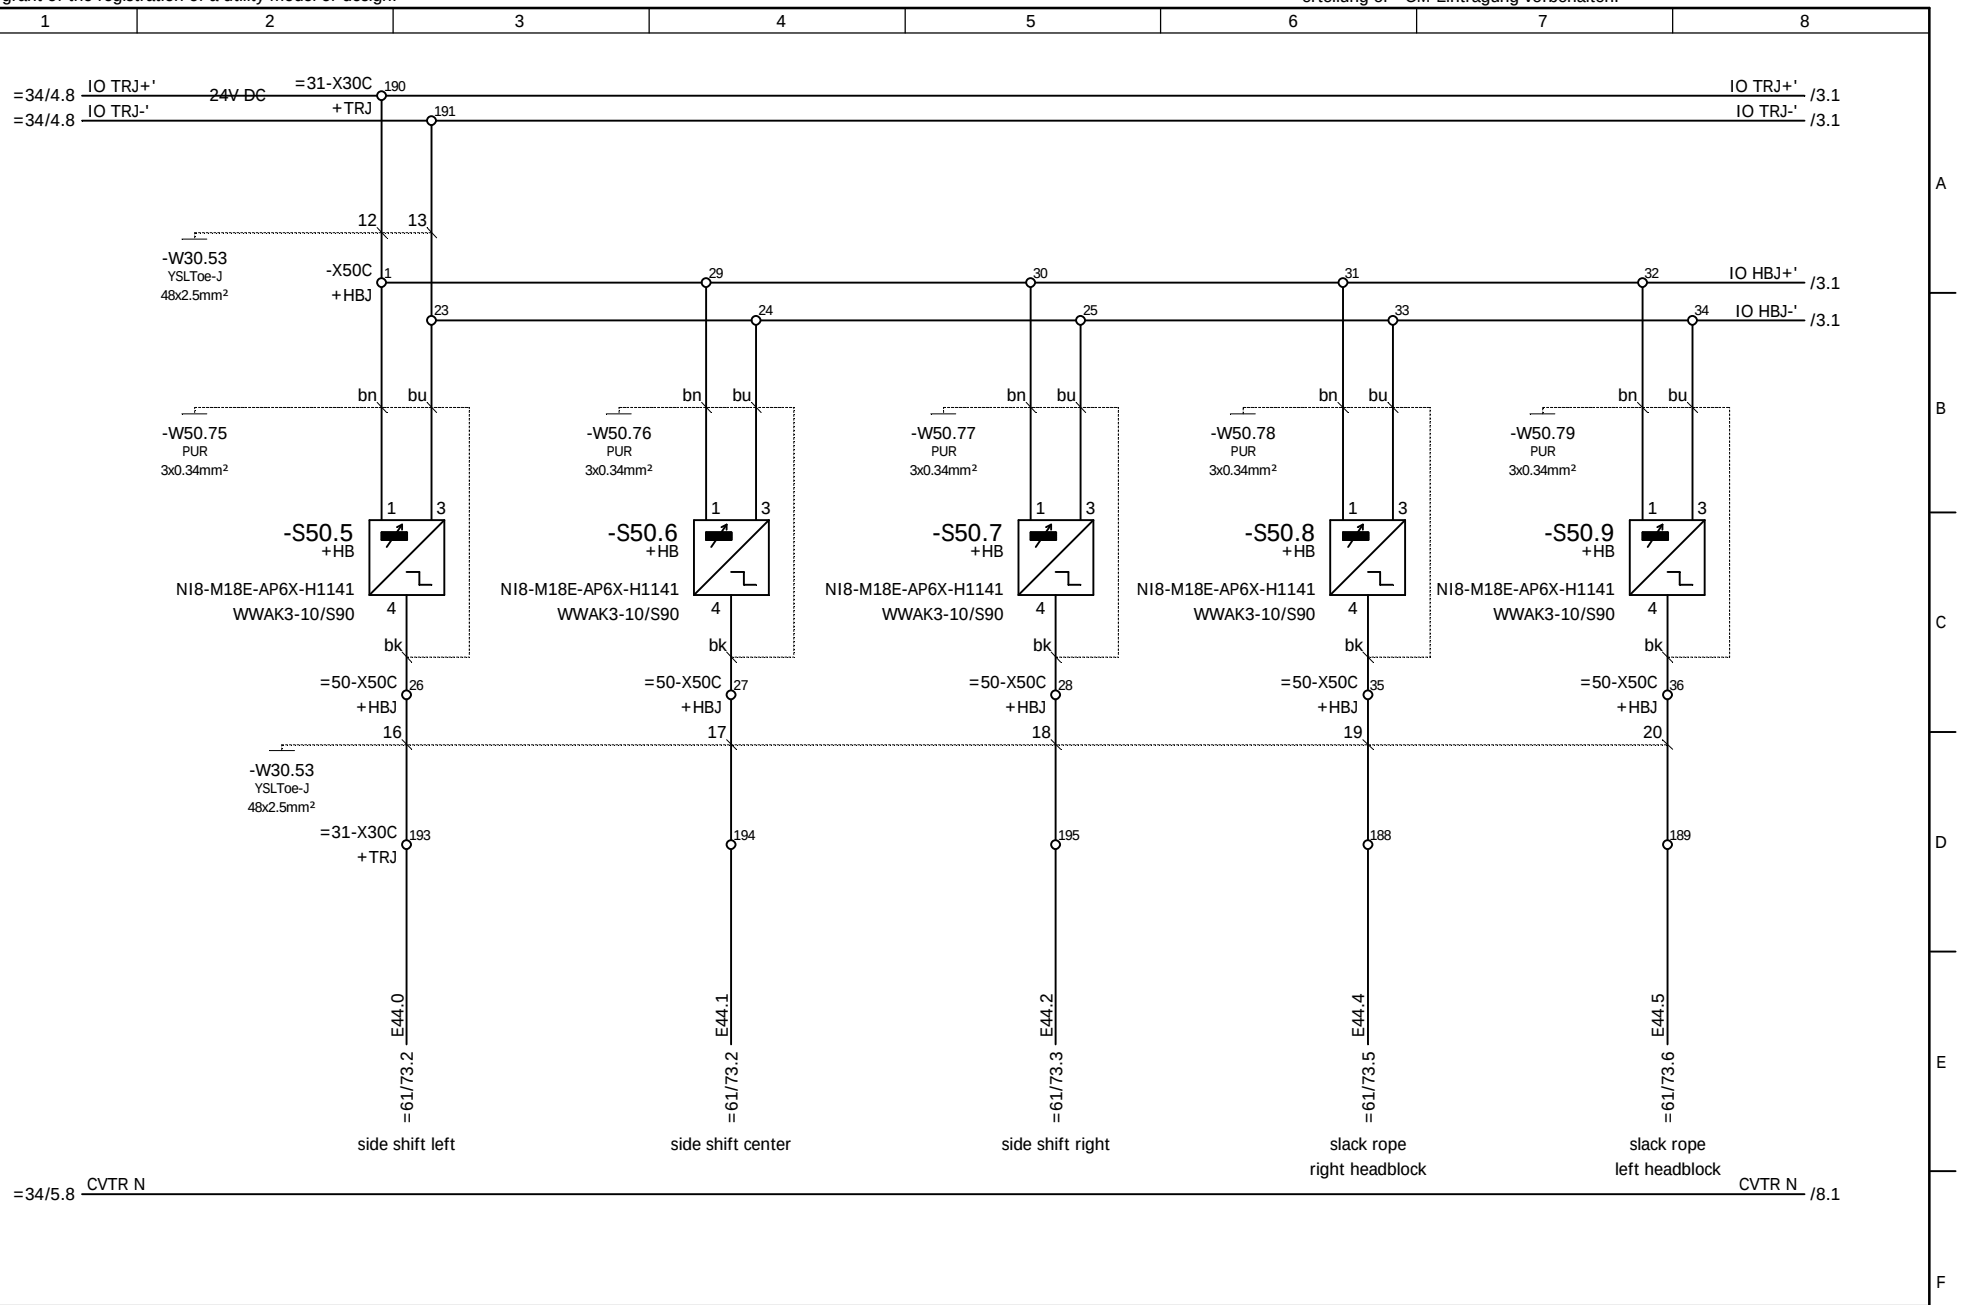


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=50 +TRJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 2 11 Sh.

NOELL

antisway, control
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

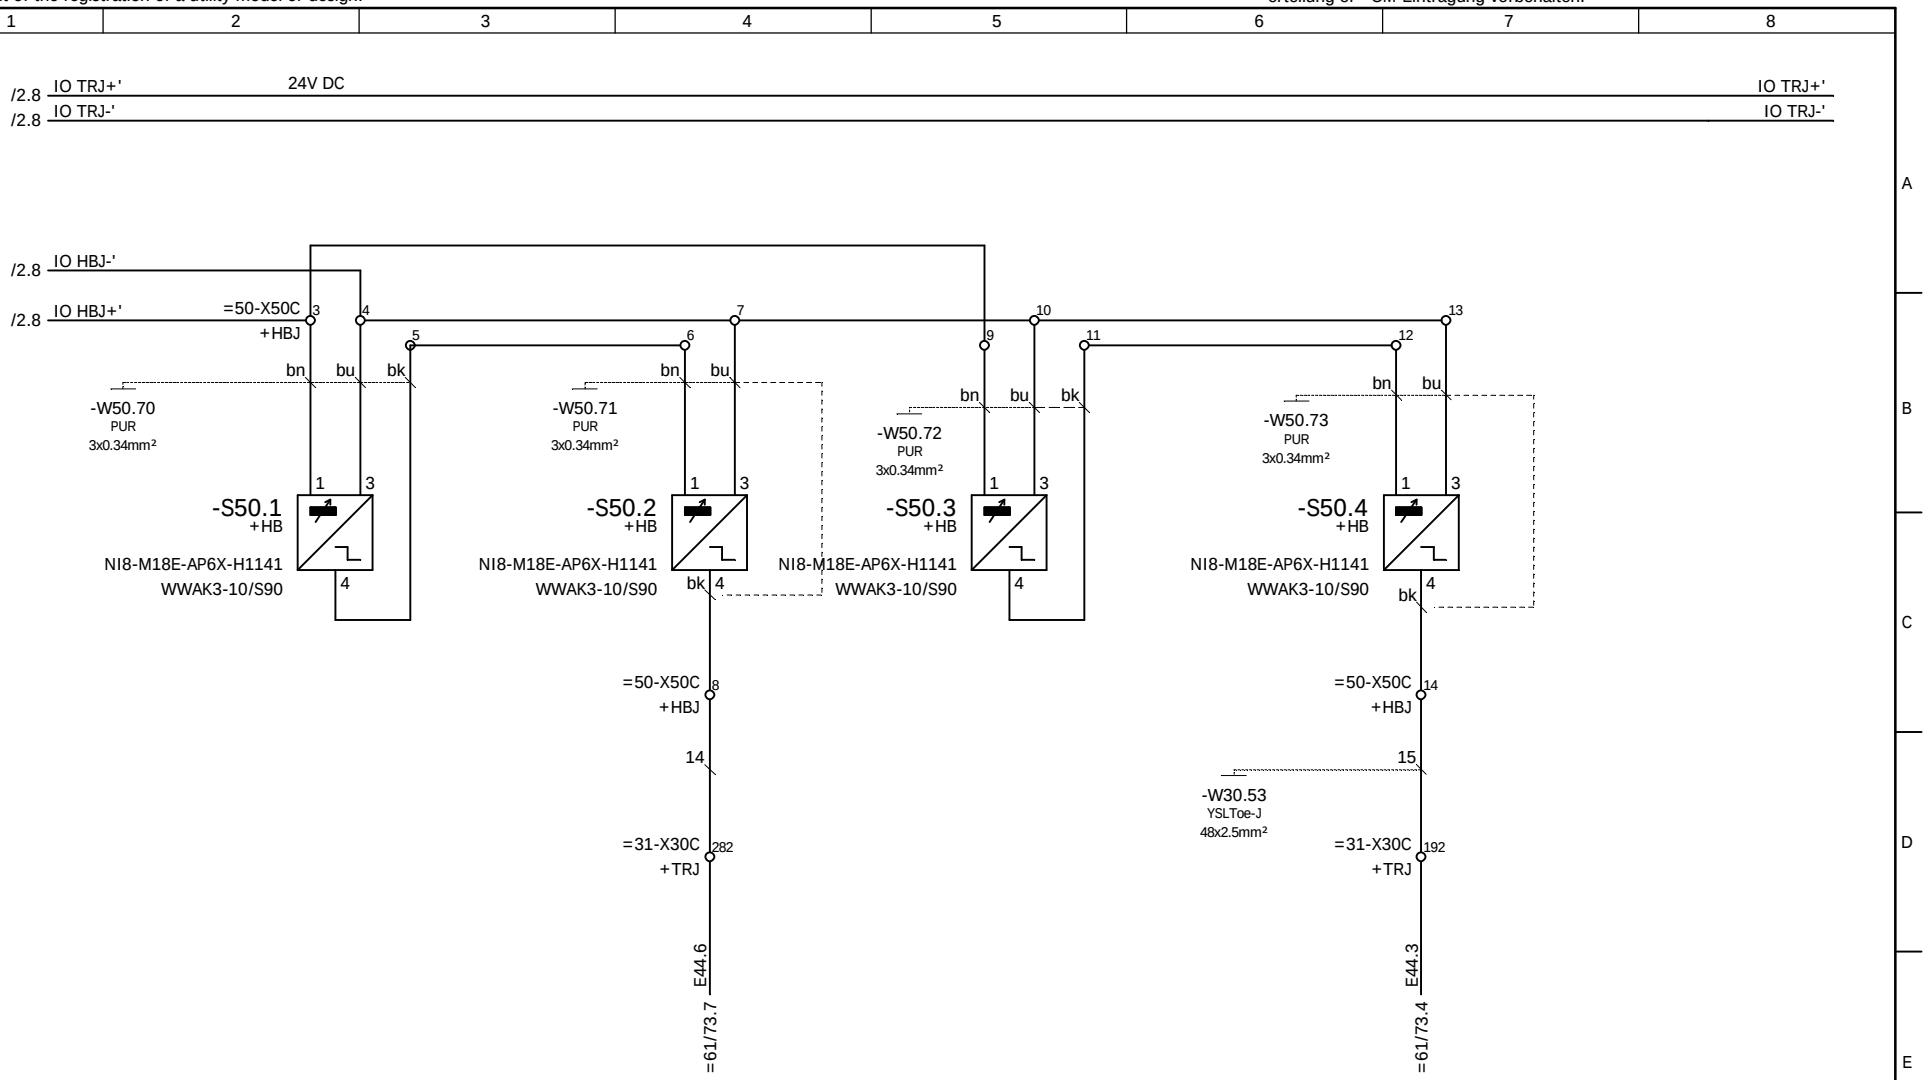

				Date		Costumer	AMPT Egypt	NOELL	antisway, control	Type	RTG 50/26.50/5+1/AC	=50
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+TRJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 3
Ind.	Revision	Date	Name	Standard		Source:						11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

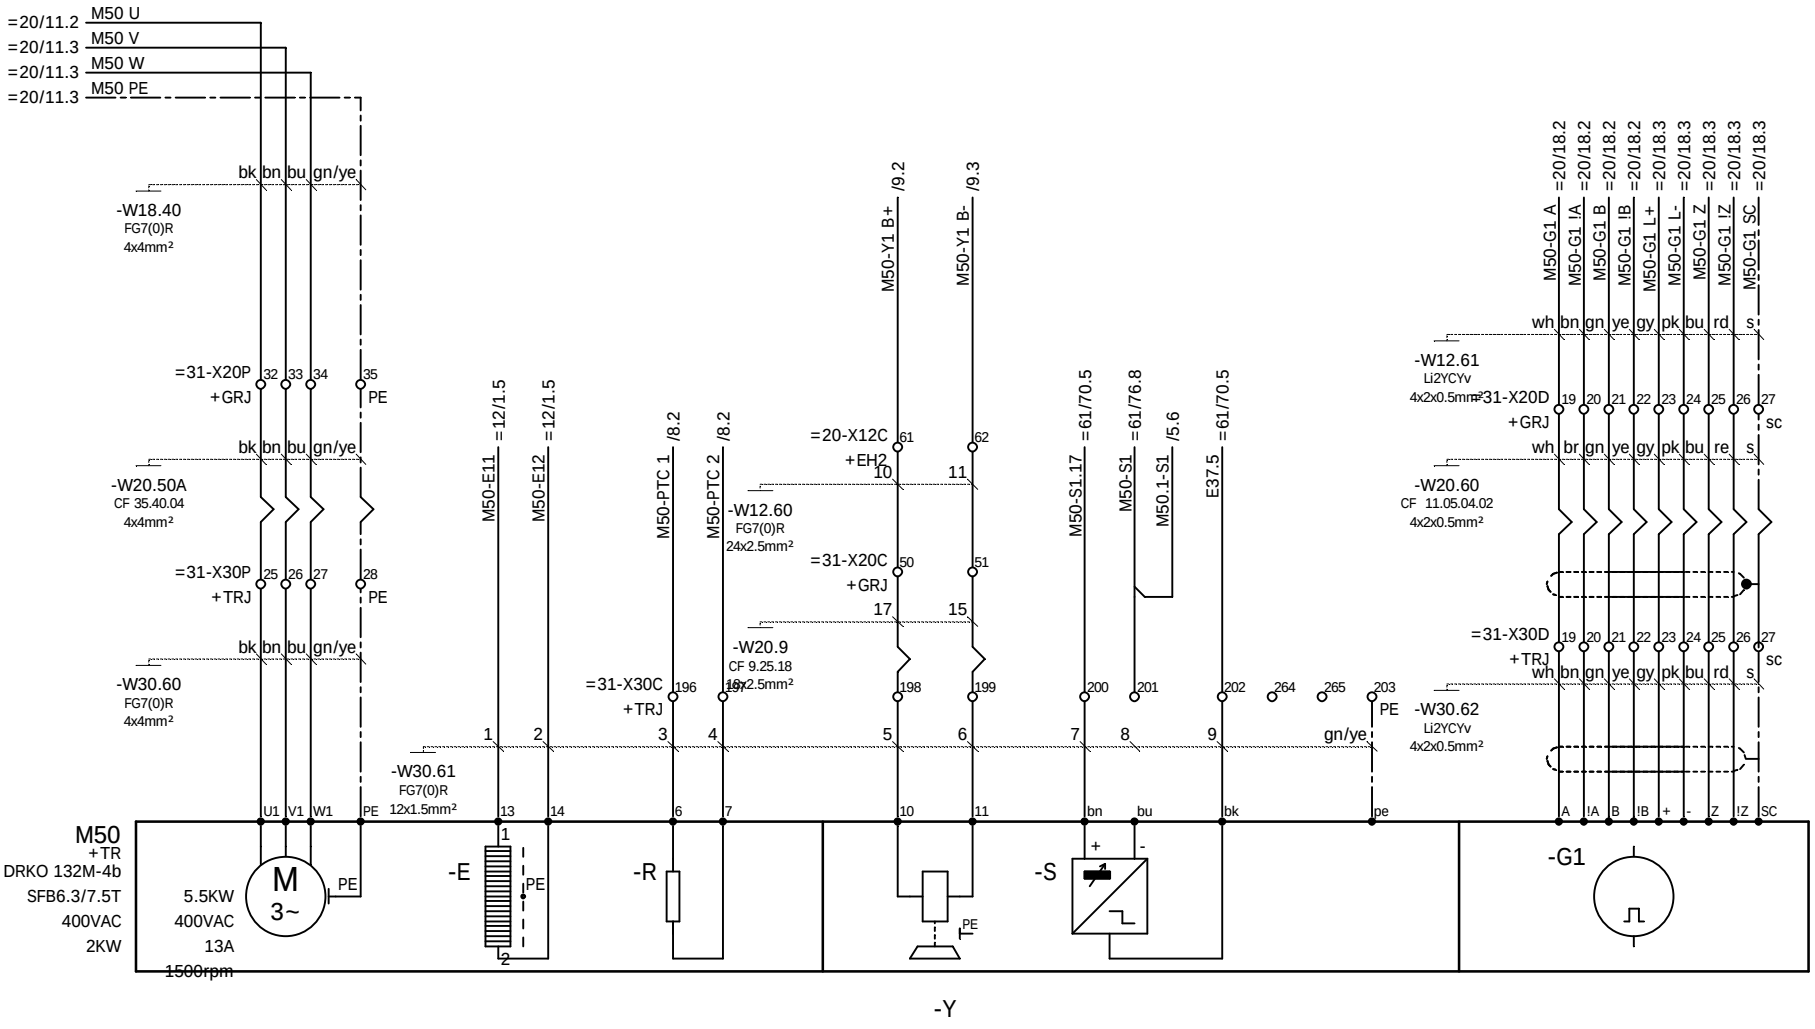


antisway motor 1 | anti condensing heating | thermistor | brake | brake limit switch | encoder

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

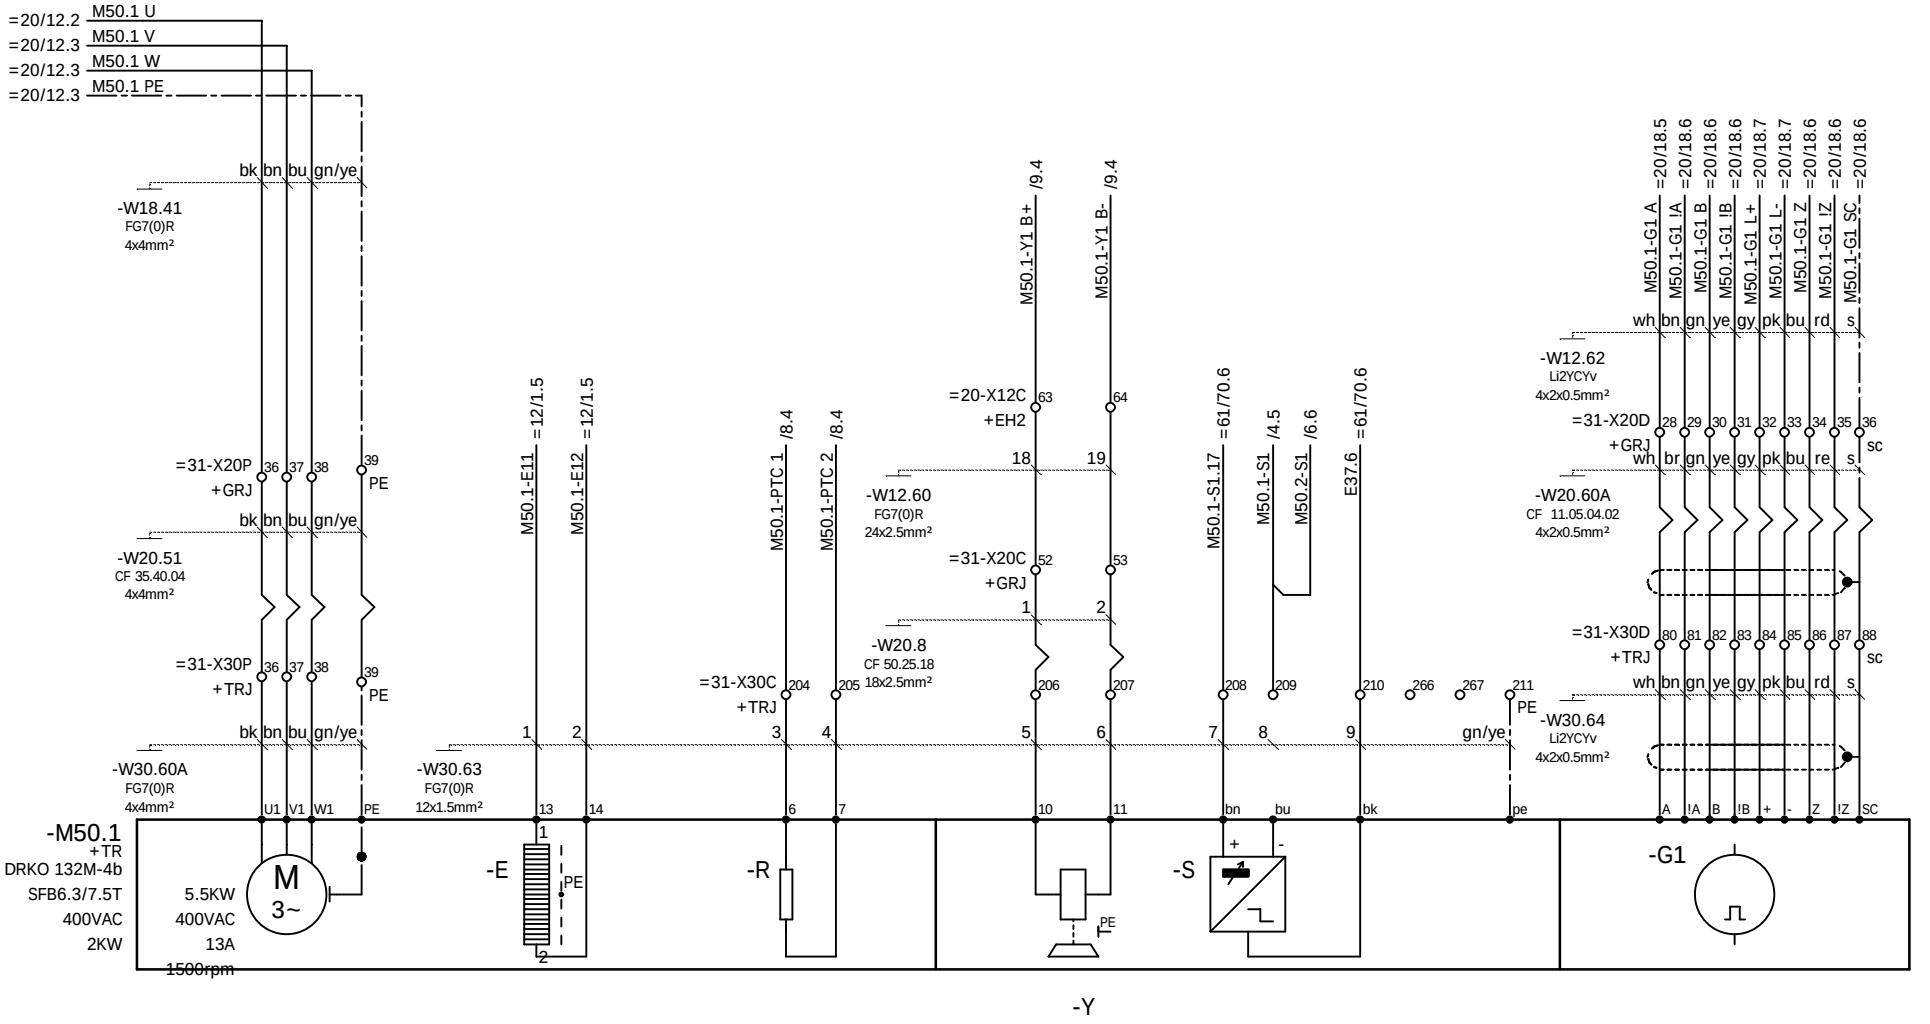

				Date		Costumer	AMPT Egypt	NOELL	antisway system Motor 2	Type	RTG 50/26.50/5+1/AC	=50
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 5 / 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

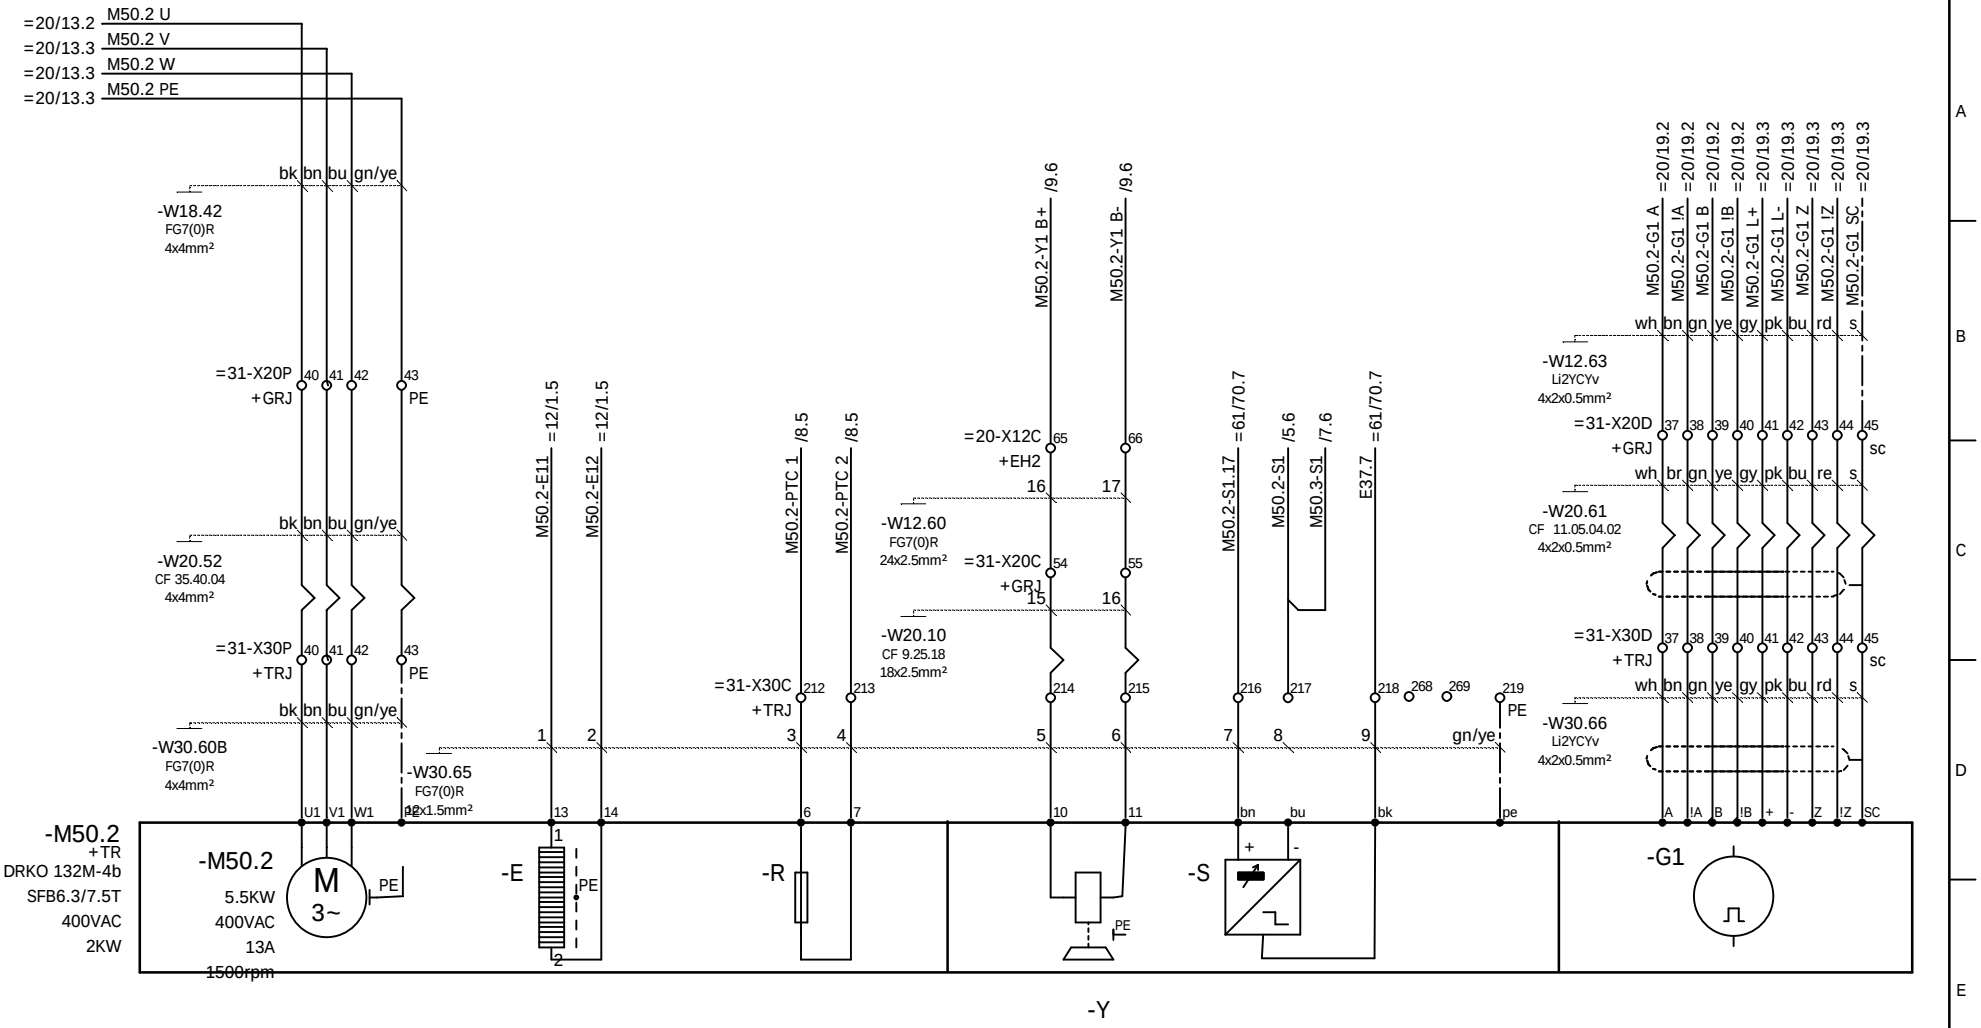

				Date		Costumer	AMPT Egypt	NOELL	antisway system Motor 3	Type RTG 50/26.50/5+1/AC	=50
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH2
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 6
Ind.	Revision	Date	Name	Standard		Source:						11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

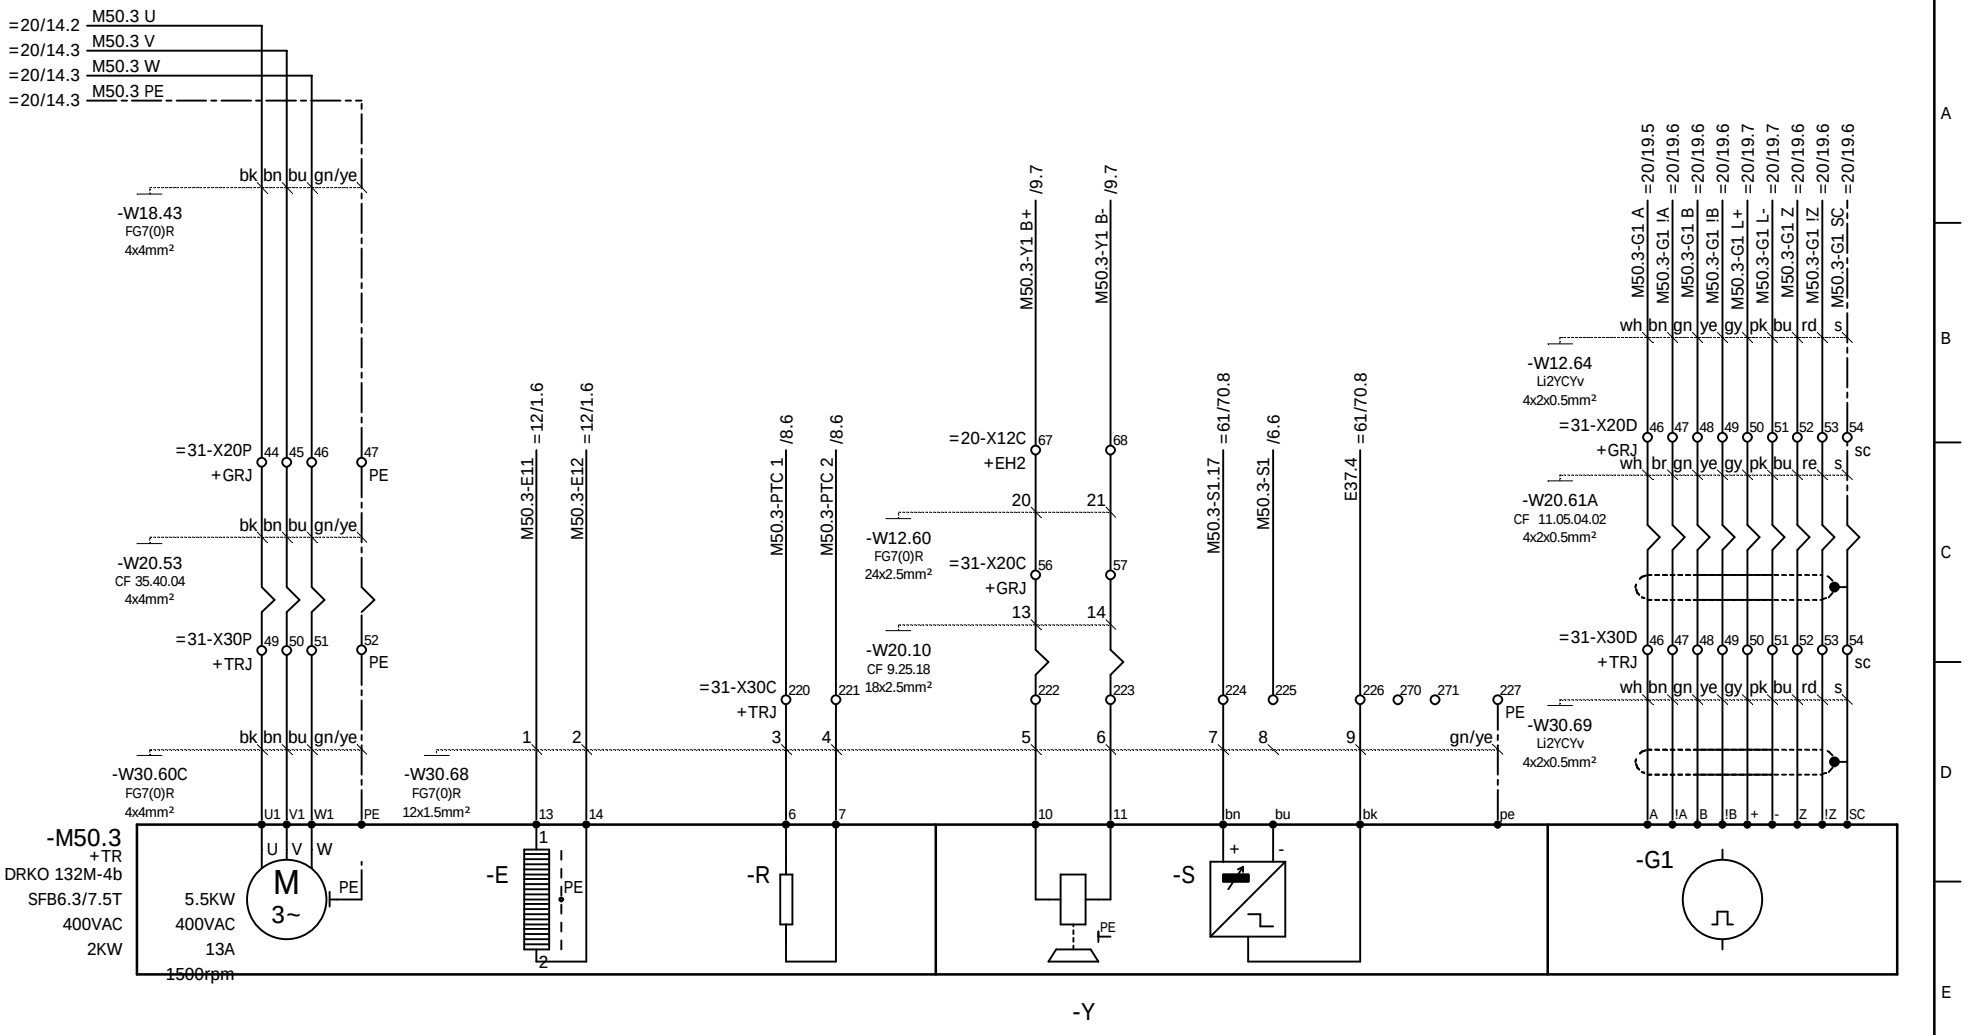

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=50 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 7 11 Sh.


NOELL

antisway system Motor 4

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

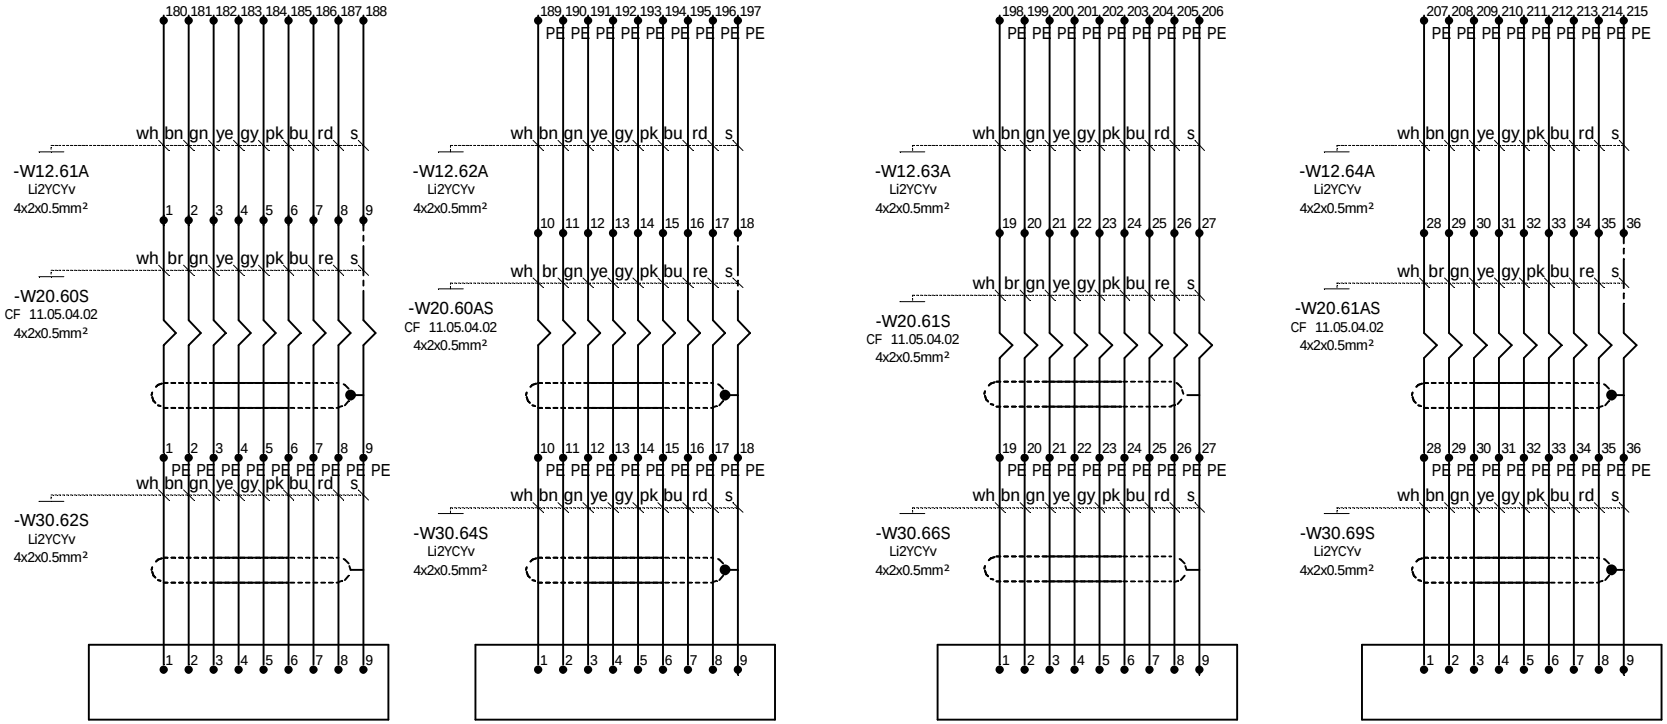

				Date		Costumer	Type	=50
				Designer	XU HR	AMPT Egypt	RTG 50/26.50/5+1/AC	+EH2
				Checked	LIU KP			
nd.	Revision	Date	Name	Standard		Source:	Job No. 1255	Drawing No. 78.5692.60.00


NOELL

antisway system Motor 4
Stromlaufplan / Circuit Diagram

Sheet 7.1
11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

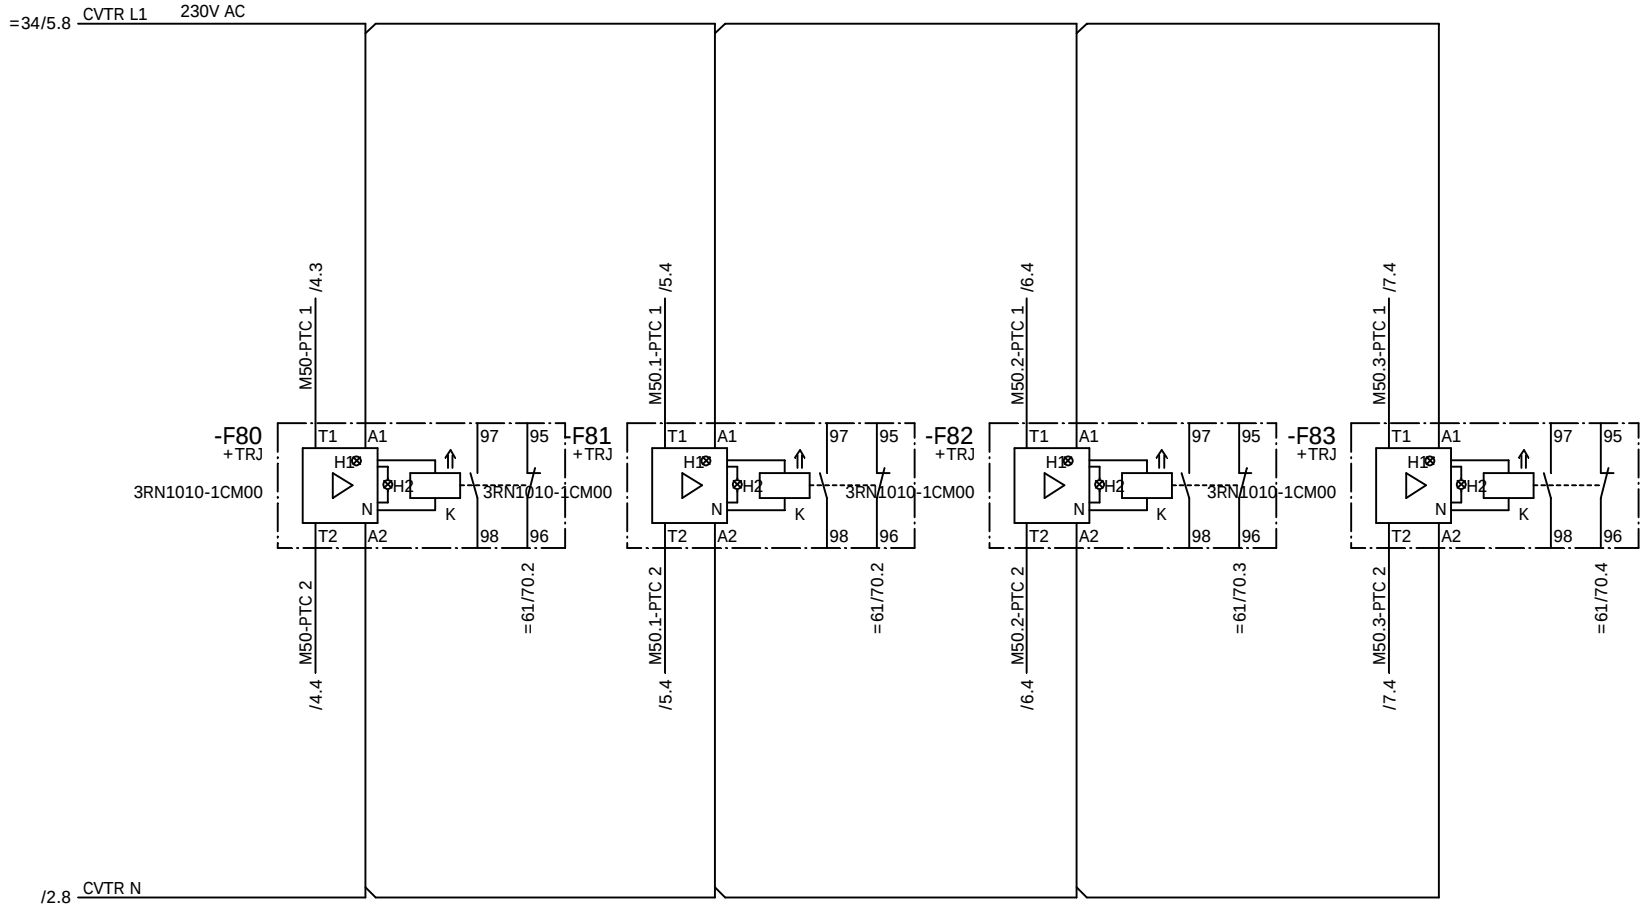

antisway motor1
no overtemperature

antisway motor2
no overtemperature

antisway motor3
no overtemperature

antisway motor4
no overtemperature

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00

NOELL


antisway system sensors
Stromlaufplan / Circuit Diagram

=50
+EH2

Sheet 8
11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

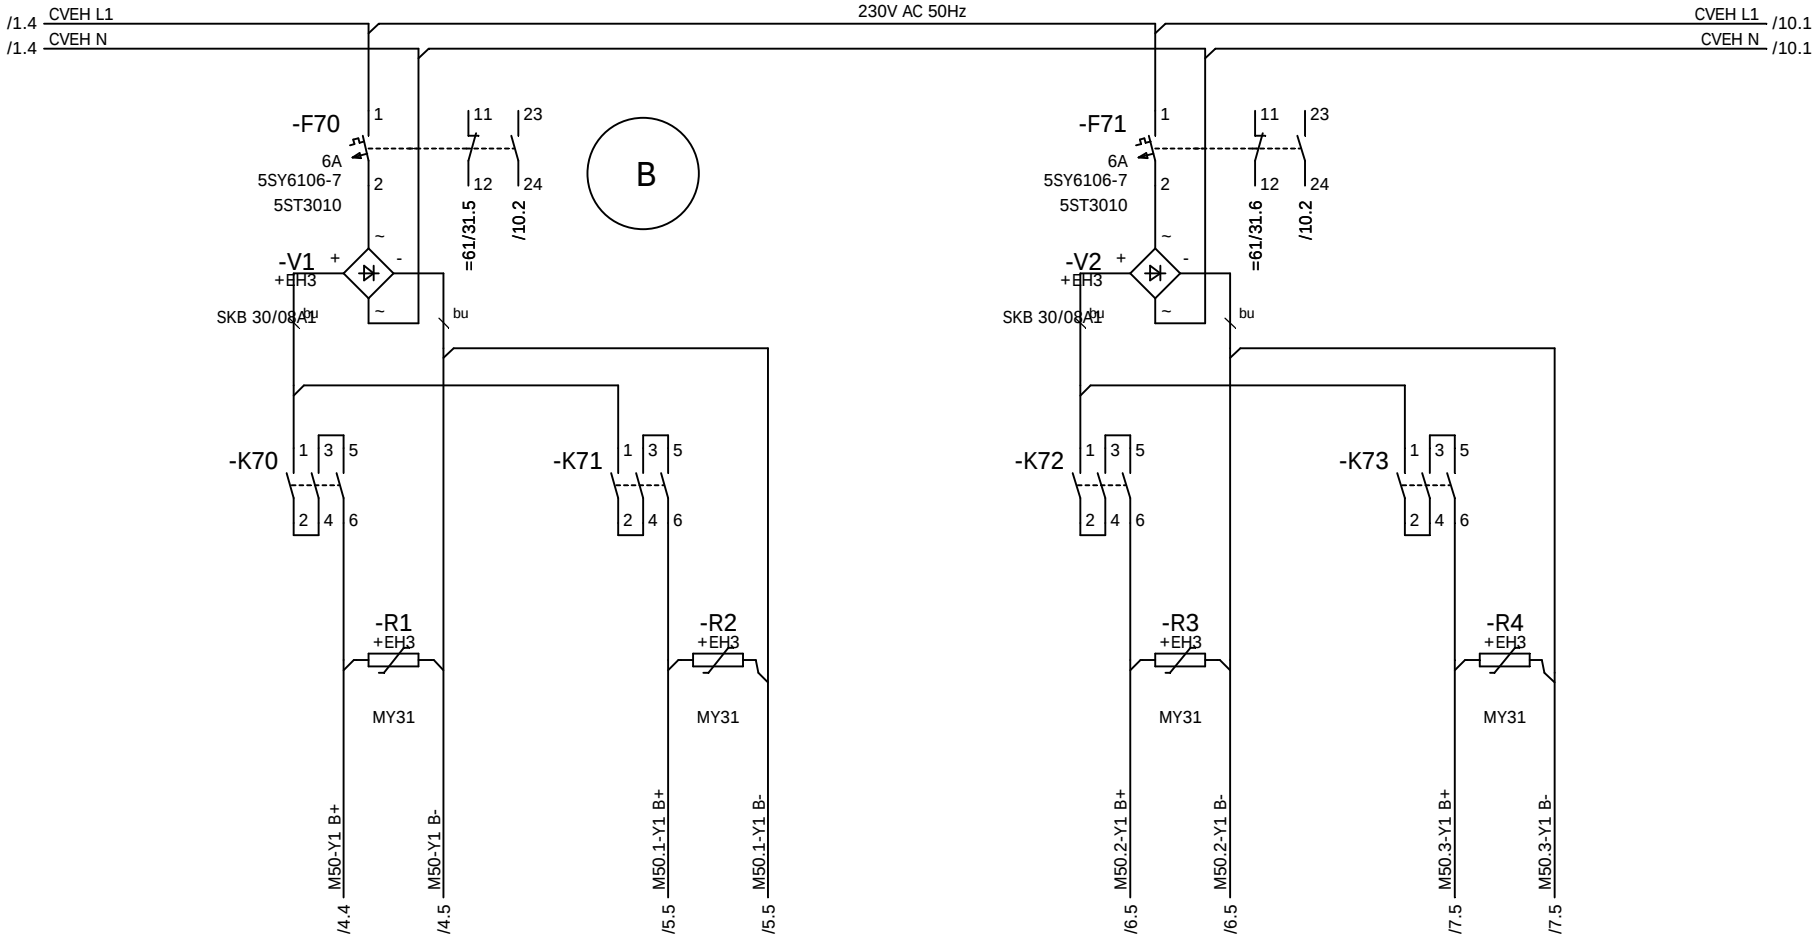


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=50 +EH3
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 9 11 Sh.

NOELL

antisway system feeding
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

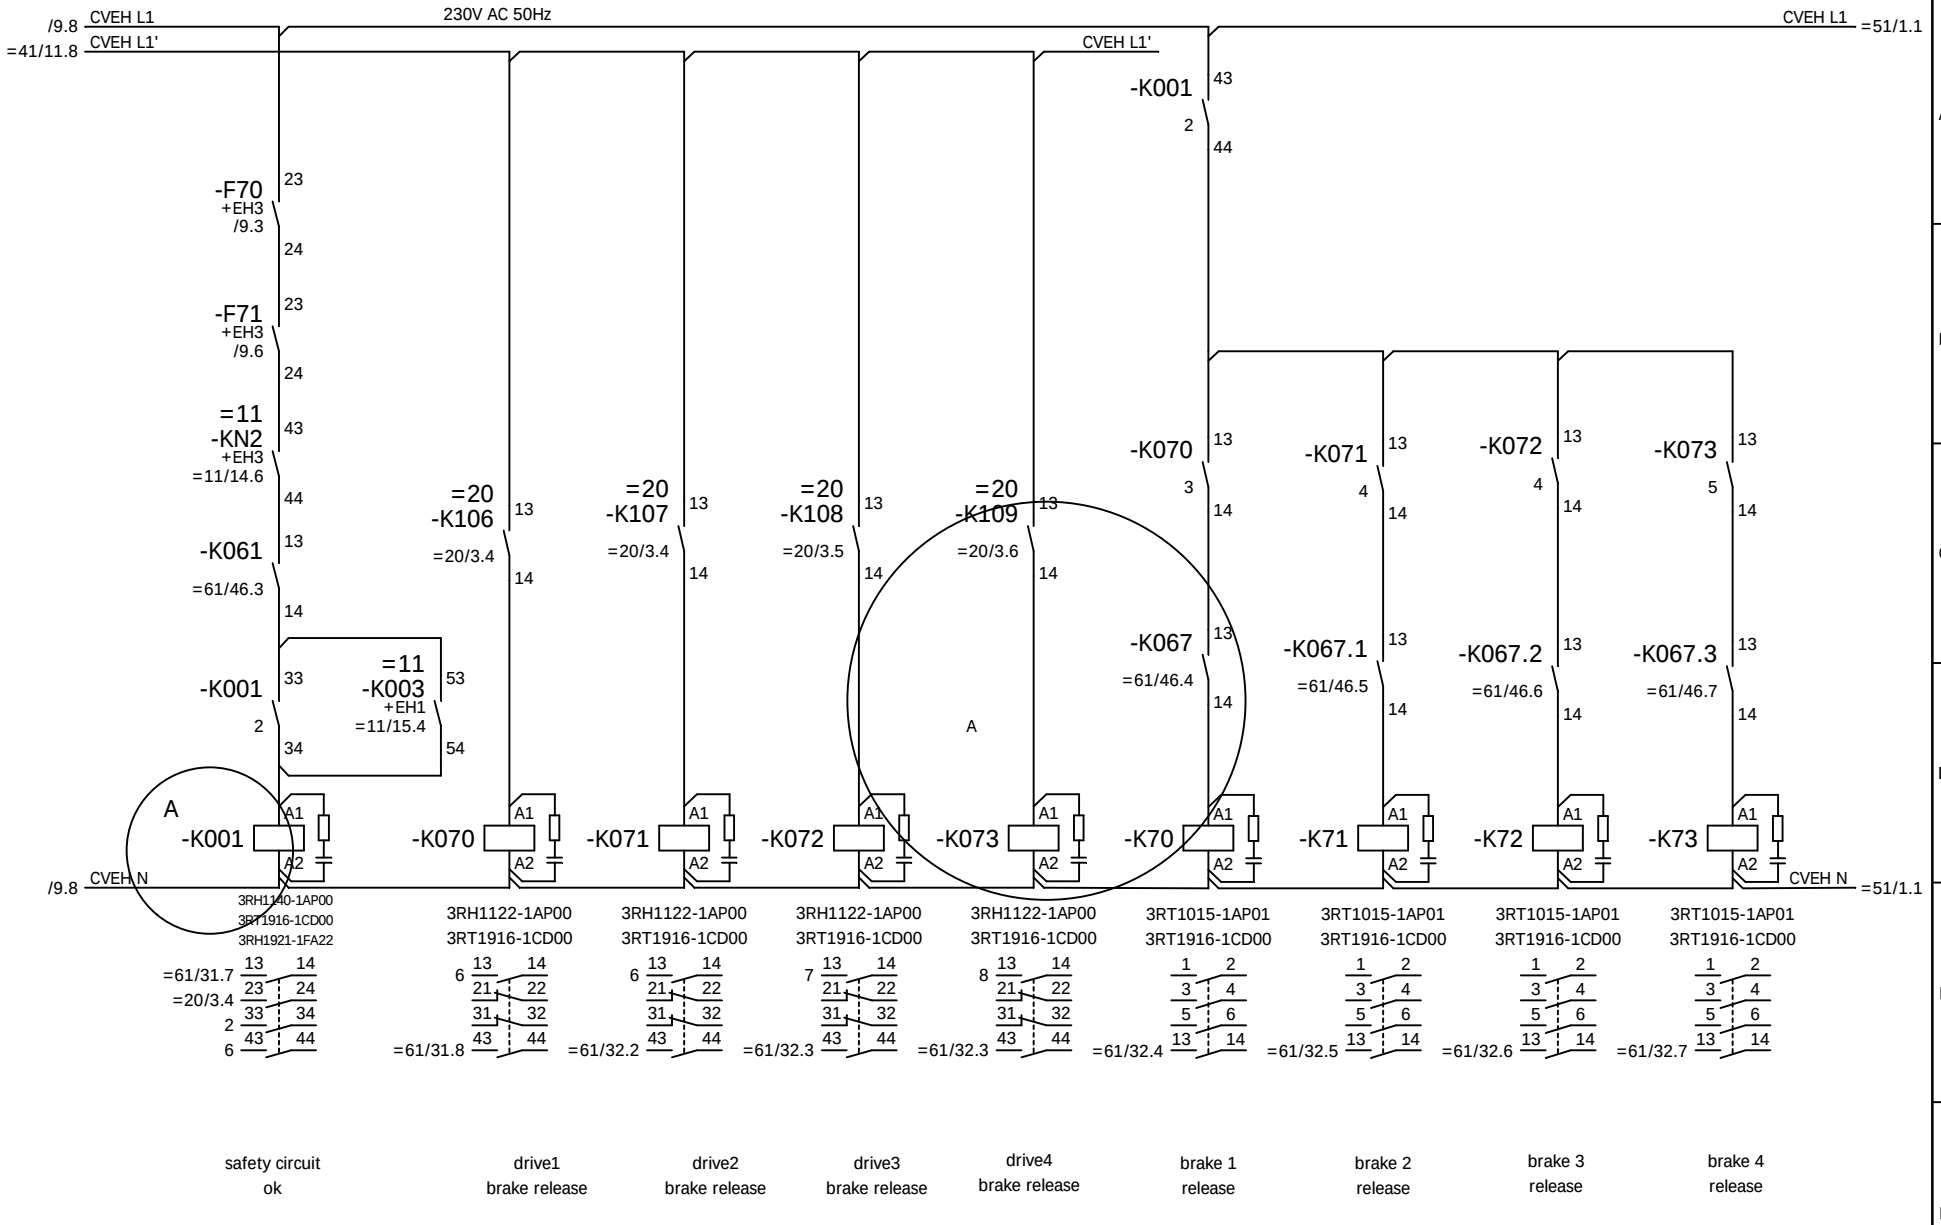

				Date		Costumer	AMPT Egypt	NOELL	antisway, control	Type RTG 50/26.50/5+1/AC	=50 +EH2
				Designer	XU HR				Stromlaufplan / Circuit Diagram		
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:					Sheet 10 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

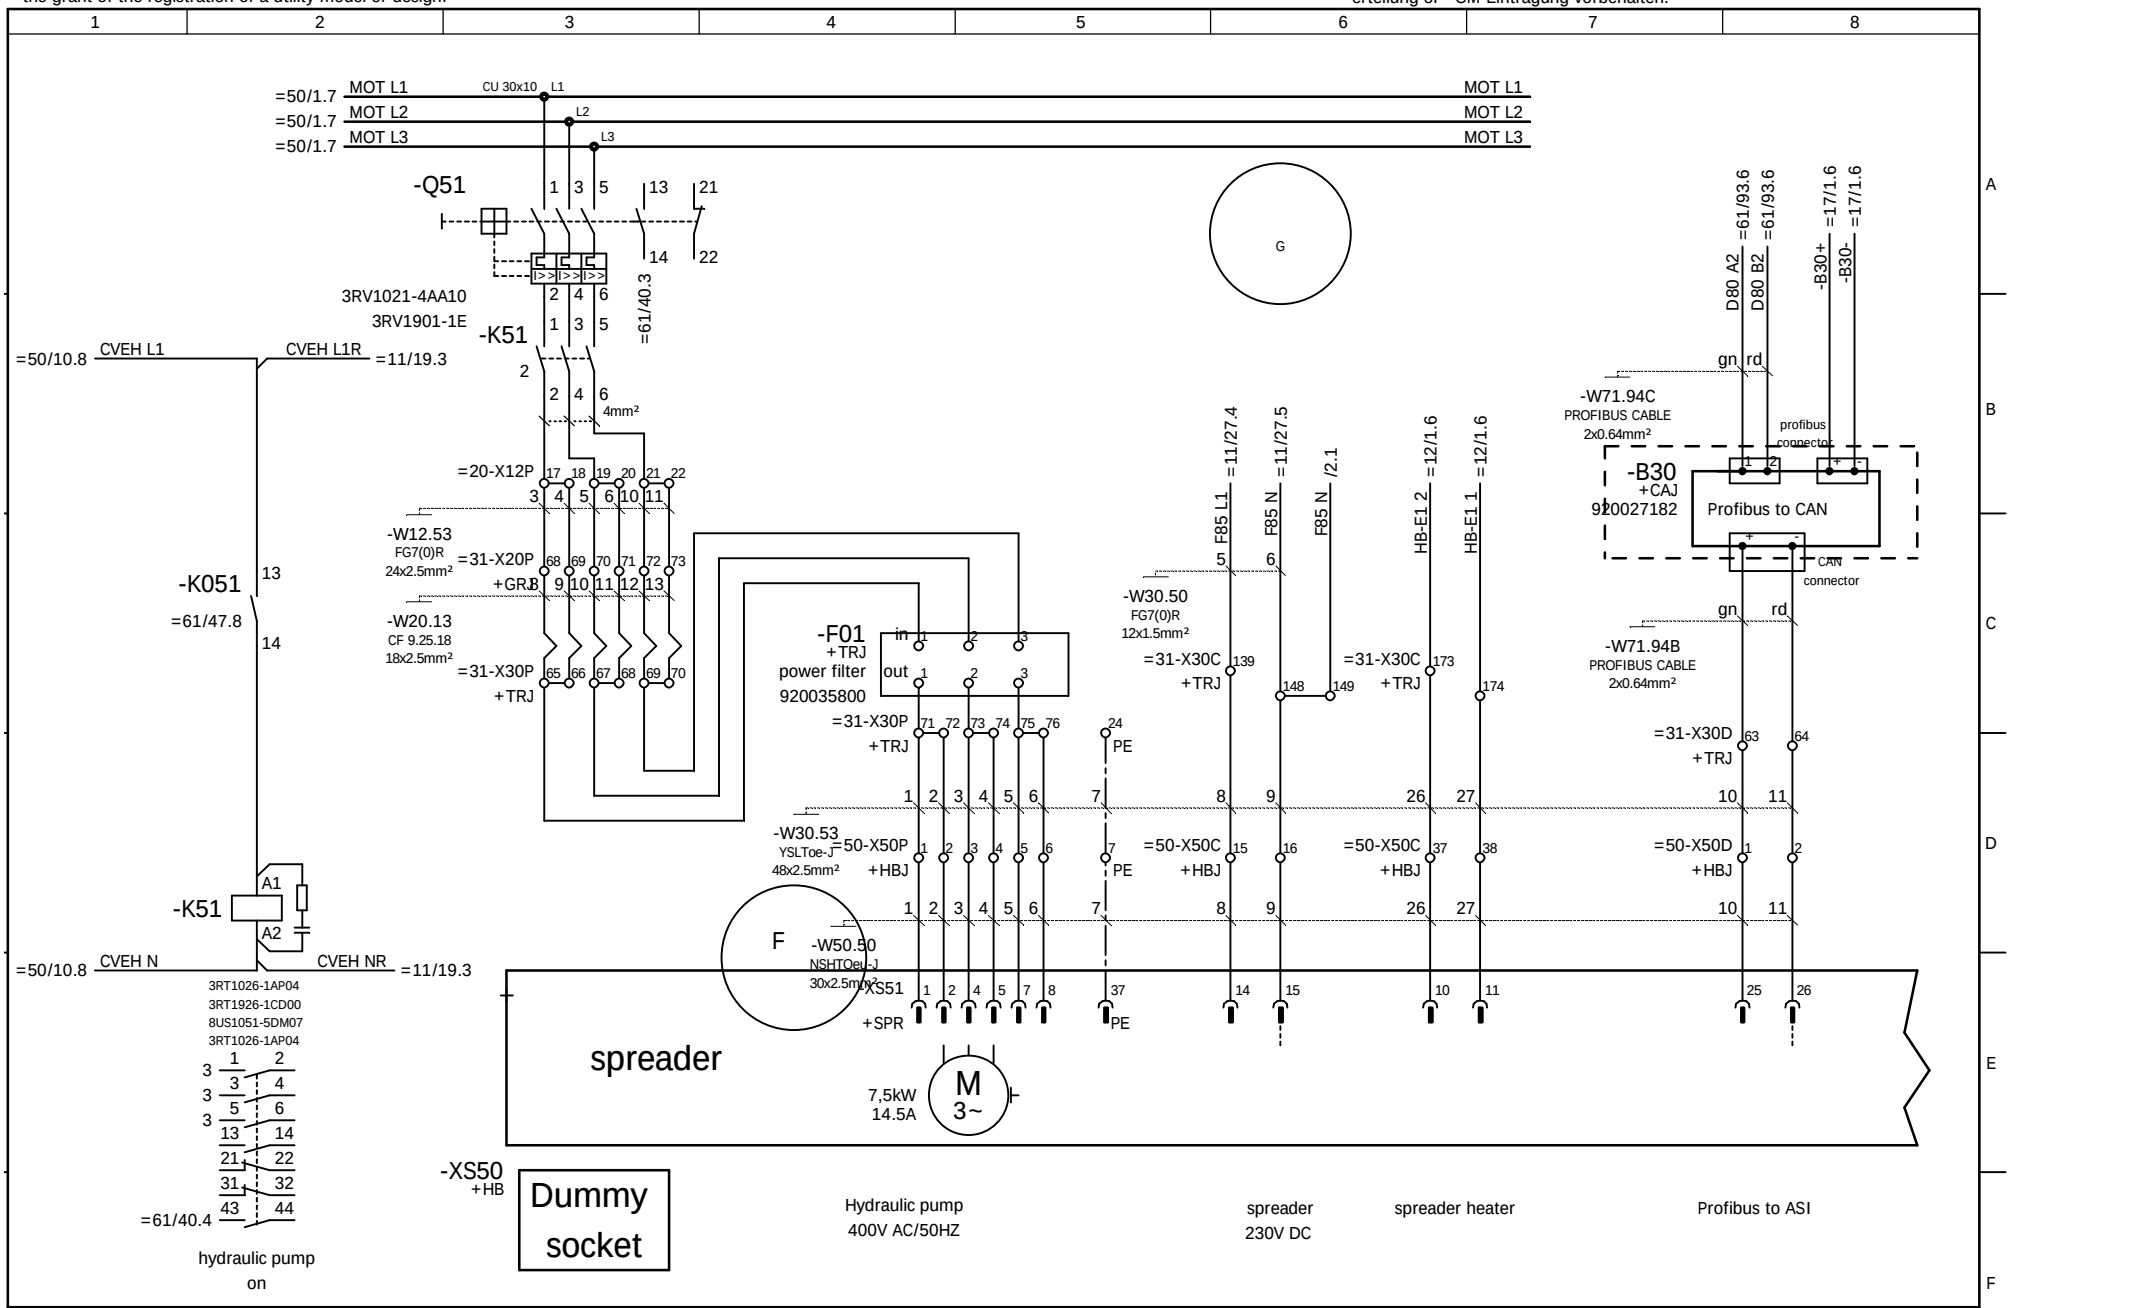


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=51
				Checked	LIU KP				+EH2
Ind.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00
									Sheet 1 / 3 Sh.

NOELL

spreader, feeding
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

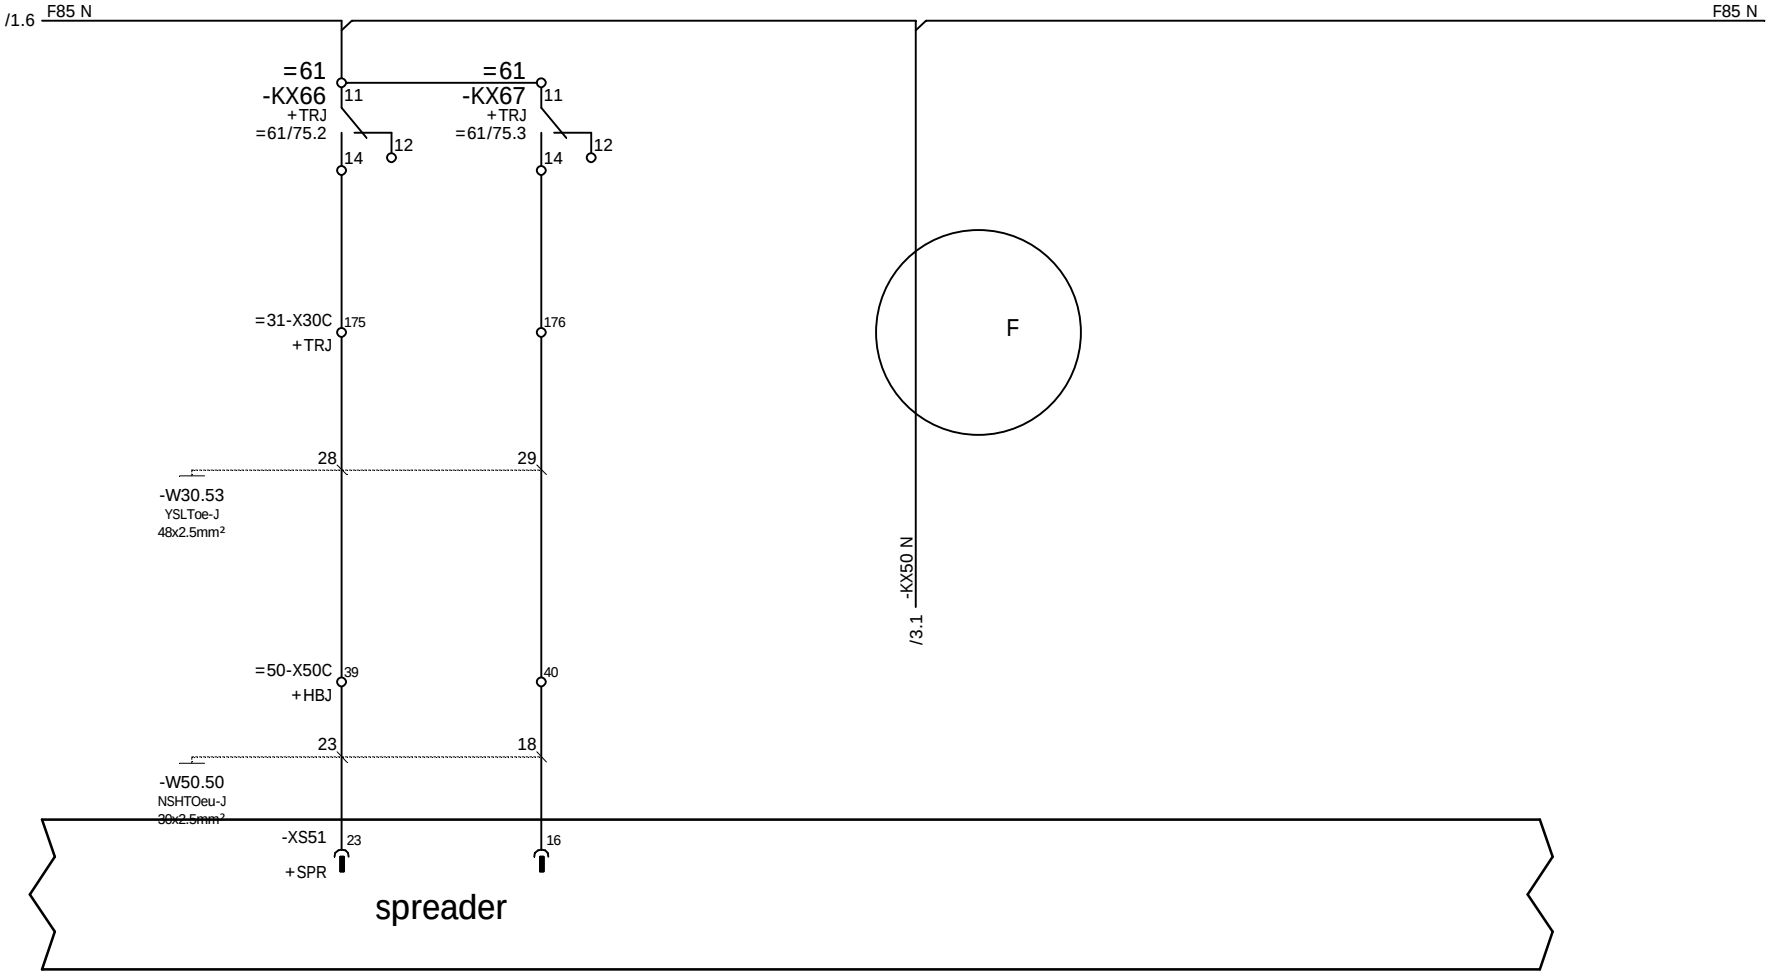

spare hoisting interlock landed bypass

RELAY RCL KITS

	24VDC 1C/O			Date		Costumer	AMPT Egypt
	WITH LAMP			Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

spreader, output
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC		=51 +TRJ
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	2 3 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

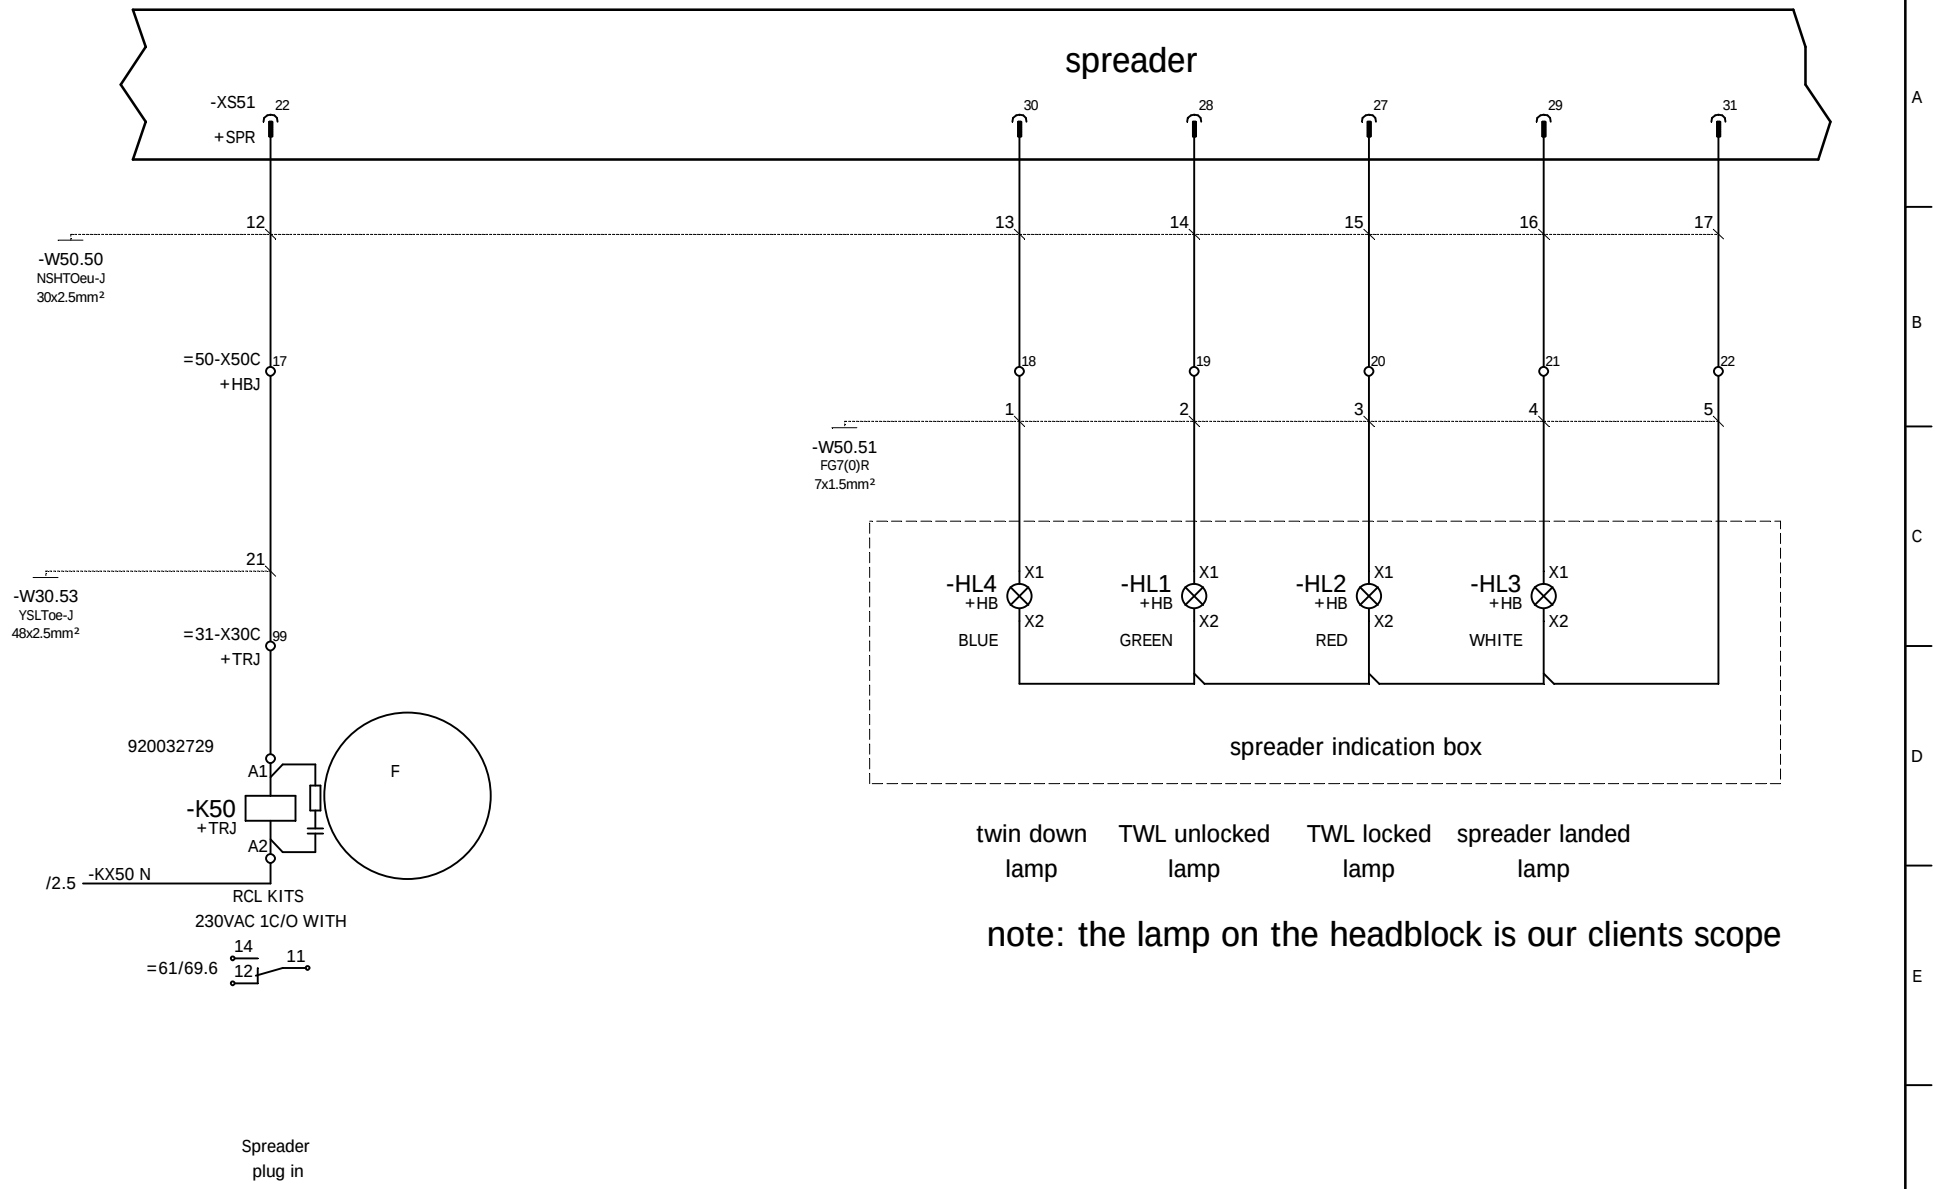

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP				
nd.	Revision	Date	Name	Standard		Source:		Job No. 1255	Drawing No. 78.5692.60.00

NOELL


spreader, feeding
Stromlaufplan / Circuit Diagram

=51
+EH2

Sheet 3
3 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

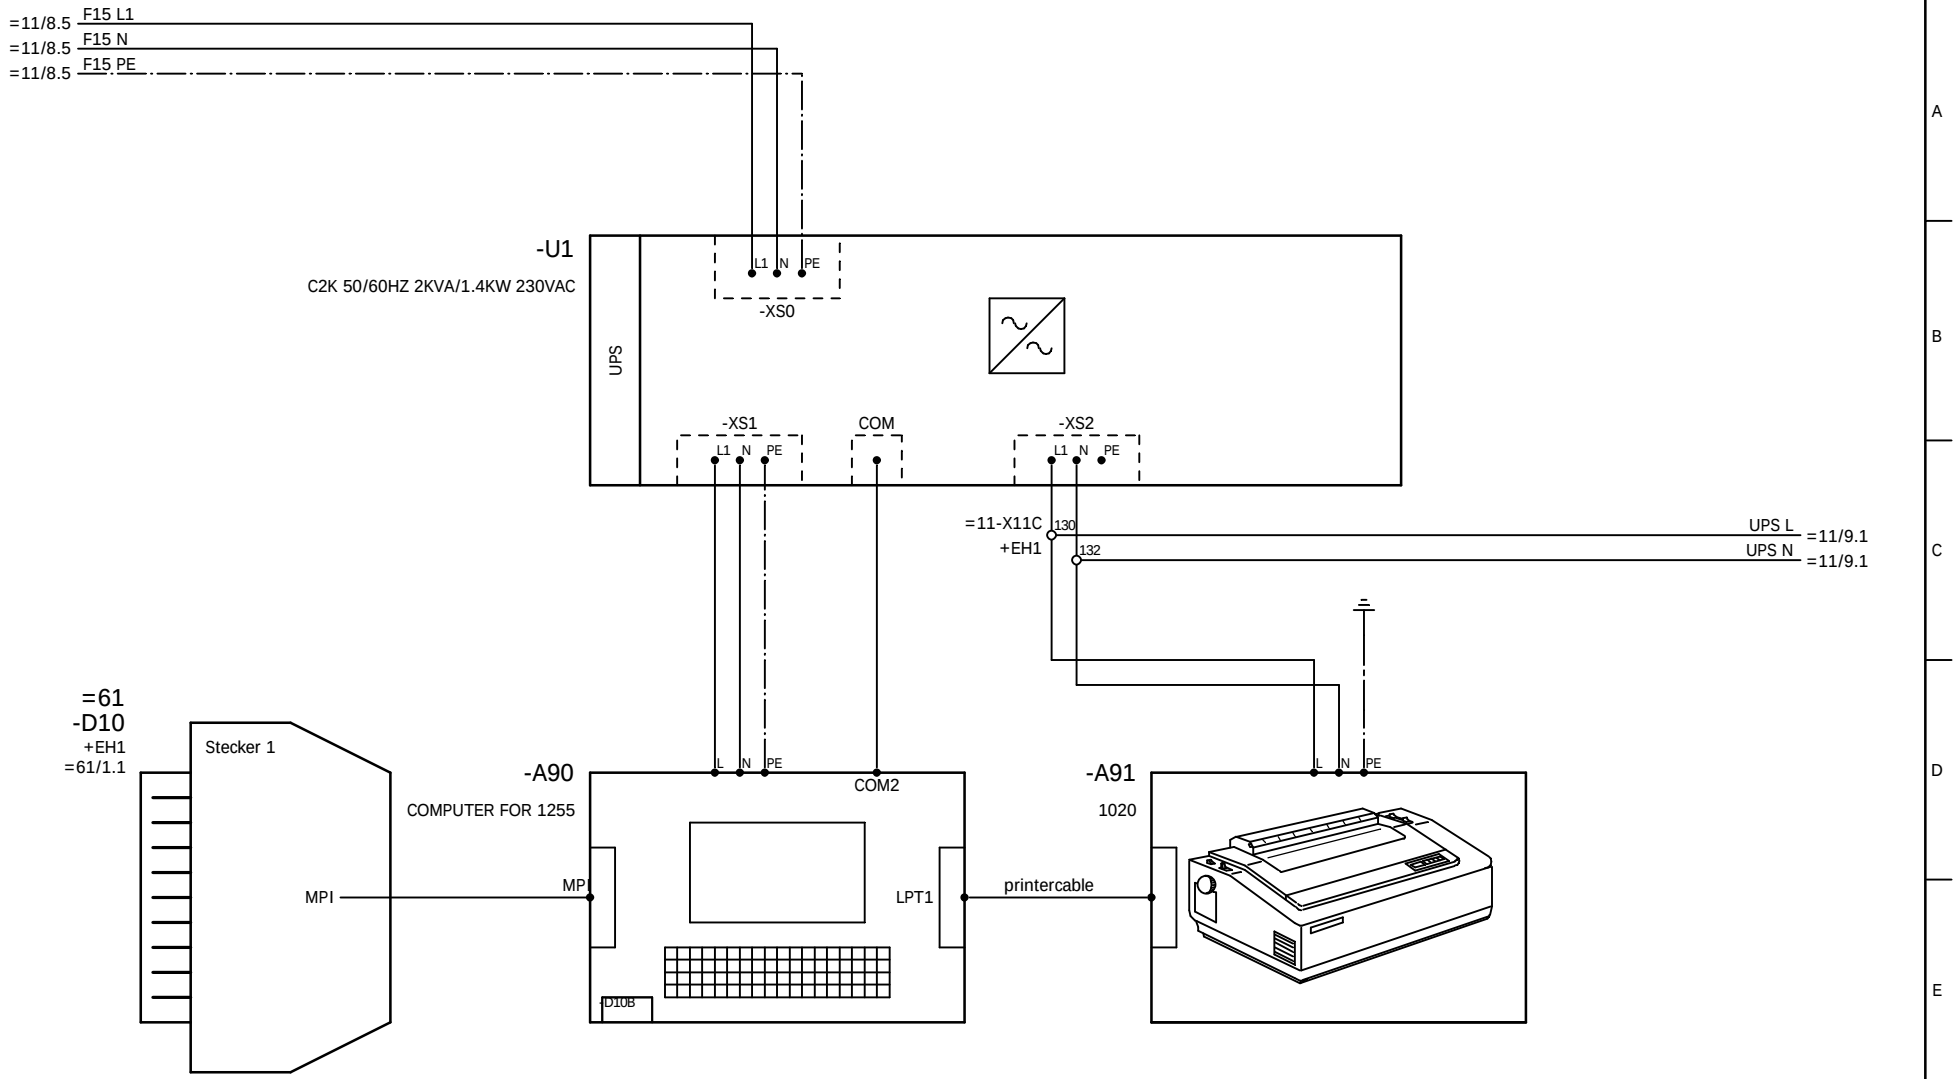

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=60 +EH5
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	CMS and Display Stromlaufplan / Circuit Diagram		Sheet 1 2 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

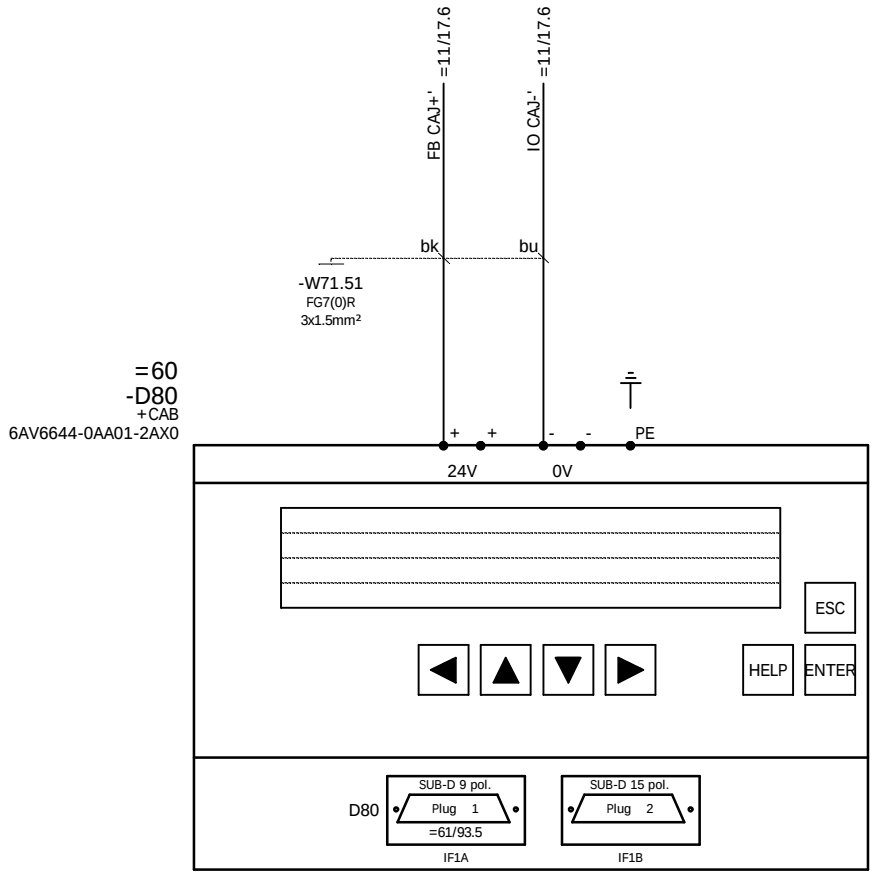


Touch pannel MP277

				Date		Costumer	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR	AMPT Egypt		=60 +CAB
				Checked	LIU KP		Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	Touch pannel MP277 Stromlaufplan / Circuit Diagram	Sheet 2 2 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

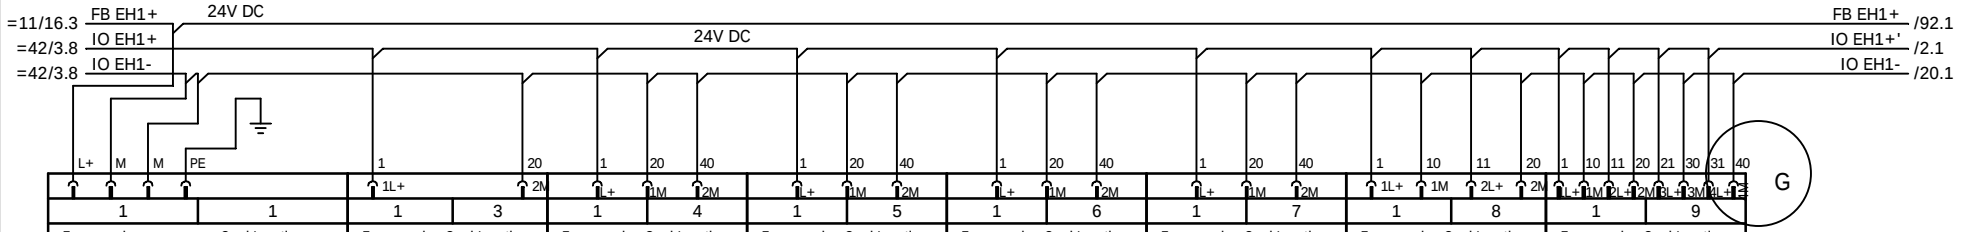

1	1	1	3	1	4	1	5	1	6	1	7	1	8	1	9
Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location
		revision		revision		revision		revision		revision		revision		revision	
CPU 315-2DP		12		14		28		52		56		12		14	
Siemens CPU		IN	KL KL IN	IN	KL KL IN	IN	KL KL IN	IN	KL KL IN	IN	KL KL IN			IN	KL KL IN
SF	E 12.0	E 14.0 /4.2	2 22 E 16.0 /6.2	E 28.0 /8.2	2 22 E 30.0 /10.2	E 52.0 /12.2	2 22 E 54.0 /14.2	E 56.0 /16.2	2 22 E 58.0 /18.2	A 12.0	2 /20.2	A 14.0 /22.2	2 22 A 16.0 /24.2		
BATF	E 12.1	E 14.1 /4.2	3 23 E 16.1 /6.2	E 28.1 /8.2	3 23 E 30.1 /10.2	E 52.1 /12.2	3 23 E 54.1 /14.2	E 56.1 /16.2	3 23 E 58.1 /18.2	A 12.1	3 /20.2	A 14.1 /22.2	3 23 A 16.1 /24.2		
DC5V	E 12.2	E 14.2 /4.3	4 24 E 16.2 /6.3	E 28.2 /8.3	4 24 E 30.2 /10.3	E 52.2 /12.3	4 24 E 54.2 /14.3	E 56.2 /16.3	4 24 E 58.2 /18.3	A 12.2	4 /20.3	A 14.2 /22.3	4 24 A 16.2 /24.3		
FRCE	E 12.3	E 14.3 /4.4	5 25 E 16.3 /6.4	E 28.3 /8.4	5 25 E 30.3 /10.4	E 52.3 /12.4	5 25 E 54.3 /14.4	E 56.3 /16.4	5 25 E 58.3 /18.4	A 12.3	5 /20.4	A 14.3 /22.4	5 25 A 16.3 /24.4		
RUN	E 12.4	E 14.4 /4.5	6 26 E 16.4 /6.5	E 28.4 /8.5	6 26 E 30.4 /10.5	E 52.4 /12.5	6 26 E 54.4 /14.5	E 56.4 /16.5	6 26 E 58.4 /18.5	A 12.4	6 /20.5	A 14.4 /22.5	6 26 A 16.4 /24.5		
Stop	E 12.5	E 14.5 /4.6	7 27 E 16.5 /6.6	E 28.5 /8.6	7 27 E 30.5 /10.6	E 52.5 /12.6	7 27 E 54.5	E 56.5 /16.6	7 27 E 58.5 /18.6	A 12.5	7 /20.6	A 14.5 /22.6	7 27 A 16.5 /24.6		
Memory Card	E 12.6	E 14.6 /4.7	8 28 E 16.6 /6.7	E 28.6 /8.7	8 28 E 30.6 /10.7	E 52.6 /12.7	8 28 E 54.6 /14.7	E 56.6 /16.7	8 28 E 58.6 /18.7	A 12.6	8 /20.7	A 14.6 /22.7	8 28 A 16.6 /24.7		
Run-P Run Stop MERS	E 12.7	E 14.7 /4.8	9 29 E 16.7 /6.8	E 28.7 /8.8	9 29 E 30.7 /10.8	E 52.7 /12.8	9 29 E 54.7 /14.8	E 56.7 /16.8	9 29 E 58.7 /18.8	A 12.7	9 /20.8	A 14.7 /22.8	9 29 A 16.7 /24.8		
	E 13.0	E 15.0 /5.2	12 32 E 17.0 /7.2	E 29.0 /9.2	12 32 E 31.0 /11.2	E 53.0 /13.2	12 32 E 55.0 /15.2	E 57.0 /17.2	12 32 E 59.0 /19.2	A 13.0	12 /21.2	A 15.0 /23.2	12 32 A 17.0 /25.2		
	E 13.1	E 15.1 /5.2	13 33 E 17.1 /7.2	E 29.1 /9.2	13 33 E 31.1 /11.2	E 53.1 /13.2	13 33 E 55.1 /15.2	E 57.1 /17.2	13 33 E 59.1 /19.2	A 13.1	13 /21.2	A 15.1 /23.2	13 33 A 17.1 /25.2		
Batteriefach	E 13.2	E 15.2 /5.3	14 34 E 17.2 /7.3	E 29.2 /9.3	14 34 E 31.2 /11.3	E 53.2 /13.3	14 34 E 55.2 /15.3	E 57.2 /17.3	14 34 E 59.2 /19.3	A 13.2	14 /21.3	A 15.2 /23.3	14 34 A 17.2 /25.3		
Profibus-DP	E 13.3	E 15.3 /5.4	15 35 E 17.3 /7.4	E 29.3 /9.4	15 35 E 31.3 /11.4	E 53.3 /13.4	15 35 E 55.3 /15.4	E 57.3 /17.4	15 35 E 59.3 /19.4	A 13.3	15 /21.4	A 15.3 /23.4	15 35 A 17.3 /25.4		
	E 13.4	E 15.4 /5.5	16 36 E 17.4 /7.5	E 29.4 /9.5	16 36 E 31.4 /11.5	E 53.4 /13.5	16 36 E 55.4 /15.5	E 57.4 /17.5	16 36 E 59.4 /19.5	A 13.4	16 /21.5	A 15.4 /23.5	16 36 A 17.4 /25.5		
	E 13.5	E 15.5 /5.6	17 37 E 17.5 /7.6	E 29.5 /9.6	17 37 E 31.5 /11.6	E 53.5 /13.6	17 37 E 55.5 /15.6	E 57.5 /17.6	17 37 E 59.5 /19.6	A 13.5	17 /21.6	A 15.5 /23.6	17 37 A 17.5 /25.6		
Bridge bei Isolierterm 24V/DC-Netz I	E 13.6	E 15.6 /5.7	18 38 E 17.6 /7.7	E 29.6 /9.7	18 38 E 31.6 /11.7	E 53.6 /13.7	18 38 E 55.6 /15.7	E 57.6 /17.7	18 38 E 59.6 /19.7	A 13.6	18 /21.7	A 15.6 /23.7	18 38 A 17.6 /25.7		
PE M L+ M MPI DP	E 13.7	E 15.7 /5.8	19 39 E 17.7 /7.8	E 29.7 /9.8	19 39 E 31.7 /11.8	E 53.7 /13.8	19 39 E 55.7 /15.8	E 57.7 /17.8	19 39 E 59.7 /19.8	A 13.7	19 /21.8	A 15.7 /23.8	19 39 A 17.7 /25.8		
SUB-D 9 pol. Plug 1 =60/1.2	SUB-D 9 pol. Plug 2 /91.3														
Digital Input 16x24V DC		Digital Input 32x24V DC		Digital Input 32x24V DC		Digital Input 32x24V DC		Digital Input 32x24V DC		Digital Output 16x24V DC/0,5A		Digital Output 32x24V DC/0,5A			
6ES79538LJ300AA0		6ES7392-1AJ00-0AA0		6ES7321-1BL00-0AA0		6ES7321-1BL00-0AA0		6ES7321-1BL00-0AA0		6ES7321-1BL00-0AA0		6ES7322-1BH01-0AA0		6ES7322-1BL00-0AA0	
6ES7315-2AG10-0AB0		6ES7321-1BH02-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AM00-0AA0	
-D10		-D12		-D13		-D14		-D15		-D16		-D17		-D17'	

					Date		Costumer										
					Designer	XU HR	AMPT Egypt										
					Checked	LIU KP											
Ind.	Revision	Date	Name		Standard		Source:										


NOELL

SPS Busklemme +EH1
PLC bus terminal
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	1 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

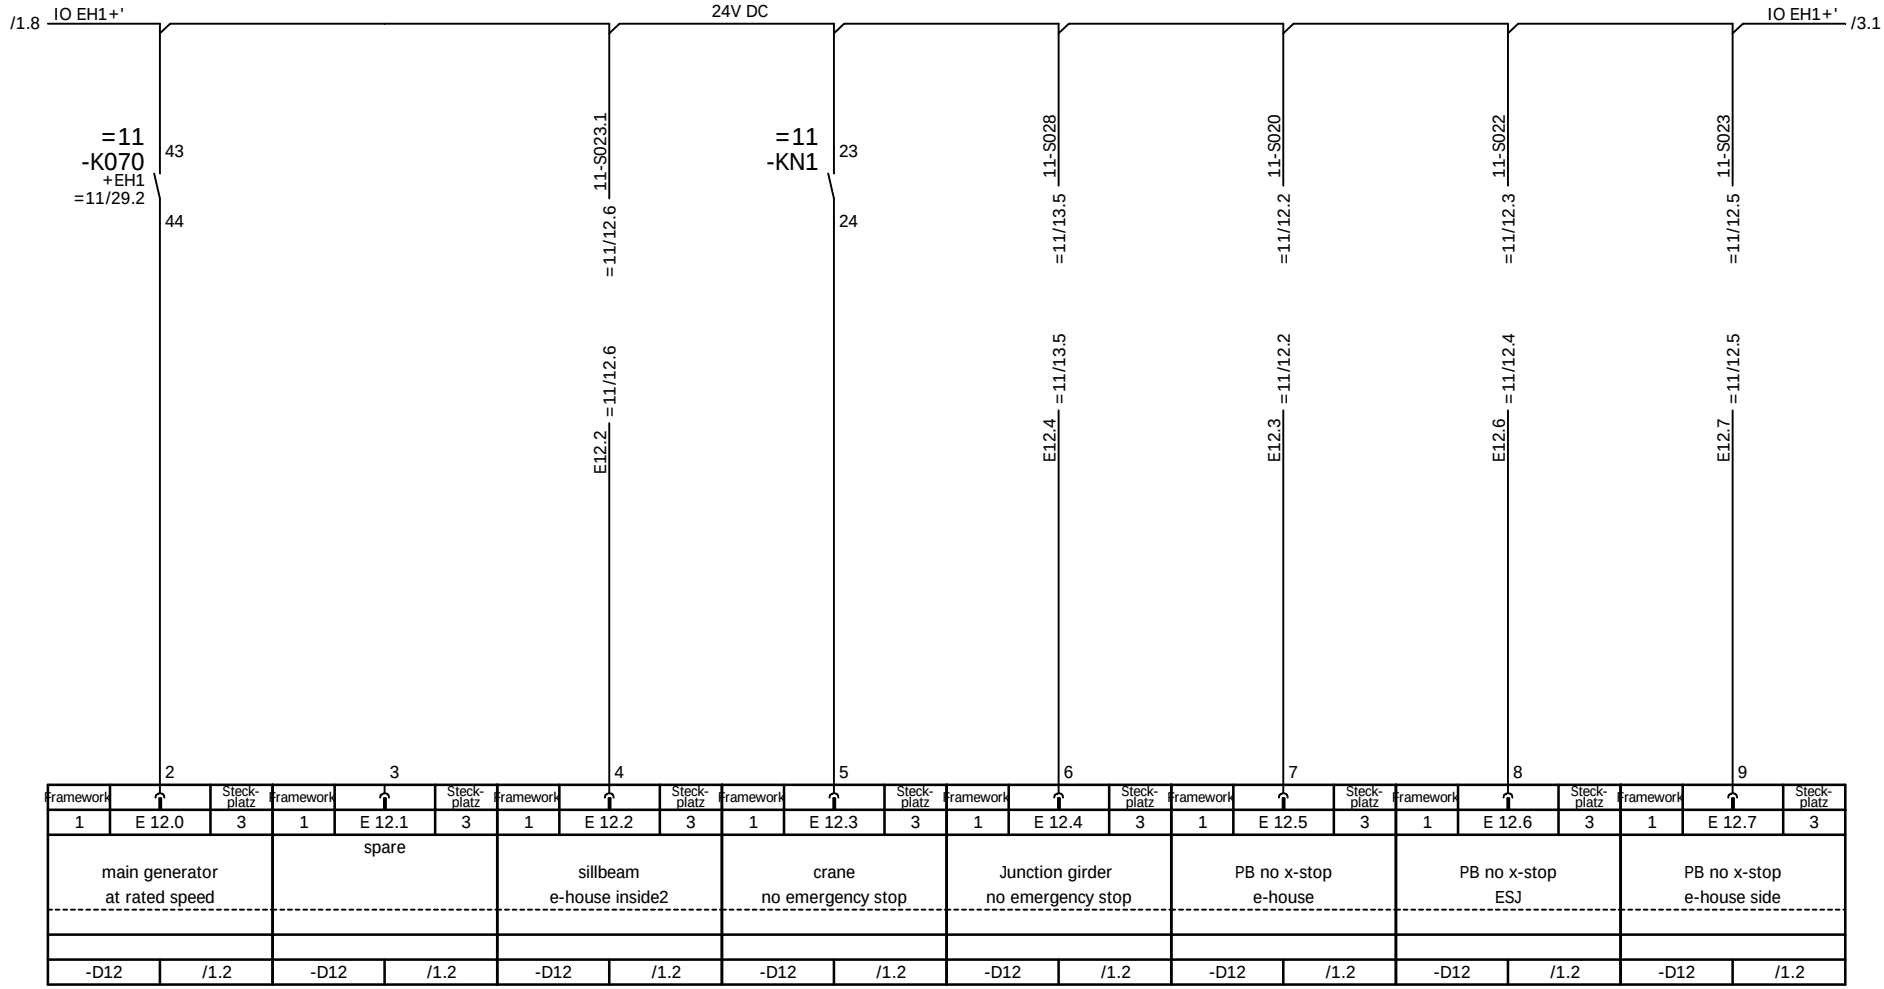

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 12.0	3	1	E 12.1	3	1	E 12.2	3	1	E 12.3	3	1	E 12.4	3	1	E 12.5	3	1	E 12.6	3	1	E 12.7	3
main generator at rated speed			spare			sillbeam e-house inside2			crane no emergency stop			Junction girder no emergency stop			PB no x-stop e-house			PB no x-stop ESJ			PB no x-stop e-house side		
-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	2	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

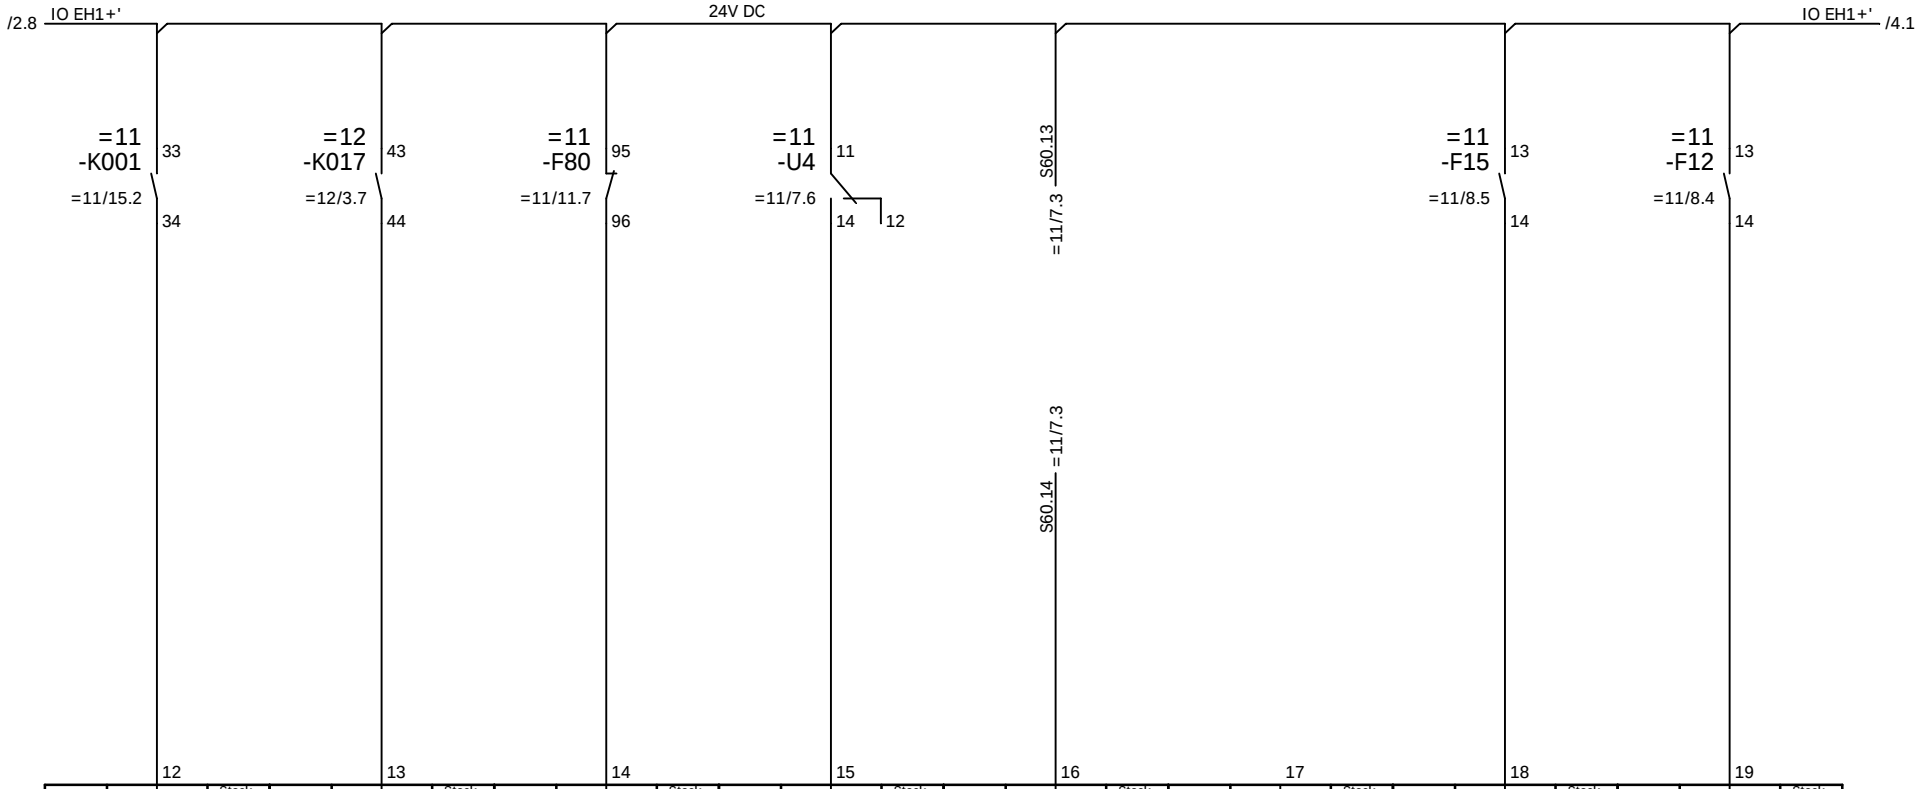

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 13.0	3	1	E 13.1	3	1	E 13.2	3	1	E 13.3	3	1	E 13.4	3	1	E 13.5	3	1	E 13.6	3	1	E 13.7	3
master switches in zero position			e-house no over- or undertemperature			lighting transformer no overtemperature			phase monitoring			e-house fire smoke 1 alarm			spare			CB F15 CMS supply			CB main diesel battery charger is OK		
-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2		-D12	/1.2	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

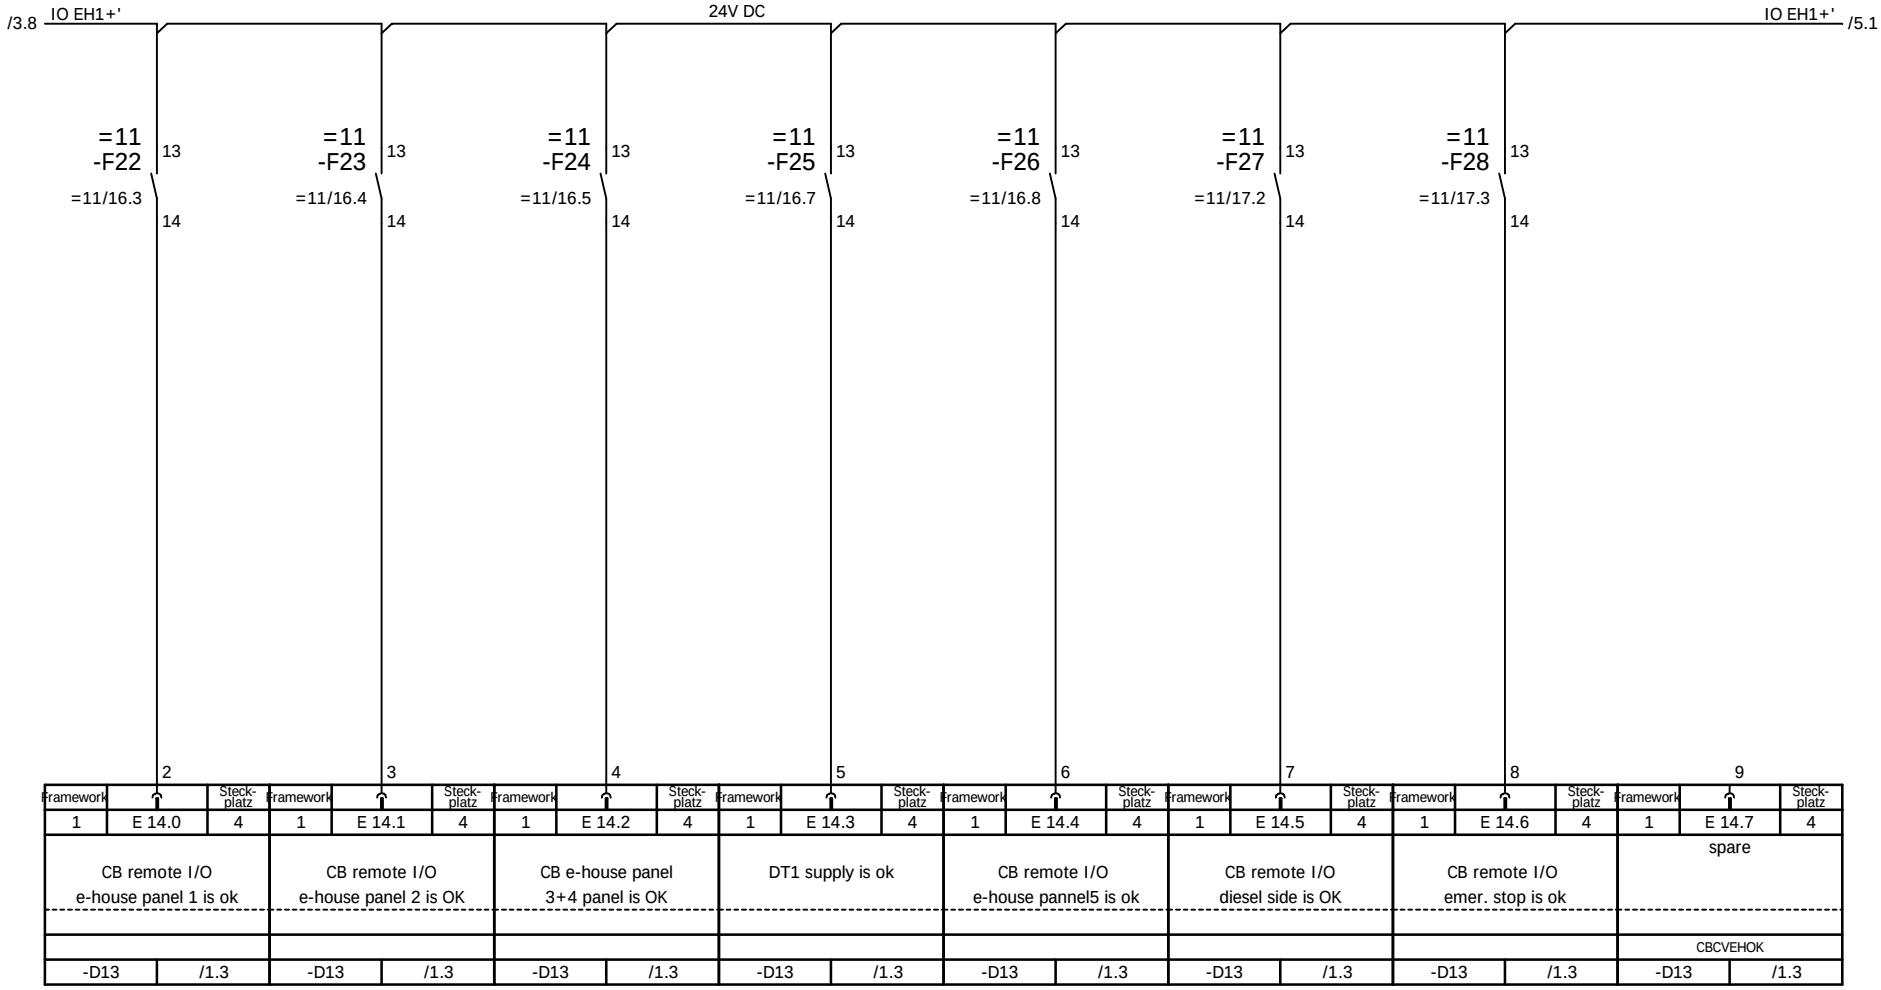


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 14.0	4	1	E 14.1	4	1	E 14.2	4	1	E 14.3	4	1	E 14.4	4	1	E 14.5	4	1	E 14.6	4	1	E 14.7	4
CB remote I/O e-house panel 1 is ok			CB remote I/O e-house panel 2 is OK			CB e-house panel 3+4 panel is OK			DT1 supply is ok			CB remote I/O e-house pannel5 is ok			CB remote I/O diesel side is OK			CB remote I/O emer. stop is ok			spare		
																					CBCVEHOK		
-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3	

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding, input
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	4	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

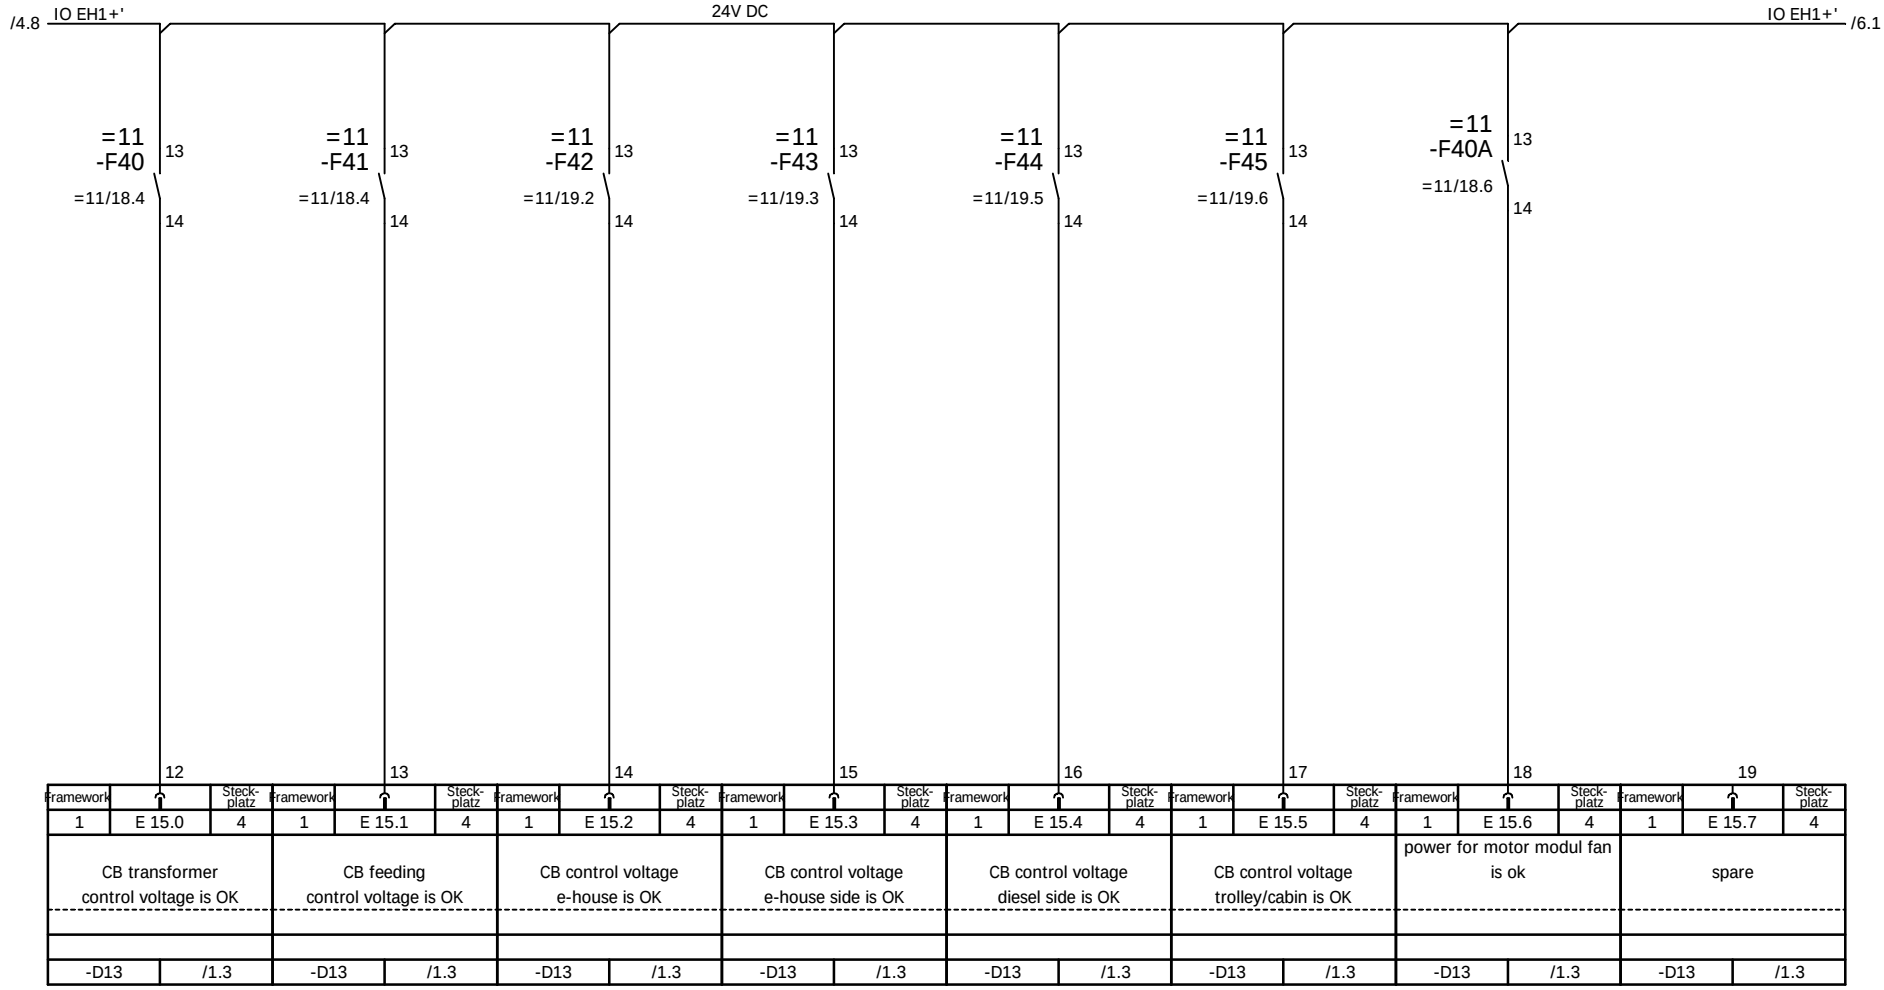

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 15.0	4	1	E 15.1	4	1	E 15.2	4	1	E 15.3	4	1	E 15.4	4	1	E 15.5	4	1	E 15.6	4	1	E 15.7	4
CB transformer control voltage is OK			CB feeding control voltage is OK			CB control voltage e-house is OK			CB control voltage e-house side is OK			CB control voltage diesel side is OK			CB control voltage trolley/cabin is OK			power for motor modul fan is ok			spare		
-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	5	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

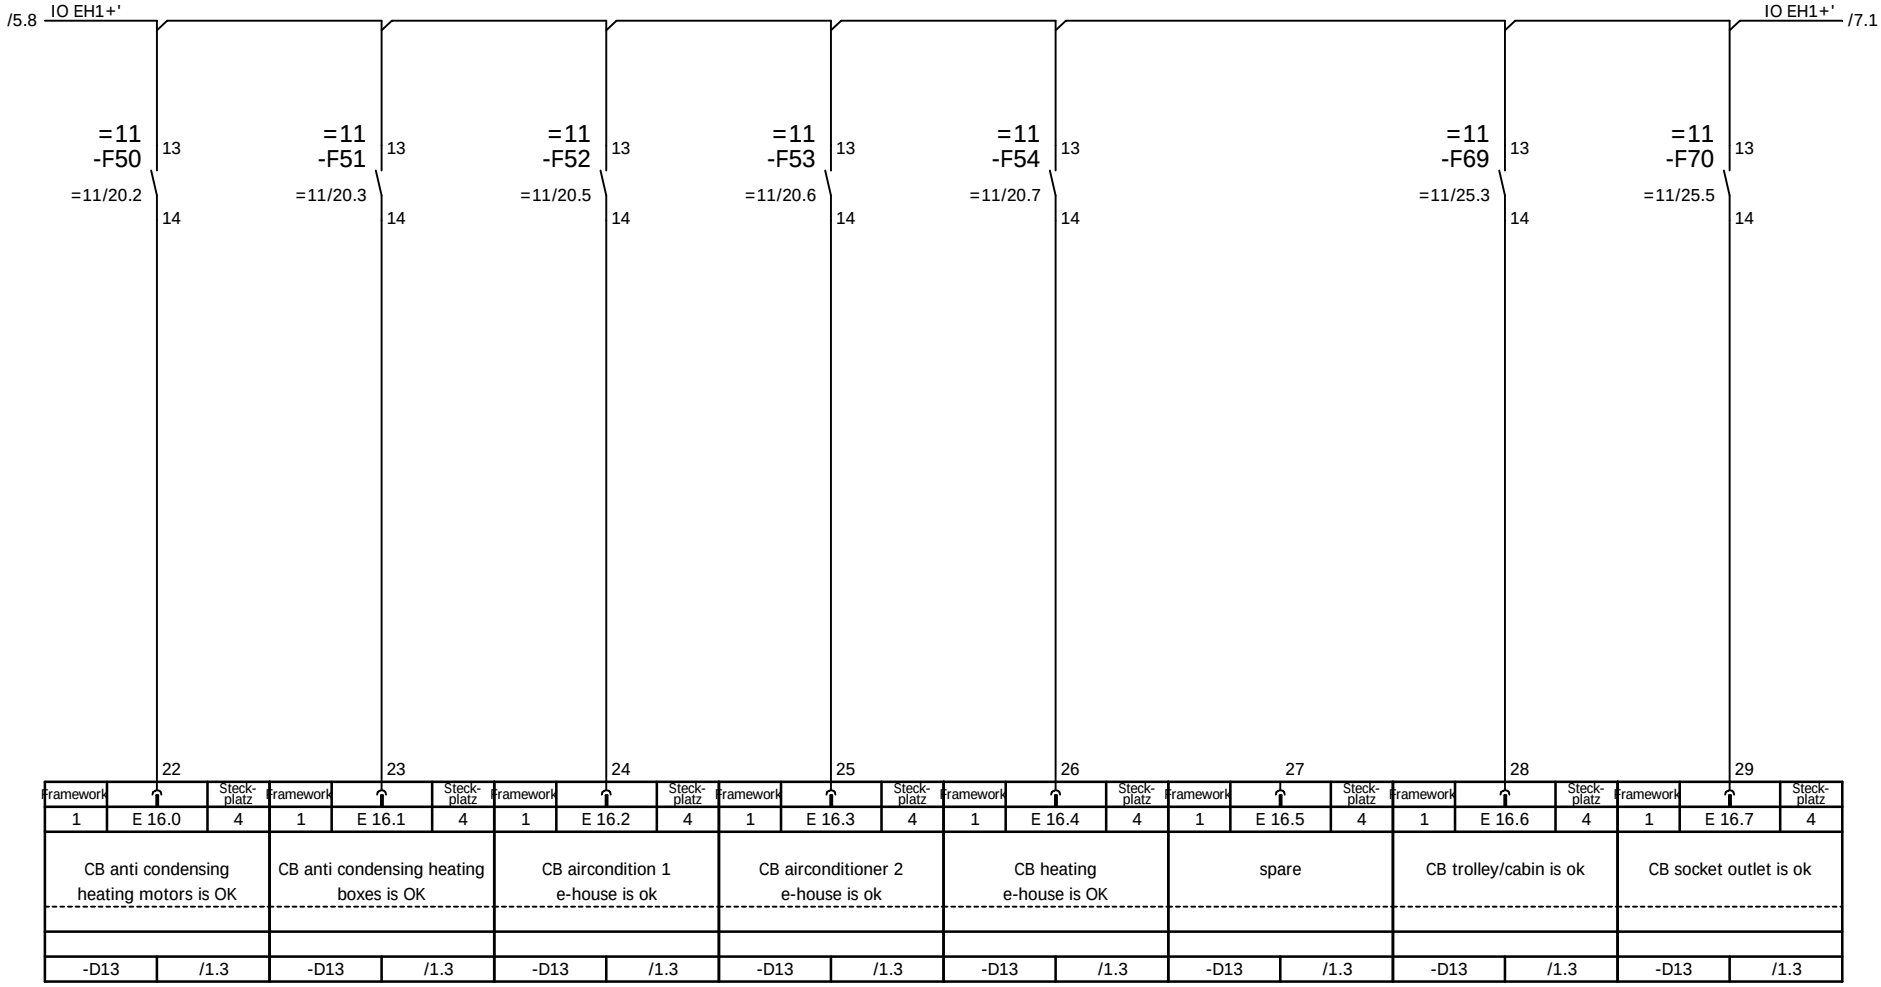

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 16.0	4	1	E 16.1	4	1	E 16.2	4	1	E 16.3	4	1	E 16.4	4	1	E 16.5	4	1	E 16.6	4	1	E 16.7	4
CB anti condensing heating motors is OK			CB anti condensing heating boxes is OK			CB aircondition 1 e-house is ok			CB airconditioner 2 e-house is ok			CB heating e-house is OK			spare			CB trolley/cabin is ok			CB socket outlet is ok		
-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	6	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

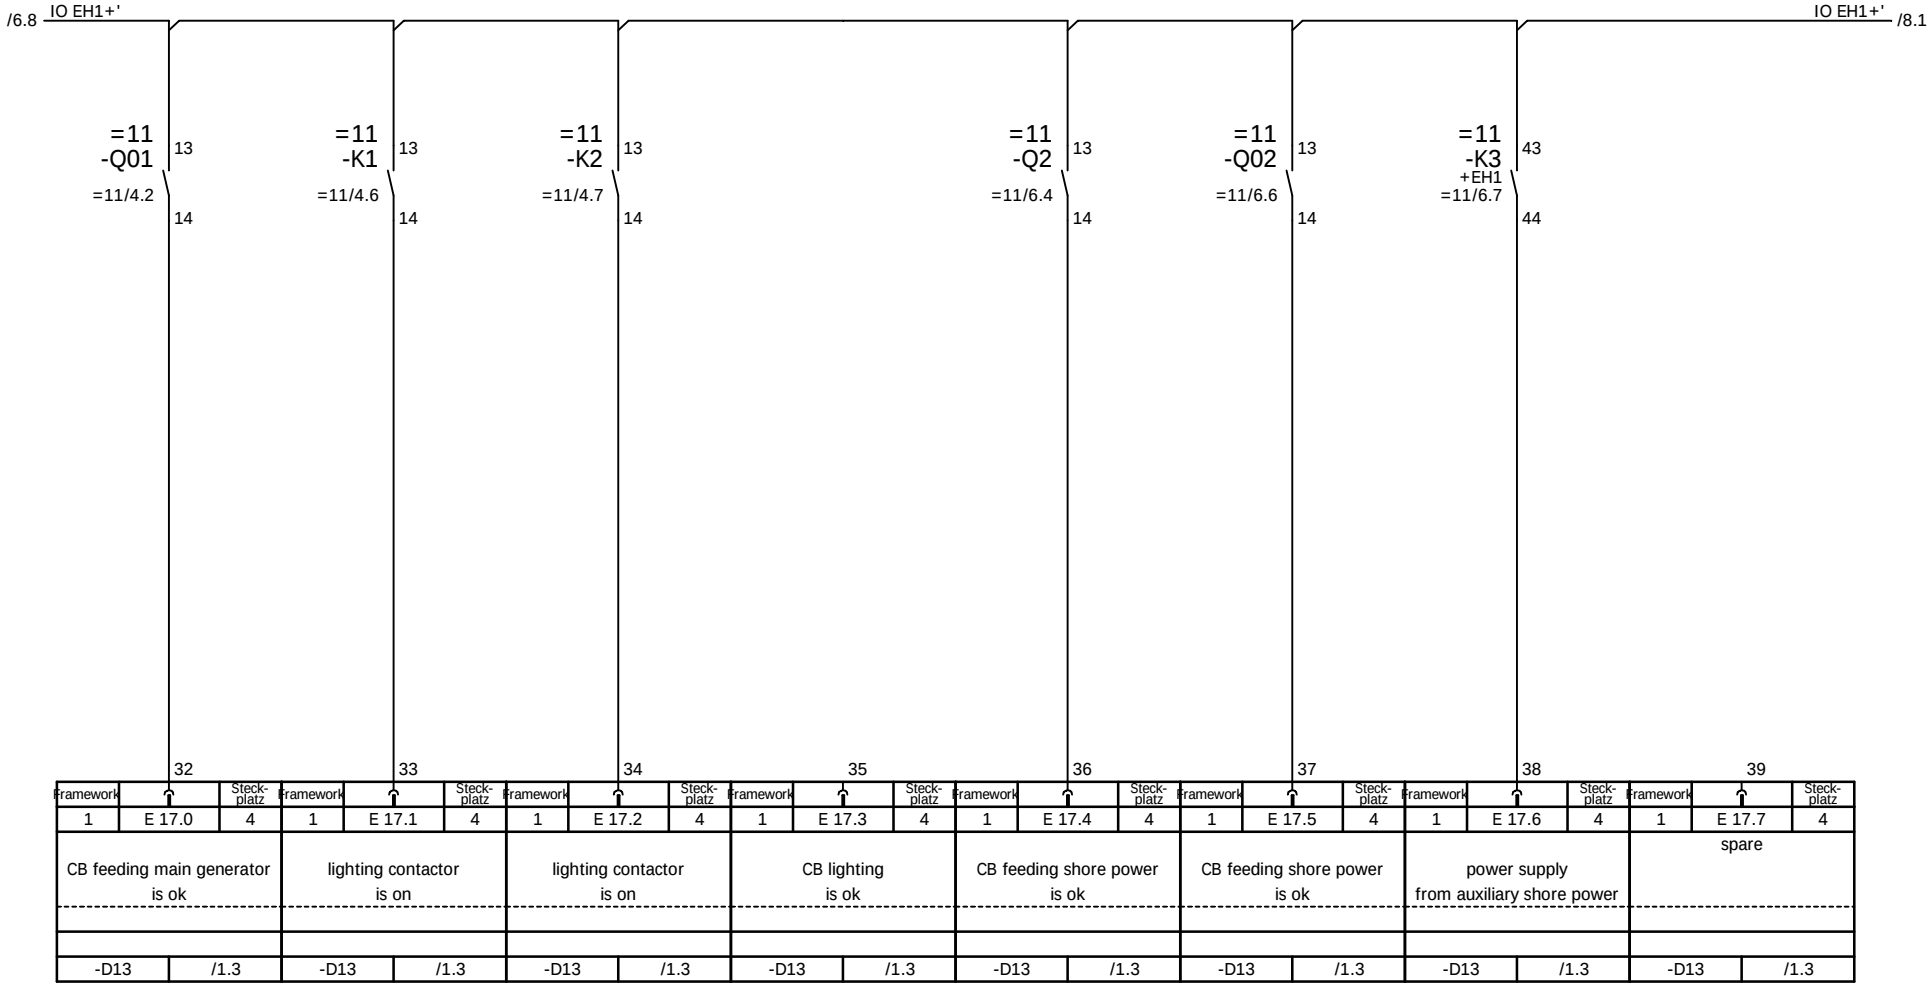


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 17.0	4	1	E 17.1	4	1	E 17.2	4	1	E 17.3	4	1	E 17.4	4	1	E 17.5	4	1	E 17.6	4	1	E 17.7	4
CB feeding main generator is ok			lighting contactor is on			lighting contactor is on			CB lighting is ok			CB feeding shore power is ok			CB feeding shore power is ok			power supply from auxiliary shore power			spare		
-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3		-D13	/1.3	

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding, input
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	7	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

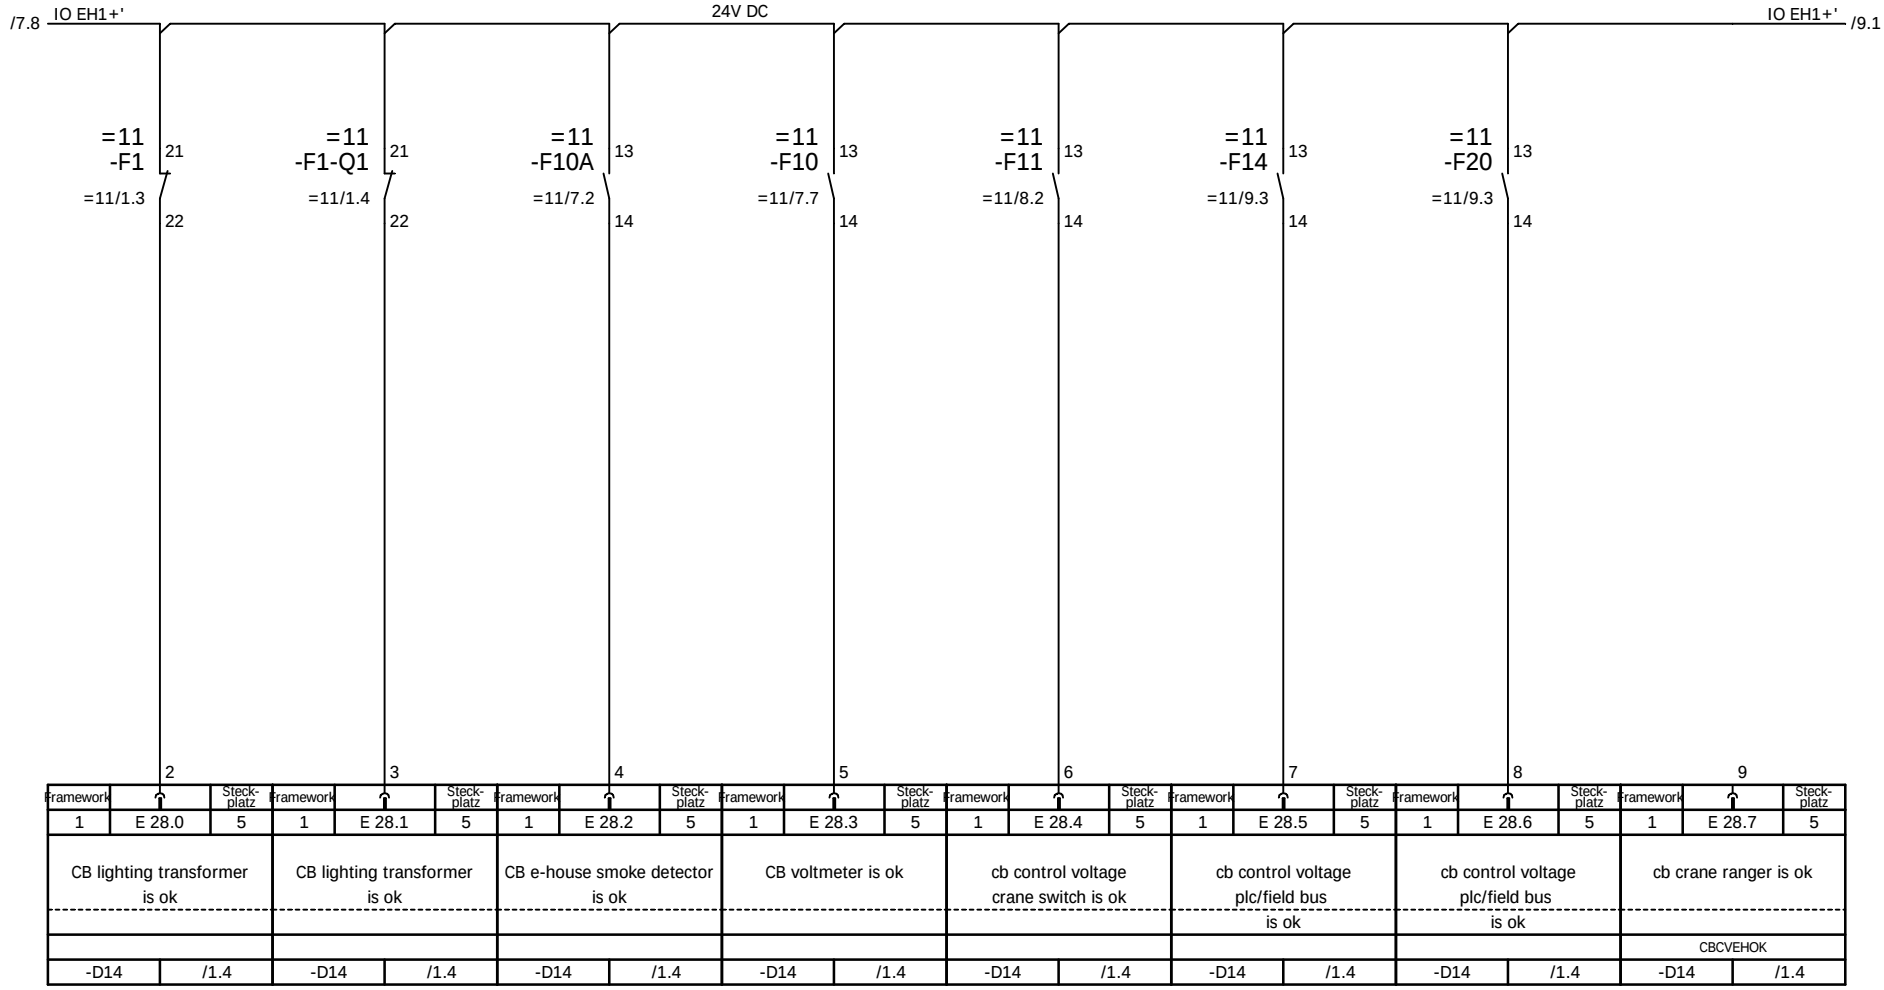

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 28.0	5	1	E 28.1	5	1	E 28.2	5	1	E 28.3	5	1	E 28.4	5	1	E 28.5	5	1	E 28.6	5	1	E 28.7	5
CB lighting transformer is ok			CB lighting transformer is ok			CB e-house smoke detector is ok			CB voltmeter is ok			cb control voltage crane switch is ok			cb control voltage plc/field bus is ok			cb control voltage plc/field bus is ok			cb crane ranger is ok		
																					CBCVEHOK		
-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

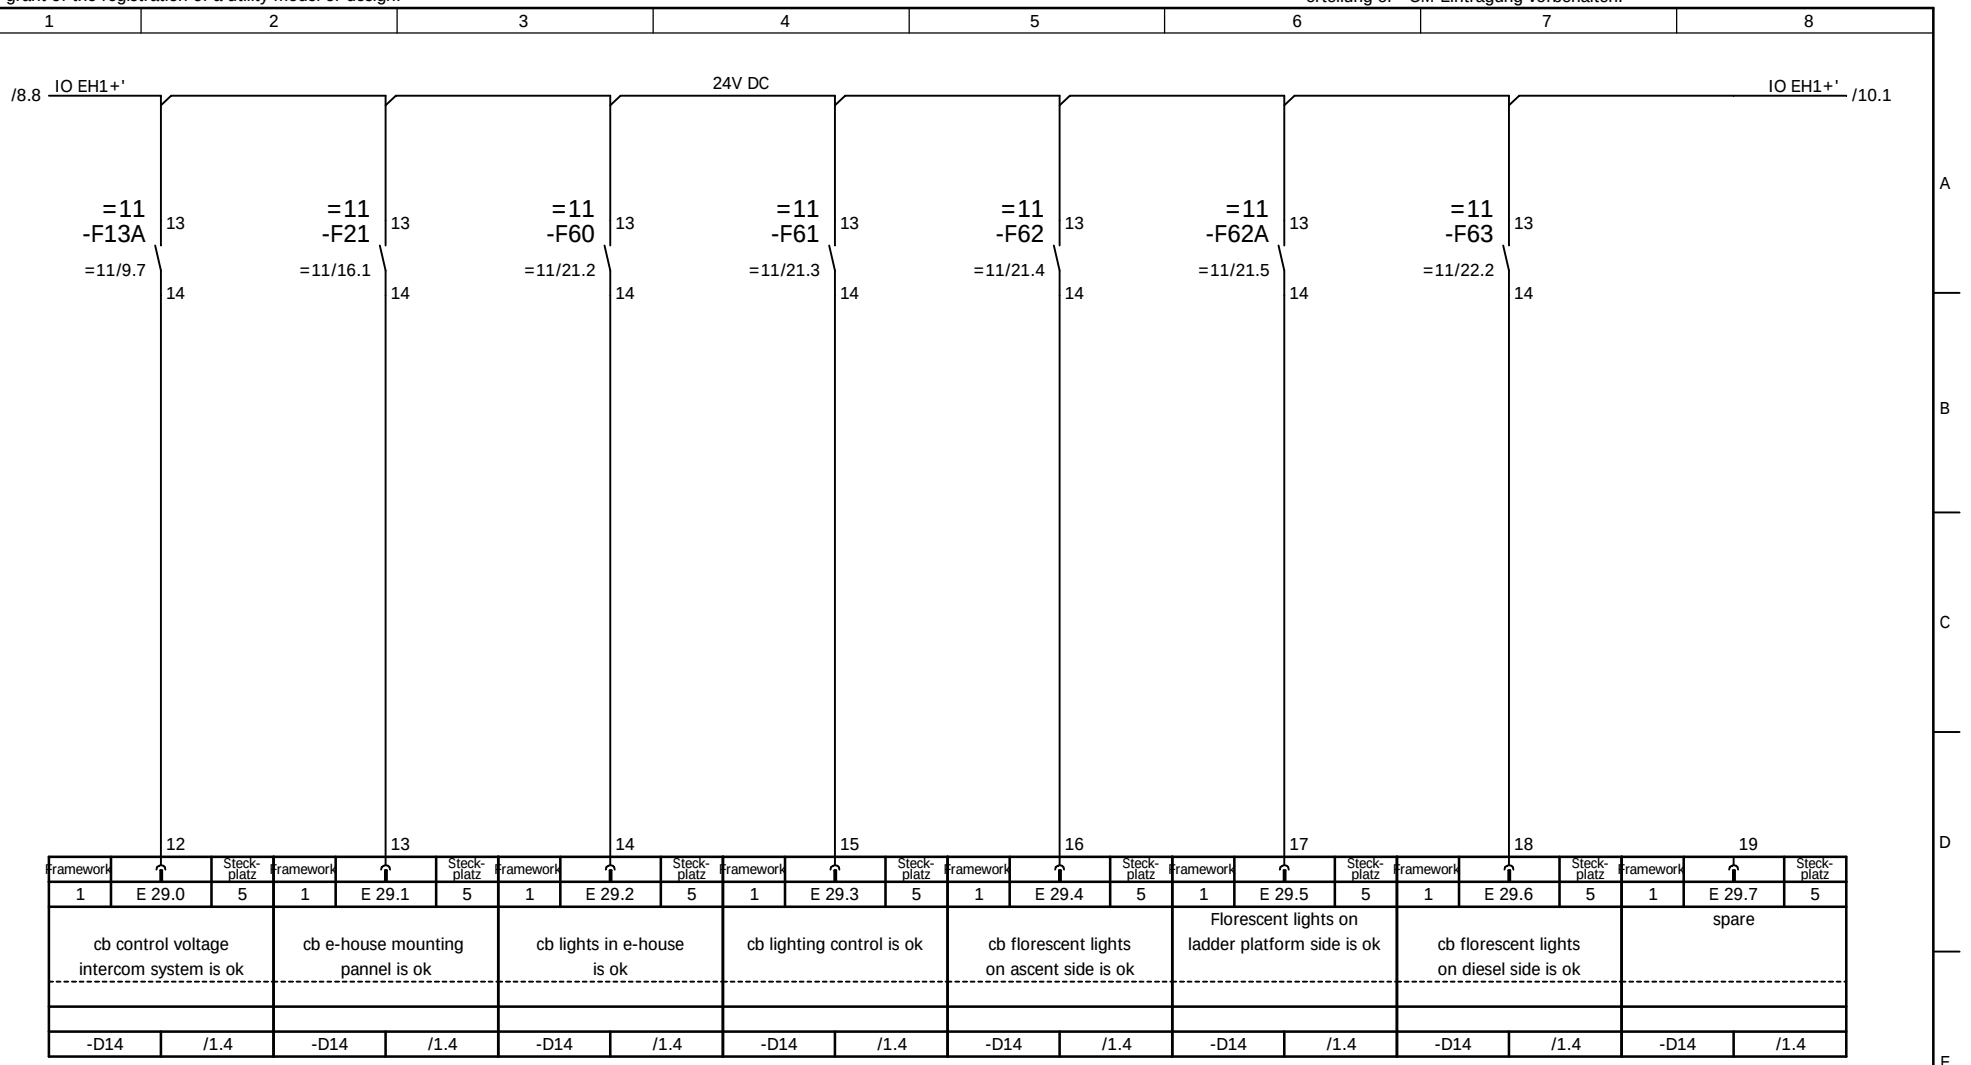

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 29.0	5	1	E 29.1	5	1	E 29.2	5	1	E 29.3	5	1	E 29.4	5	1	E 29.5	5	1	E 29.6	5	1	E 29.7	5
cb control voltage intercom system is ok			cb e-house mounting pannel is ok			cb lights in e-house is ok			cb lighting control is ok			cb florescent lights on ascent side is ok			Florescent lights on ladder platform side is ok			cb florescent lights on diesel side is ok			spare		
-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4	

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard
Source:

Costumer: AMPT Egypt

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type: RTG 50/26.50/5+1/AC
=61
+EH1
Job No. 1255
Drawing No. 78.5692.60.00
Sheet 9
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

/9.8 IO EH1+'

IO EH1+' /11.1


=11 -F64	=11 -F64A	=11 -F65	=11 -F65A	=11 -F66	=11 -F66A	=11 -F67
=11/22.5	=11/22.6	=11/23.2	=11/23.3	=11/23.5	=11/23.6	=11/24.3

	22		23		24		25		26		27		28		29	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 30.0	5	1	E 30.1	5	1	E 30.2	5	1	E 30.3	5	1	E 30.4	5	1	E 30.5	5	1	E 30.6	5	1	E 30.7	5
cb florescent lights on girder is ok			cb florescent lights on girder is ok			CB floodlight girder 1 is ok			CB floodlight girder 1 is ok			CB floodlight girder 2 is ok			spare			CB floodlight girder 2 is ok			CB floodlight working area roadway is ok		
-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4	

| | | | | | | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

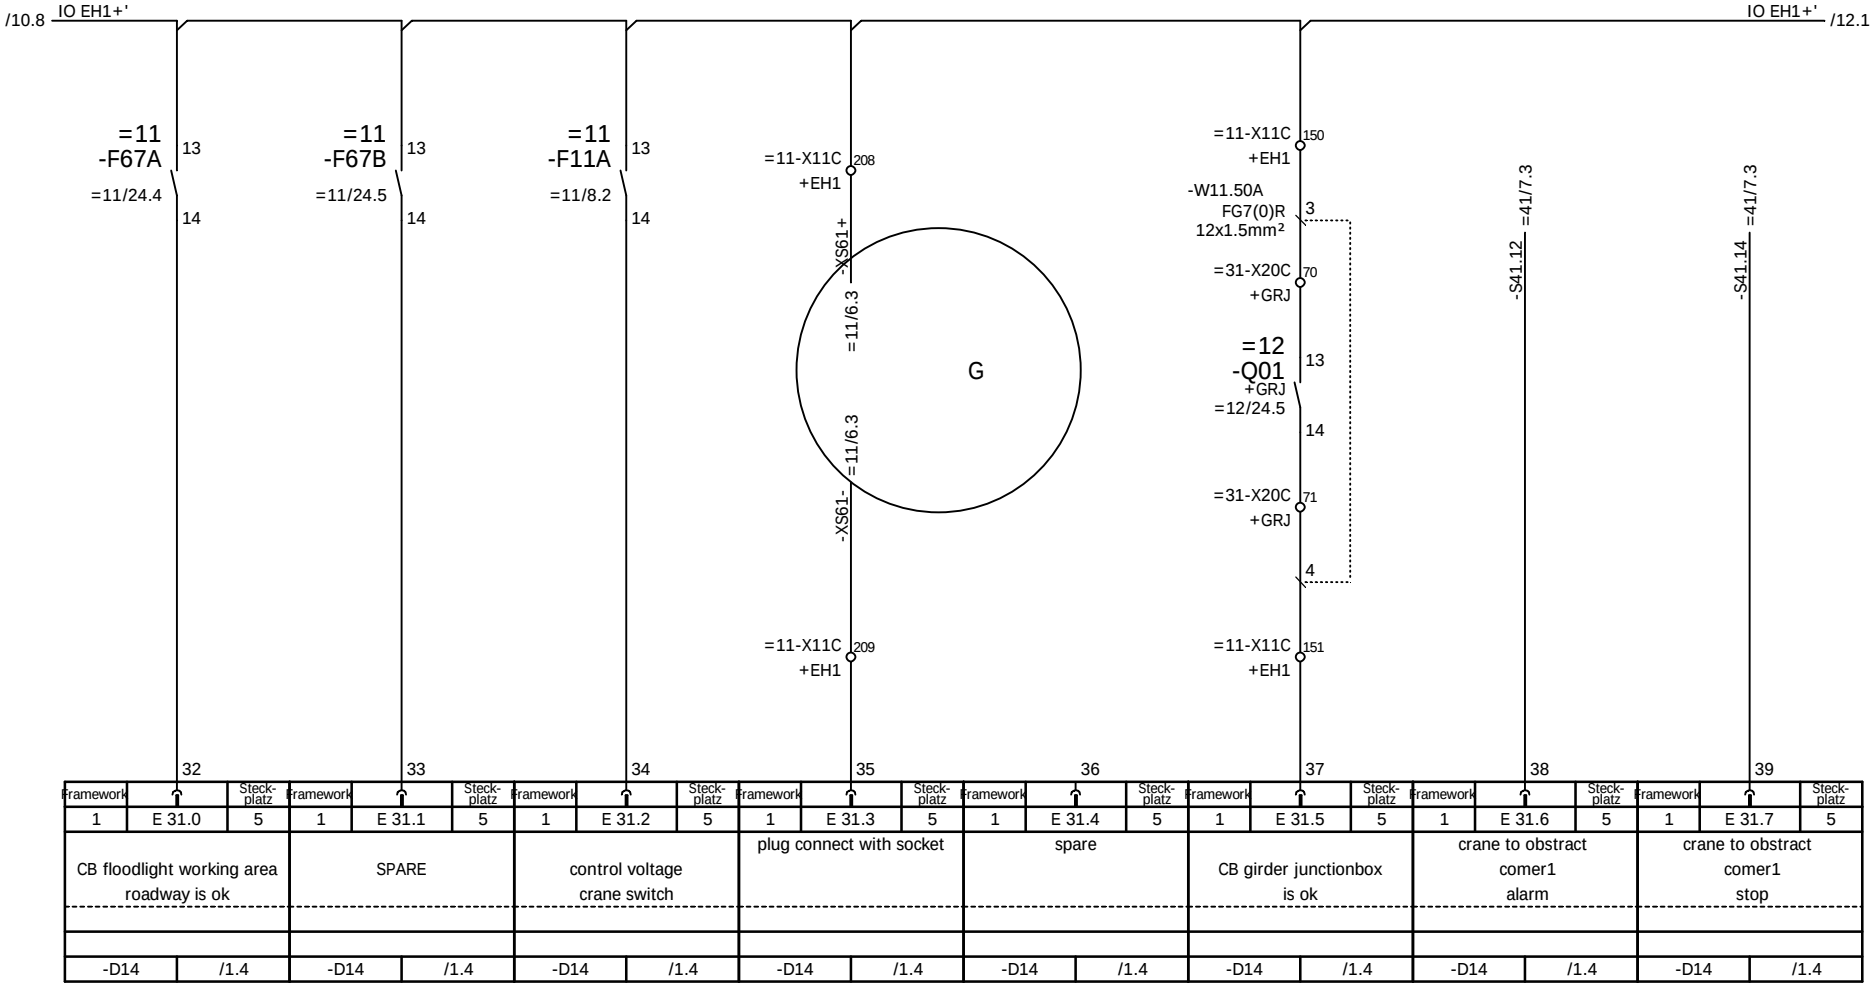

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 31.0	5	1	E 31.1	5	1	E 31.2	5	1	E 31.3	5	1	E 31.4	5	1	E 31.5	5	1	E 31.6	5	1	E 31.7	5
CB floodlight working area roadway is ok			SPARE			control voltage crane switch			plug connect with socket			spare			CB girder junctionbox is ok			crane to obstract comer1 alarm			crane to obstract comer1 stop		
-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4		-D14	/1.4	


				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	11 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

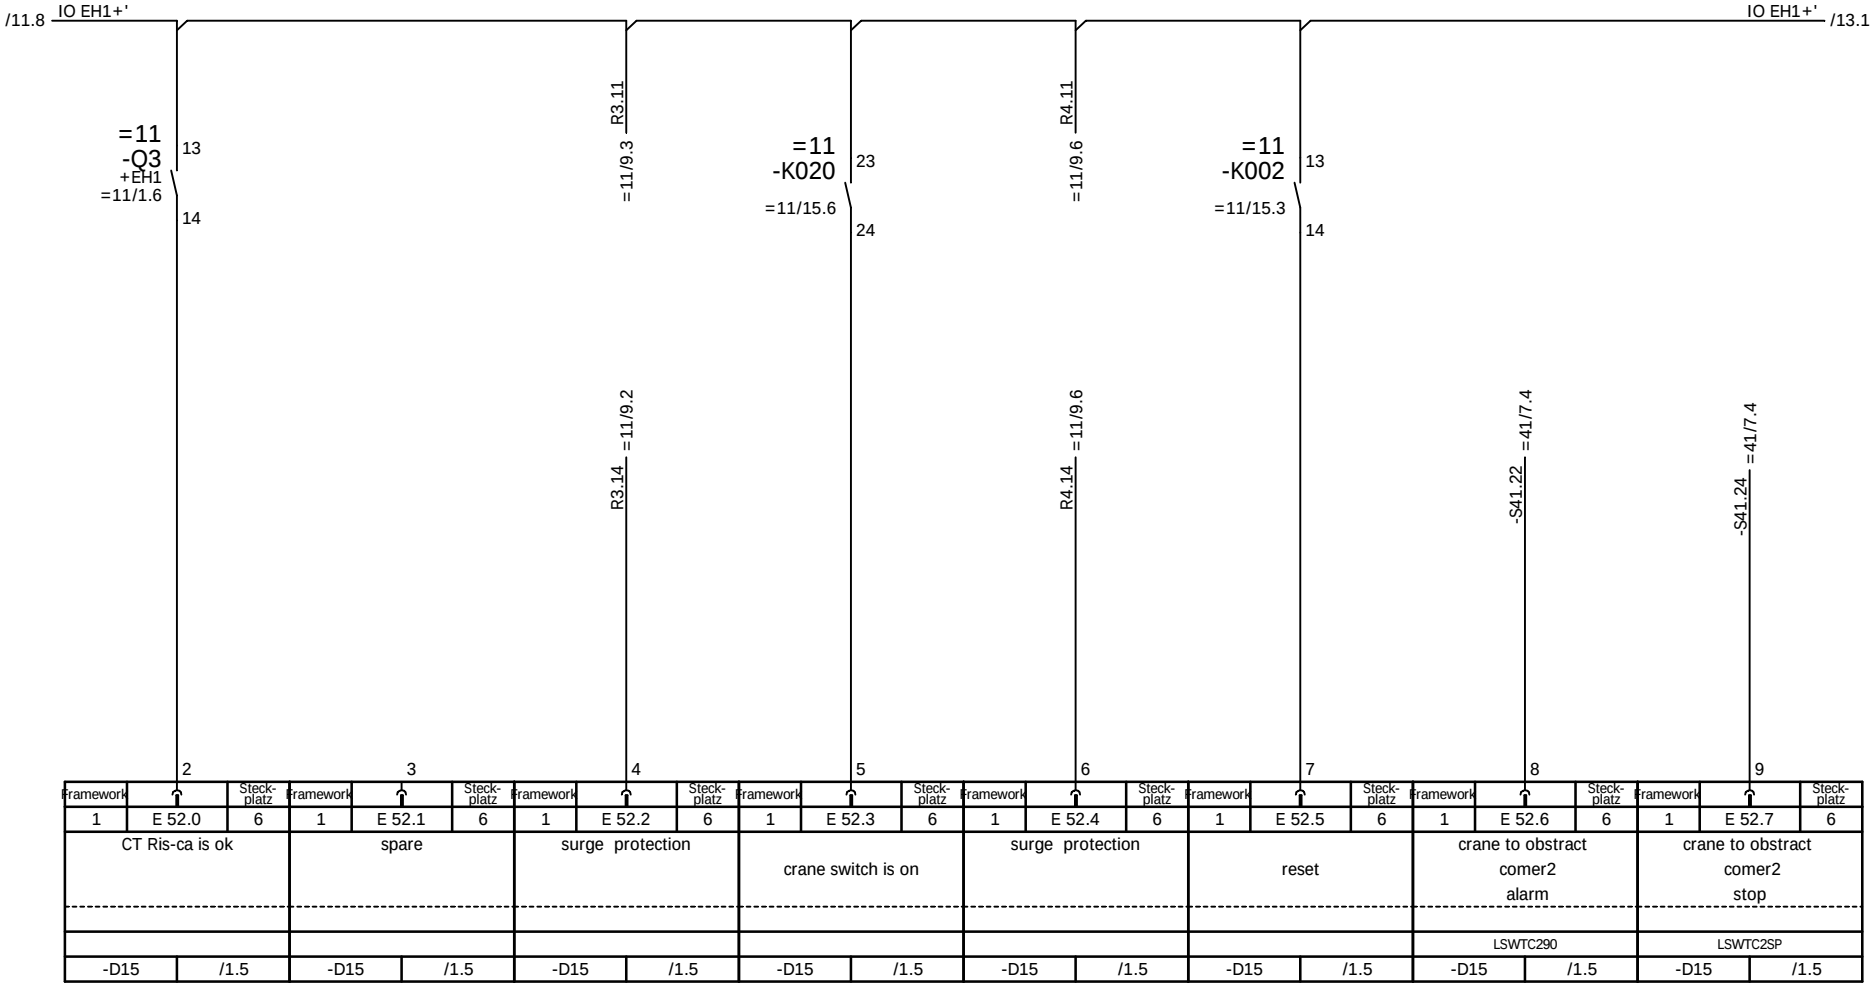

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 52.0	6	1	E 52.1	6	1	E 52.2	6	1	E 52.3	6	1	E 52.4	6	1	E 52.5	6	1	E 52.6	6	1	E 52.7	6
CT Ris-ca is ok			spare			surge protection			crane switch is on			surge protection			reset			crane to obstract comer2 alarm			crane to obstract comer2 stop		
																		LSWTC290			LSWTC2SP		
-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5	

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard
Source:

Costumer: AMPT Egypt


NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type: RTG 50/26.50/5+1/AC
=61
+EH1
Job No. 1255
Drawing No. 78.5692.60.00
Sheet 12
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

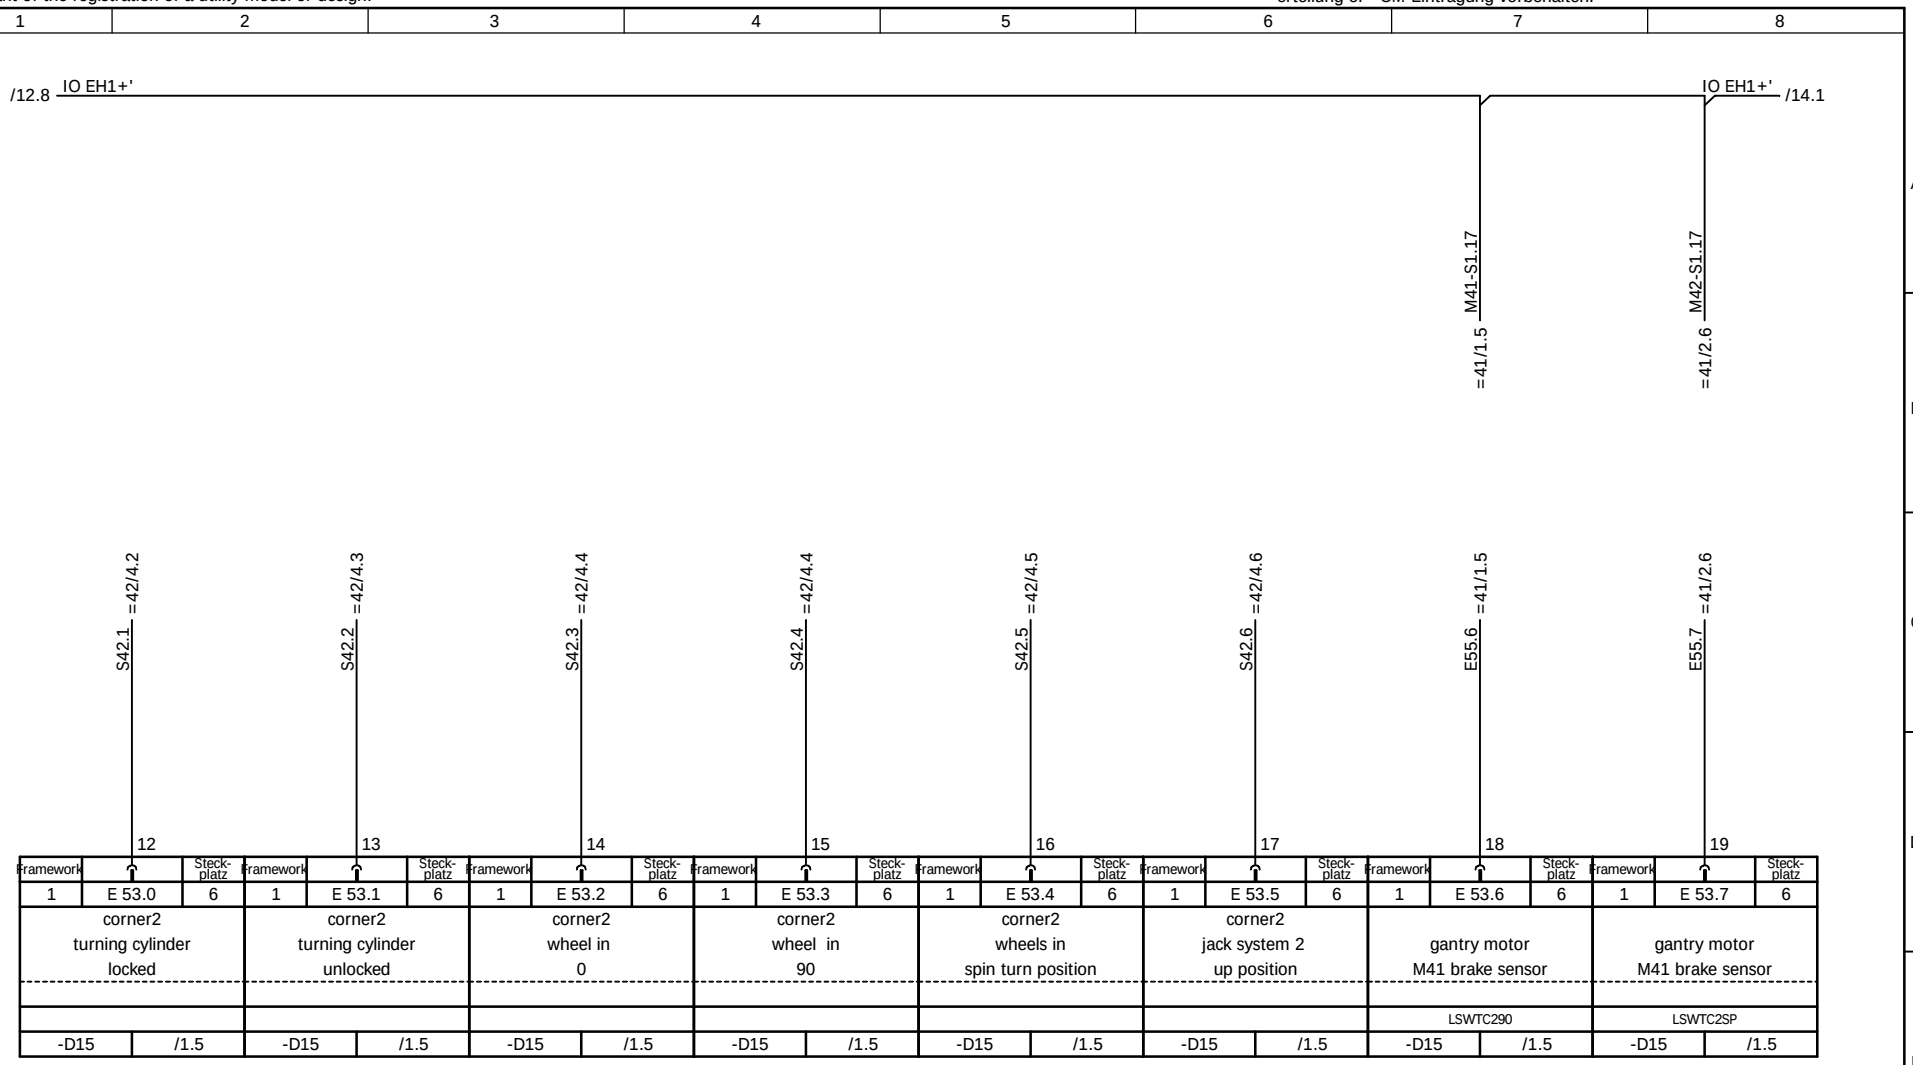

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8


/13.8 IO EH1+' — IO EH1+' /15.1

	22			23			24			25			26			27			28			29	
	S41.3 =42/3.4			S41.4 =42/3.4			S41.5 =42/3.5			S41.6 =42/3.6			S41.7 =42/3.7			S42.7 =42/4.7			E18.6 =42/3.2			E18.7 =42/3.3	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 54.0	6	1	E 54.1	6	1	E 54.2	6	1	E 54.3	6	1	E 54.4	6	1	E 54.5	56	1	E 54.6	6	1	E 54.7	6
corner 1 wheel in 0			corner 1 wheel in 90			corner 1 wheels in spin turn position			corner 1 jack system 1 up position			corner 1 jack system 1 down position			corner2 jack system 2 down position			corner 1 turning cylinder locked			corner 1 turning cylinder unlocked	
												LSCOLLC1			LSCOLLC2			LSWTC1LO			LSWTC1UN	
-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15			-D15	/1.5		-D15	/1.5	

| | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

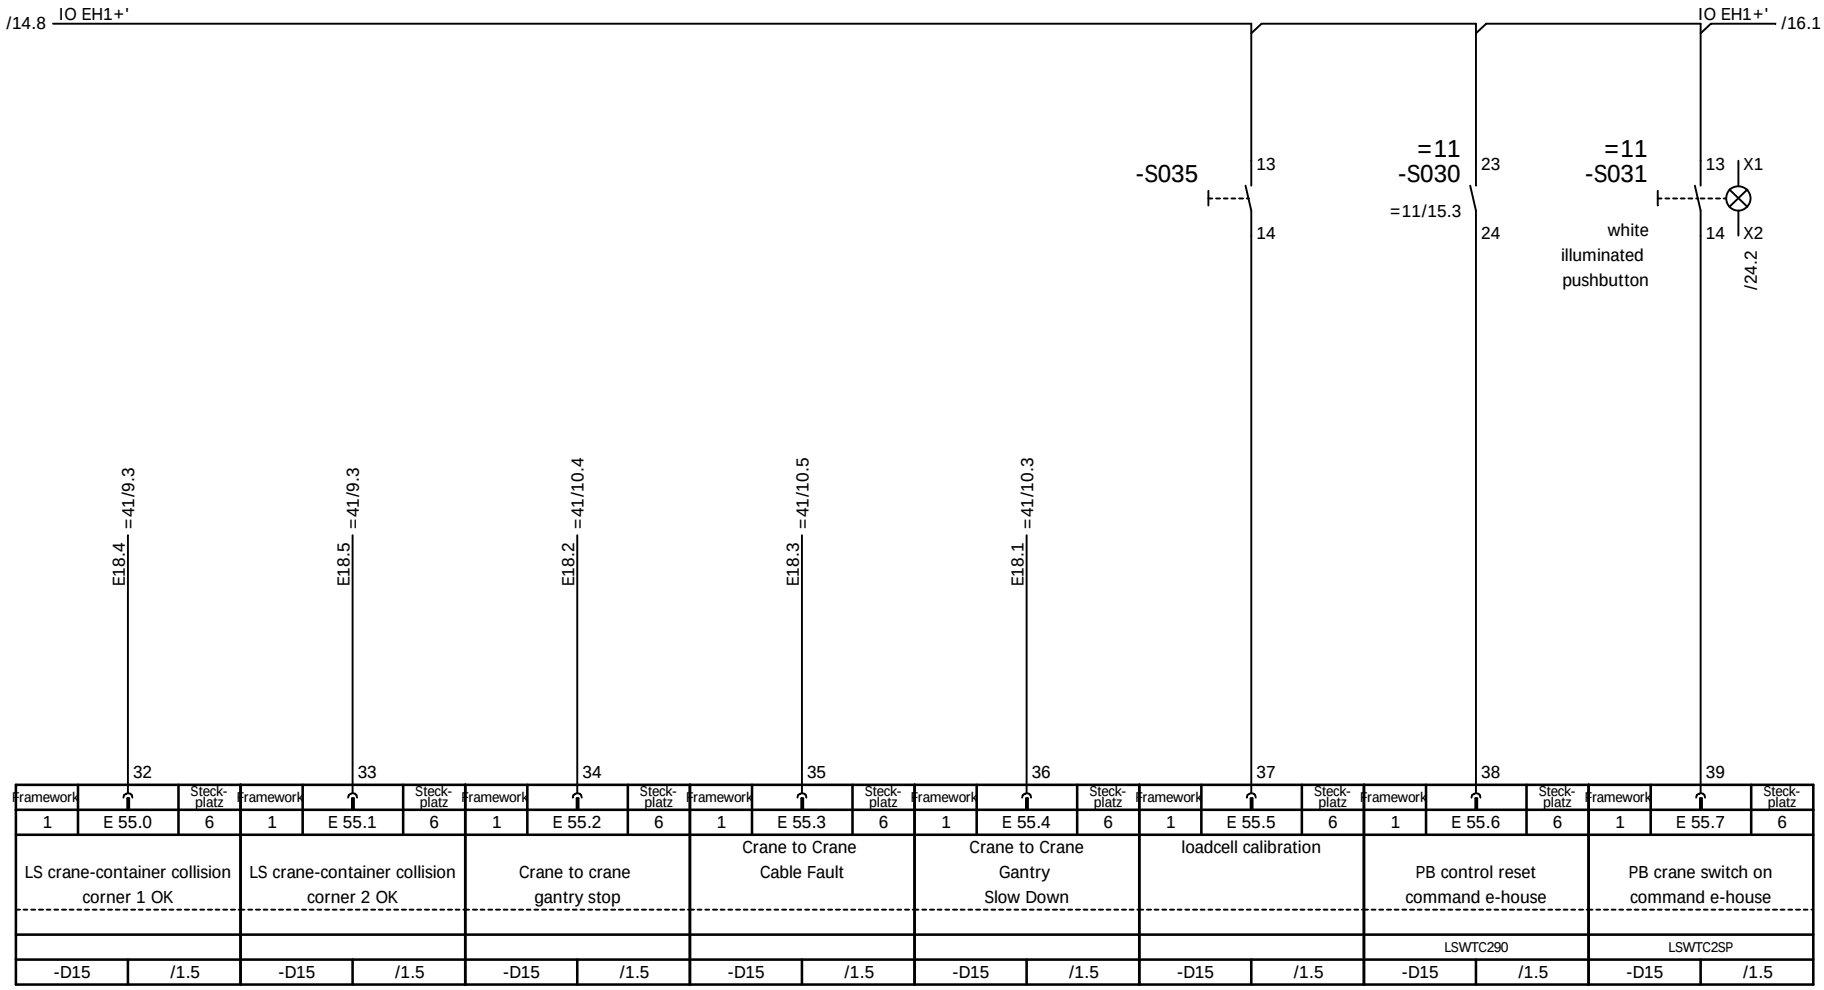


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 55.0	6	1	E 55.1	6	1	E 55.2	6	1	E 55.3	6	1	E 55.4	6	1	E 55.5	6	1	E 55.6	6	1	E 55.7	6
LS crane-container collision corner 1 OK			LS crane-container collision corner 2 OK			Crane to crane gantry stop			Crane to Crane Cable Fault			Crane to Crane Gantry Slow Down			loadcell calibration			PB control reset command e-house			PB crane switch on command e-house		
																			LSWTC290			LSWTC2SP	
-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5		-D15	/1.5	

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding, input
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61	
		+EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 15	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

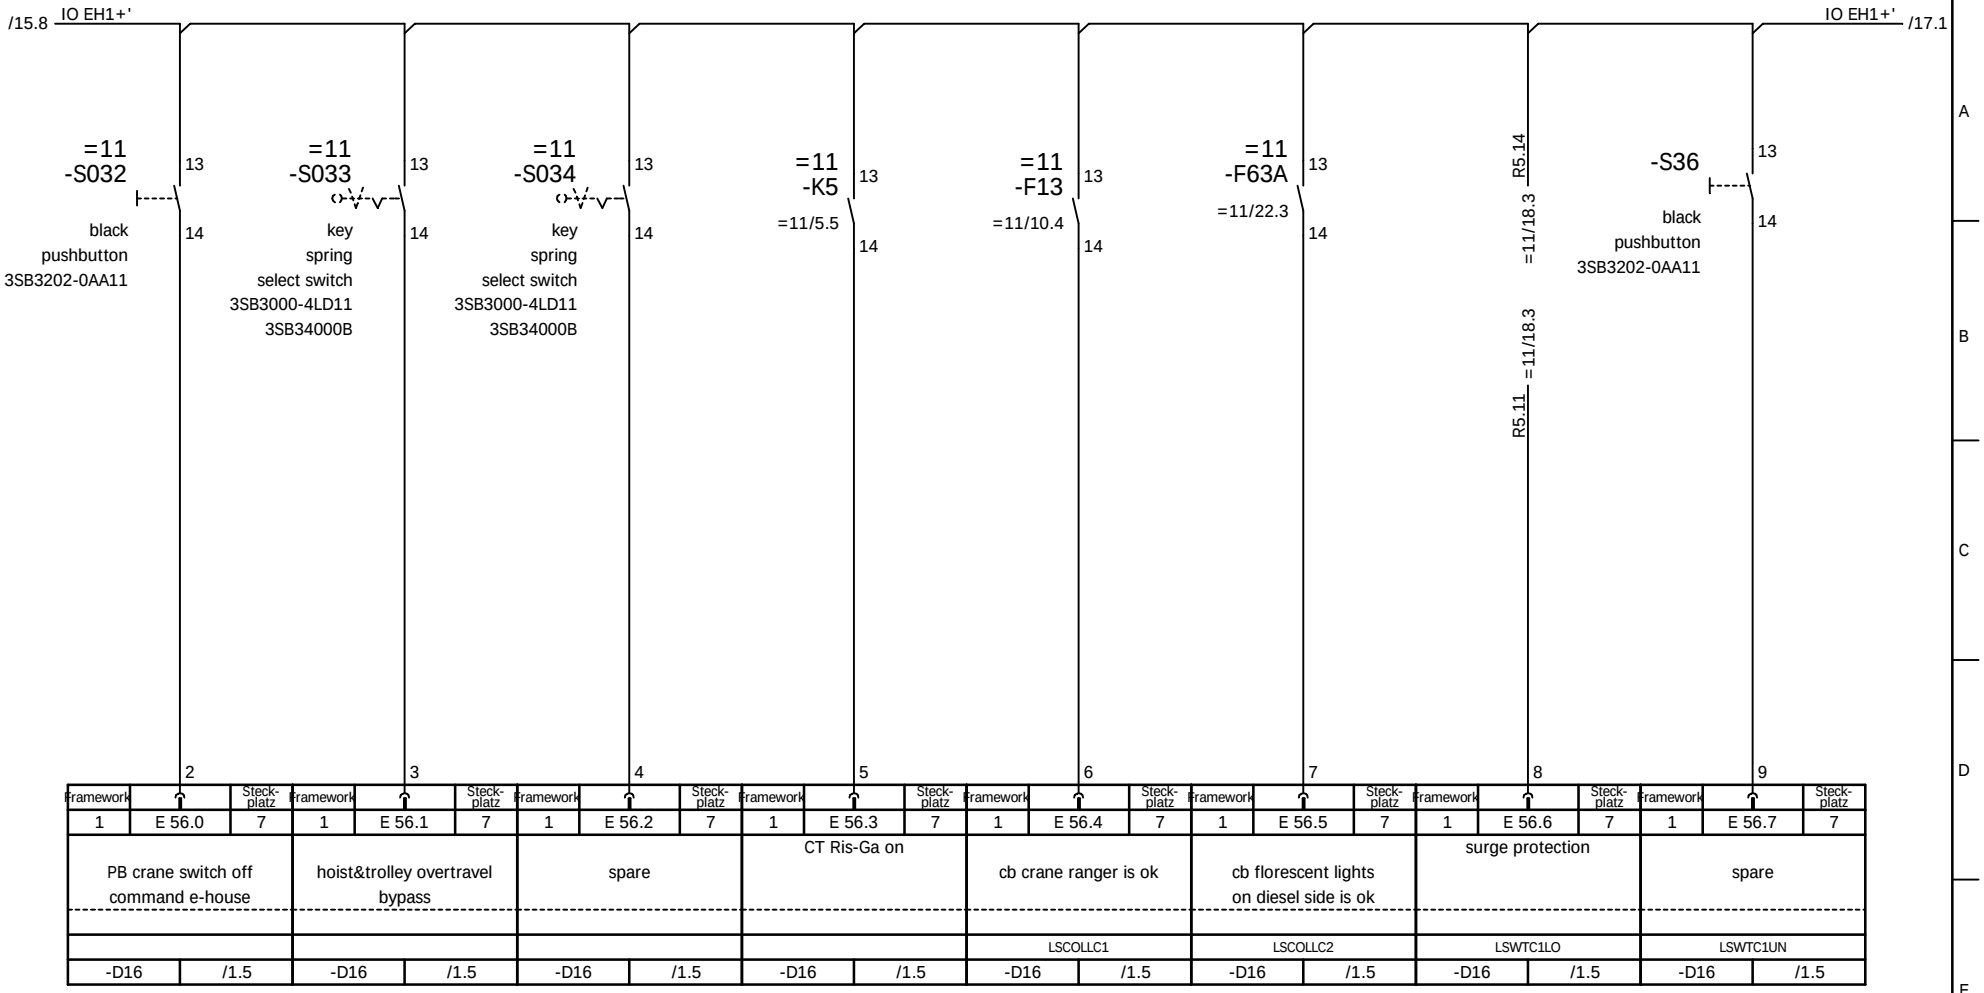


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 56.0	7	1	E 56.1	7	1	E 56.2	7	1	E 56.3	7	1	E 56.4	7	1	E 56.5	7	1	E 56.6	7	1	E 56.7	7
PB crane switch off command e-house			hoist&trolley overtravel bypass			spare			CT Ris-Ga on			cb crane ranger is ok			cb florescent lights on diesel side is ok			surge protection			spare		
												LSCOLLC1			LSCOLLC2			LSWTC1LO			LSWTC1UN		
-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5	

| | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

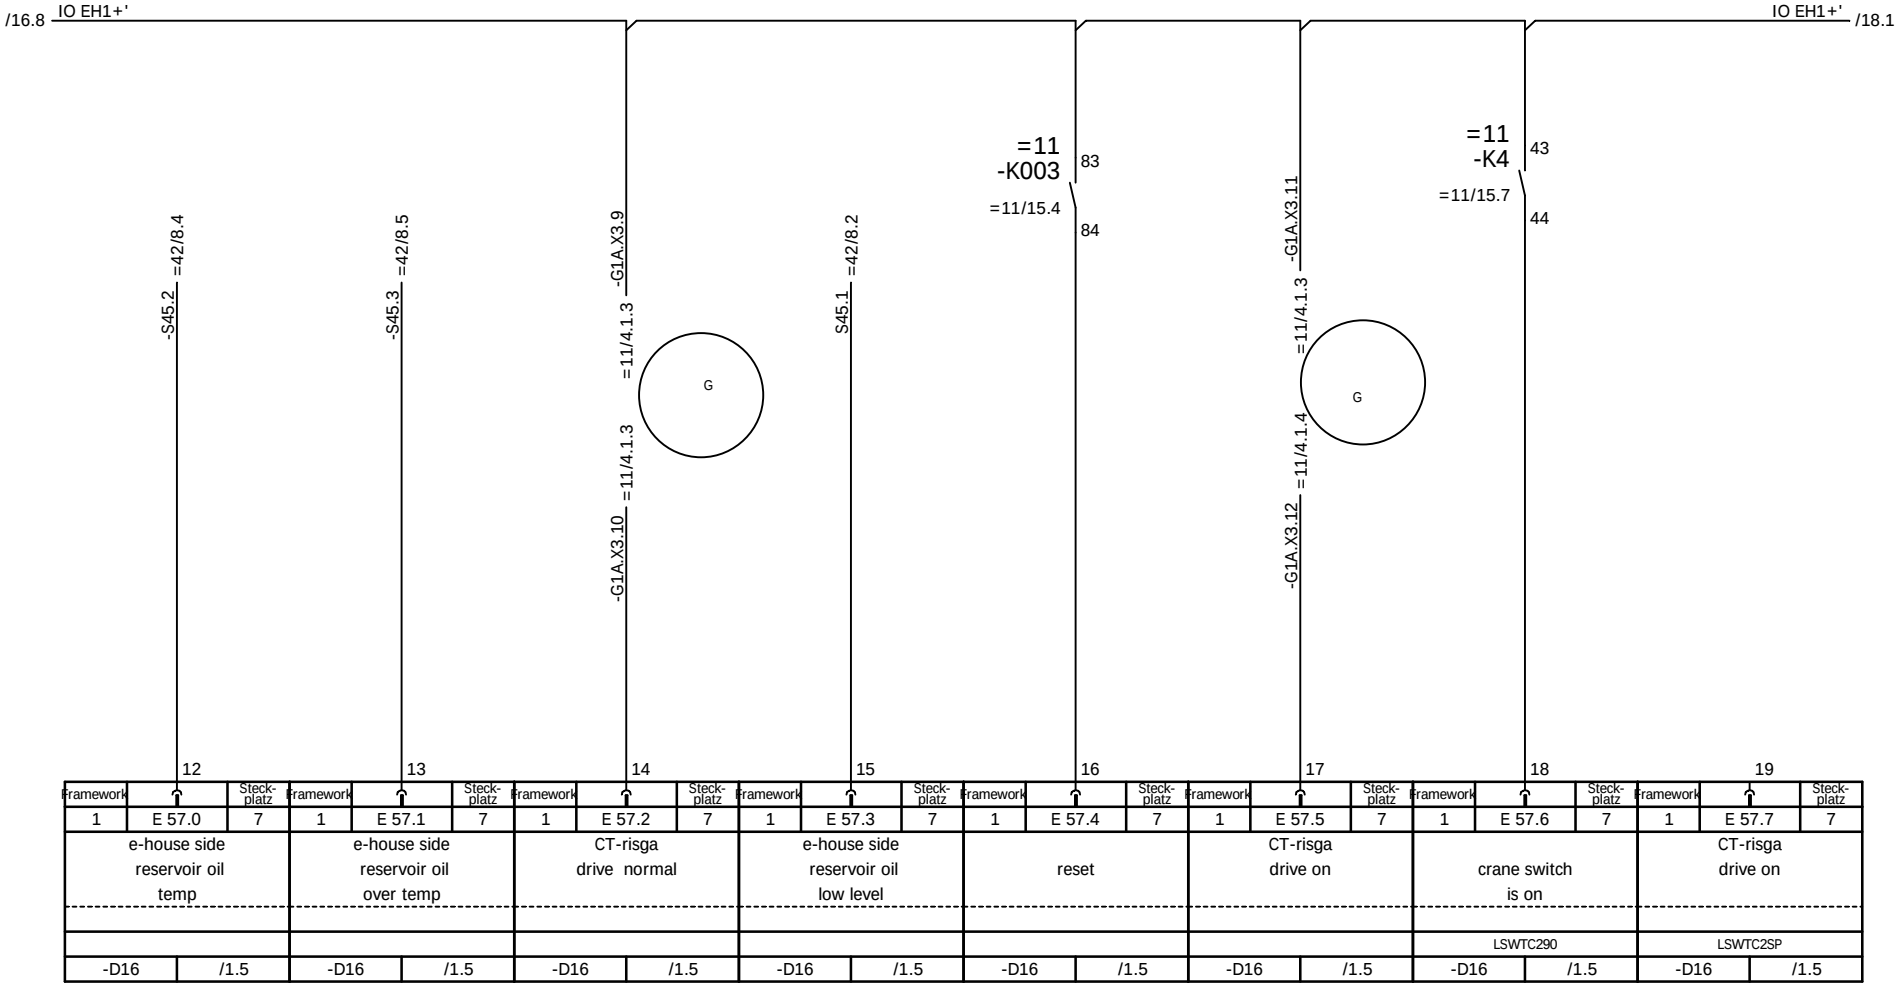

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 57.0	7	1	E 57.1	7	1	E 57.2	7	1	E 57.3	7	1	E 57.4	7	1	E 57.5	7	1	E 57.6	7	1	E 57.7	7
e-house side reservoir oil temp			e-house side reservoir oil over temp			CT-risga drive normal			e-house side reservoir oil low level			reset			CT-risga drive on			crane switch is on			CT-risga drive on		
																		LSWTC290			LSWTC2SP		
-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5	

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt
Source:


NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type: RTG 50/26.50/5+1/AC
=61
+EH1
Job No. 1255
Drawing No. 78.5692.60.00
Sheet 17
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

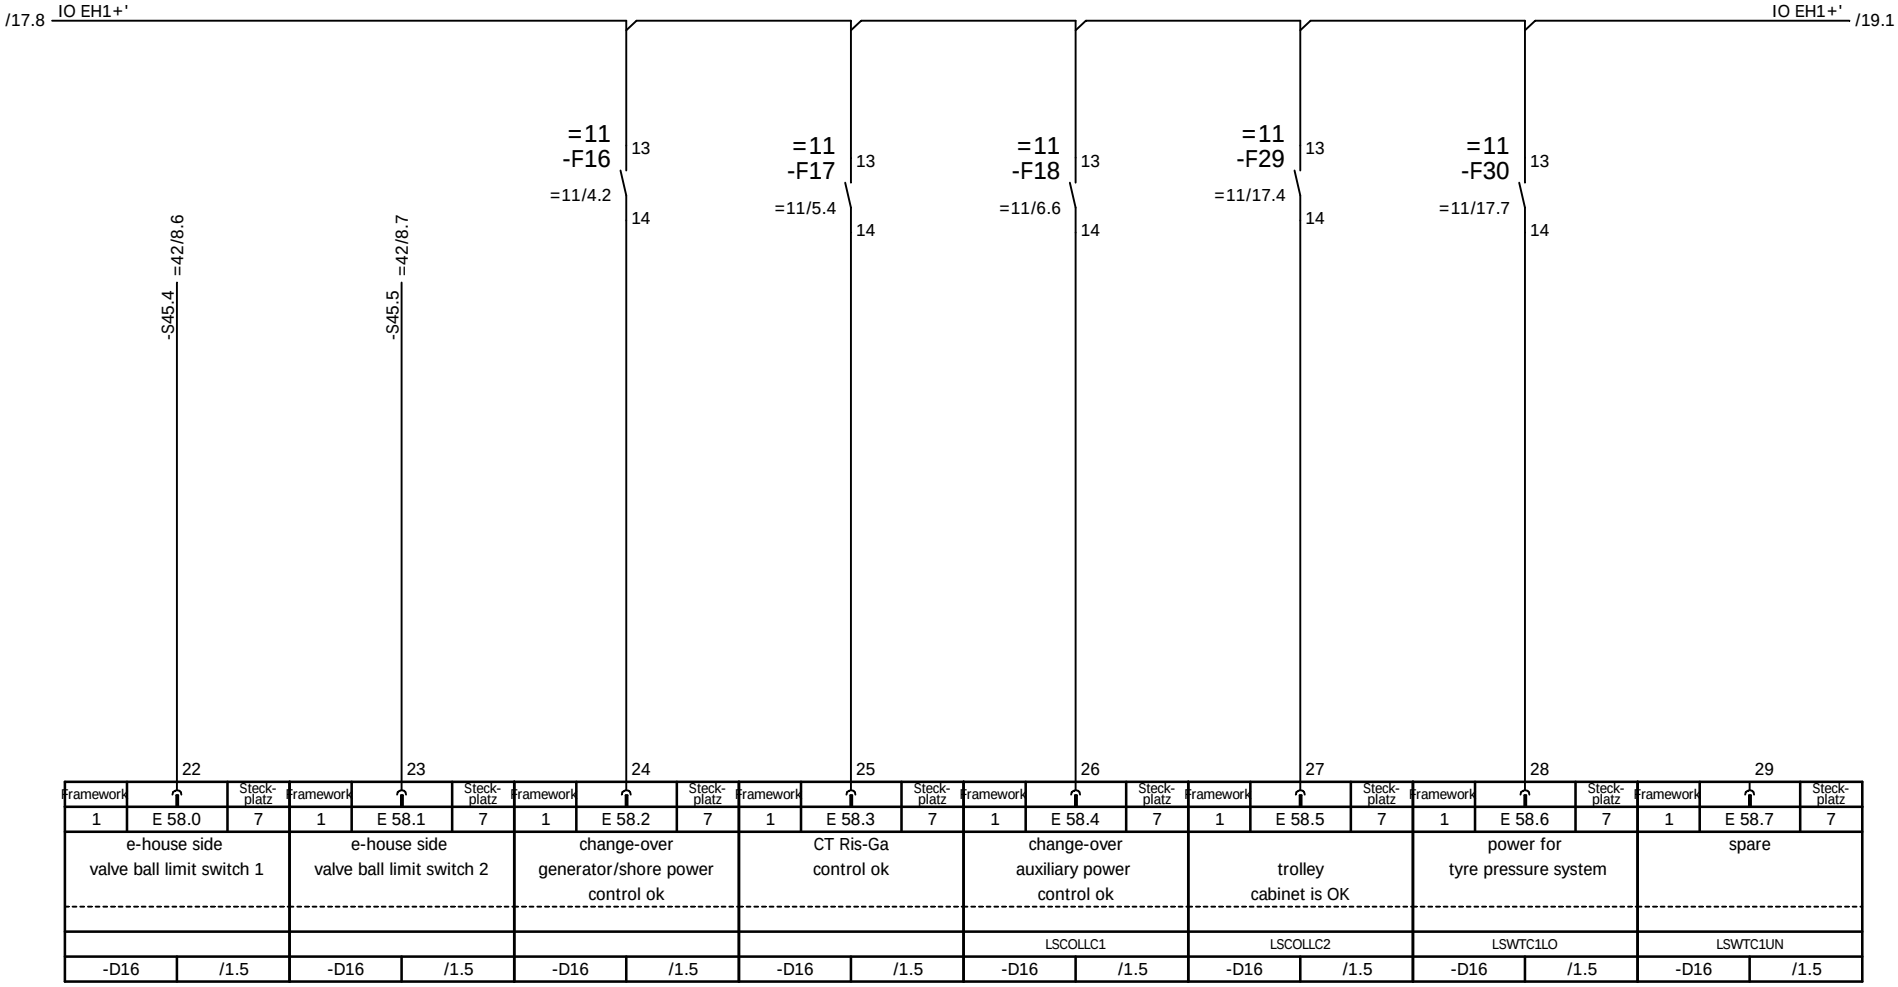


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 58.0	7	1	E 58.1	7	1	E 58.2	7	1	E 58.3	7	1	E 58.4	7	1	E 58.5	7	1	E 58.6	7	1	E 58.7	7
e-house side valve ball limit switch 1			e-house side valve ball limit switch 2			change-over generator/shore power control ok			CT Ris-Ga control ok			change-over auxiliary power control ok			trolley cabinet is OK			power for tyre pressure system			spare		
												LSCOLLC1			LSCOLLC2			LSWTC1LO			LSWTC1UN		
-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5	

| | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

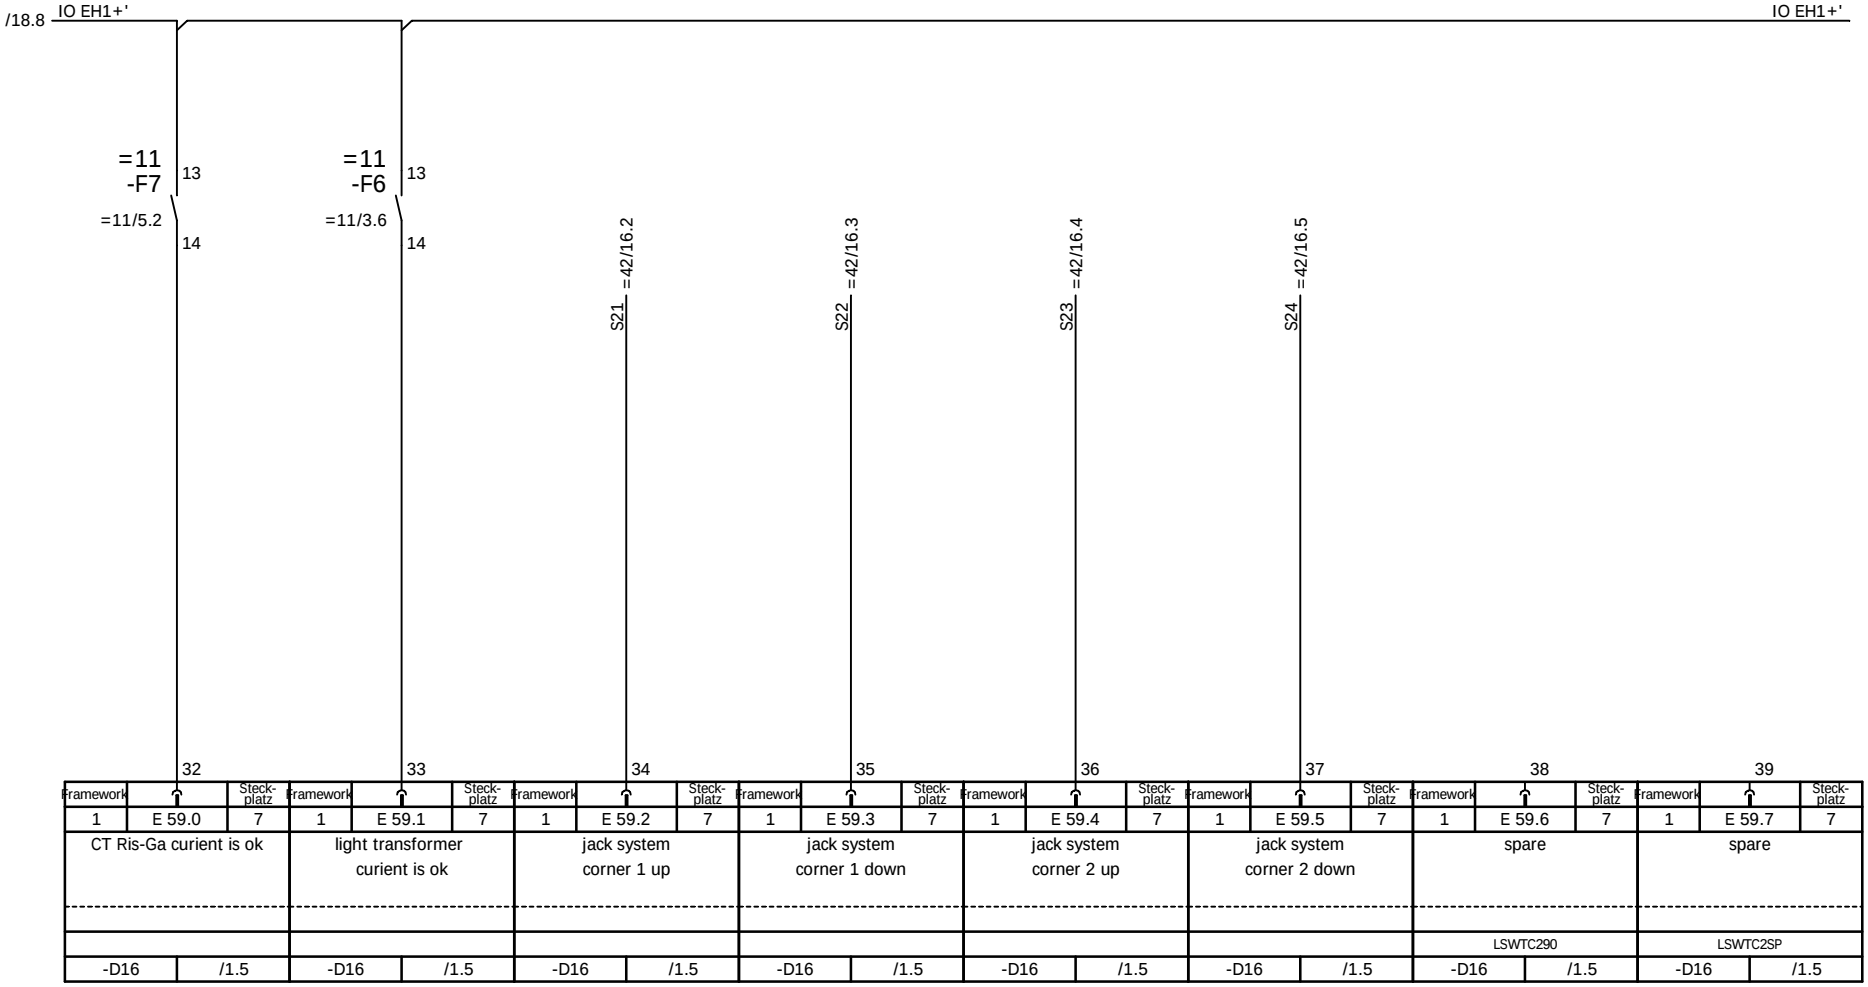

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
1	E 59.0	7	1	E 59.1	7	1	E 59.2	7	1	E 59.3	7	1	E 59.4	7	1	E 59.5	7	1	E 59.6	7	1	E 59.7	7
CT Ris-Ga curient is ok			light transformer curient is ok			jack system corner 1 up			jack system corner 1 down			jack system corner 2 up			jack system corner 2 down			spare			spare		
																		LSWTC290			LSWTC2SP		
-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5		-D16	/1.5	

Ind.	Revision	Date	Name				
				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
				Standard		Source:	

NOELL

PLC feeding, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	19 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6
CRSW_ON		PLC_RUN													
crane switch on command		PLC is in running condition		hydraulic pump e-house side		spare		hydraulic pump dieselside		spare		spare		spare	
1	A 12.0	8	1	A 12.1	8	1	A 12.2	8	1	A 12.3	8	1	A 12.4	8	1	A 12.5	8	1	A 12.6	8	1	A 12.7	8
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

2 3 4 5 6 7 8 9

=11 -K021 A1 A2

=12 -K019 A1 A2

=42 -K045 +EH2 A1 A2

=42 -K082 +EH2 A1 A2

=42 -K046 +EH2 A1 A2

=42 -K046A +EH2 A1 A2

=42 -K047 +EH2 A1 A2

=42 -K047A +EH2 A1 A2

/1.8 IO EH1- IO EH1- /21.1

CAD32BD LADRO LA4DC1U 13 14 21 22 31 32 43 44

=11/15.6 57 58 65 66

3RH1122-1BB40 3RT1916-1EH00

=12/3.8 13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

=42/2.2 13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

=42/2.3 13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

13 14 21 22 31 32 43 44

3RH1122-1BB40 3RT1916-1EH00

13 14 21 22 31 32 43 44

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding output	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 20
Ind.	Revision	Date	Name	Standard		Source:						94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6	-D17	/1.6
jack cylinder 1 up e-house side		ack cylinder 1 down e-house side		jack cylinder 2 up e-house side		jack cylinder 2 down e-house side		Reserve spare		circulation valve e-house side		steering cylinder 2 90		Reserve spare	
1	A 13.0	8	1	A 13.1	8	1	A 13.2	8	1	A 13.3	8	1	A 13.4	8	1	A 13.5	8	1	A 13.6	8	1	A 13.7	8
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	12			13			14			15			16			17			18			19	

=42 -KX048 +EH1 — =42 -KX049 +EH1 — =42 -KX050 +EH1 — =42 -KX051 +EH1 — =42 -KX052 +EH1 — -KX053 +EH1 — -KX082 +EH1

/20.8 IO EH1- ... IO EH1- /22.1

RELAY RCL KITS 24VDC 1C/O WITH LAMP

=42/15.2 — =42/15.3 — =42/15.3 — =42/15.4 — =42/7.2 — =42/7.2

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding output	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH1
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 21 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7
SVWTESBY		SVWTC2_0		SVWTC290		SVWTC2UN		SVWTC2LO		SVWTC1UN		SVWTC1LO		SVWTC1_0	
steering cylinder 2 0		steering cylinder 2 unlock		steering cylinder 2 lock in		steering cylinder 1 unlock		steering cylinder 1 lock in		steering cylinder 1 90		steering cylinder 1 0		Reserve spare	

1	A 14.0	9	1	A 14.1	9	1	A 14.2	9	1	A 14.3	9	1	A 14.4	9	1	A 14.5	9	1	A 14.6	9	1	A 14.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

2 3 4 5 6 7 8 9

-KX83 -KX84 -KX85 -KX86 -KX87 -KX88 -KX89 -KX90

A1 A2

/21.8 IO EH1- IO EH1- /23.1

RELAY RCL
24VDC 1C/O

=42/7.3 =42/7.4 =42/7.5 =42/7.5 =42/7.6 =42/7.7 =42/7.8

14 12 11

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=61 +EH1
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00
									Sheet 22 94 Sh.


NOELL

PLC feeding output
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7
SVWTC190		GAWARNES													
rotating beacon corner 1		sound generator corner 1		rotating beacon corner 2		sound generator corner 2		crane twistlocks counter		hoist&trolley running time		Reserve spare		Reserve spare	
1	A 15.0	9	1	A 15.1	9	1	A 15.2	9	1	A 15.3	9	1	A 15.4	9	1	A 15.5	9	1	A 15.6	9	1	A 15.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	12			13			14			15			16			17			18			19	

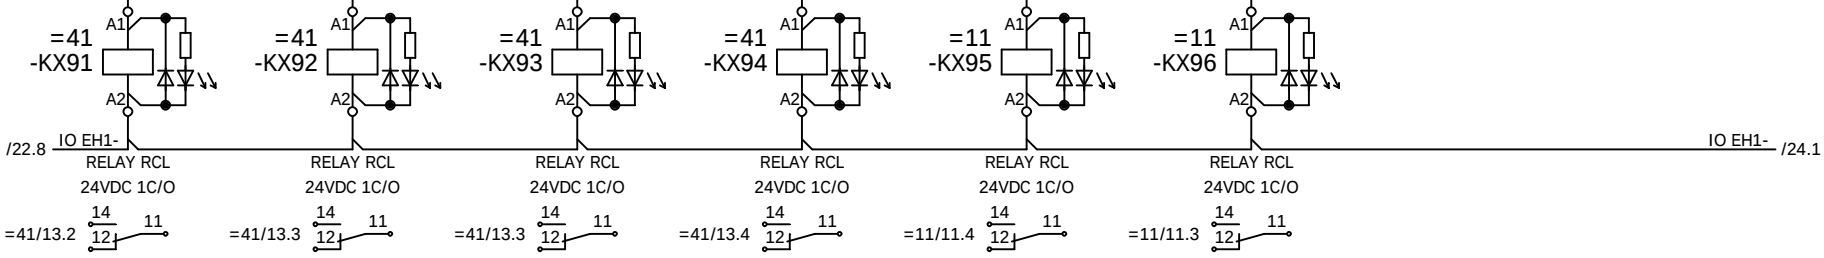

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=61 +EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 23 94 Sh.

NOELL

PLC feeding output

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7
SVWTESBY		SVWTC2_0		SVWTC290		SVWTC2UN		SVWTC2LO		SVWTC1UN		SVWTC1LO		SVWTC1_0	
crane switch on e-house		spare		hoist raise		hoist low		gantery left		gantry right		trolley forward		spare	
1	A 16.0	9	1	A 16.1	9	1	A 16.2	9	1	A 16.3	9	1	A 16.4	9	1	A 16.5	9	1	A 16.6	9	1	A 16.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	22			23			24			25			26			27			28			29	

=11-X11C +EH1

186 187 188 189 190 191

=11
-S031
+EH1
/15.8

green

A21.5 A21.6 A21.7 A21.8 A21.9 A21.10

=42/17.2 =42/17.3 =42/17.4 =42/17.5 =42/17.6 =42/17.7

/23.8 IO EH1- IO EH1- /25.1

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7	-D17'	/1.7
SVWTC190		GAWARNES													
jack system corner 1 up		jack system corner 1 down		jack system corner 2 up		jack system corner 2 down		trolley backword		spreader reboot		Reserve spare		Reserve spare	

1	A 17.0	9	1	A 17.1	9	1	A 17.2	9	1	A 17.3	9	1	A 17.4	9	1	A 17.5	9	1	A 17.6	9	1	A 17.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

32 33 34 35 36 37 38 39

=11-X11C
+EH1

180 181 182 183 184 185

A21.1 =42/16.3
A21.2 =42/16.3
A21.3 =42/16.5
A21.4 =42/16.6
A21.11 =42/17.7
A21.12 =42/17.8

/24.8 IO EH1- IO EH1- /92.1


A B C D E F

				Date		Costumer	AMPT Egypt	NOELL	PLC feeding output
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +EH1
Job No.	1255	Drawing No. 78.5692.60.00
Sheet	25	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

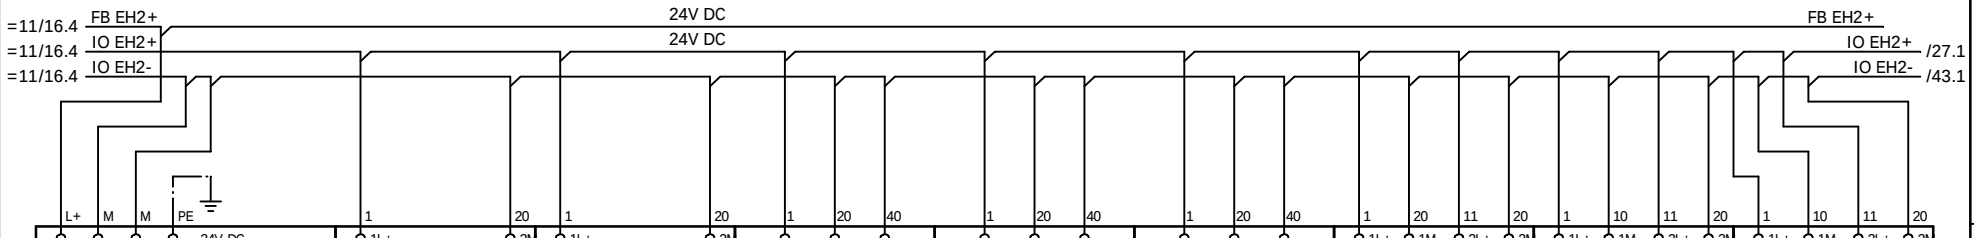

2	1	2	2	2	3	2	4	2	5	2	6	2	7	2	8	2	9
Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location
		revision 20		revision 22		revision 24		revision 70		revision 74		revision 20		revision 22		revision 24	
		E 20.0 2 /27.2		E 22.0 2 /29.2		IN KL KL IN E 24.0 /31.2 2 22 E 26.0 /33.2		IN KL KL IN E 70.0 /35.2 2 22 E 72.0 /37.2		IN KL KL IN E 74.0 /39.2 2 22 E 76.0 /41.2		A 20.0 2 /43.2		A 22.0 2 /45.2		A 24.0 2 /47.2	
		E 20.1 3 /27.2		E 22.1 3 /29.2		E 24.1 /31.3 3 23 E 26.1 /33.3		E 70.1 /35.2 3 23 E 72.1 /37.2		E 74.1 /39.2 3 23 E 76.1 /41.2		A 20.1 3 /43.2		A 22.1 3 /45.2		A 24.1 3 /47.2	
		E 20.2 4 /27.3		E 22.2 4 /29.3		E 24.2 /31.3 4 24 E 26.2 /33.3		E 70.2 /35.3 4 24 E 72.2 /37.3		E 74.2 /39.3 4 24 E 76.2 /41.3		A 20.2 4 /43.3		A 22.2 4 /45.3		A 24.2 4 /47.3	
		E 20.3 5 /27.4		E 22.3 5 /29.4		E 24.3 /31.4 5 25 E 26.3 /33.4		E 70.3 /35.4 5 25 E 72.3 /37.4		E 74.3 /39.4 5 25 E 76.3 /41.4		A 20.3 5 /43.4		A 22.3 5 /45.4		A 24.3 5 /47.4	
		E 20.4 6 /27.5		E 22.4 6 /29.5		E 24.4 /31.5 6 26 E 26.4 /33.5		E 70.4 /35.5 6 26 E 72.4 /37.5		E 74.4 /39.5 6 26 E 76.4 /41.5		A 20.4 6 /43.5		A 22.4 6 /45.5		A 24.4 6 /47.5	
		E 20.5 7 /27.6		E 22.5 7 /29.6		E 24.5 /31.6 7 27 E 26.5 /33.6		E 70.5 /35.6 7 27 E 72.5 /37.6		E 74.5 /39.6 7 27 E 76.5 /41.6		A 20.5 7 /43.6		A 22.5 7 /45.6		A 24.5 7 /47.6	
		E 20.6 8 /27.7		E 22.6 8 /29.7		E 24.6 /31.7 8 28 E 26.6 /33.7		E 70.6 /35.7 8 28 E 72.6 /37.7		E 74.6 /39.7 8 28 E 76.6 /41.7		A 20.6 8 /43.7		A 22.6 8 /45.7		A 24.6 8 /47.7	
		E 20.7 9 /27.8		E 22.7 9 /29.8		E 24.7 /31.8 9 29 E 26.7 /33.8		E 70.7 /35.8 9 29 E 72.7 /37.8		E 74.7 /39.8 9 29 E 76.7 /41.8		A 20.7 9 /43.8		A 22.7 9 /45.8		A 24.7 9 /47.8	
		E 21.0 12 /28.2		E 23.0 12 /30.2		E 25.0 /32.2 12 32 E 27.0 /34.2		E 71.0 /36.2 12 32 E 73.0 /38.2		E 75.0 /40.2 12 32 E 77.0 /42.2		A 21.0 12 /44.2		A 23.0 12 /46.2		A 25.0 12 /48.2	
		E 21.1 13 /28.2		E 23.1 13 /30.2		E 25.1 /32.3 13 33 E 27.1 /34.3		E 71.1 /36.2 13 33 E 73.1 /38.2		E 75.1 /40.2 13 33 E 77.1 /42.2		A 21.1 13 /44.2		A 23.1 13 /46.2		A 25.1 13 /48.2	
		E 21.2 14 /28.3		E 23.2 14 /30.3		E 25.2 /32.3 14 34 E 27.2 /34.3		E 71.2 /36.3 14 34 E 73.2 /38.3		E 75.2 /40.3 14 34 E 77.2 /42.3		A 21.2 14 /44.3		A 23.2 14 /46.3		A 25.2 14 /48.3	
		E 21.3 15 /28.4		E 23.3 15 /30.4		E 25.3 /32.4 15 35 E 27.3 /34.4		E 71.3 /36.4 15 35 E 73.3 /38.4		E 75.3 /40.4 15 35 E 77.3 /42.4		A 21.3 15 /44.4		A 23.3 15 /46.4		A 25.3 15 /48.4	
		E 21.4 16 /28.5		E 23.4 16 /30.5		E 25.4 /32.5 16 36 E 27.4 /34.5		E 71.4 /36.5 16 36 E 73.4 /38.5		E 75.4 /40.5 16 36 E 77.4 /42.5		A 21.4 16 /44.5		A 23.4 16 /46.5		A 25.4 16 /48.5	
		E 21.5 17 /28.6		E 23.5 17 /30.6		E 25.5 /32.6 17 37 E 27.5 /34.6		E 71.5 /36.6 17 37 E 73.5 /38.6		E 75.5 /40.6 17 37 E 77.5 /42.6		A 21.5 17 /44.6		A 23.5 17 /46.6		A 25.5 17 /48.6	
		E 21.6 18 /28.7		E 23.6 18 /30.7		E 25.6 /32.7 18 38 E 27.6 /34.7		E 71.6 /36.7 18 38 E 73.6 /38.7		E 75.6 /40.7 18 38 E 77.6 /42.7		A 21.6 18 /44.7		A 23.6 18 /46.7		A 25.6 18 /48.7	
		E 21.7 19 /28.8		E 23.7 19 /30.8		E 25.7 /32.8 19 39 E 27.7 /34.8		E 71.7 /36.8 19 39 E 73.7 /38.8		E 75.7 /40.8 19 39 E 77.7 /42.8		A 21.7 19 /44.8		A 23.7 19 /46.8		A 25.7 19 /48.8	
		Digital Input 16x24V DC		Digital Input 16x24V DC		Digital Input 32x24V DC		Digital Input 32x24V DC		Digital Input 32x24V DC		Digital Output 16x24V DC/0,5A		Digital Output 16x24V DC/0,5A		Digital Output 16x24V DC/0,5A	
6ES7153-1AA03-0XA4		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7321-1BL00-0AA0		6ES7321-1BL00-0AA0		6ES7321-1BL00-0AA0		6ES7322-1BH01-0AA0		6ES7322-1BH01-0AA0		6ES7322-1BH01-0AA0	
		6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0	
-D20		-D21		-D22		-D23		-D24		-D25		-D26		-D27		-D28	

SF ⊗
BF ⊗
ON ⊗

SUB-D 9 pol. Stecker 1 /91.3

SIMATIC
ET 200M

L2-bus adress


		64
X		32
		16
		8
X		4
		2
		1

OFF ON

				Date		Costumer	AMPT Egypt	NOELL	SPS Busklemme +EH2 PLC bus terminal Stromlaufplan / Circuit Diagram	Type	RTG 50/26.50/5+1/AC	=61 +EH2	
				Designer	XU HR					Job No.	1255	Drawing No.	78.5692.60.00	Sheet 26 94 Sh.	
				Checked	LIU KP										
Ind.	Revision	Date	Name	Standard		Source:									

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

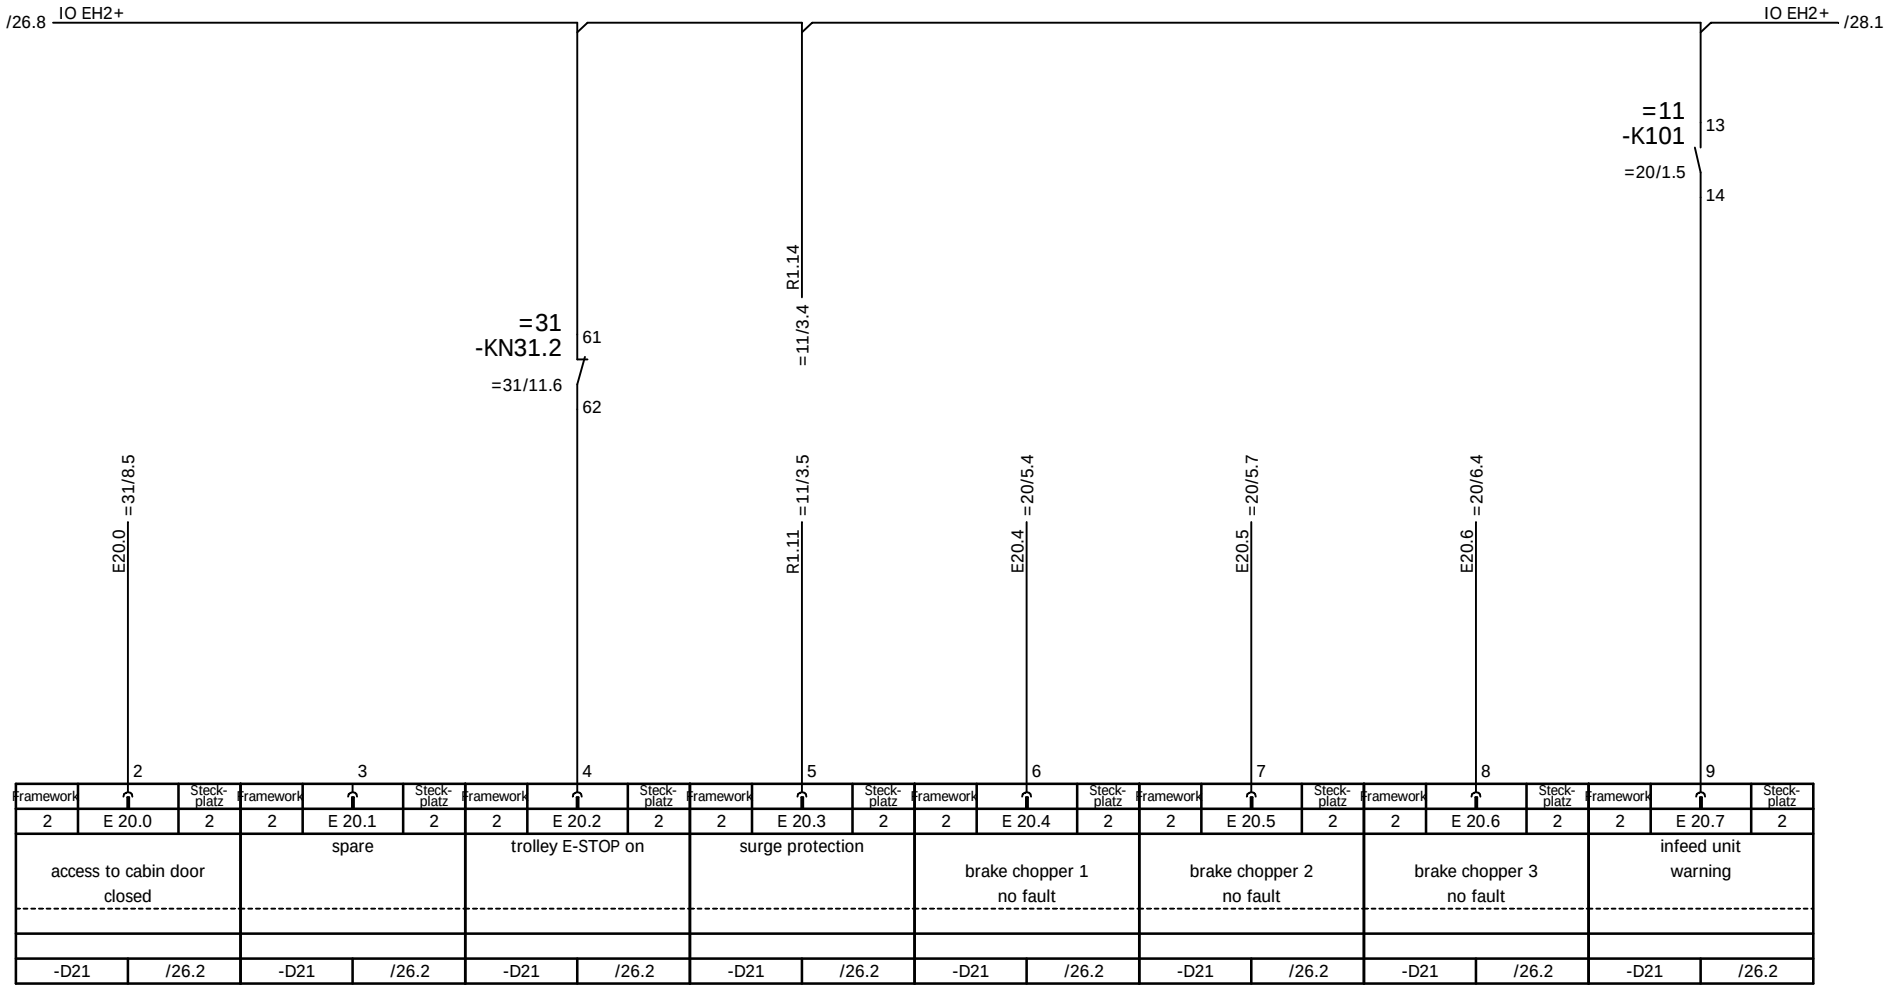

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 20.0	2	2	E 20.1	2	2	E 20.2	2	2	E 20.3	2	2	E 20.4	2	2	E 20.5	2	2	E 20.6	2	2	E 20.7	2
access to cabin door closed			spare			trolley E-STOP on			surge protection			brake chopper 1 no fault			brake chopper 2 no fault			brake chopper 3 no fault			infeed unit warning		
-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC input converter
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+EH2	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	27		
	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

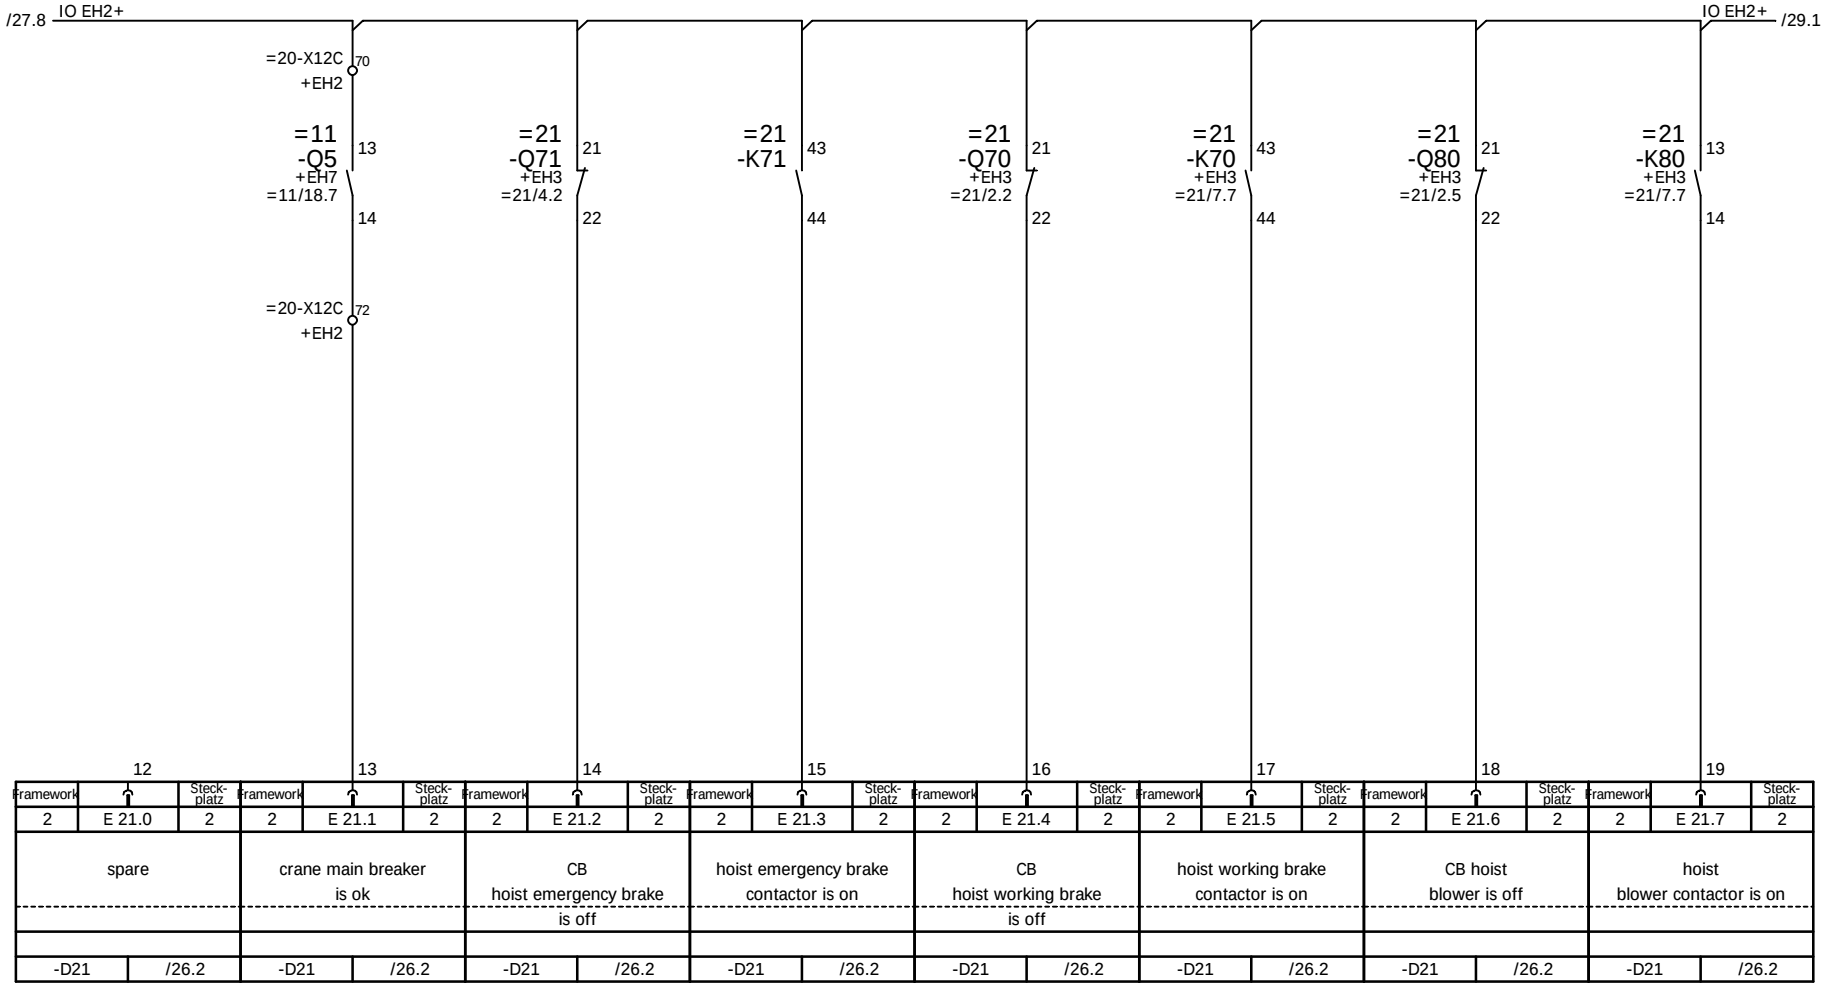

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 21.0	2	2	E 21.1	2	2	E 21.2	2	2	E 21.3	2	2	E 21.4	2	2	E 21.5	2	2	E 21.6	2	2	E 21.7	2
spare			crane main breaker is ok			CB hoist emergency brake is off			hoist emergency brake contactor is on			CB hoist working brake is off			hoist working brake contactor is on			CB hoist blower is off			hoist blower contactor is on		
-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2		-D21	/26.2	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC input converter
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	28 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

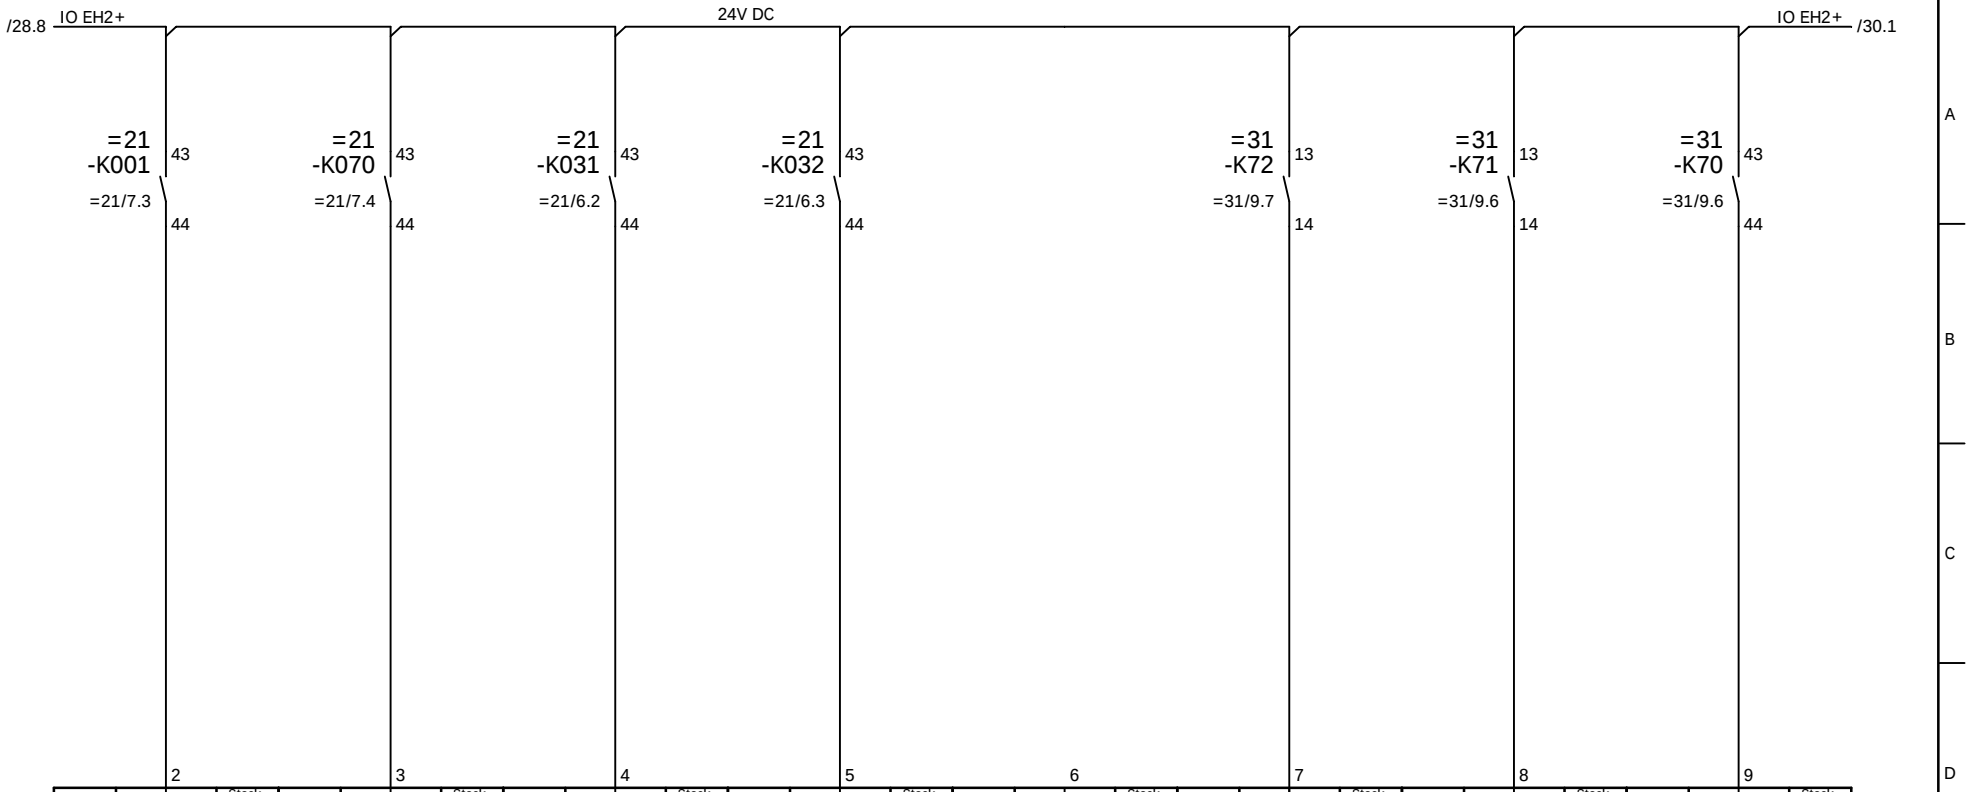

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 22.0	3	2	E 22.1	3	2	E 22.2	3	2	E 22.3	3	2	E 22.4	3	2	E 22.5	3	2	E 22.6	3	2	E 22.7	3
hoist safety chain is OK			Brake release			hoist motor no overspeed			LS no hoist emergency up stop			spare			trolley motor M33 brake release			trolley motor M32 brake release			trolley motor M31 brake release		
-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC input hoisting unit
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	29 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

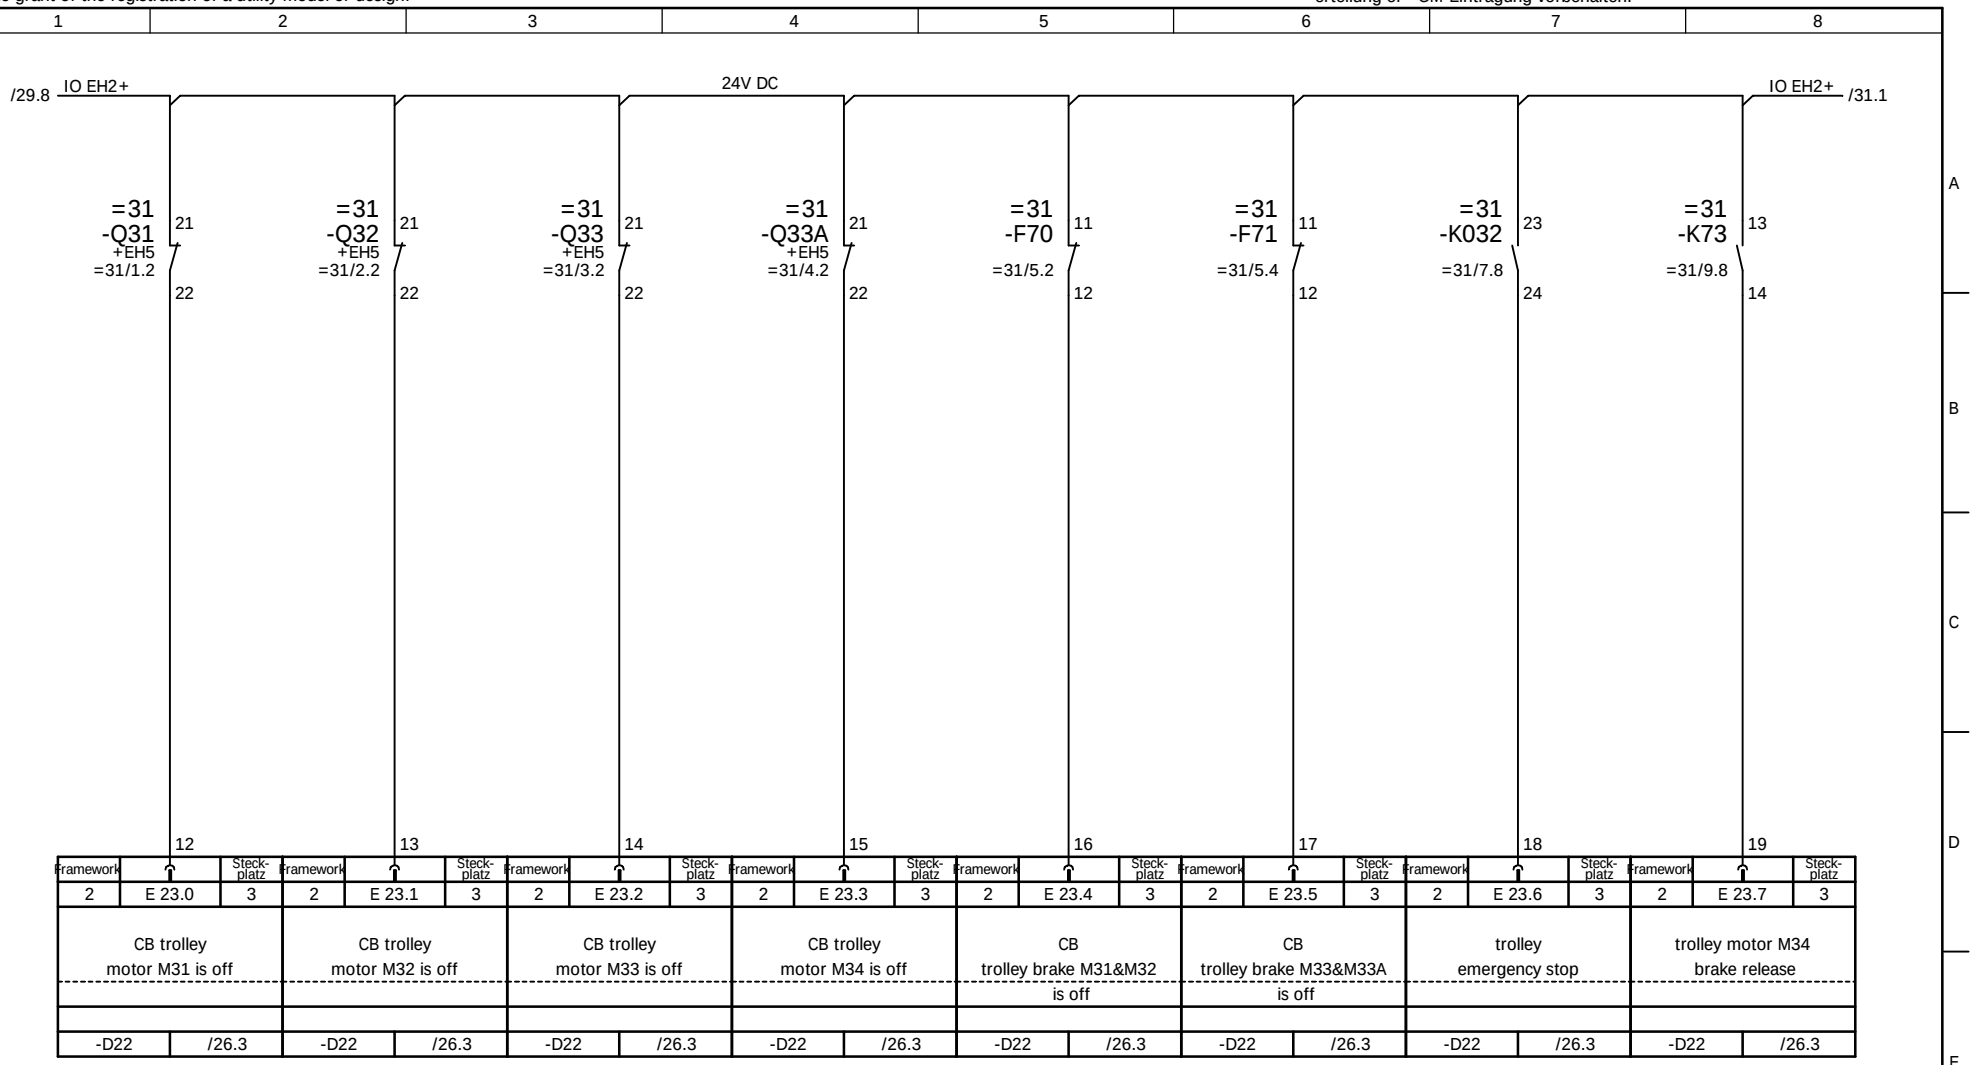

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 23.0	3	2	E 23.1	3	2	E 23.2	3	2	E 23.3	3	2	E 23.4	3	2	E 23.5	3	2	E 23.6	3	2	E 23.7	3
CB trolley motor M31 is off			CB trolley motor M32 is off			CB trolley motor M33 is off			CB trolley motor M34 is off			CB trolley brake M31&M32 is off			CB trolley brake M33&M33A is off			trolley emergency stop			trolley motor M34 brake release		
-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3		-D22	/26.3	


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=61 +EH2
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 30 94 Sh.

NOELL

PLC input hoisting unit
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

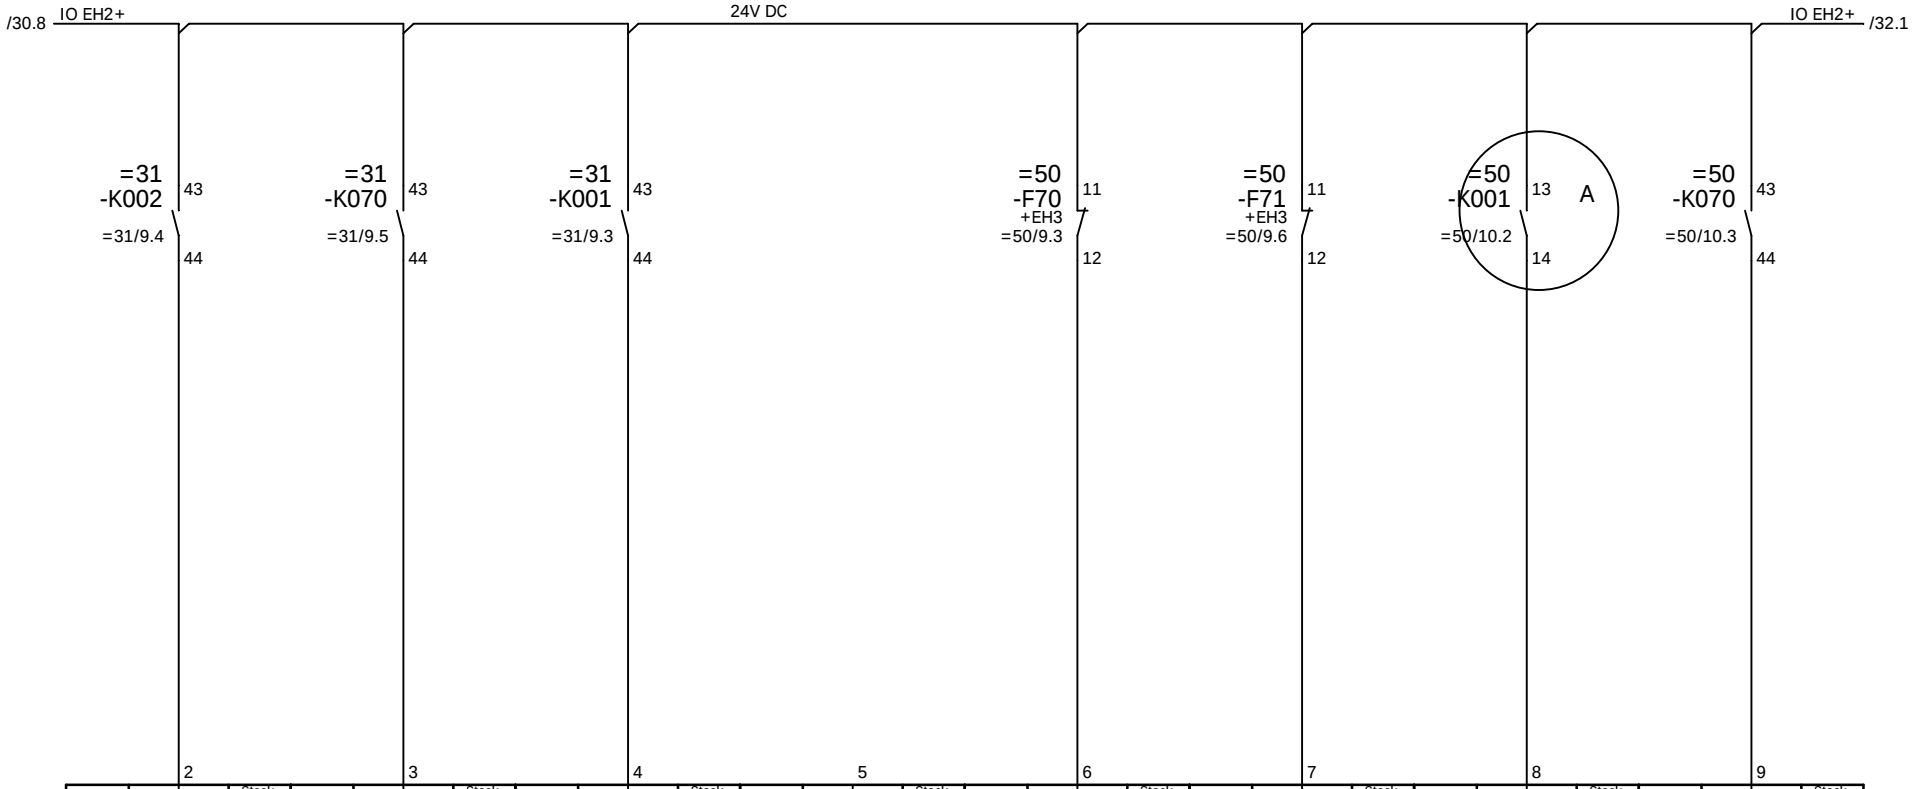


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 24.0	4	2	E 24.1	4	2	E 24.2	4	2	E 24.3	4	2	E 24.4	4	2	E 24.5	4	2	E 24.6	4	2	E 24.7	4
trolley motor safety-circuit			trolley motor brake release			trolley motor safety-circuit			spare			cb antisway M50&M50.1 brake is off			cb antisway M50.2&M50.3 brake is off			antisway motor safety-circuit			antisway drive1 brake release	
is ok						is ok												is ok					
-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4	

				Date		Costumer	AMPT Egypt	NOELL	PLC input trolley travelling unit	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 31 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

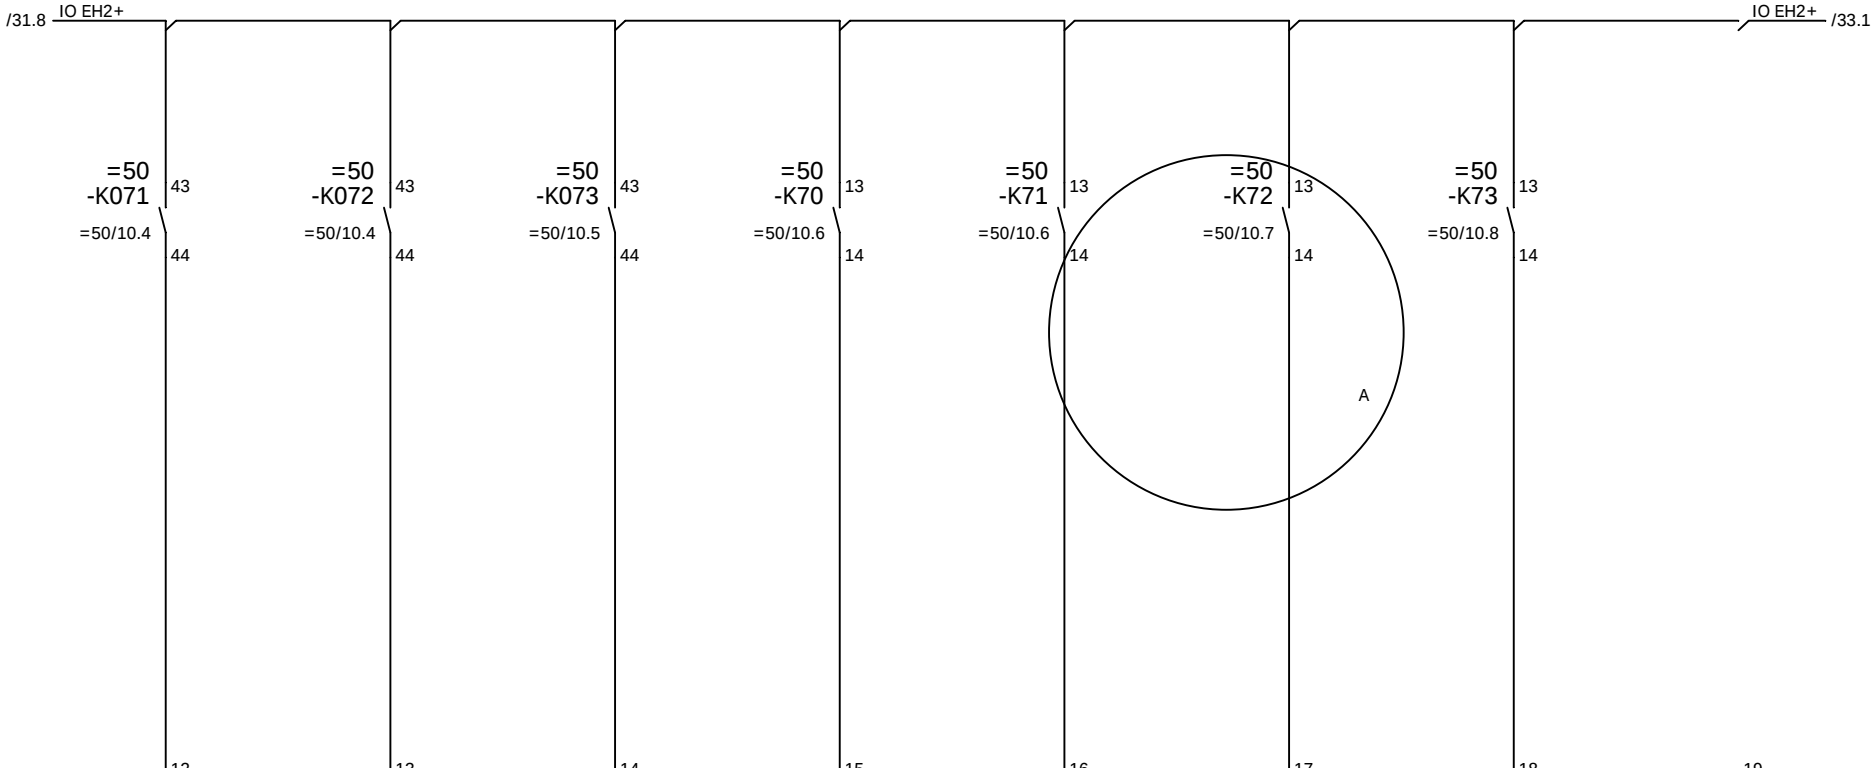


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 25.0	4	2	E 25.1	4	2	E 25.2	4	2	E 25.3	4	2	E 25.4	4	2	E 25.5	4	2	E 25.6	4	2	E 25.7	4
antisway drive2 brake release			antisway drive3 brake release			antisway drive4 brake release			antisway motor M50 brake release			antisway motor M50.1 brake release			antisway motor M50.2 brake release			antisway motor M50.3 brake release			spare		
-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4	

				Date		Costumer	AMPT Egypt	NOELL	PLC input trolley travelling unit	Type	RTG 50/26.50/5+1/AC	=61											
				Designer	XU HR							+EH2											
				Checked	LIU KP					Job No.	1255	Drawing No.	78.5692.60.00	Sheet 32									
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram					94 Sh.									

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

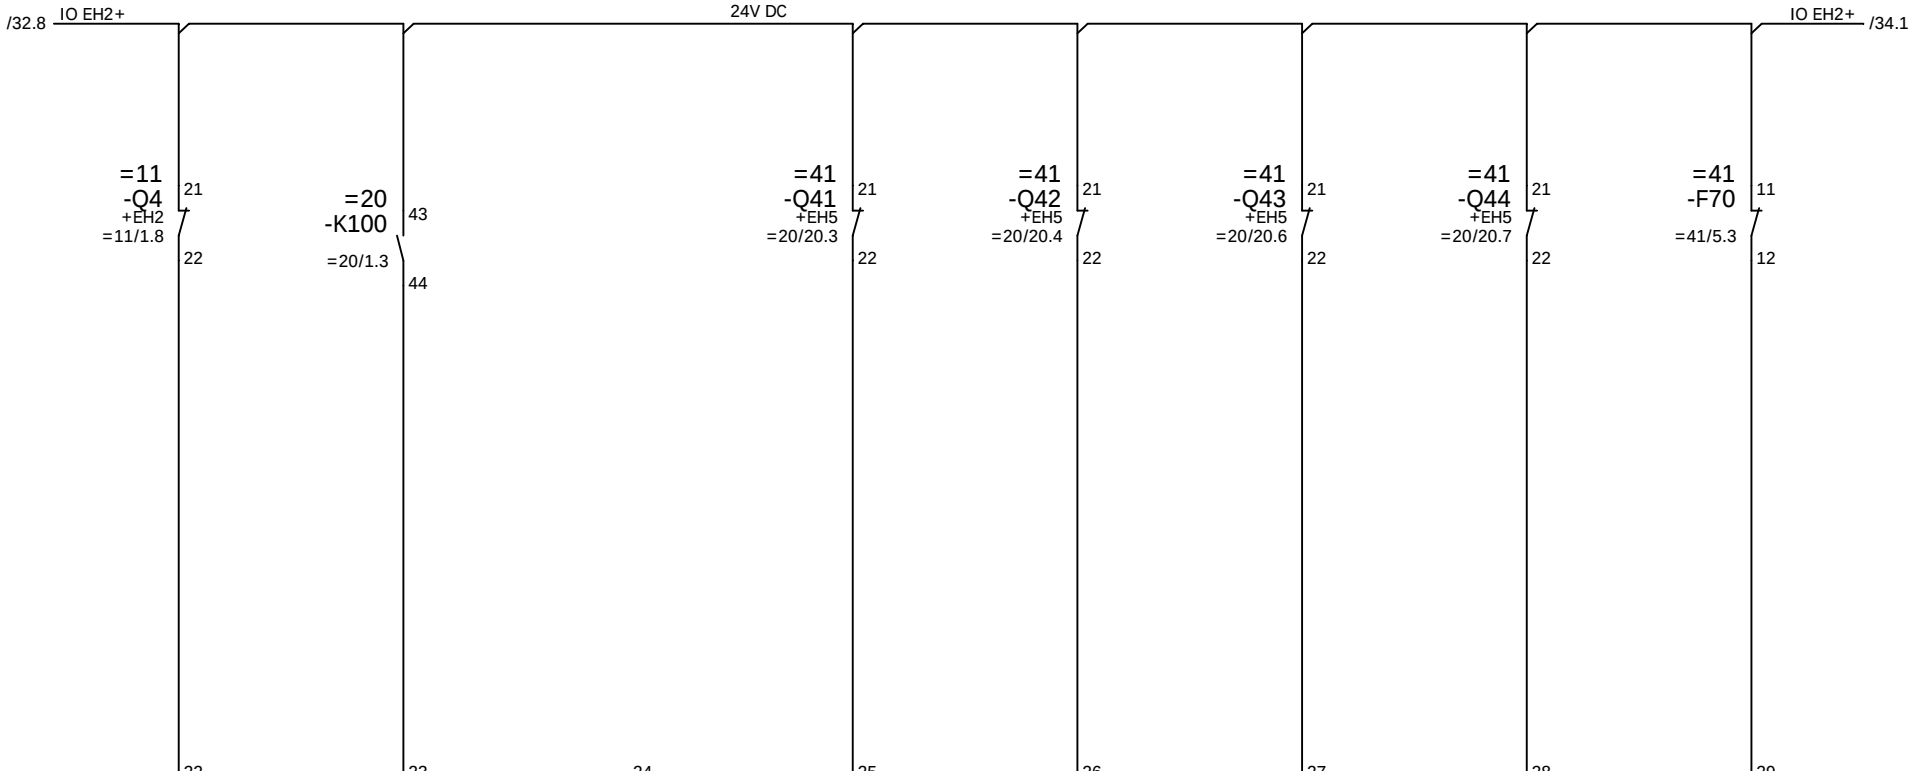


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 26.0	4	2	E 26.1	4	2	E 26.2	4	2	E 26.3	4	2	E 26.4	4	2	E 26.5	4	2	E 26.6	4	2	E 26.7	4
crane switch is on			infeed unit fault			spare			gantry circuit breaker 1 is off			gantry circuit breaker 2 is off			gantry circuit breaker 3 is off			gantry circuit breaker 4 is off			cb gantry brake M41&M42 is off		
-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4	

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

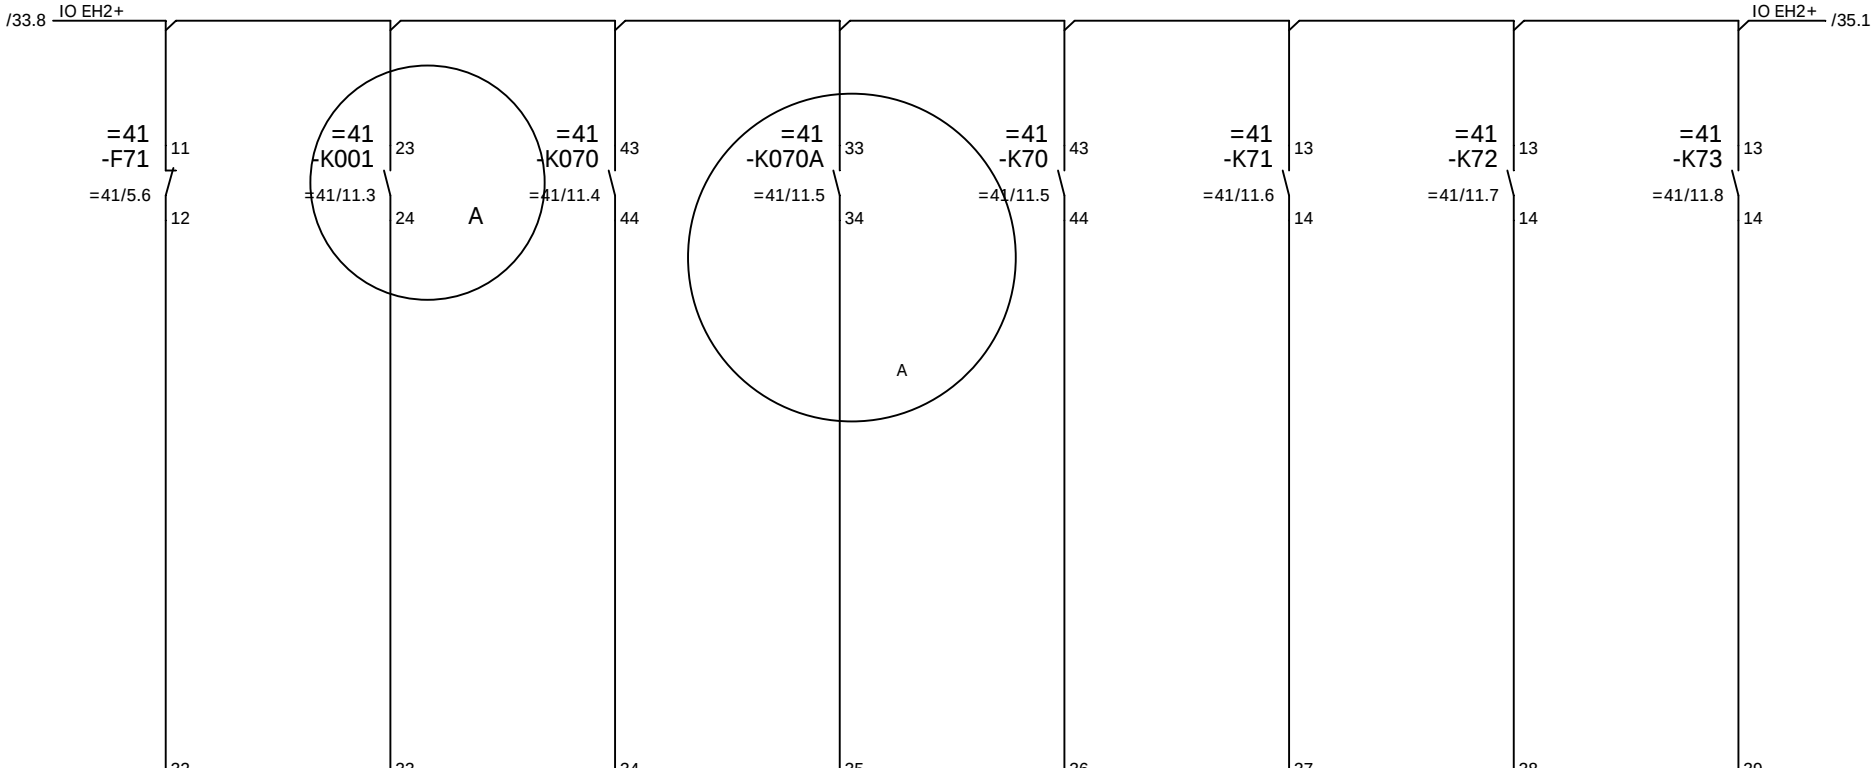


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 27.0	4	2	E 27.1	4	2	E 27.2	4	2	E 27.3	4	2	E 27.4	4	2	E 27.5	4	2	E 27.6	4	2	E 27.7	4
cb gantry brake M43&M44 is off			gantry motor safety-circuit is ok			gantry motor brake is release 1			gantry motor brake is release 2			gantry motor M41 contactor is on			gantry motor M42 contactor is on			gantry motor M43 contactor is on			gantry motor M44 contactor is on		
-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4		-D23	/26.4	

| | | | | | | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

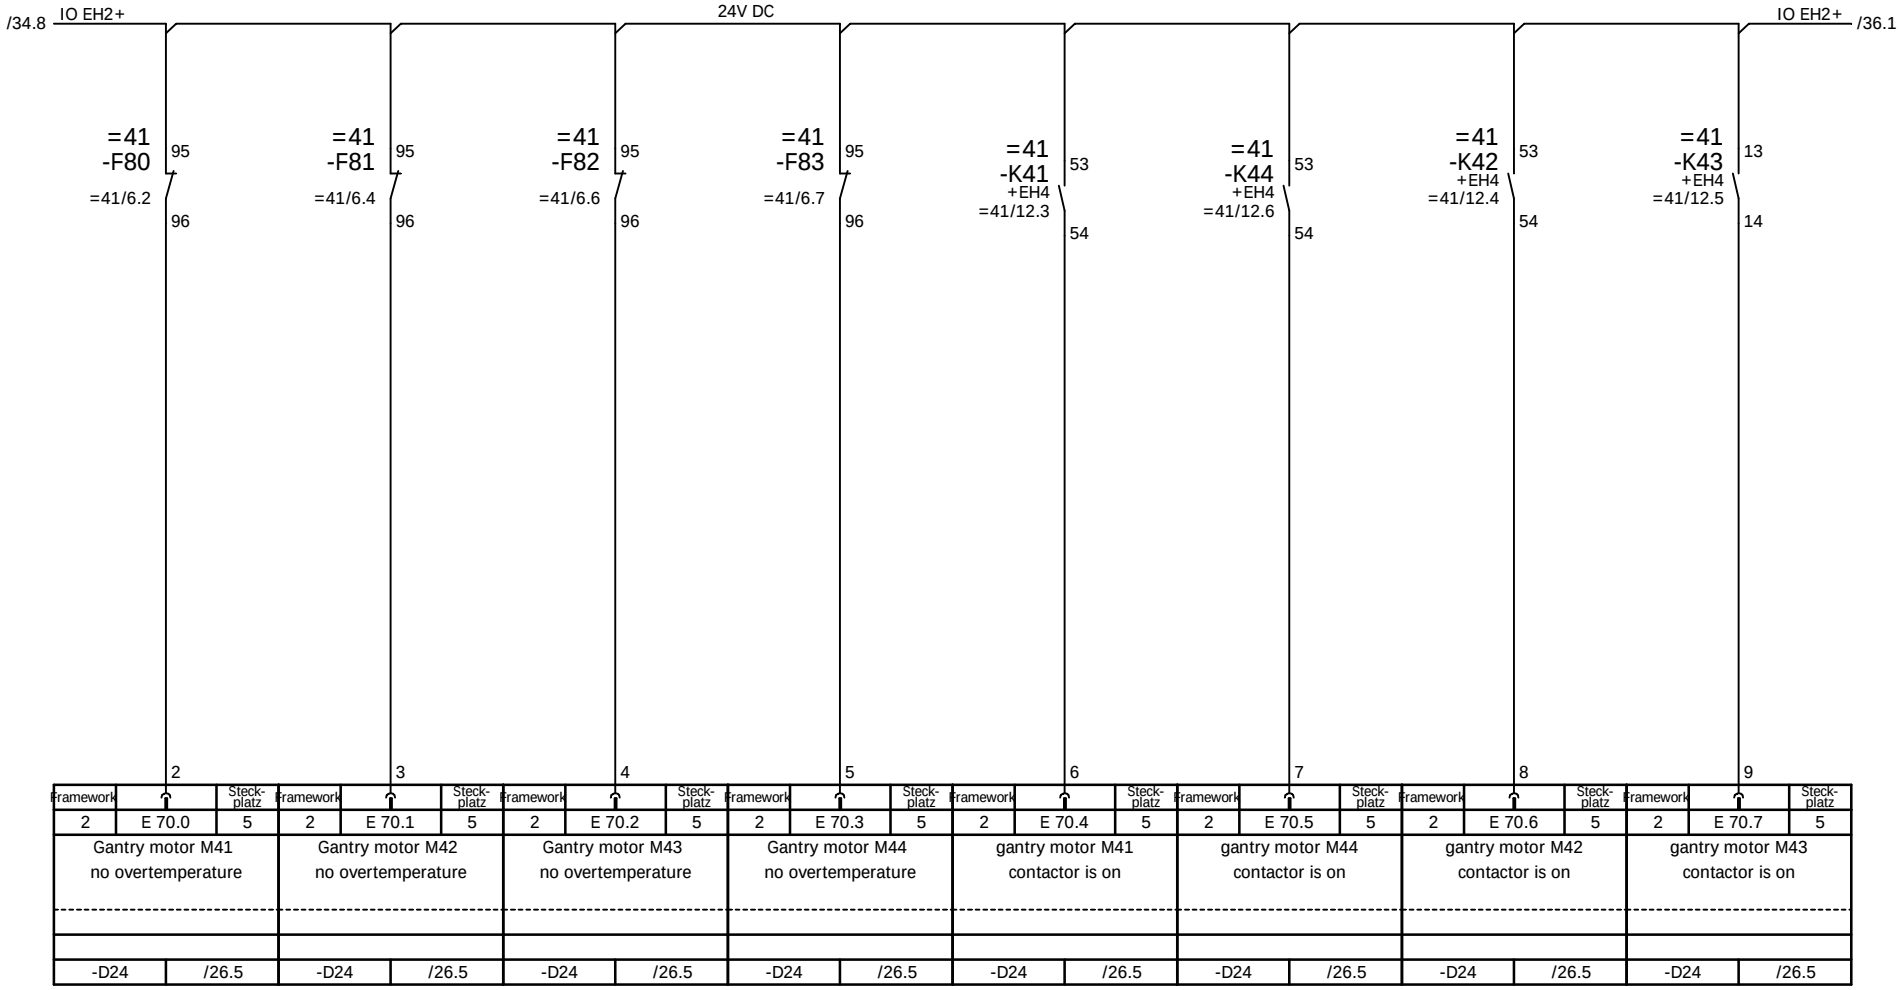

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 70.0	5	2	E 70.1	5	2	E 70.2	5	2	E 70.3	5	2	E 70.4	5	2	E 70.5	5	2	E 70.6	5	2	E 70.7	5
Gantry motor M41 no overtemperature			Gantry motor M42 no overtemperature			Gantry motor M43 no overtemperature			Gantry motor M44 no overtemperature			gantry motor M41 contactor is on			gantry motor M44 contactor is on			gantry motor M42 contactor is on			gantry motor M43 contactor is on		
-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5	


				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		

PLC input gantry travelling unit
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	35 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

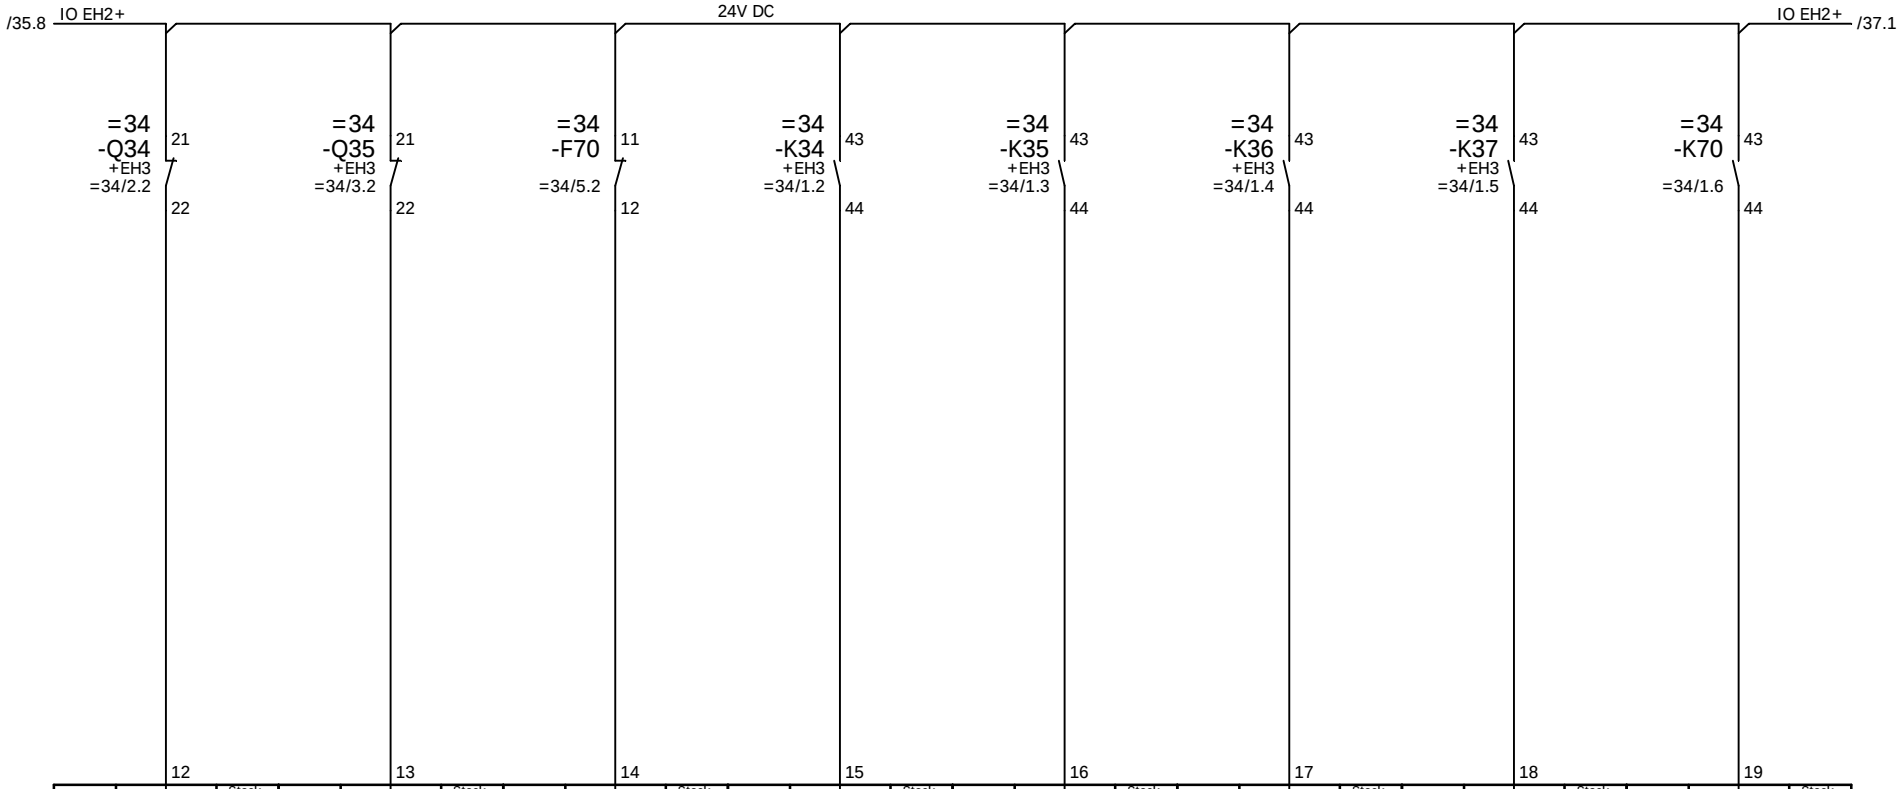


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 71.0	5	2	E 71.1	5	2	E 71.2	5	2	E 71.3	5	2	E 71.4	5	2	E 71.5	5	2	E 71.6	5	2	E 71.7	5
cb skew/trim motor1 is off			cb skew/trim motor2 is off			cb skew/trim brake is off			skew/trim motor 1 contactor is on clockwise			skew/trim motor 1 contactor is on anti-clockwise			skew/trim motor 2 contactor is on clockwise			skew/trim motor 2 contactor is on anti-clockwise			skew/trim motor 1 brake open		
-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5	

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

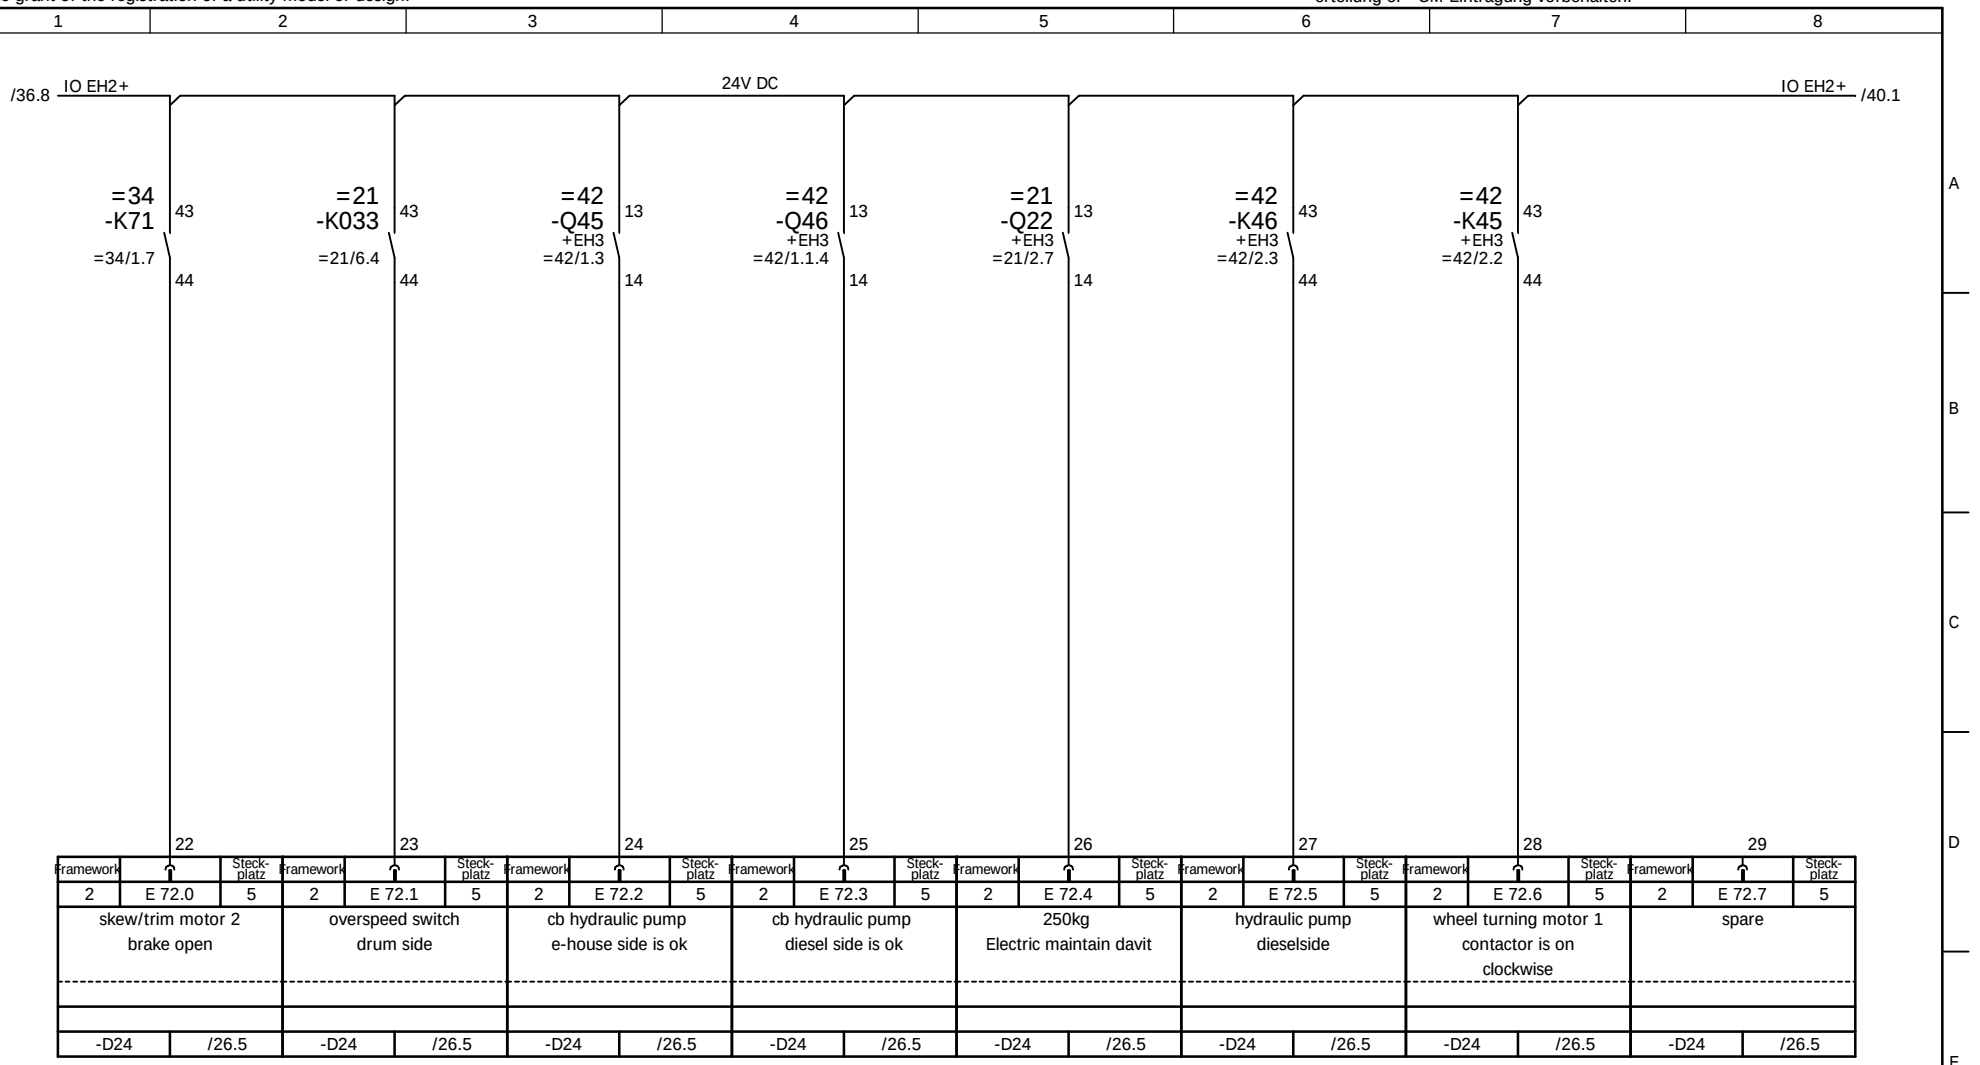


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 72.0	5	2	E 72.1	5	2	E 72.2	5	2	E 72.3	5	2	E 72.4	5	2	E 72.5	5	2	E 72.6	5	2	E 72.7	5
skew/trim motor 2 brake open			overspeed switch drum side			cb hydraulic pump e-house side is ok			cb hydraulic pump diesel side is ok			250kg Electric maintain davit			hydraulic pump dieselside			wheel turning motor 1 contactor is on clockwise			spare		
-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5	

				Date		Costumer	AMPT Egypt	NOELL	PLC input auxiliary drives	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR							+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			Sheet 37 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

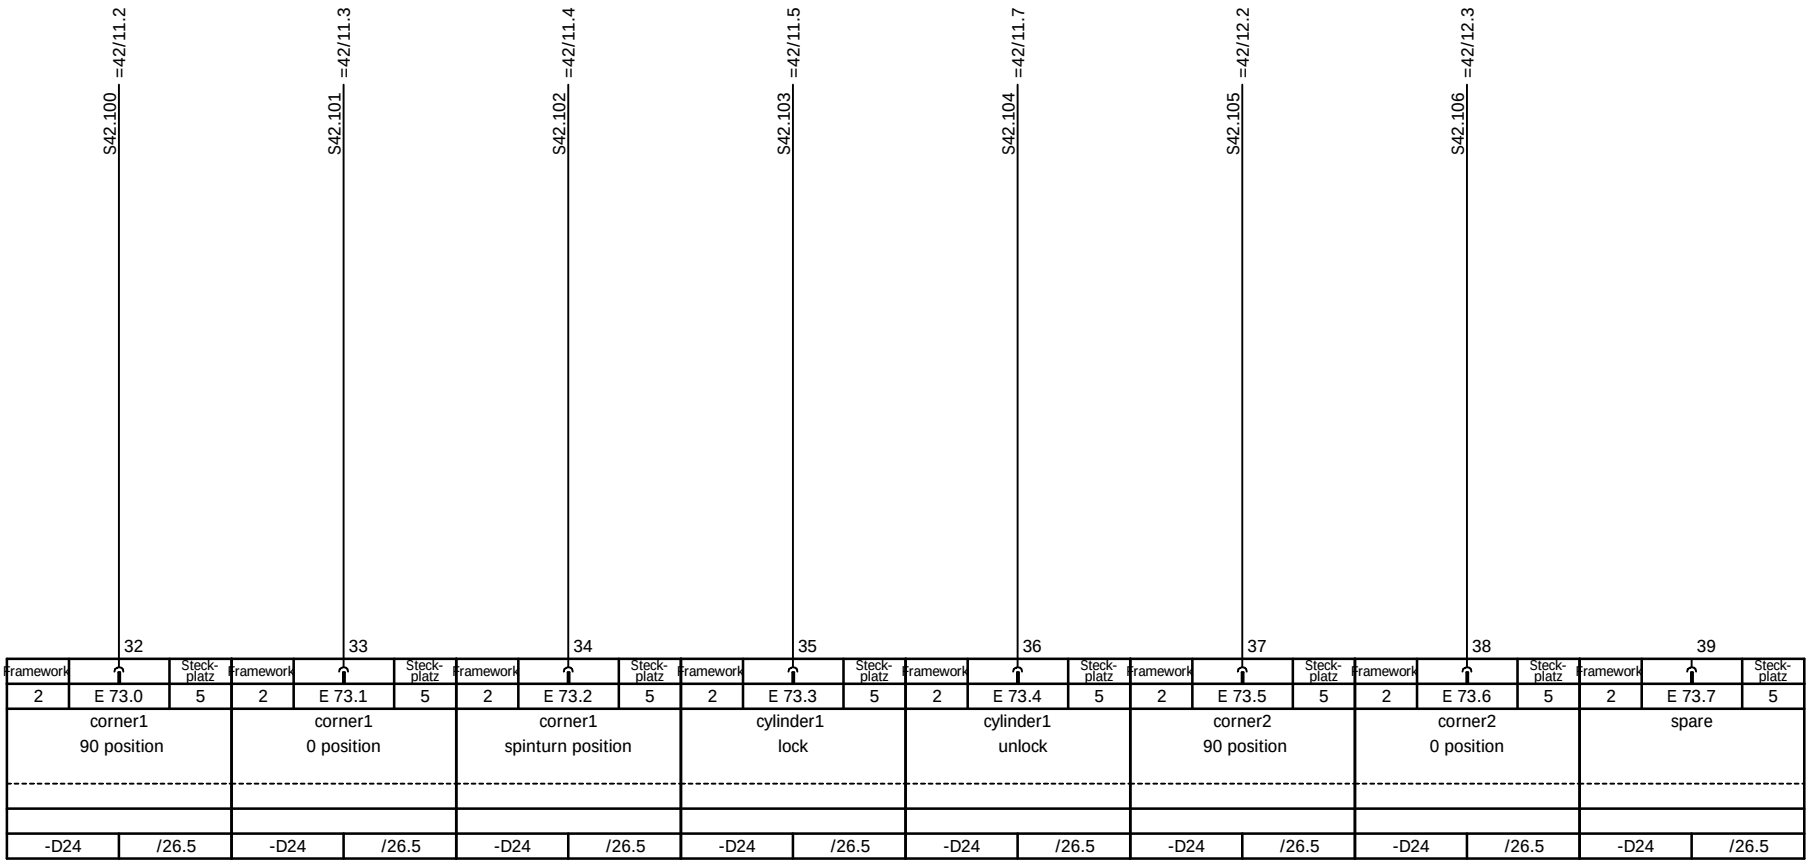

	32			33			34			35			36			37			38			39		
Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz
2	E 73.0	5	2	E 73.1	5	2	E 73.2	5	2	E 73.3	5	2	E 73.4	5	2	E 73.5	5	2	E 73.6	5	2	E 73.7	5
corner1 90 position			corner1 0 position			corner1 spinturn position			cylinder1 lock			cylinder1 unlock			corner2 90 position			corner2 0 position			spare		
-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5		-D24	/26.5	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

PLC input auxiliary drives
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	38 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

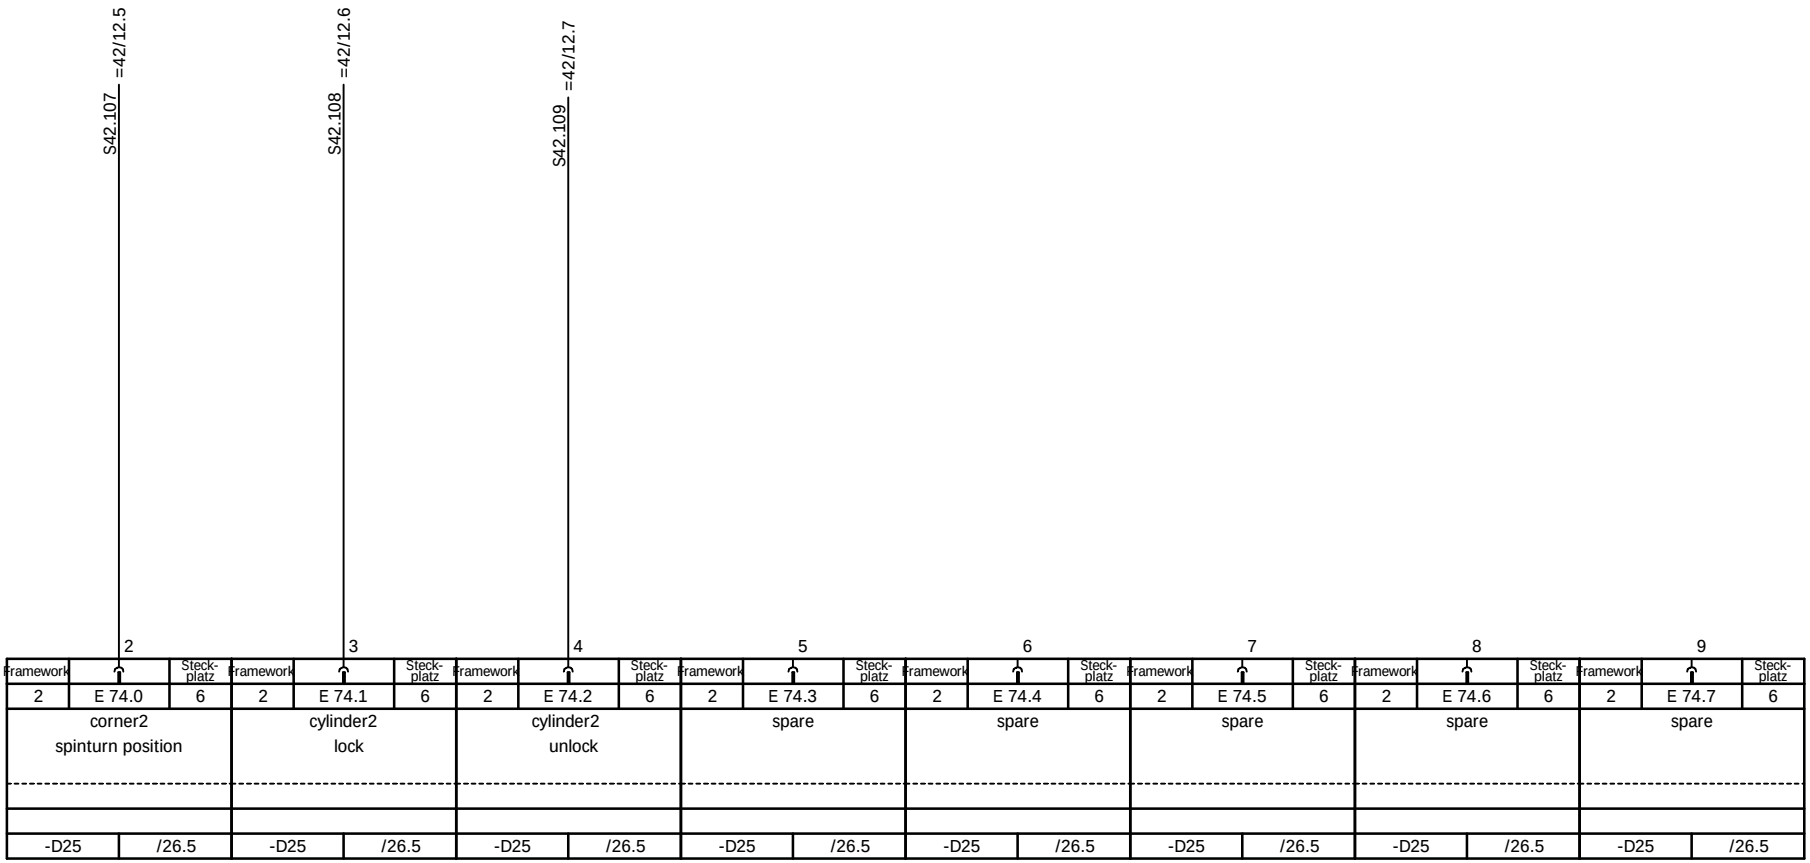


	2			3			4			5			6			7			8			9	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 74.0	6	2	E 74.1	6	2	E 74.2	6	2	E 74.3	6	2	E 74.4	6	2	E 74.5	6	2	E 74.6	6	2	E 74.7	6
corner2 spinturn position			cylinder2 lock			cylinder2 unlock			spare			spare			spare			spare			spare		
-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5	

| | | | | | | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

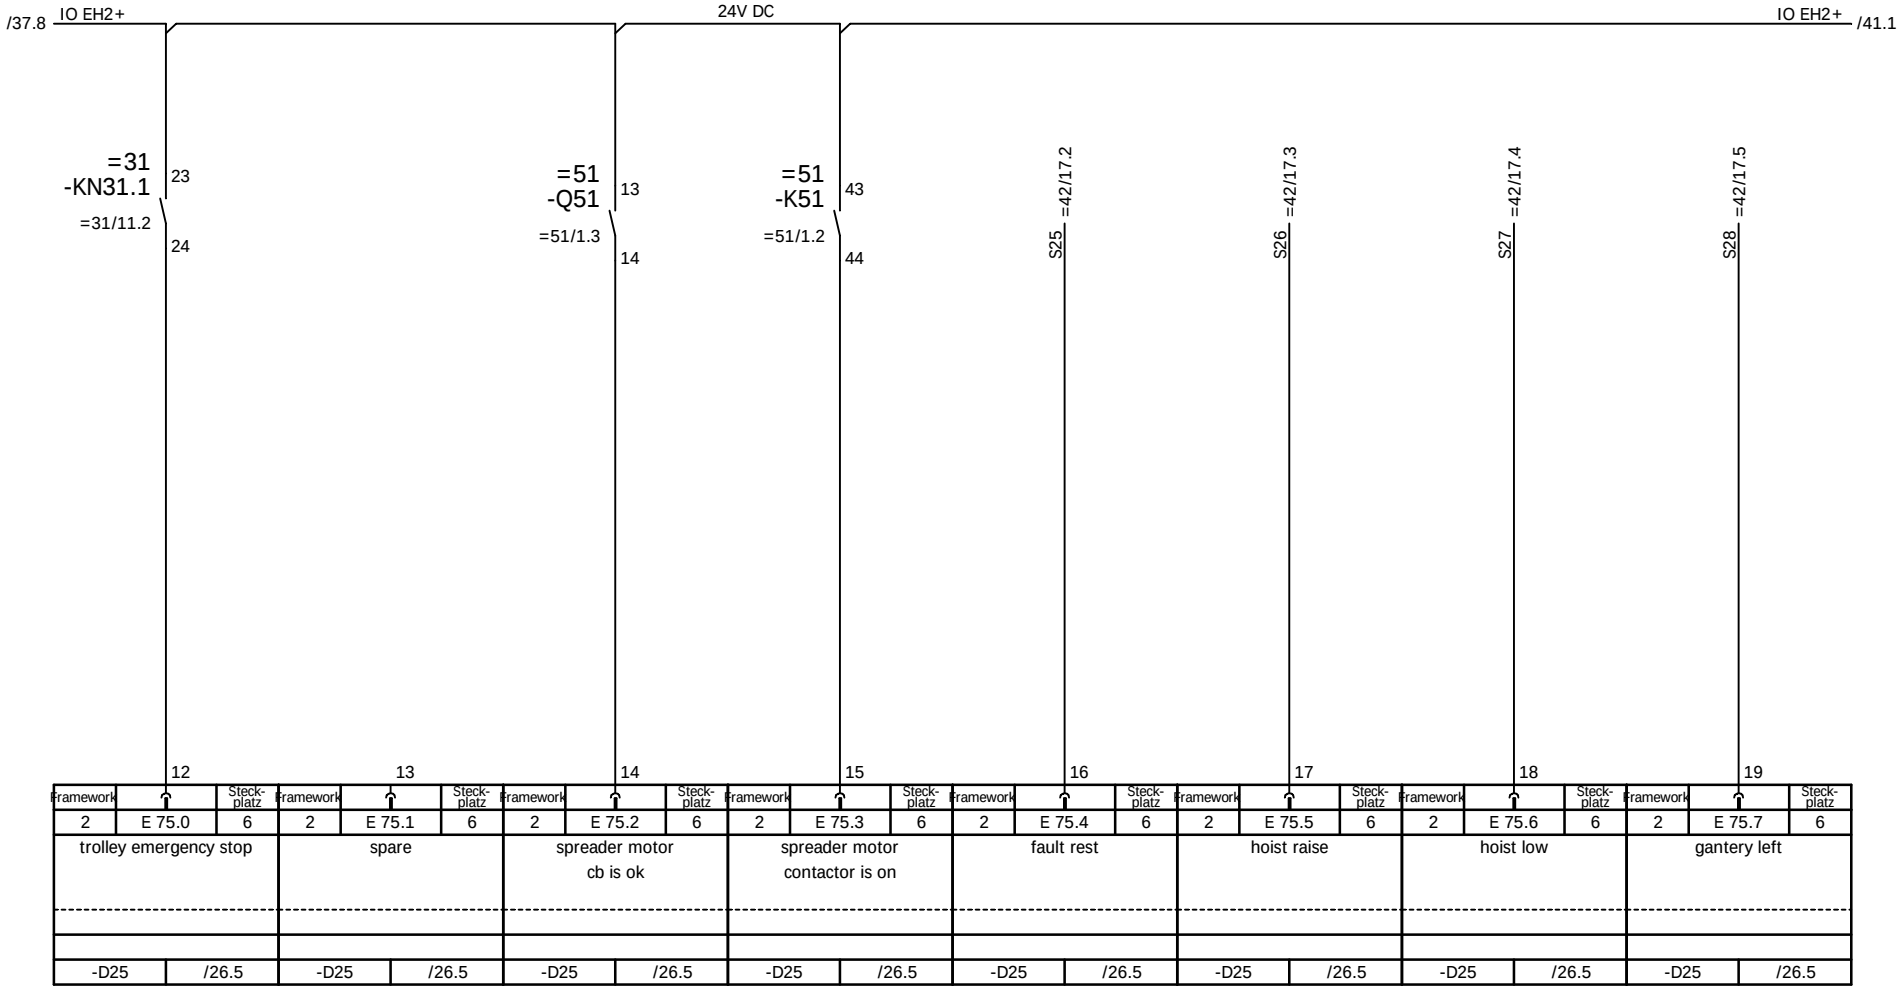

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

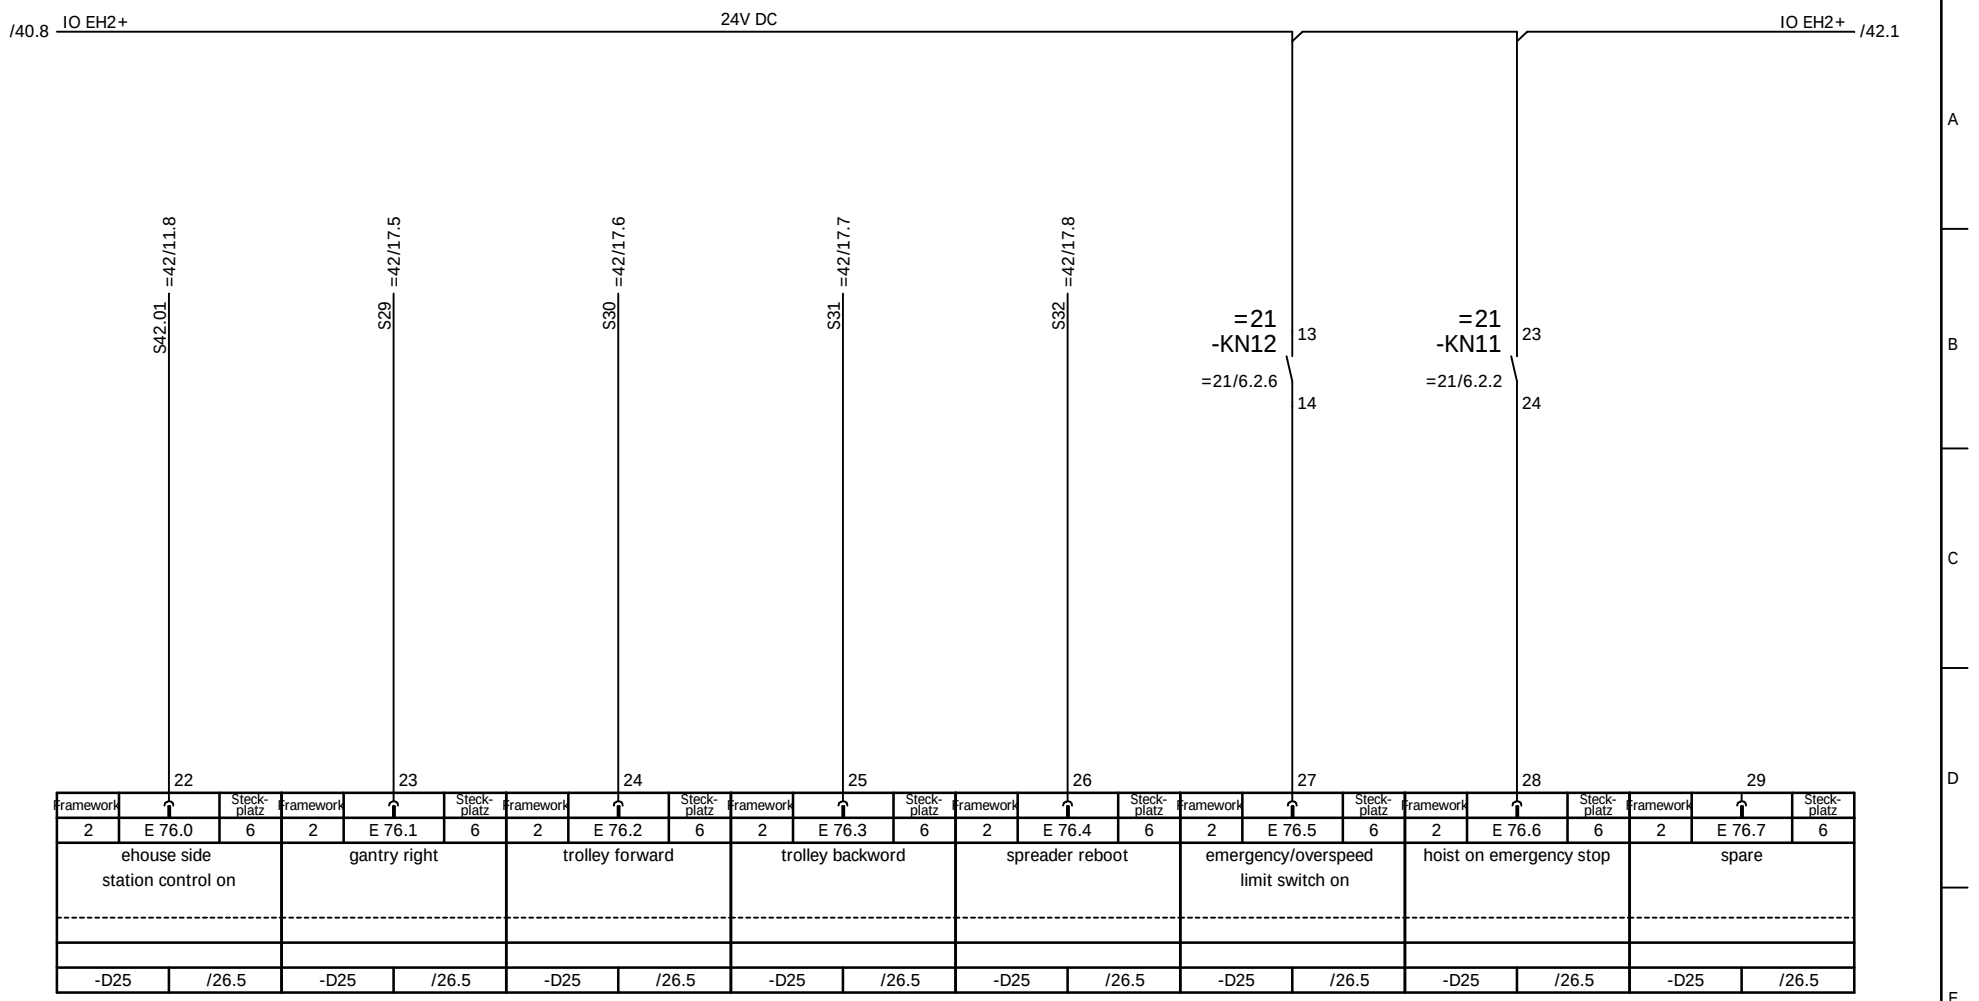

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1 2 3 4 5 6 7 8

/41.8 IO EH2+

IO EH2+

=41 -K41.1 +EH4 =41/12.7 — 53 / 54

=41 -K44.1 +EH4 =41/12.7 — 53 / 54

=50 -Q52 +EH2 =50/1.5 — 13 / 14

=50 -K52 +EH2 =50/1.2 — 13 / 14

=50 -K52A +EH2 =50/1.3 — 13 / 14

RTG code No.list

RTG NO.	bit3	bit2	bit1
RTG 1	0	0	1
RTG 2	0	1	0
RTG 3	0	1	1
RTG 4	1	0	0

	32		33		34		35		36		37		38		39	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
2	E 77.0	6	2	E 77.1	6	2	E 77.2	6	2	E 77.3	6	2	E 77.4	6	2	E 77.5	6	2	E 77.6	6	2	E 77.7	6
gantry motor M41 contactor is on			gantry motor M44 contactor is on			RTG CODE BIT1			RTG CODE BIT2			RTG CODE BIT3			CB sideshift motor is ok			sideshift motor clock is on			sideshift motor anticlock is on		
-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5		-D25	/26.5	

A B C D E F

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		

NOELL

PLC input auxiliary drives
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	42 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6
Reserve spare		gantry left running condition RTG to RTG		gantry right running condition RTG to RTG		corner1 90 position		corner1 0 position		corner1 spinturn position		cylinder1 lock		cylinder1 unlock	

2	A 20.0	7	2	A 20.1	7	2	A 20.2	7	2	A 20.3	7	2	A 20.4	7	2	A 20.5	7	2	A 20.6	7	2	A 20.7	7
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	2			3			4			5			6			7			8			9	

A20.1 =42/11.2
A20.2 =42/11.3
A20.3 =42/11.5
A20.4 =42/11.6
A20.5 =42/11.7

=41 -KX59 A1 A2
=41 -KX60 A1 A2

/26.8 IO EH2-

RELAY RCL 24VDC 1C/O
=41/10.6 14 12 11
RELAY RCL 24VDC 1C/O
=41/10.7 14 12 11

IO EH2- /44.1
M41-S1- =41/1.5

				Date		Costumer	AMPT Egypt	NOELL	PLC output converter	Type	RTG 50/26.50/5+1/AC	=61	
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2	
				Checked	LIU KP					Job No.	1255	Drawing No.	78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:							Sheet 43 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6	-D26	/26.6
hoist, PLC release for safety chain		hoist working brake release permission		hoist emergency brake release permission		hoist blower contactor on command		Reserve spare		corner2 90 position		corner2 0 position		corner2 spinturn position	
2	A 21.0	7	2	A 21.1	7	2	A 21.2	7	2	A 21.3	7	2	A 21.4	7	2	A 21.5	7	2	A 21.6	7	2	A 21.7	7
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	12			13			14			15			16			17			18			19	

A22.2 =42/12.3

A22.3 =42/12.4

A22.4 =42/12.5

=21 -K061 A1 A2

=21 -K067 A1 A2

=21 -K067A A1 A2

=21 -K068 A1 A2

/43.8 IO EH2- IO EH2- /45.1

3RH1122-1BB40
3RT1916-1EH00

=21/7.2 13 14 21 22 31 32 43 44

3RH1122-1BB40
3RT1916-1EH00

=21/7.7 13 14 21 22 31 32 43 44

3RH1122-1BB40
3RT1916-1EH00

=21/7.6 13 14 21 22 31 32 43 44

3RH1122-1BB40
3RT1916-1EH00

=21/7.7 13 14 21 22 31 32 43 44

				Date		Costumer	AMPT Egypt	NOELL	PLC output converter hoisting Stromlaufplan / Circuit Diagram
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +EH2
Job No.	1255	Drawing No. 78.5692.60.00
		Sheet 44 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D27	/26.7	-D27	/26.7	-D27	/26.7	-D27	/26.7	-D27	/26.7	-D27	/26.7	-D27	/26.7	-D27	/26.7
trolley, PLC release for safety chain		trolley drive slow down speed <70%		trolley break release permit		Reserve spare		Reserve spare		gantry, PLC release for safety chain		gantry brake release permit		gantry contactor is on	
2	A 22.0	8	2	A 22.1	8	2	A 22.2	8	2	A 22.3	8	2	A 22.4	8	2	A 22.5	8	2	A 22.6	8	2	A 22.7	8
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

2 3 4 5 6 7 8 9

=31 -K061 A1 A2 — /44.8 IO EH2-
3RH1122-1BB40
3RT1916-1EH00
=31/9.3 13 14 / 21 22 / 31 32 / 43 44

=31 -K062 A1 A2
3RH1122-1BB40
3RT1916-1EH00
=31/9.4 13 14 / 21 22 / 31 32 / 43 44

=31 -K065 A1 A2
3RH1122-1BB40
3RT1916-1EH00
=31/9.6 13 14 / 21 22 / 31 32 / 43 44

=31 -K063 A1 A2
3RH1122-1BB40
3RT1916-1EH00
13 14 / 21 22 / 31 32 / 43 44

=41 -K061 A1 A2
3RH1122-1BB40
3RT1916-1EH00
=41/11.3 13 14 / 21 22 / 31 32 / 43 44

=41 -K067 A1 A2
3RH1122-1BB40
3RT1916-1EH00
=41/11.5 13 14 / 21 22 / 31 32 / 43 44

=41 -K062 A1 A2 — IO EH2- /46.1
3RH1122-1BB40
3RT1916-1EH00
13 14 / 21 22 / 31 32 / 43 44
=41/12.3

				Date		Costumer	AMPT Egypt	NOELL	PLC output converter trolley	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 45 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7	-D27 /26.7
gantry cross travel	gantry normal/spin travel	antisway,PLC release for safety	antisway 1 release ok	antisway 2 release ok	antisway 3 release ok	antisway 4 release	spare	
2 A 23.0 8	2 A 23.1 8	2 A 23.2 8	2 A 23.3 8	2 A 23.4 8	2 A 23.5 8	2 A 23.6 8	2 A 23.7 8	
Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	
12	13	14	15	16	17	18	19	

=41 -K065	=41 -K066	=50 -K061	=50 -K067	=50 -K067.1	=50 -K067.2	=50 -K067.3
A1 A2	A1 A2	A1 A2	A1 A2	A1 A2	A1 A2	A1 A2

/45.8 IO EH2- — IO EH2- /47.1

3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00
=41/12.3 13 14 / 21 22 / 31 32 / 43 44 =41/12.6	=41/12.7 13 14 / 21 22 / 31 32 / 43 44 =41/12.7	=50/10.2 13 14 / 21 22 / 31 32 / 43 44	=50/10.6 13 14 / 21 22 / 31 32 / 43 44	=50/10.6 13 14 / 21 22 / 31 32 / 43 44	=50/10.7 13 14 / 21 22 / 31 32 / 43 44	=50/10.8 13 14 / 21 22 / 31 32 / 43 44

				Date		Costumer	AMPT Egypt	NOELL	PLC output converter gantry
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +EH2	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	46 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8
sideshift motor right		sideshift motor left		E-HOUSE side wheel turming oil heater		diesel side wheel turming oil heater		spare		spare		Skew/trim motor1 clock on		spreader hydraulic pump on command	
2	A 24.0	9	2	A 24.1	9	2	A 24.2	9	2	A 24.3	9	2	A 24.4	9	2	A 24.5	9	2	A 24.6	9	2	A 24.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

2 3 4 5 6 7 8 9

=50 -K052 A1 A2 — =50 -K052A A1 A2 — =50 -K067.7 A1 A2 — =50 -K067.8 A1 A2 — =34 -K034 A1 A2 — =51 -K051 A1 A2

/46.8 IO EH2- IO EH2- /48.1

3RH1122-1BB40
3RT1916-1EH00

=50/1.2 =50/1.3 =12/2.2 =12/2.3 =34/1.2 =51/1.2

13 14
21 22
31 32
43 44

				Date		Costumer	AMPT Egypt	NOELL	PLC output auxiliary drives	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+EH2
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 47 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8	-D28	/26.8
cylinder2 lock		cylinder2 unlock		Skew/trim motor1 brake open		Skew/trim motor2 brake open		Skew/trim motor1 anti clock on		Skew/trim motor2 clock on		Skew/trim motor2 anti clock on		Reserve spare	
2	A 25.0	9	2	A 25.1	9	2	A 25.2	9	2	A 25.3	9	2	A 25.4	9	2	A 25.5	9	2	A 25.6	9	2	A 25.7	9
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	12			13			14			15			16			17			18			19	

=42/12.6 A22.5

=42/12.7 A22.6

	=34 -K70A	=34 -K71A	=34 -K035	=34 -K036	=34 -K037
	A1	A1	A1	A1	A1
	A2	A2	A2	A2	A2
	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00	3RH1122-1BB40 3RT1916-1EH00
	=34/1.6	=34/1.7	=34/1.3	=34/1.4	=34/1.5
	13 14	13 14	13 14	13 14	13 14
	21 22	21 22	21 22	21 22	21 22
	31 32	31 32	31 32	31 32	31 32
	43 44	43 44	43 44	43 44	43 44

/47.8 IO EH2- IO EH2-

Ind.	Revision	Date	Name			
				Date		
				Designer	XU HR	
				Checked	LIU KP	
				Standard		

Costumer: AMPT Egypt

Source:

NOELL


PLC output auxiliary drives

Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +EH2
Job No.	1255	Drawing No. 78.5692.60.00
		Sheet 48 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

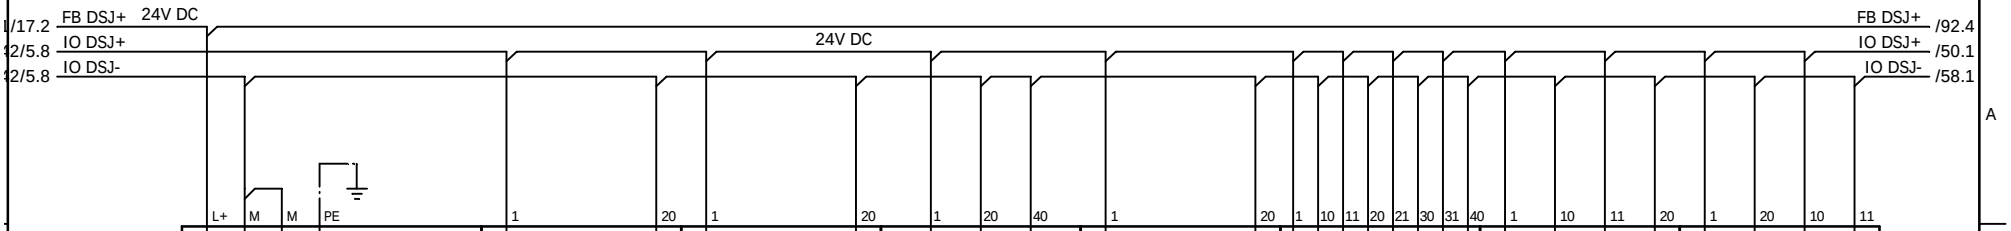

SIMATIC
ET 200M

L2-bus adress

		64
		32
		16
		8
	X	4
	X	2
		1

OFF ON

Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location
4	1	4	2	4	3	4	4			4	5			5	7
		revision 40		revision 42		revision 44		revision 48		revision 40		revision 45		standard 128	
		E 40.0 2 /50.2		E 42.0 2 /52.2		E 44.0 /54.2 2	22 E 46.0 /56.2	E 48.0 2 /57.1.2		A 40.0 /58.2 2	22 A 42.0 /60.2	A 45.0 2 /62.2		PW128 /63.1.2	2
		E 40.1 3 /50.2		E 42.1 3 /52.2		E 44.1 /54.2 3	23 E 46.1 /56.2	E 48.1 3 /57.1.2		A 40.1 /58.2 3	23 A 42.1 /60.2	A 45.1 3 /62.2			3
		E 40.2 4 /50.3		E 42.2 4 /52.3		E 44.2 /54.3 4	24 E 46.2 /56.3	E 48.2 4 /57.1.3		A 40.2 /58.3 4	24 A 42.2 /60.3	A 45.2 4 /62.3		PW130 /63.1.4	4
		E 40.3 5 /50.4		E 42.3 5 /52.4		E 44.3 /54.4 5	25 E 46.3 /56.4	E 48.3 5 /57.1.4		A 40.3 /58.4 5	25 A 42.3 /60.4	A 45.3 5 /62.4			5
		E 40.4 6 /50.5		E 42.4 6 /52.5		E 44.4 /54.5 6	26 E 46.4 /56.5	E 48.4 6 /57.1.5		A 40.4 /58.5 6	26 A 42.4 /60.5	A 45.4 6 /62.5			
		E 40.5 7 /50.6		E 42.5 7 /52.6		E 44.5 /54.6 7	27 E 46.5 /56.6	E 48.5 7 /57.1.6		A 40.5 /58.6 7	27 A 42.5 /60.6	A 45.5 7 /62.6			
		E 40.6 8 /50.7		E 42.6 8 /52.7		E 44.6 /54.7 8	28 E 46.6 /56.7	E 48.6 8 /57.1.7		A 40.6 /58.7 8	28 A 42.6 /60.7	A 45.6 8 /62.7			
		E 40.7 9 /50.8		E 42.7 9 /52.8		E 44.7 /54.8 9	29 E 46.7 /56.8	E 48.7 9 /57.1.8		A 40.7 /58.8 9	29 A 42.7 /60.8	A 45.7 9 /62.8			
		E 41.0 12 /51.2		E 43.0 12 /53.2		E 45.0 /55.2 12	32 E 47.0 /57.2	E 49.0 12 /57.2.2		A 41.0 /59.2 12	32 A 43.0 /61.2	A 46.0 12 /63.2			
		E 41.1 13 /51.2		E 43.1 13 /53.2		E 45.1 /55.2 13	33 E 47.1 /57.2	E 49.1 13 /57.2.2		A 41.1 /59.2 13	33 A 43.1 /61.2	A 46.1 13 /63.2			
		E 41.2 14 /51.3		E 43.2 14 /53.3		E 45.2 /55.3 14	34 E 47.2 /57.3	E 49.2 14 /57.2.3		A 41.2 /59.3 14	34 A 43.2 /61.3	A 46.2 14 /63.3			
		E 41.3 15 /51.4		E 43.3 15 /53.4		E 45.3 /55.4 15	35 E 47.3 /57.4	E 49.3 15 /57.2.4		A 41.3 /59.4 15	35 A 43.3 /61.4	A 46.3 15 /63.4			
		E 41.4 16 /51.5		E 43.4 16 /53.5		E 45.4 /55.5 16	36 E 47.4 /57.5	E 49.4 16 /57.2.5		A 41.4 /59.5 16	36 A 43.4 /61.5	A 46.4 16 /63.5			
		E 41.5 17 /51.6		E 43.5 17 /53.6		E 45.5 /55.6 17	37 E 47.5 /57.6	E 49.5 17 /57.2.6		A 41.5 /59.6 17	37 A 43.5 /61.6	A 46.5 17 /63.6			
		E 41.6 18 /51.7		E 43.6 18 /53.7		E 45.6 /55.7 18	38 E 47.6 /57.7	E 49.6 18 /57.2.7		A 41.6 /59.7 18	38 A 43.6 /61.7	A 46.6 18 /63.7			
		E 41.7 19 /51.8		E 43.7 19 /53.8		E 45.7 /55.8 19	39 E 47.7 /57.8	E 49.7 19 /57.2.8		A 41.7 /59.8 19	39 A 43.7 /61.8	A 46.7 19 /63.8			
		Digital Input 16x24V DC		Digital Input 16x24V DC		Digital Input 32x24V DC		Digital Input 16x24V DC		Digital Output 32x24V DC/0,5A		Digital Output 16x24V DC/0,5A		Analog Input 2xAI	
6ES7153-1AA03-0XA4		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7321-1BL00-0AA0		6ES7392-1AJ00-0AA0		6ES7322-1BL00-0AA0		6ES7322-1BH01-0AA0		6ES7331-7KF02-0AB0	
		6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7392-1AM00-0AA0		6ES7321-1BH02-0AA0		6ES7392-1AM00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0	
-D40		-D41		-D42		-D45		-D46		-D43		-D44		-D47	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

SPS Busklemme +DSJ
PLC bus terminal dieselside
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+DSJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	49		
	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

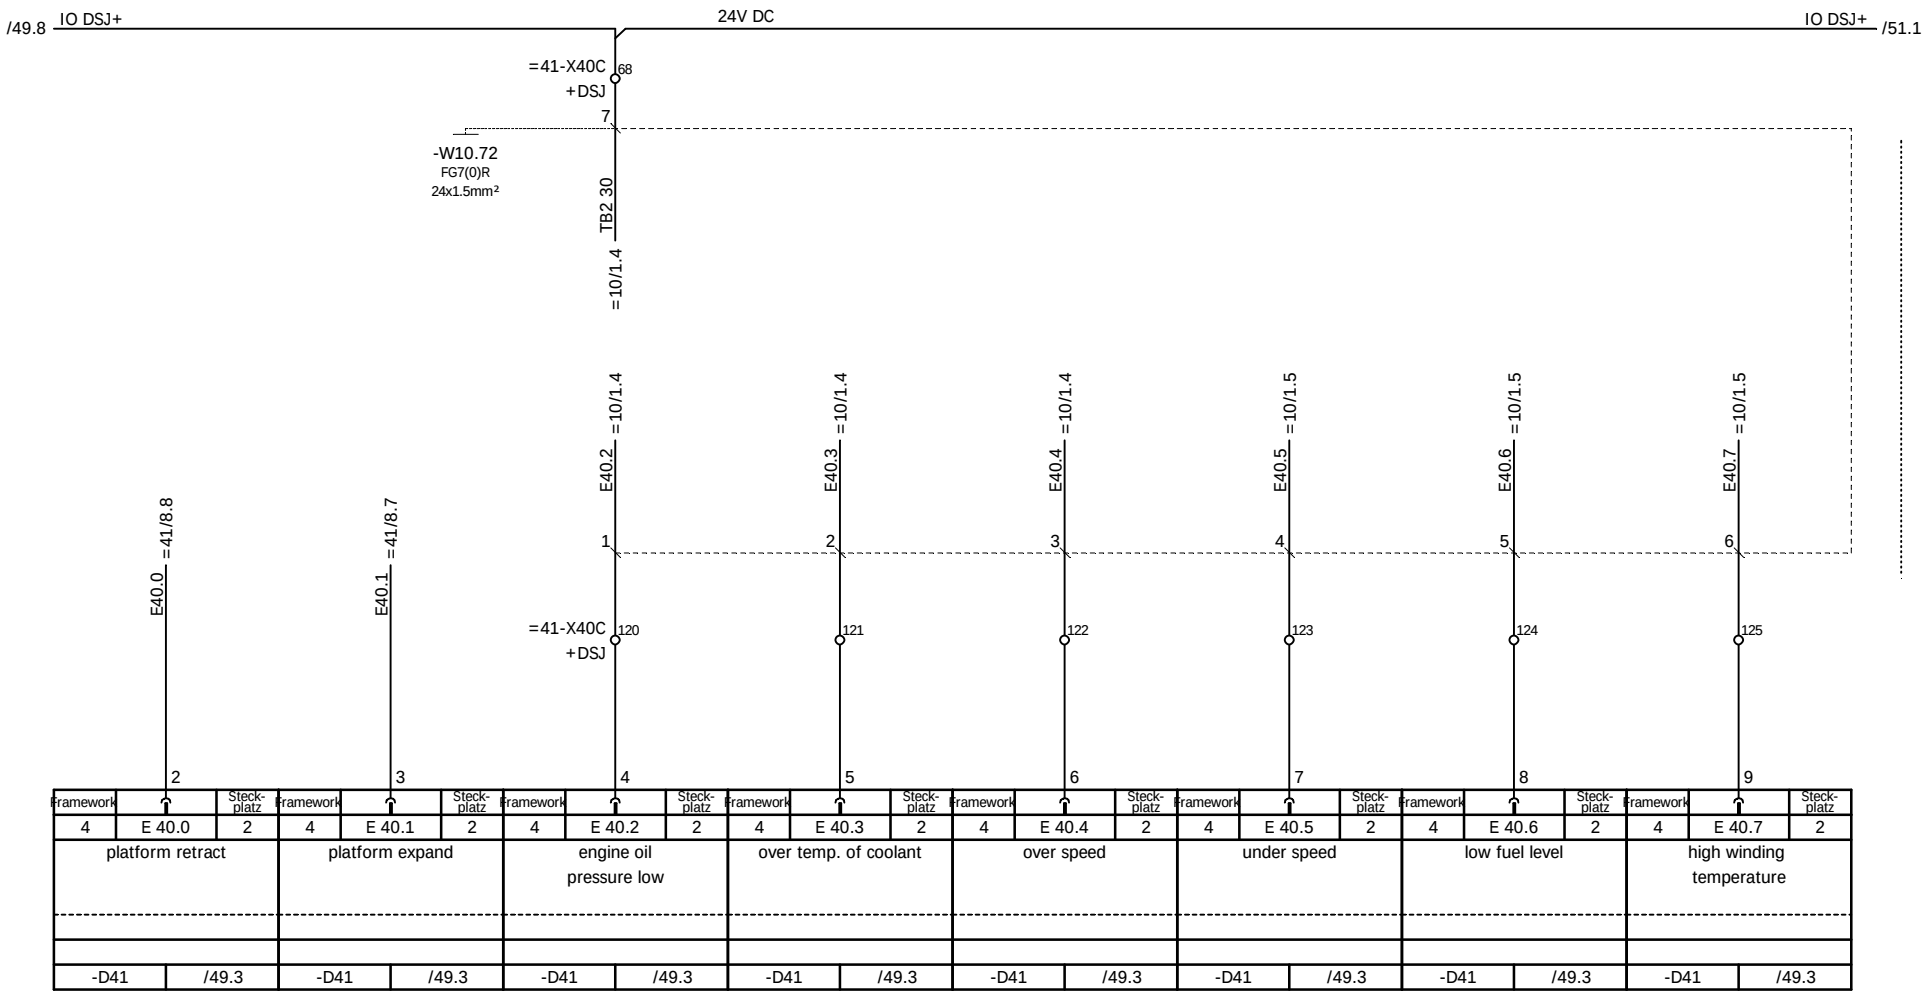

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 40.0	2	4	E 40.1	2	4	E 40.2	2	4	E 40.3	2	4	E 40.4	2	4	E 40.5	2	4	E 40.6	2	4	E 40.7	2
platform retract			platform expand			engine oil pressure low			over temp. of coolant			over speed			under speed			low fuel level			high winding temperature		
-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

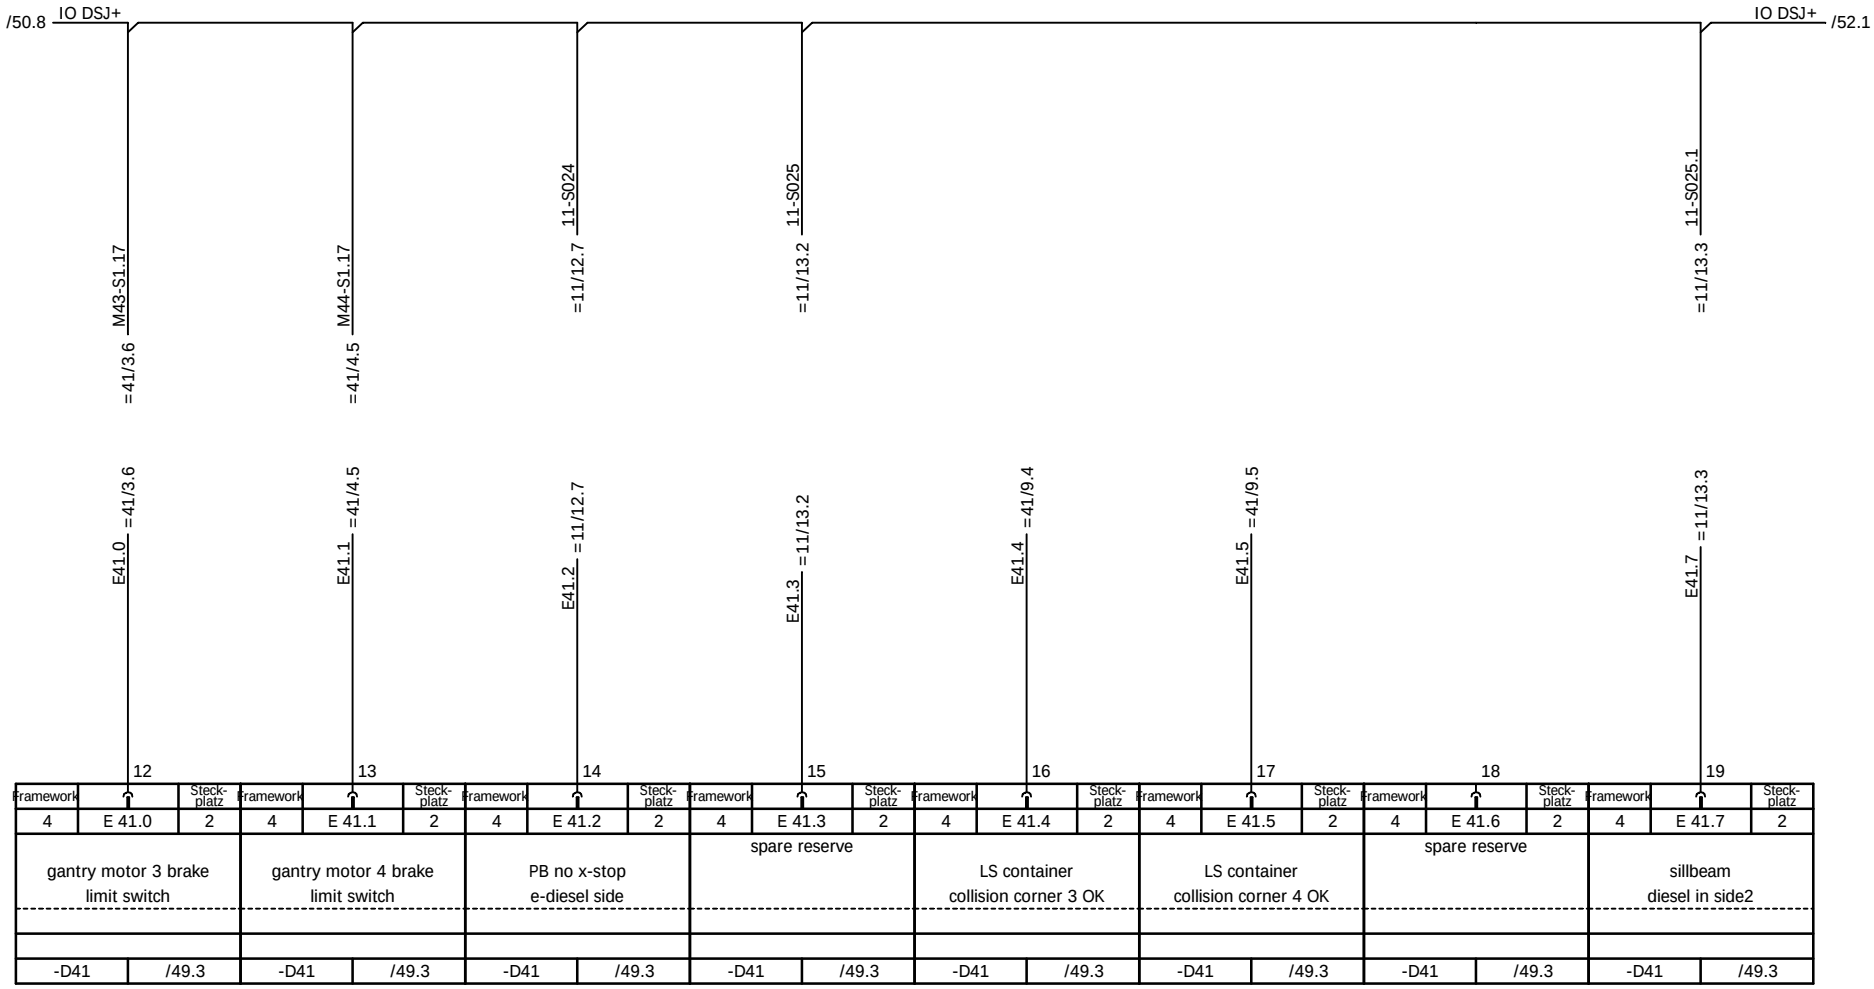


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 41.0	2	4	E 41.1	2	4	E 41.2	2	4	E 41.3	2	4	E 41.4	2	4	E 41.5	2	4	E 41.6	2	4	E 41.7	2
gantry motor 3 brake limit switch			gantry motor 4 brake limit switch			PB no x-stop e-diesel side			spare reserve			LS container collision corner 3 OK			LS container collision corner 4 OK			spare reserve			sillbeam diesel in side2		
-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3		-D41	/49.3	

| | | | | | | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

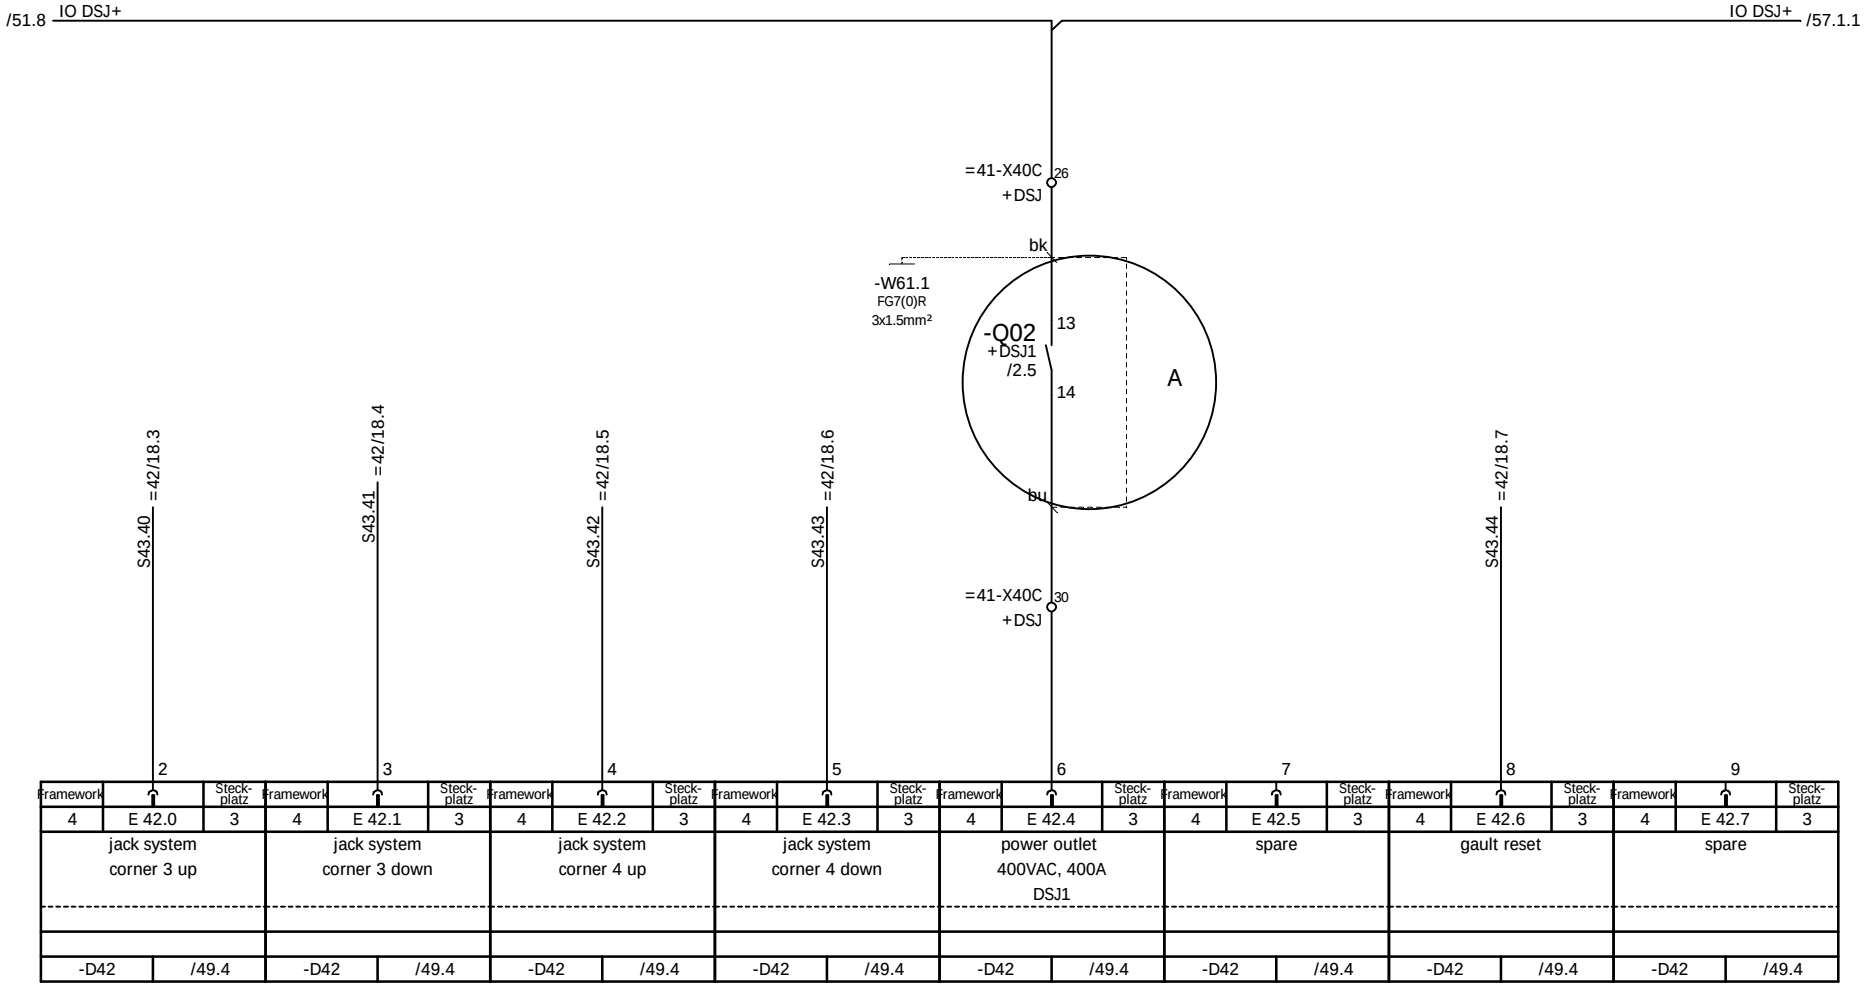

	2			3			4			5			6			7			8			9		
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 42.0	3	4	E 42.1	3	4	E 42.2	3	4	E 42.3	3	4	E 42.4	3	4	E 42.5	3	4	E 42.6	3	4	E 42.7	3
jack system corner 3 up			jack system corner 3 down			jack system corner 4 up			jack system corner 4 down			power outlet 400VAC, 400A DSJ1			spare			gault reset			spare		
-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


PLC dieselside, input
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +DSJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	52
			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

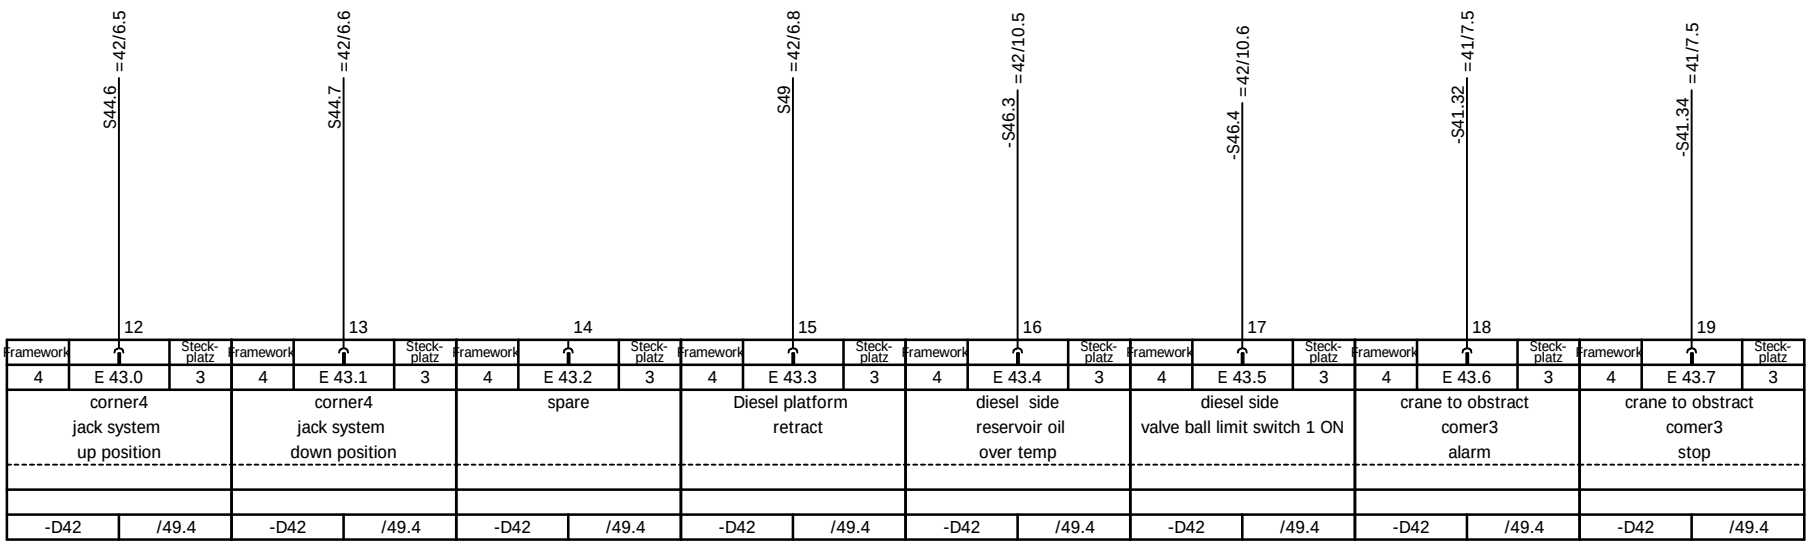

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 43.0	3	4	E 43.1	3	4	E 43.2	3	4	E 43.3	3	4	E 43.4	3	4	E 43.5	3	4	E 43.6	3	4	E 43.7	3
corner4 jack system up position			corner4 jack system down position			spare			Diesel platform retract			diesel side reservoir oil over temp			diesel side valve ball limit switch 1 ON			crane to obstract comer3 alarm			crane to obstract comer3 stop		
-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4		-D42	/49.4	

A
B
C
D
E
F

				Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, input	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR							+DSJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			Sheet 53 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8


	2		3		4		5		6		7		8		9	
-S41.42 =41/7.5			-S41.44 =41/7.6		S43.1 =42/5.2		S43.2 =42/5.3		S43.3 =42/5.3		S43.4 =42/5.4		S43.5 =42/5.5			
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 44.0	4	4	E 44.1	4	4	E 44.2	4	4	E 44.3	4	4	E 44.4	4	4	E 44.5	4	4	E 44.6	4	4	E 44.7	4
crane to obstract comer4 alarm			crane to obstract comer4 stop			corner3 turning cylinder locked			corner3 turning cylinder unlocked			corner3 wheels in 0position			corner3 wheels in 90position			corner3 wheels in spin turn position			spare		
-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4	

A B C D E F

					Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, output	Type	RTG 50/26.50/5+1/AC	=61										
					Designer	XU HR							+DSJ										
					Checked	LIU KP					Job No.	1255	Drawing No.	78.5692.60.00	Sheet 54								
Ind.	Revision	Date	Name		Standard		Source:			Stromlaufplan / Circuit Diagram					94 Sh.								

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

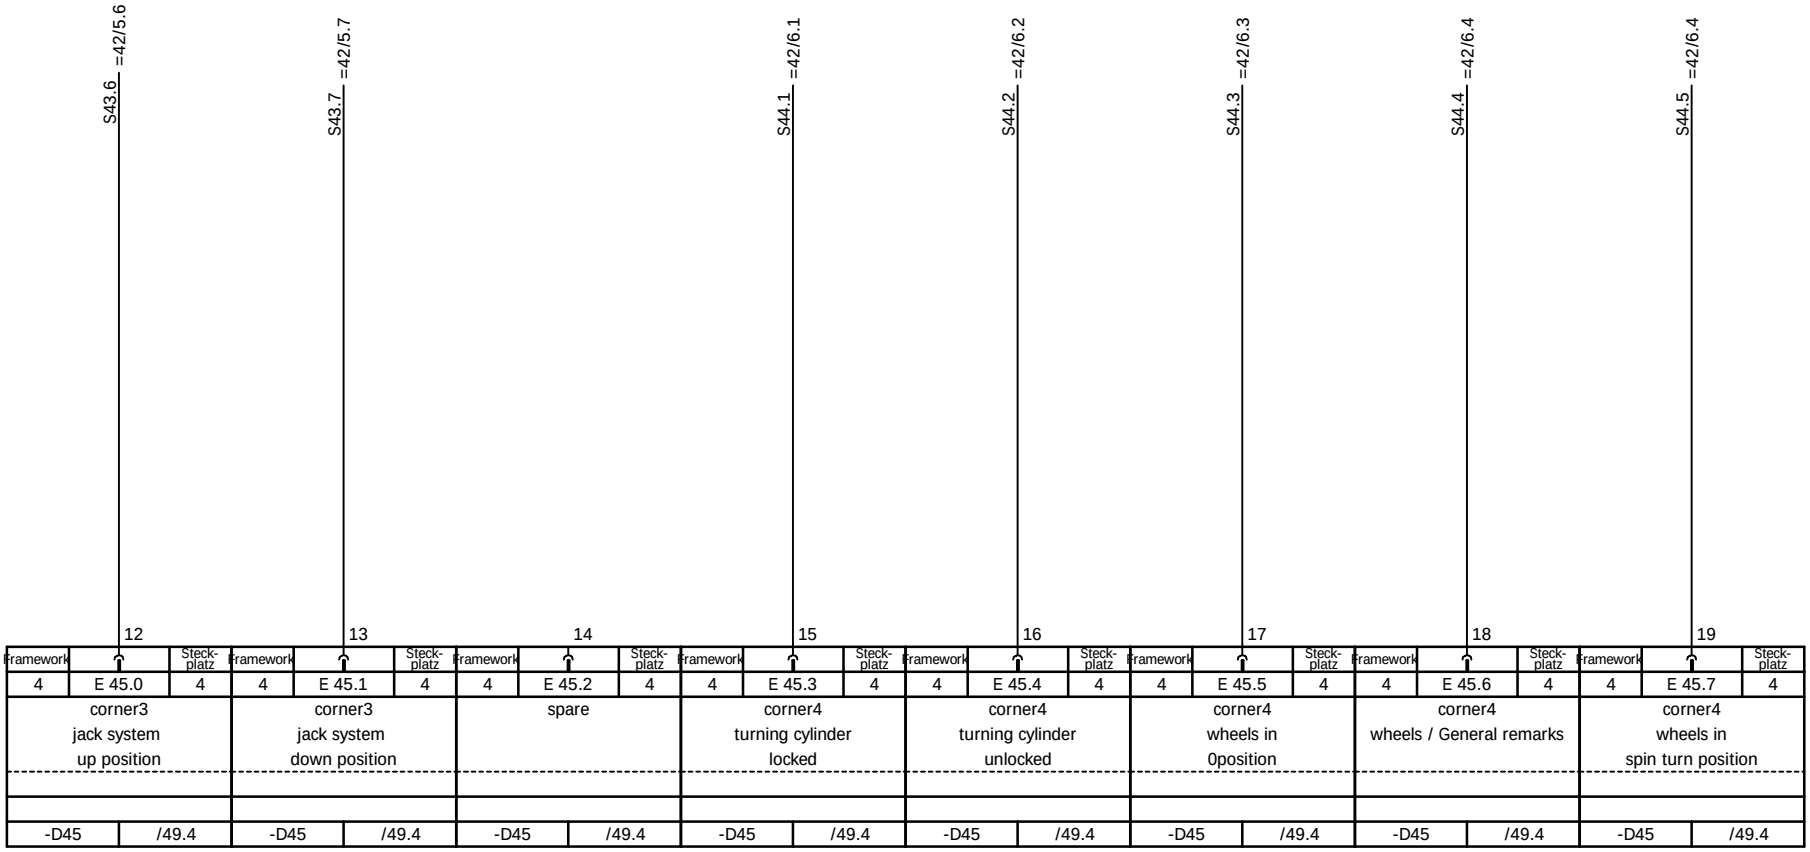

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

	22		23		24		25		26		27		28		29	
	S46.1 =42/10.3		-S46.2 =42/10.4		S43.100 =42/13.2		S43.101 =42/13.3		S43.102 =42/13.4		S43.103 =42/13.5		S43.104 =42/13.7			
Framework		Steck-platz	Framework	Steck-platz	Framework	Steck-platz	Framework	Steck-platz	Framework	Steck-platz	Framework	Steck-platz	Framework	Steck-platz	Framework	Steck-platz
4	E 46.0	4	4	E 46.1	4	4	E 46.2	4	4	E 46.3	4	4	E 46.4	4	4	E 46.5	4	4	E 46.6	4	4	E 46.7	4
diesel side reservoir oil low level			diesel side reservoir oil low temp		corner3 90 position		corner3 0 position		corner3 spinturn position		cylinder3 lock		cylinder3 unlock		spare	
-D45	/49.4		-D45	/49.4	-D45	/49.4	-D45	/49.4	-D45	/49.4	-D45	/49.4	-D45	/49.4	-D45	/49.4

A B C D E F

				Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, output	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				Stromlaufplan / Circuit Diagram		=61 +DSJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:					Sheet 56 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.


1	2	3	4	5	6	7	8

	32			33			34			35			36			37			38			39		
	S43.105 =42/13.8			S43.106 =42/14.2			S43.107 =42/14.3			S43.108 =42/14.5			S43.109 =42/14.6			S43.110 =42/14.7			-S46.5 =42/10.8					
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
4	E 47.0	4	4	E 47.1	4	4	E 47.2	4	4	E 47.3	4	4	E 47.4	4	4	E 47.5	4	4	E 47.6	4	4	E 47.7	4
dieselside control station is on			corner4 90 position			corner4 0 position			corner4 spinturn position			cylinder4 lock			cylinder4 unlock			diesel side valve ball limit switch 2 on			spare		
-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		-D45	/49.4		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

/52.8 IO DSJ+ — IO DSJ+

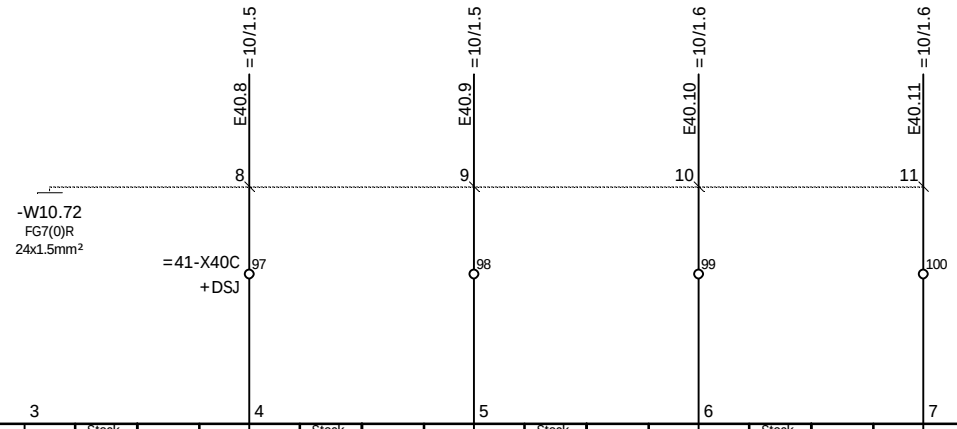

2			3			4			5			6			7			8			9		
Framework	E 48.0	Steck-platz	Framework	E 48.1	Steck-platz	Framework	E 48.2	Steck-platz	Framework	E 48.3	Steck-platz	Framework	E 48.4	Steck-platz	Framework	E 48.5	Steck-platz	Framework	E 48.6	Steck-platz	Framework	E 48.7	Steck-platz
							AC over voltage			fuel filling			ac over current			genset commont fault			fuel filling				
-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

PLC dieselside, output
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +DSJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 57.1	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

12			13			14			15			16			17			18			19		
Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz
	E 49.0			E 49.1			E 49.2			E 49.3			E 49.4			E 49.5			E 49.6			E 49.7	
-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5		-D46	/49.5	

					Date		Costumer	AMPT Egypt	
					Designer	XU HR			
					Checked	LIU KP			
Ind.	Revision	Date	Name		Standard		Source:		

NOELL

PLC dieselside, output
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +DSJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	57.2	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6
gantry travelling warning diesel side		gantry travelling warning diesel side		gantry travelling warning diesel side		gantry travelling warning diesel side		steering cylinder 3 lock in		steering cylinder 4 unlock		steering cylinder 4 lock in		spare	
4	A 40.0	5	4	A 40.1	5	4	A 40.2	5	4	A 40.3	5	4	A 40.4	5	4	A 40.5	5	4	A 40.6	5	4	A 40.7	5
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	2			3			4			5			6			7			8			9	

-KX33 -KX34 -KX35 -KX36 -KX37 -KX38 -KX39

/49.8 IO DSJ- IO DSJ- /59.1

RELAY RCL 24VDC 1C/O

=41/13.5 =41/13.6 =41/13.7 =41/13.8 =42/9.5 =42/9.6 =42/9.6


| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D43 /49.6	-D43 /49.6	-D43 /49.6	-D43 /49.6	-D43 /49.6	-D43 /49.6	-D43 /49.6	-D43 /49.6
steering cylinder 4 0	circulation valve diesel side	steering cylinder 3 90	oil heater on Diesel side wheel turming station	SPEAR	steering cylinder 3 0	steering cylinder 4 90	Reserve spare
4 A 41.0 5	4 A 41.1 5	4 A 41.2 5	4 A 41.3 5	4 A 41.4 5	4 A 41.5 5	4 A 41.6 5	4 A 41.7 5
Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz

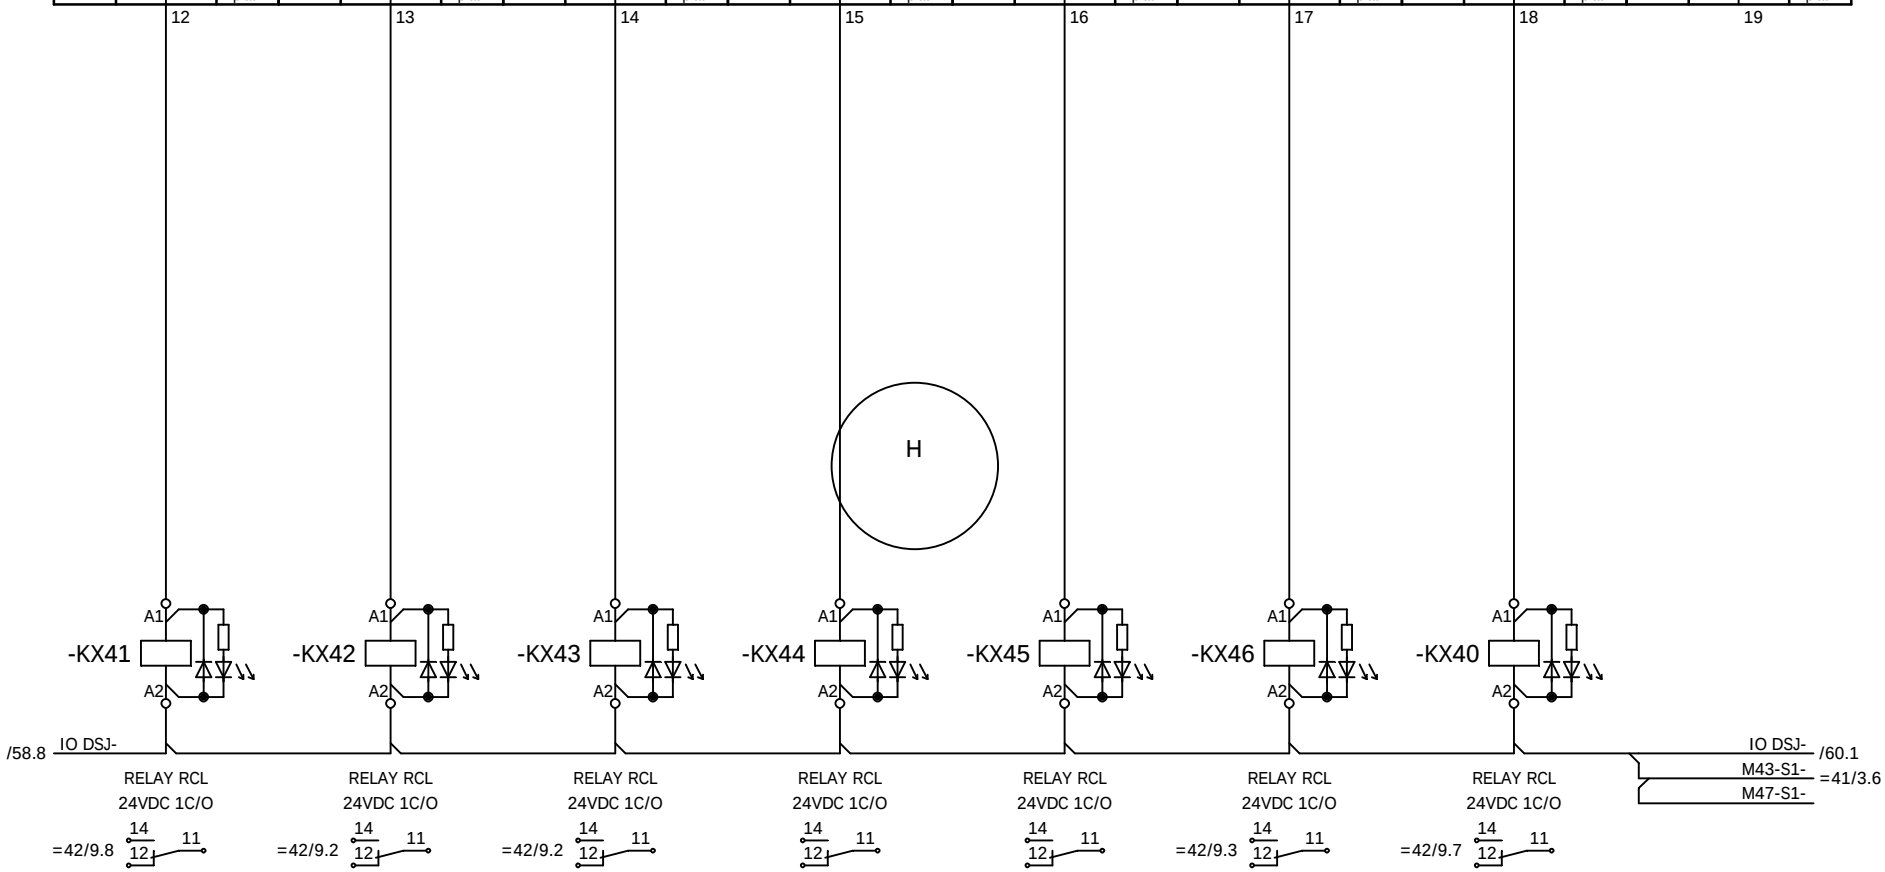

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6
steering cylinder 4 0		orner3 90 position		corner3 0 position		corner3 spinturn position		cylinder3 lock		cylinder3 unlock		corner4 90 position		Reserve spare	
4	A 42.0	5	4	A 42.1	5	4	A 42.2	5	4	A 42.3	5	4	A 42.4	5	4	A 42.5	5	4	A 42.6	5	4	A 42.7	5
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	22			23			24			25			26			27			28			29	

A43.0 =42/13.2

A43.1 =42/13.3

A43.2 =42/13.4

A43.3 =42/13.6

A43.4 =42/13.7

A43.5 =42/14.3

-KX035

A1

A2

/59.8 IO DSJ-

IO DSJ- /62.1

RELAY RCL
24VDC 1C/O

=42/9.4 14 12 11

				Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, output	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+DSJ
				Checked	LIU KP					Job No.	Drawing No.	Sheet 60
Ind.	Revision	Date	Name	Standard		Source:				1255	78.5692.60.00	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6	-D43	/49.6
corner4 0 position		corner4 spinturn position		cylinder4 lock		cylinder4 unlock		jack system corner 3 up		ack system corner 3 down		jack system corner 4 up		Reserve spare	
4	A 43.0	5	4	A 43.1	5	4	A 43.2	5	4	A 43.3	5	4	A 43.4	5	4	A 43.5	5	4	A 43.6	5	4	A 43.7	5
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	32			33			34			35			36			37			38			39	
=42/14.4	A43.6		=42/14.5	A43.7		=42/14.6	A43.8		=42/14.7	A43.9		=42/18.3	A42.4		=42/18.4	A42.5		=42/18.5	A42.6				

| | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D44 /49.7	-D44 /49.7	-D44 /49.7	-D44 /49.7	-D44 /49.7	-D44 /49.7	-D44 /49.7	-D44 /49.7
jack cylinder 1 up diesel side	jack cylinder 1 down diesel side	jack cylinder 2 up diesel side	jack cylinder 2 down diesel side	spare	jack system corner 4 down	gault reset	spare
A 45.0	A 45.1	A 45.2	A 45.3	A 45.4	A 45.5	A 45.6	A 45.7
Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz	Framework Steck-platz
2	3	4	5	6	7	8	9

=61 -KX052 =61 -KX053 =61 -KX054 =61 -KX055

A1 A2

/60.8 IO DSJ-

RELAY RCL 24VDC 1C/O

14 12 11

=42/15.5 =42/15.6 =42/15.7 =42/15.8

A42.7 =42/18.6

A42.8 =42/18.7

				Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, output
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61 +DSJ
Job No.	1255	Drawing No. 78.5692.60.00
Sheet	62 94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D44	/49.7	-D44	/49.7	-D44	/49.7	-D44	/49.7	-D44	/49.7	-D44	/49.7	-D44	/49.7	-D44	/49.7
spare		spare		spare		spare		spare		spare		spare		spare	
	A 46.0			A 46.1			A 46.2			A 46.3			A 46.4			A 46.5			A 46.6			A 46.7	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
12			13			14			15			16			17			18			19		

A

B

C

D


E

F

				Date		Costumer	AMPT Egypt	NOELL	PLC dieselside, output	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+DSJ
				Checked	LIU KP					Job No.	Drawing No.	Sheet 63
Ind.	Revision	Date	Name	Standard		Source:				1255	78.5692.60.00	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

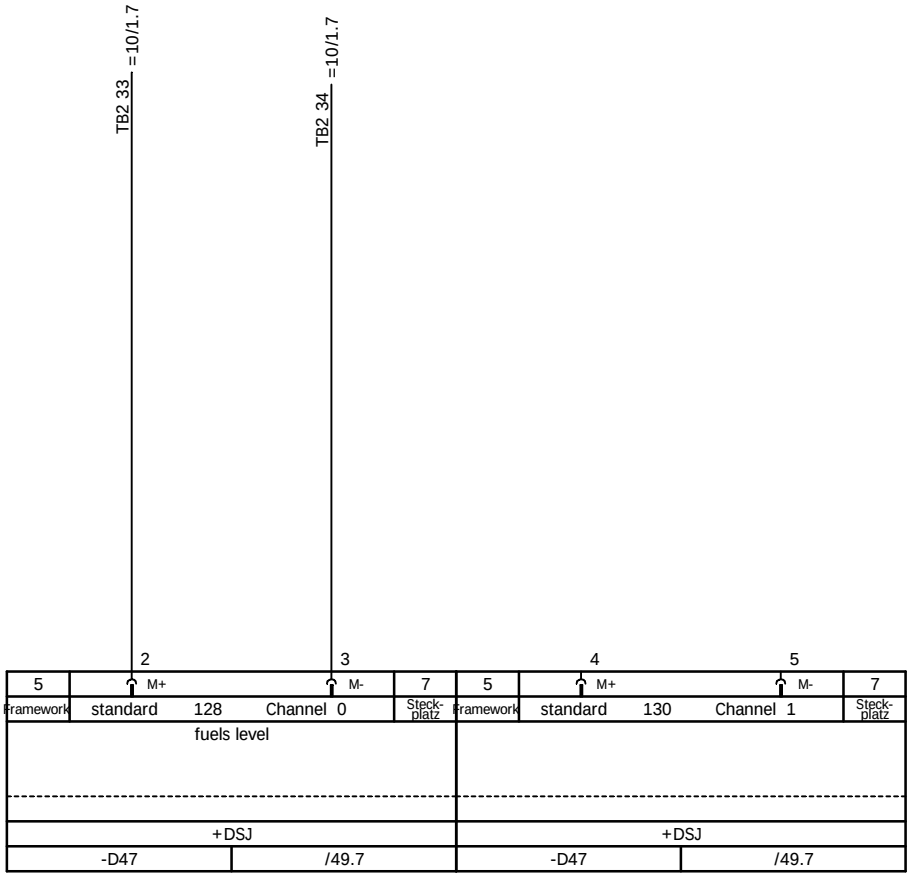

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=61 +DSJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 63.1 94 Sh.

PLC output auxiliary drives
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

=11/17.4 FB TRJ+ 24V DC — FB TRJ+ /92.6
=11/17.4 IO TRJ+ — 24V DC — IO TRJ+ /65.1
=11/17.5 IO TRJ- — IO TRJ- /75.1

L+ M M PE — 24V DC

	1	2	3	4	5	6	7	8
	1 20	1 20	1 20	1 20	1 20	1 20	1 10 11 20	
	1L+ 2M	1L+ 2M	1L+ 2M	1L+ 2M	1L+ 2M	1L+ 2M	1L+ 1M 2L+ 2M	
Framework	3	3	3	3	3	3	3	
Card Location	1	2	3	4	5	6	8	
revision		32	34	36	38	84	32	
	E 32.0 2 /65.2	E 34.0 2 /67.2	E 36.0 2 /69.2	E 38.0 2 /71.2	E 84.0 2 /73.2	A 32.0 2 /75.2		
	E 32.1 3 /65.2	E 34.1 3 /67.2	E 36.1 3 /69.2	E 38.1 3 /71.2	E 84.1 3 /73.2	A 32.1 3 /75.2		
	E 32.2 4 /65.3	E 34.2 4 /67.3	E 36.2 4 /69.3	E 38.2 4 /71.3	E 84.2 4 /73.3	A 32.2 4 /75.3		
	E 32.3 5 /65.4	E 34.3 5 /67.4	E 36.3 5 /69.4	E 38.3 5 /71.4	E 84.3 5 /73.4	A 32.3 5 /75.4		
	E 32.4 6 /65.5	E 34.4 6 /67.5	E 36.4 6 /69.5	E 38.4 6 /71.5	E 84.4 6 /73.5	A 32.4 6 /75.5		
	E 32.5 7 /65.6	E 34.5 7 /67.6	E 36.5 7 /69.6	E 38.5 7 /71.6	E 84.5 7 /73.6	A 32.5 7 /75.6		
	E 32.6 8 /65.7	E 34.6 8 /67.7	E 36.6 8 /69.7	E 38.6 8 /71.7	E 84.6 8 /73.7	A 32.6 8 /75.7		
	E 32.7 9 /65.8	E 34.7 9 /67.8	E 36.7 9 /69.8	E 38.7 9 /71.8	E 84.7 9 /73.8	A 32.7 9 /75.8		
	E 33.0 12 /66.2	E 35.0 12 /68.2	E 37.0 12 /70.2	E 39.0 12 /72.2	E 85.0 12 /74.2	A 33.0 12 /76.2		
	E 33.1 13 /66.2	E 35.1 13 /68.2	E 37.1 13 /70.2	E 39.1 13 /72.2	E 85.1 13 /74.2	A 33.1 13 /76.2		
	E 33.2 14 /66.3	E 35.2 14 /68.3	E 37.2 14 /70.3	E 39.2 14 /72.3	E 85.2 14 /74.3	A 33.2 14 /76.3		
	E 33.3 15 /66.4	E 35.3 15 /68.4	E 37.3 15 /70.4	E 39.3 15 /72.4	E 85.3 15 /74.4	A 33.3 15 /76.4		
	E 33.4 16 /66.5	E 35.4 16 /68.5	E 37.4 16 /70.5	E 39.4 16 /72.5	E 85.4 16 /74.5	A 33.4 16 /76.5		
	E 33.5 17 /66.6	E 35.5 17 /68.6	E 37.5 17 /70.6	E 39.5 17 /72.6	E 85.5 17 /74.6	A 33.5 17 /76.6		
	E 33.6 18 /66.7	E 35.6 18 /68.7	E 37.6 18 /70.7	E 39.6 18 /72.7	E 85.6 18 /74.7	A 33.6 18 /76.7		
	E 33.7 19 /66.8	E 35.7 19 /68.8	E 37.7 19 /70.8	E 39.7 19 /72.8	E 85.7 19 /74.8	A 33.7 19 /76.8		
	Digital Input 16x24V DC	Digital Input 16x24V DC	Digital Input 16x24V DC	Digital Input 16x24V DC	Digital Input 16x24V DC	Digital Output 16x24V DC/0,5A		
6ES7153-1AA03-0XA4	6ES7392-1AJ00-0AA0	6ES7392-1AJ00-0AA0	6ES7392-1AJ00-0AA0	6ES7392-1AJ00-0AA0	6ES7392-1AJ00-0AA0	6ES7322-1BH01-0AA0		
	6ES7321-1BH02-0AA0	6ES7321-1BH02-0AA0	6ES7321-1BH02-0AA0	6ES7321-1BH02-0AA0	6ES7321-1BH02-0AA0	6ES7392-1AJ00-0AA0		
-D30	-D31	-D32	-D33	-D34	-D35	-D37		

SF BF ON

SUB-D 9 pol. Stecker 1 /93.2

SIMATIC
ET 200M

L2-bus adress

	64
	32
	16
	8
X	4
	2
X	1

OFF ON

					Date		Costumer	AMPT Egypt	
					Designer	XU HR			
					Checked	LIU KP			
Ind.	Revision	Date	Name		Standard		Source:		


NOELL

SPS Busklemme +TRJ
PLC bus terminal trolley
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	64
			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

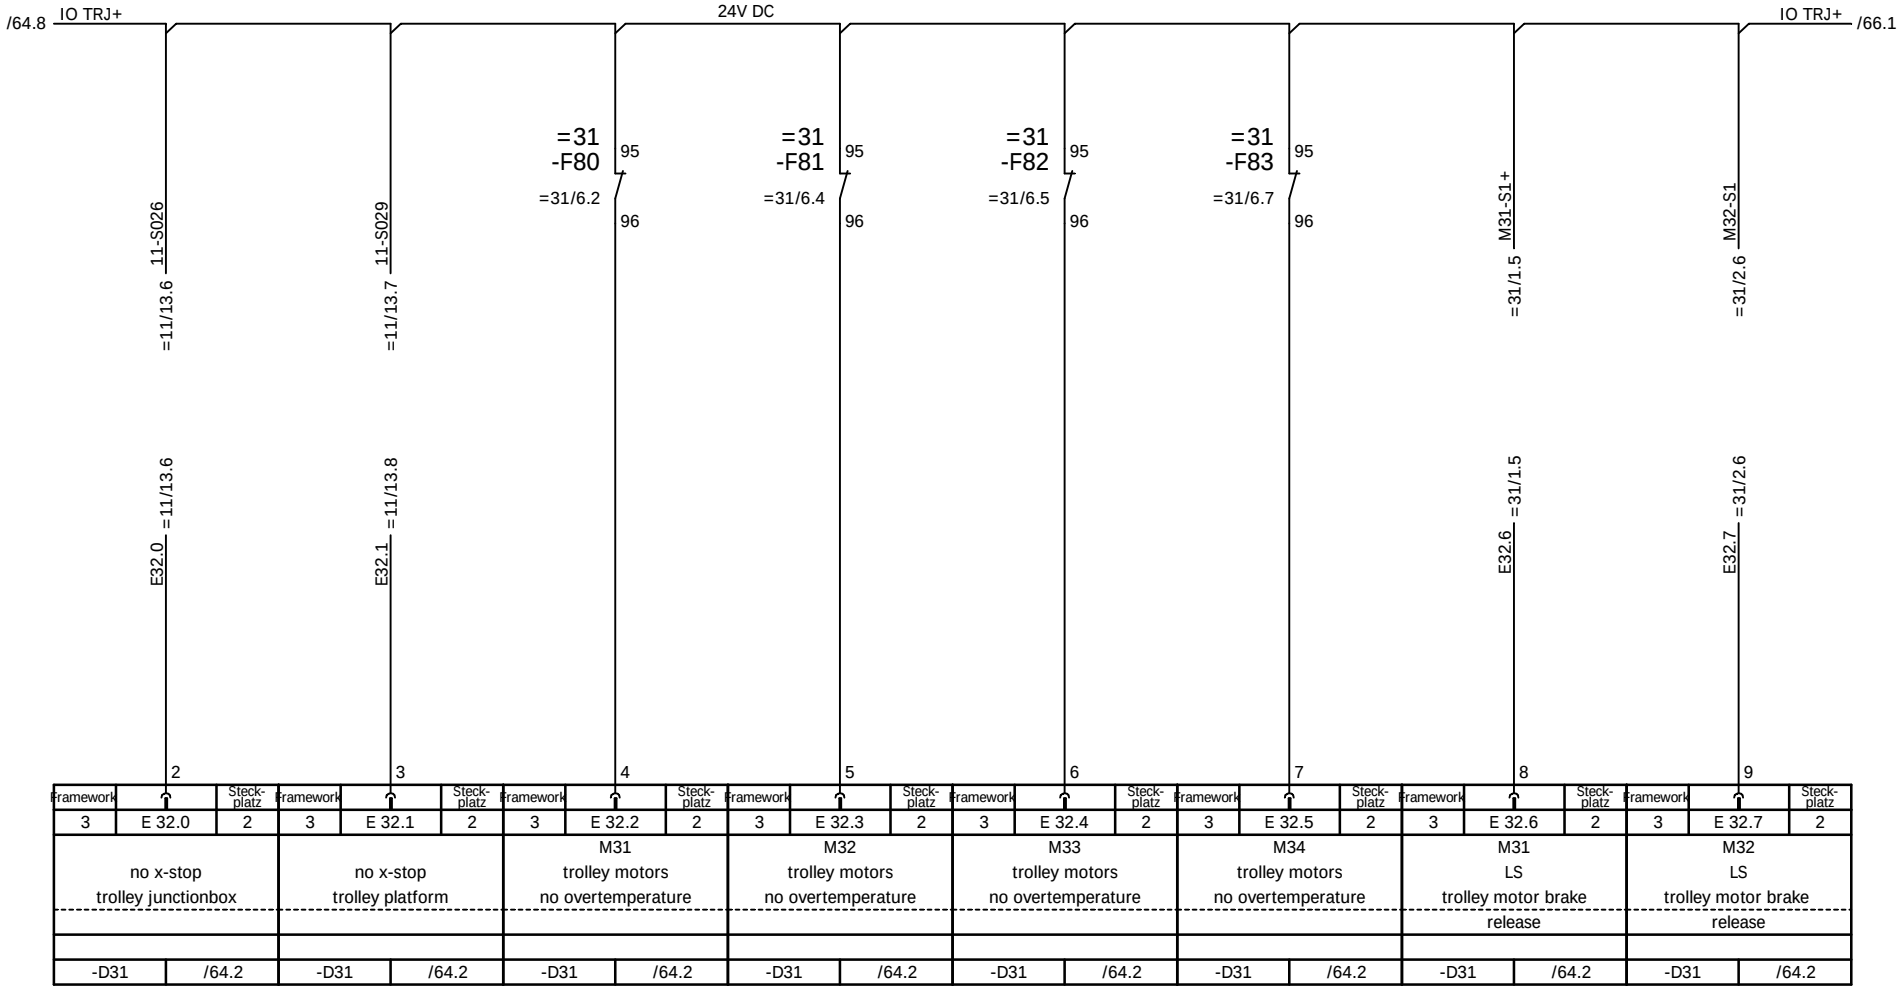

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 32.0	2	3	E 32.1	2	3	E 32.2	2	3	E 32.3	2	3	E 32.4	2	3	E 32.5	2	3	E 32.6	2	3	E 32.7	2
							M31			M32			M33			M34			M31			M32	
	no x-stop trolley junctionbox			no x-stop trolley platform			trolley motors no overtemperature			trolley motors no overtemperature			trolley motors no overtemperature			trolley motors no overtemperature			LS trolley motor brake			LS trolley motor brake	
																			release			release	
-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

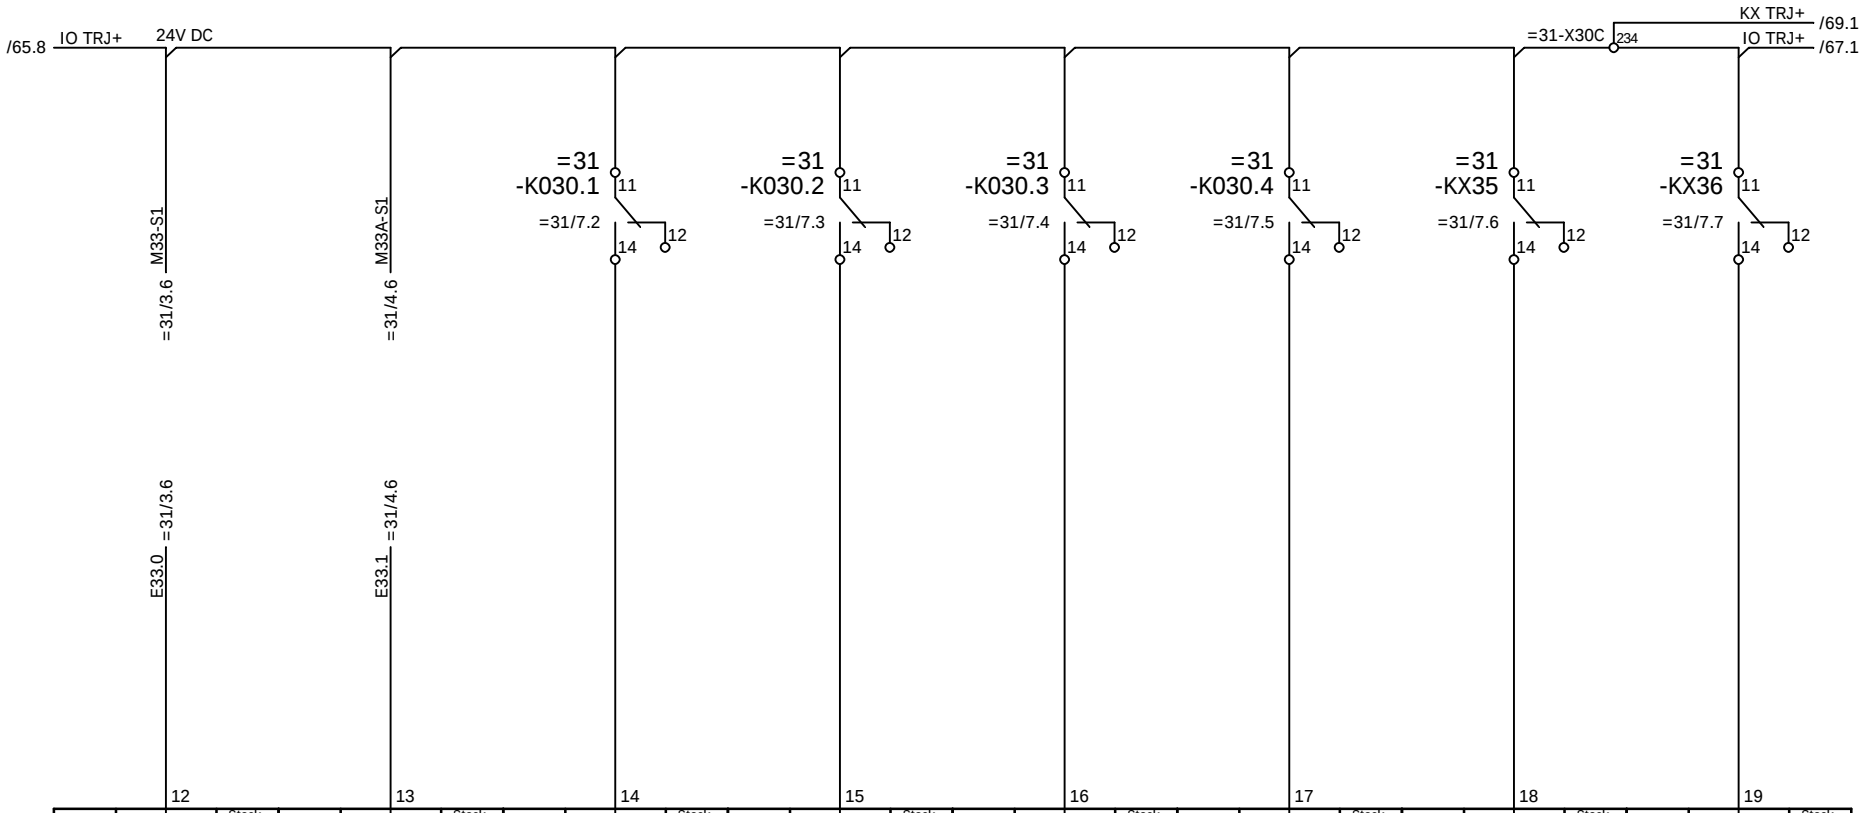


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 33.0	2	3	E 33.1	2	3	E 33.2	2	3	E 33.3	2	3	E 33.4	2	3	E 33.5	2	3	E 33.6	2	3	E 33.7	2
M33 LS trolley motor brake release			M33A LS trolley motor brake release			trolley stop forward			trolley stop backward			trolley slowdown check forward			trolley slowdown check backward			trolley slowdown forward			trolley slowdown backward		
-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2		-D31	/64.2	

				Date		Costumer	AMPT Egypt	NOELL	plc input, trolley&hoist	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+TRJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 66 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

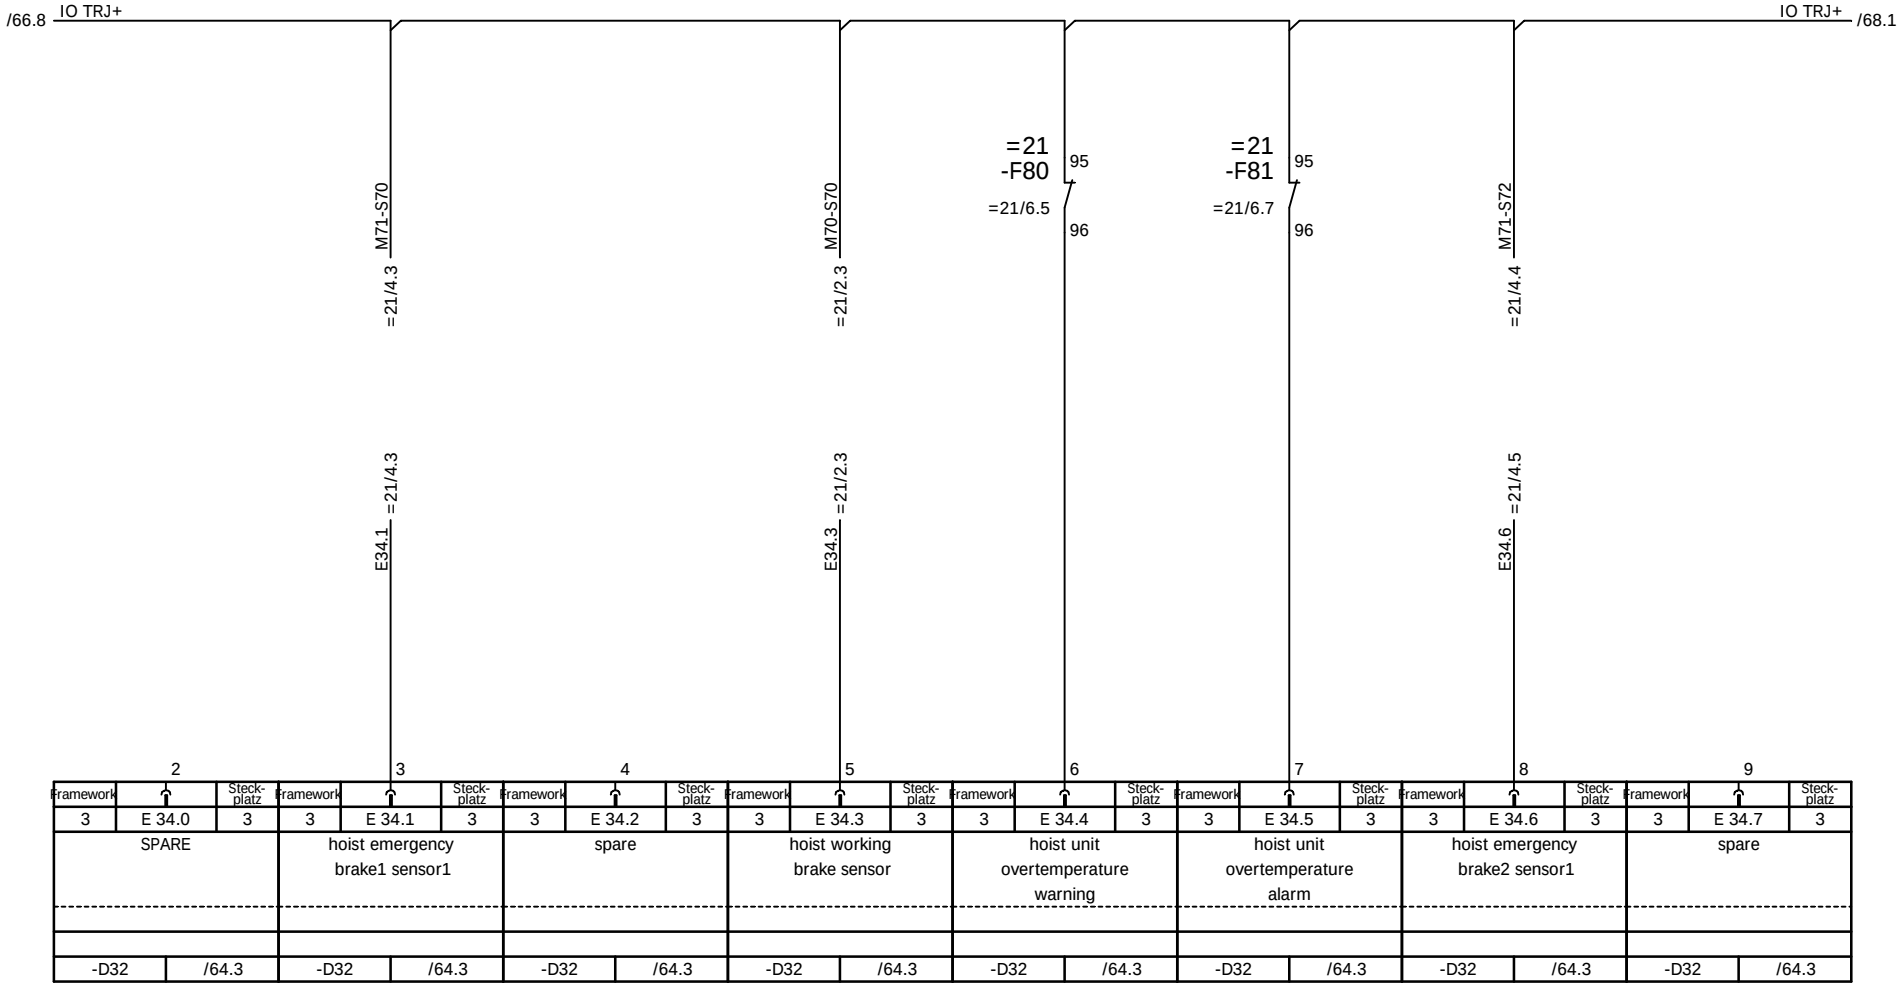

2			3			4			5			6			7			8			9		
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 34.0	3	3	E 34.1	3	3	E 34.2	3	3	E 34.3	3	3	E 34.4	3	3	E 34.5	3	3	E 34.6	3	3	E 34.7	3
SPARE			hoist emergency brake1 sensor1			spare			hoist working brake sensor			hoist unit overtemperature warning			hoist unit overtemperature alarm			hoist emergency brake2 sensor1			spare		
-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3	

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		


NOELL

PLC input, hoisting
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	67 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

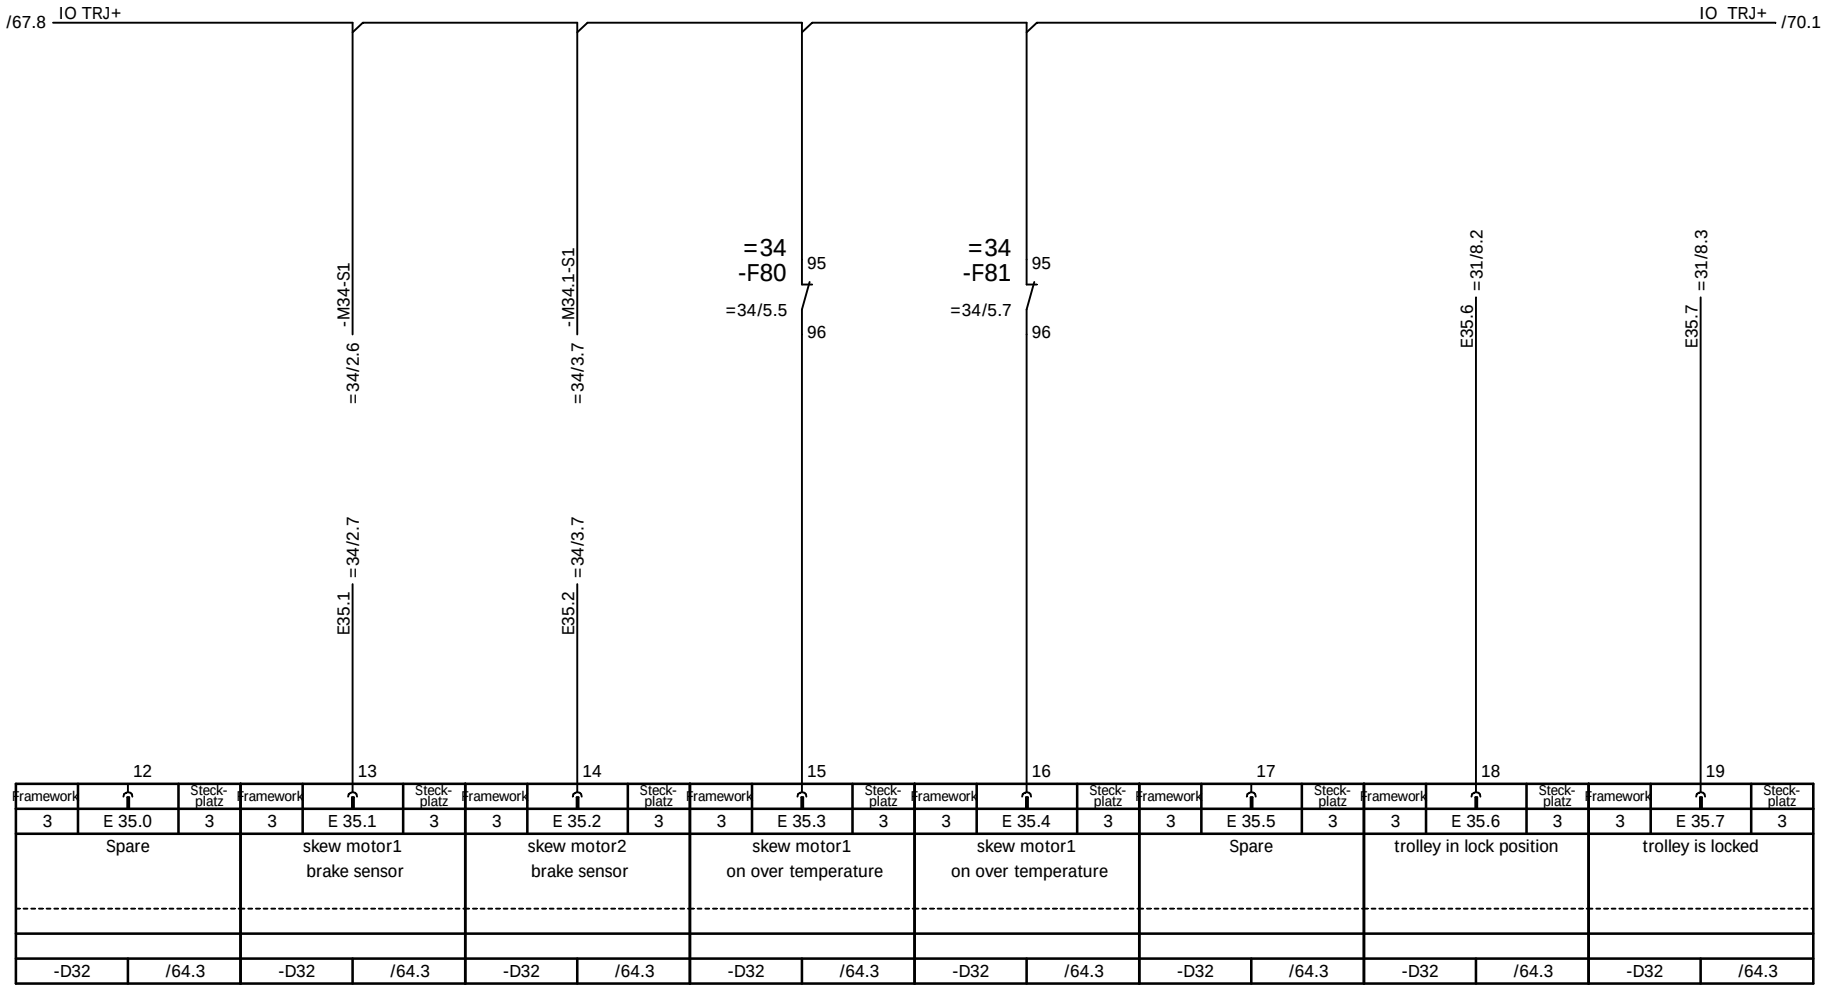

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 35.0	3	3	E 35.1	3	3	E 35.2	3	3	E 35.3	3	3	E 35.4	3	3	E 35.5	3	3	E 35.6	3	3	E 35.7	3
Spare			skew motor1 brake sensor			skew motor2 brake sensor			skew motor1 on over temperature			skew motor1 on over temperature			Spare			trolley in lock position			trolley is locked	
-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3		-D32	/64.3	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

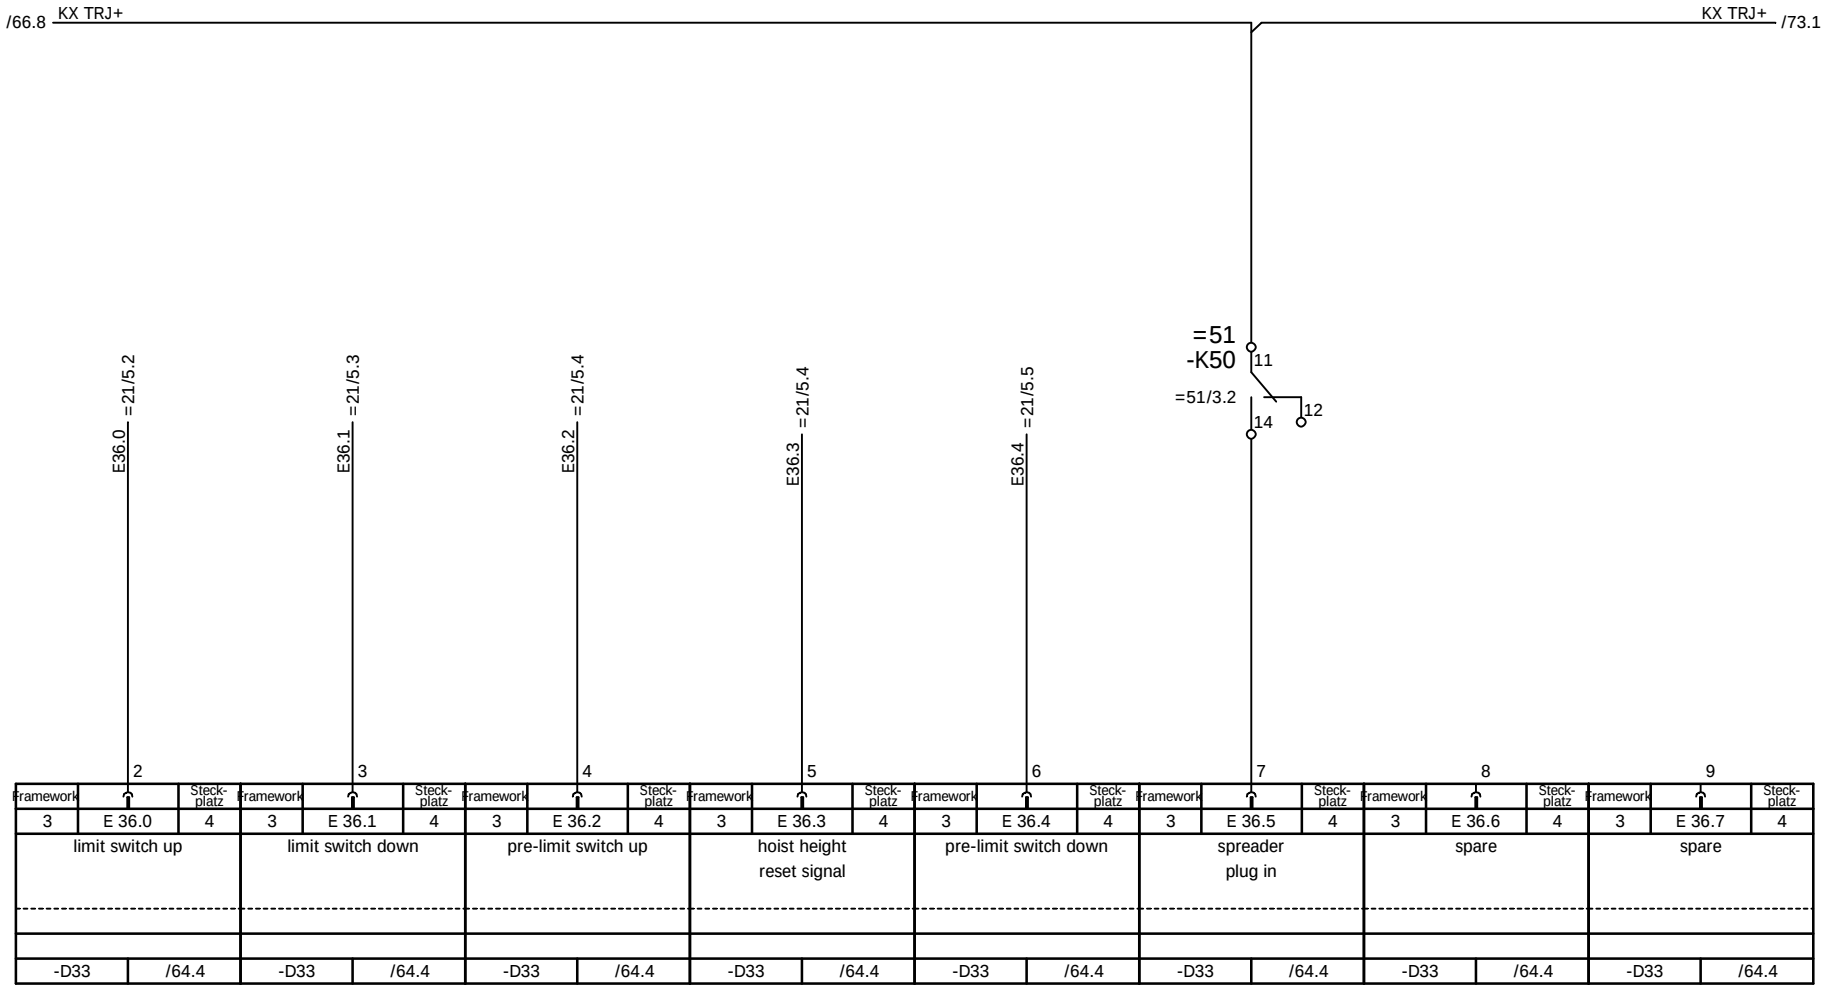

	2			3			4			5			6			7			8			9	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 36.0	4	3	E 36.1	4	3	E 36.2	4	3	E 36.3	4	3	E 36.4	4	3	E 36.5	4	3	E 36.6	4	3	E 36.7	4
limit switch up			limit switch down			pre-limit switch up			hoist height reset signal			pre-limit switch down			spreader plug in			spare			spare		
-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4	


				Date		Costumer	AMPT Egypt		
				Designer	XU HR				
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

PLC input, spreader
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	69		
	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

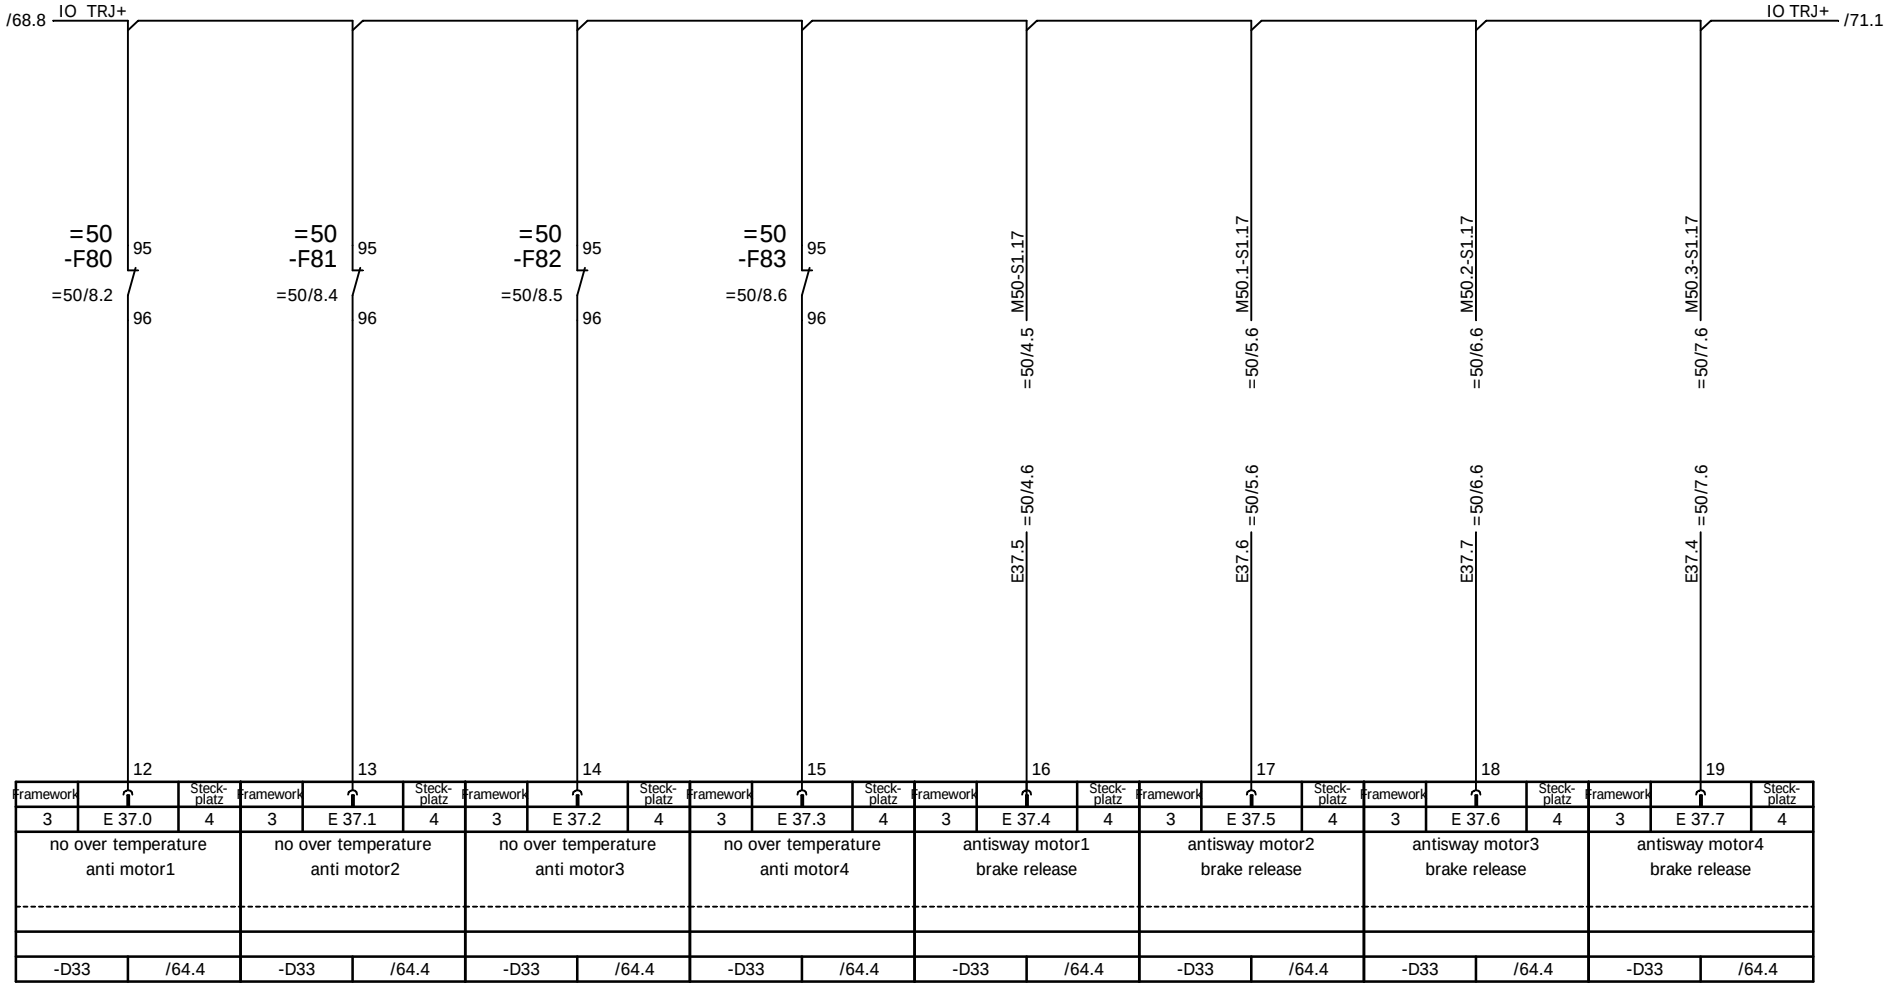

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 37.0	4	3	E 37.1	4	3	E 37.2	4	3	E 37.3	4	3	E 37.4	4	3	E 37.5	4	3	E 37.6	4	3	E 37.7	4
no over temperature anti motor1			no over temperature anti motor2			no over temperature anti motor3			no over temperature anti motor4			antisway motor1 brake release			antisway motor2 brake release			antisway motor3 brake release			antisway motor4 brake release		
-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4		-D33	/64.4	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

plc input, antisway
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	70 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

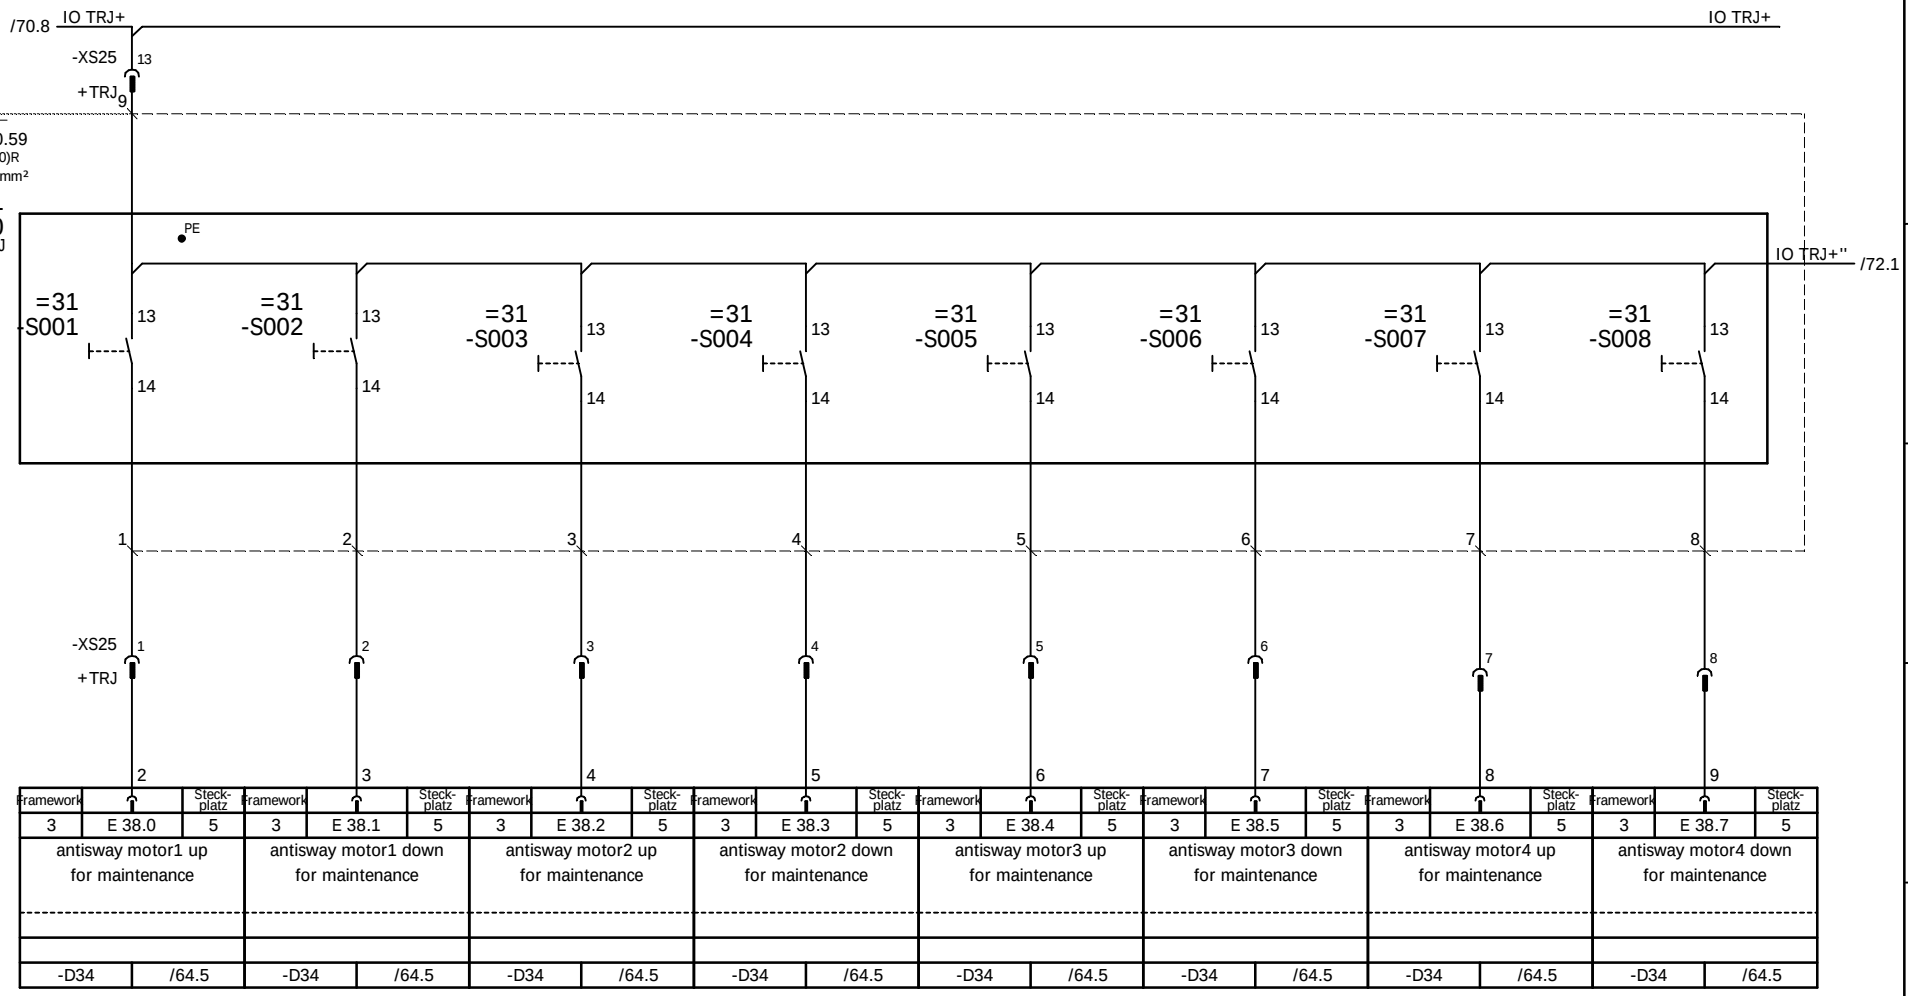


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 38.0	5	3	E 38.1	5	3	E 38.2	5	3	E 38.3	5	3	E 38.4	5	3	E 38.5	5	3	E 38.6	5	3	E 38.7	5
antisway motor1 up for maintenance			antisway motor1 down for maintenance			antisway motor2 up for maintenance			antisway motor2 down for maintenance			antisway motor3 up for maintenance			antisway motor3 down for maintenance			antisway motor4 up for maintenance			antisway motor4 down for maintenance		
-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5	

				Date		Costumer	AMPT Egypt	plc input, antisway	Type RTG 50/26.50/5+1/AC	=61
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+TRJ
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 71
Ind.	Revision	Date	Name	Standard		Source:					94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

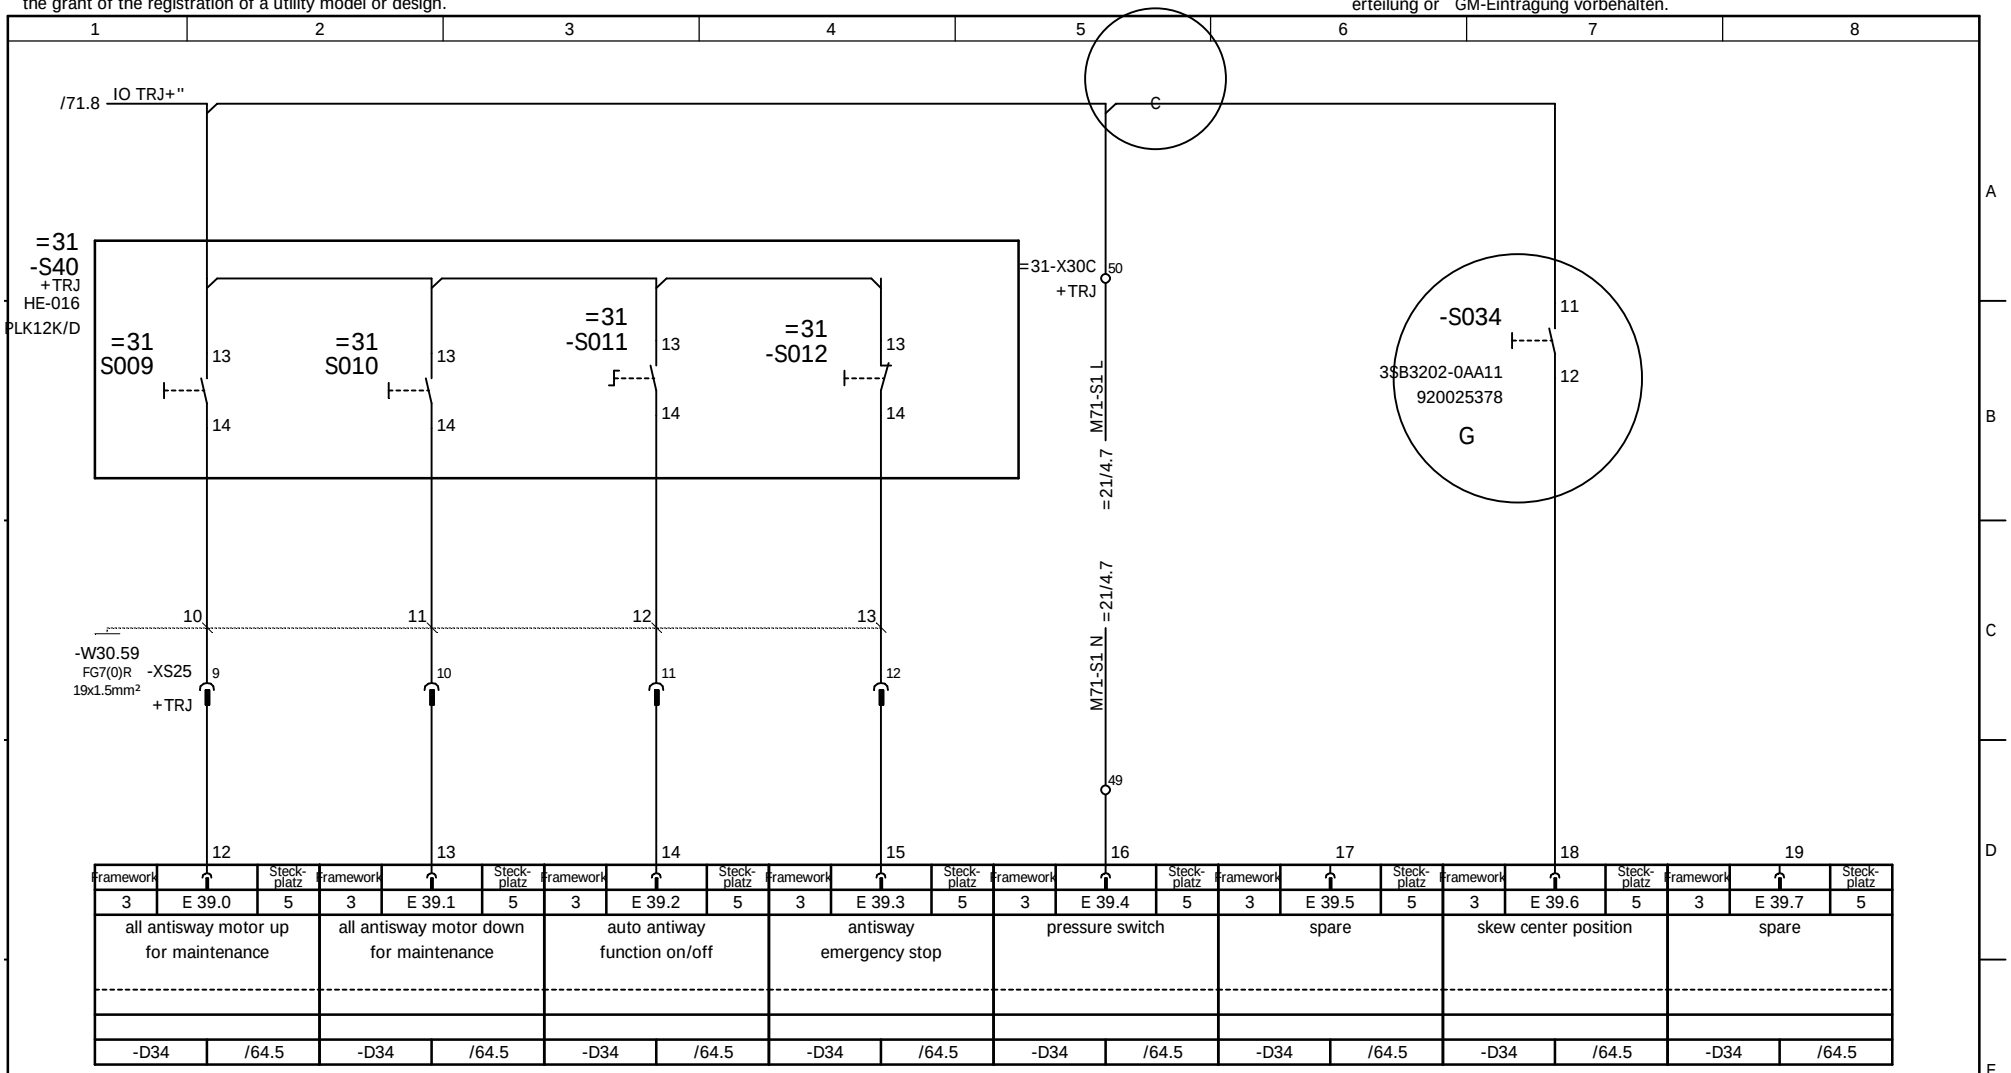

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 39.0	5	3	E 39.1	5	3	E 39.2	5	3	E 39.3	5	3	E 39.4	5	3	E 39.5	5	3	E 39.6	5	3	E 39.7	5
all antisway motor up for maintenance			all antisway motor down for maintenance			auto antiway function on/off			antisway emergency stop			pressure switch			spare			skew center position			spare		
-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5		-D34	/64.5	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

plc input, antisway
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	72 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

/69.8 KX TRJ+ — KX TRJ+ /74.1

	E44.0 =50/2.3	E44.1 =50/2.4	E44.2 =50/2.5	E44.3 =50/3.7	E44.4 =50/2.6	E44.5 =50/2.7	E44.6 =50/3.4	
	2	3	4	5	6	7	8	9
Framework	3	3	3	3	3	3	3	3
	E 84.0	E 84.1	E 84.2	E 84.3	E 84.4	E 84.5	E 84.6	E 84.7
Steck-platz	6	6	6	6	6	6	6	6
	side shift left	side shift center	side shift right	spreader&headblock connected	slack rope headblock right	slack rope headblock left	spreader&headblock not connected	spare
	-D35 /64.5	-D35 /64.5	-D35 /64.5	-D35 /64.5	-D35 /64.5	-D35 /64.5	-D35 /64.5	-D35 /64.5

					Date		Costumer	AMPT Egypt
					Designer	XU HR		
					Checked	LIU KP		
Ind.	Revision	Date	Name		Standard		Source:	


NOELL

PLC input, spreader
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	73 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

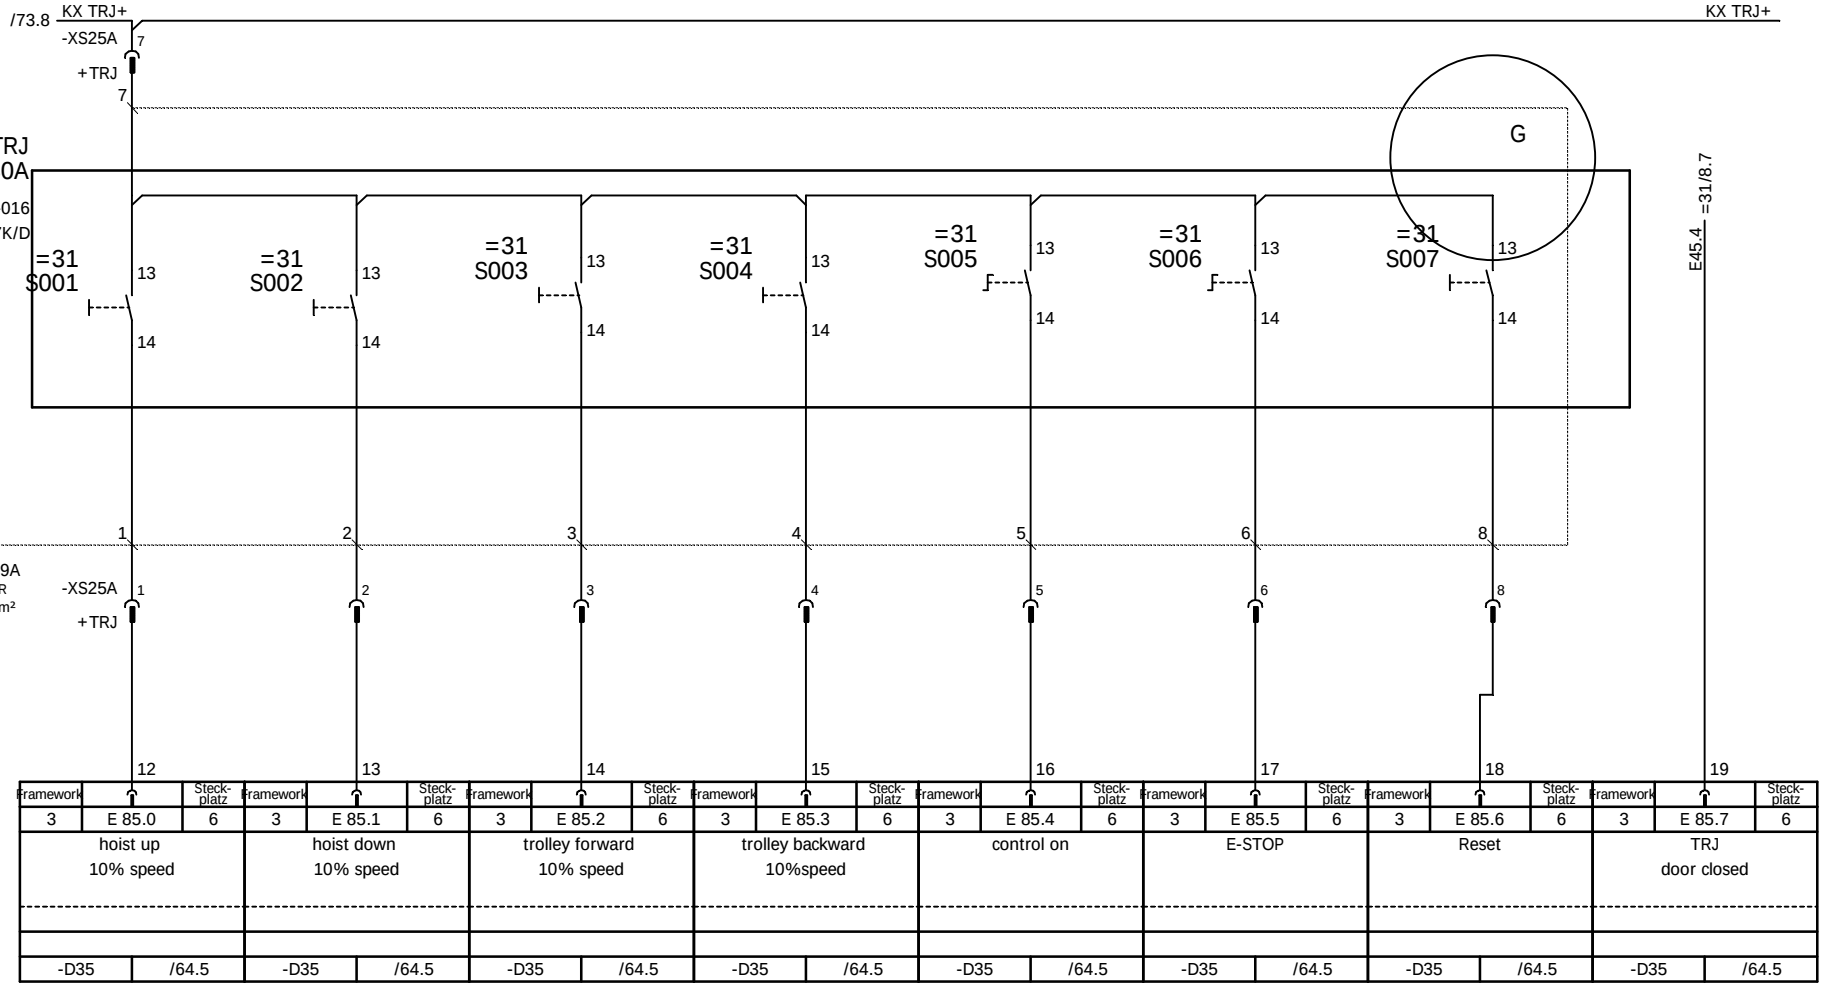

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
3	E 85.0	6	3	E 85.1	6	3	E 85.2	6	3	E 85.3	6	3	E 85.4	6	3	E 85.5	6	3	E 85.6	6	3	E 85.7	6
hoist up 10% speed			hoist down 10% speed			trolley forward 10% speed			trolley backward 10%speed			control on			E-STOP			Reset			TRJ door closed		
-D35	/64.5		-D35	/64.5		-D35	/64.5		-D35	/64.5		-D35	/64.5		-D35	/64.5		-D35	/64.5		-D35	/64.5	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

PLC input, spreader
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	74
			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6
SVTRBYP		SVSKC2OU		SVSKC2IN		SVSKC1OU		SVSKC1IN		SVHBBYP		SVAS_90B			
hoist emergency brake1 open		Spare		spare		spare		pressure switch		Reserve spare		Reserve spare		Reserve spare	

3	A 32.0	8	3	A 32.1	8	3	A 32.2	8	3	A 32.3	8	3	A 32.4	8	3	A 32.5	8	3	A 32.6	8	3	A 32.7	8
Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz
	2			3			4			5			6			7			8			9	



				Date		Costumer	AMPT Egypt	NOELL	plc output, hoist	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+TRJ
				Checked	LIU KP					Job No.	Drawing No.	Sheet 75
Ind.	Revision	Date	Name	Standard		Source:				1255	78.5692.60.00	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6	-D37	/64.6
Reserve spare		Reserve spare		Reserve spare		Reserve spare		Reserve spare		Reserve spare		Reserve spare		Reserve spare	
3	A 33.0	8	3	A 33.1	8	3	A 33.2	8	3	A 33.3	8	3	A 33.4	8	3	A 33.5	8	3	A 33.6	8	3	A 33.7	8
Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz	Framework	↓	Steck-platz
12			13			14			15			16			17			18			19		

/75.8 IO TRJ-

IO TRJ- /92.6

M50-S1 =50/4.5

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

=11/17.5 FB CAJ+ — 24V DC — FB CON+ =71/1.1
=21/8.8 IO CAJ+" — IO CAJ+ /78.1
=21/8.8 IO CAJ-" — IO CAJ- /84.1

	L+	M	M	PE	1	20	1	20	1	10	11	20	1	20	10	11	1	20
	24V DC				1L+	2M	1L+	2M	1L+	1M	2L+	2M	L+	M			L+	M
	5	1			5	2	5	2	5	3			5	7				
	Framework	Card Location			Framework	Card Location	Framework	Card Location	Framework	Card Location			Framework	Card Location			Framework	Card Location
					revision 60		revision 62		revision 62				standard 128				standard	
					E 60.0	2 /78.2	E 62.0	2 /82.2	A 62.0	2 /84.2			PW 128	2 /88.2			PW /89.2	3
					E 60.1	3 /78.2	E 62.1	3 /82.2	A 62.1	3 /84.2				3				4
					E 60.2	4 /78.3	E 62.2	4 /82.3	A 62.2	4 /84.3			PW 130	4 /88.3				5
					E 60.3	5 /78.4	E 62.3	5 /82.4	A 62.3	5 /84.4				5				6
					E 60.4	6 /78.5	E 62.4	6 /82.5	A 62.4	6 /84.5			PW 132	6 /88.5			PW2 /89.4	7
					E 60.5	7 /78.6	E 62.5	7 /82.6	A 62.5	7 /84.6				7				8
					E 60.6	8 /78.7	E 62.6	8 /82.7	A 62.6	8 /84.7			PW 134	8 /88.7				9
					E 60.7	9 /78.8	E 62.7	9 /82.8	A 62.7	9 /84.8				9				10
					E 61.0	12 /79.2	E 63.0	12 /83.2	A 63.0	12 /85.2			PW 136	12 /88.1.2				
					E 61.1	13 /79.2	E 63.1	13 /83.2	A 63.1	13 /85.2				13				
					E 61.2	14 /79.3	E 63.2	14 /83.3	A 63.2	14 /85.3			PW 138	14 /88.1.3				
					E 61.3	15 /79.4	E 63.3	15 /83.4	A 63.3	15 /85.4				15				
					E 61.4	16 /79.5	E 63.4	16 /83.5	A 63.4	16 /85.5			PW 140	16 /88.1.5				
					E 61.5	17 /79.6	E 63.5	17 /83.6	A 63.5	17 /85.6				17				
					E 61.6	18 /79.7	E 63.6	18 /83.7	A 63.6	18 /85.7			PW 142	18 /88.1.7				
					E 61.7	19 /79.8	E 63.7	19 /83.8	A 63.7	19 /85.8				19				
													Input sbereiche					
														150				
														300				
														600				
													Ch 1,2					
													Ch 3,4					
													Ch 5,6					
													Ch 7,8					
	6ES7972-0BA41-0XA0				Digital Input 16x24V DC		Digital Input 16x24V DC		Digital Output 16x24V DC/0,5A				Analog Input 8xAI				Analog Output 2xAO	
	6ES7390-1AE80-0AA0				6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7322-1BH01-0AA0				6ES7331-7KF02-0AB0				6ES7332-5HB01-0AB0	
	6ES7153-1AA03-0XA4				6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0				6ES7392-1AM00-0AA0				6ES7392-1AJ00-0AA0	
	-D60				-D61		-D62		-D63				-D66				-D67	

SF ⊗
BF ⊗
ON ⊗

SUB-D 9 pol. Stecker 1 /93.2

SIMATIC
ET 200M

L2-bus adress

	64
	32
	16
X	8
	4
	2
X	1

OFF ON


S38+ =31/8.4
S38- =31/8.4

power for
cabin door sensor

| | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

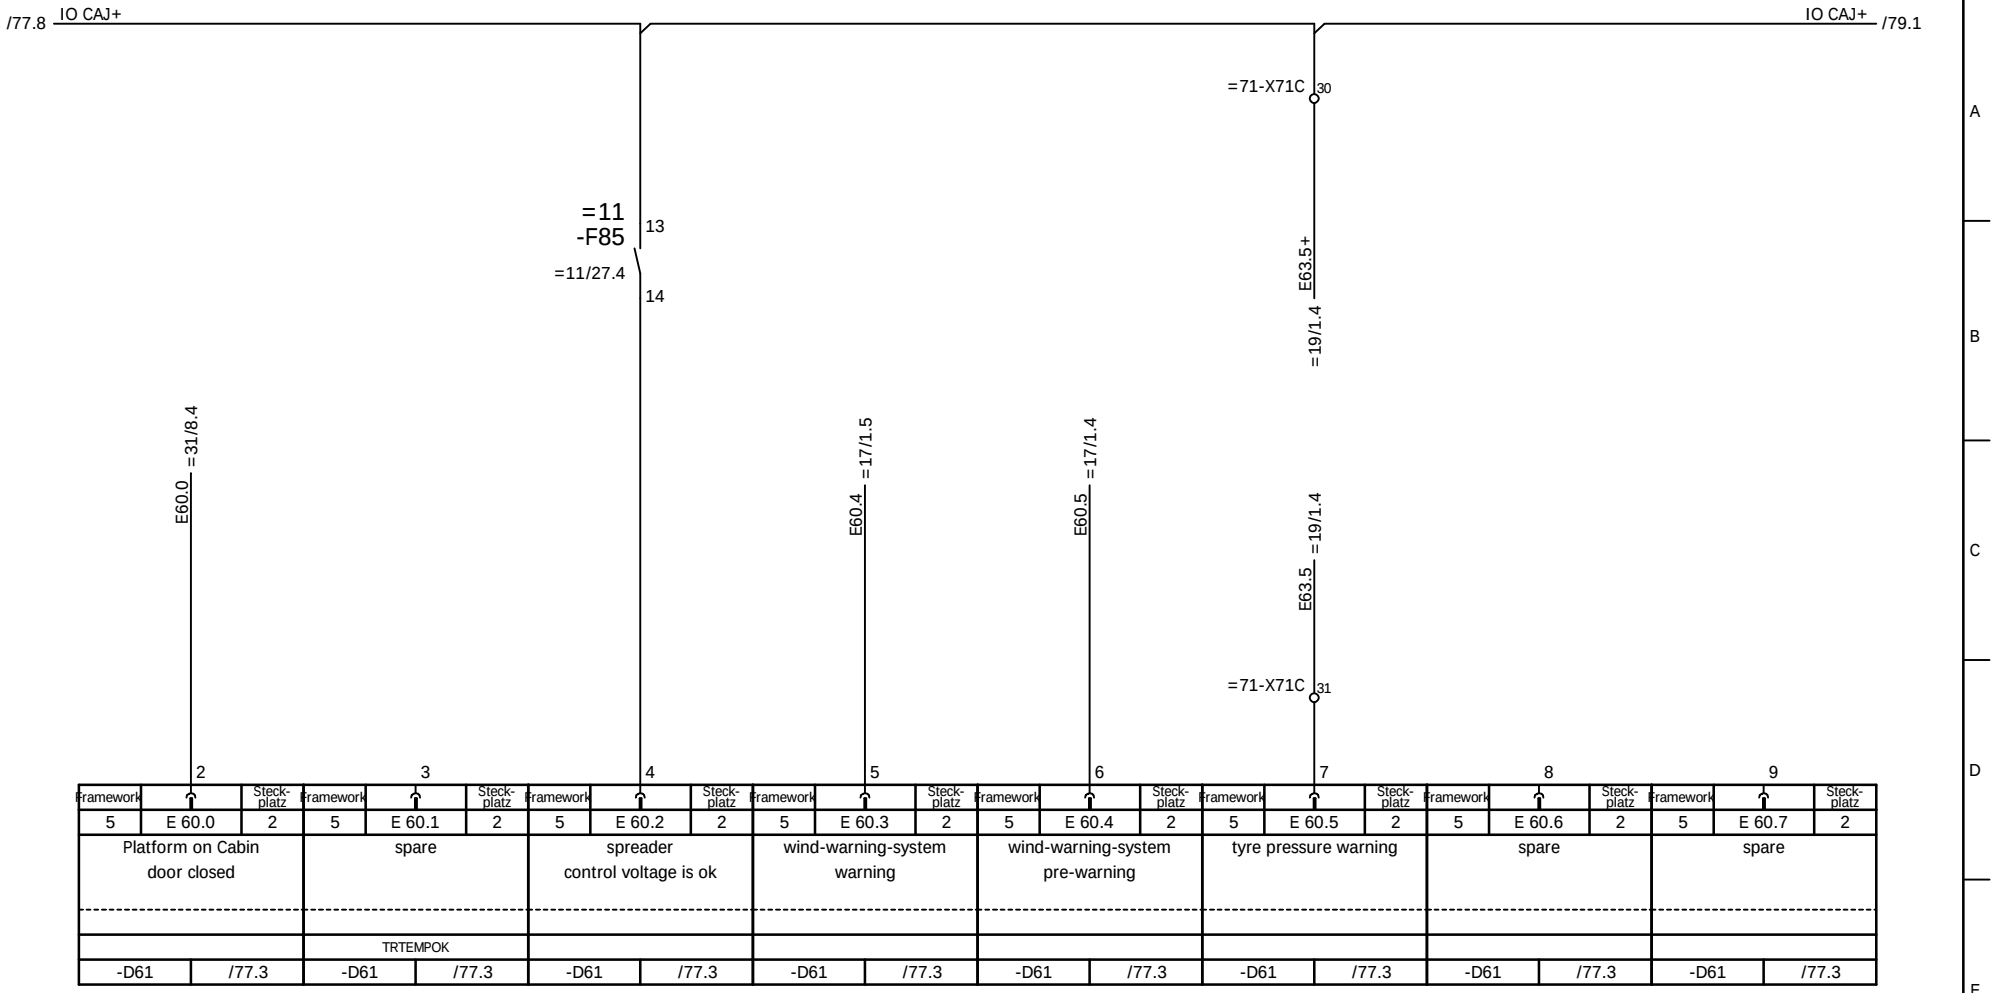

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
5	E 60.0	2	5	E 60.1	2	5	E 60.2	2	5	E 60.3	2	5	E 60.4	2	5	E 60.5	2	5	E 60.6	2	5	E 60.7	2
Platform on Cabin door closed			spare			spreader control voltage is ok			wind-warning-system warning			wind-warning-system pre-warning			tyre pressure warning			spare			spare		
			TRTEMPOK																				
-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3	

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard
Source:

Costumer: AMPT Egypt

NOELL

SPS inputs +CAJ
Stromlaufplan / Circuit Diagram

Type: RTG 50/26.50/5+1/AC
=61
+CAJ
Job No. 1255
Drawing No. 78.5692.60.00
Sheet 78
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

/78.8 IO CAJ+ — IO CAJ+ /82.1

	12			13			14			15			16			17			18			19		
Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz	Framework	↑	Steck-platz
5	E 61.0	2	5	E 61.1	2	5	E 61.2	2	5	E 61.3	2	5	E 61.4	2	5	E 61.5	2	5	E 61.6	2	5	E 61.7	2
spare			spare			spare			spare			spare			spare			spare			spare		
				TRTEMPOK															LSASPRLO				
-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3		-D61	/77.3	


A B C D E F

				Date		Costumer	AMPT Egypt	NOELL	SPS inputs +CAJ
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=61	
		+CAJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	79		
	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

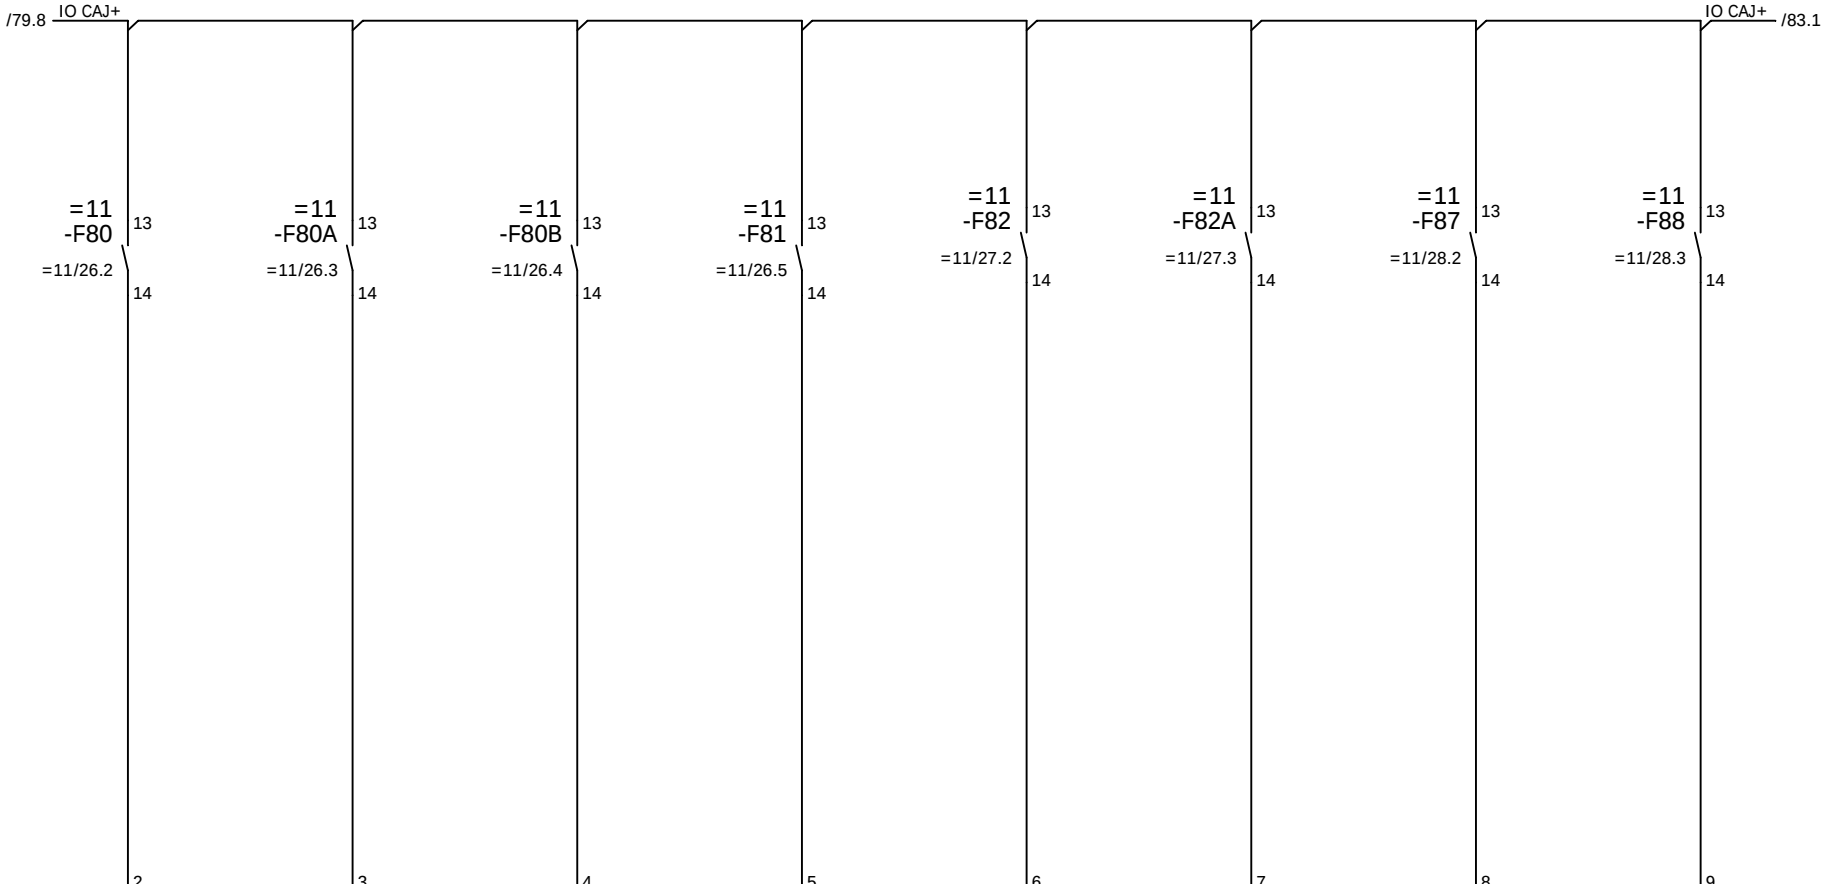


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
5	E 62.0	2	5	E 62.1	2	5	E 62.2	2	5	E 62.3	2	5	E 62.4	2	5	E 62.5	2	5	E 62.6	2	5	E 62.7	2
cb lights on trolley is ok			cb lights on trolley is ok			cb maintain floodlight on trolley is ok			cb lights in cabin is ok			cb floodlights on trolley/cap is ok			cb floodlights on trolley/cap is ok			cb airconditioner in cabin is ok			cb cabin heater1 is ok		
-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3	

				Date		Costumer	AMPT Egypt	NOELL	SPS inputs +CAJ	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+CAJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 82 / 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

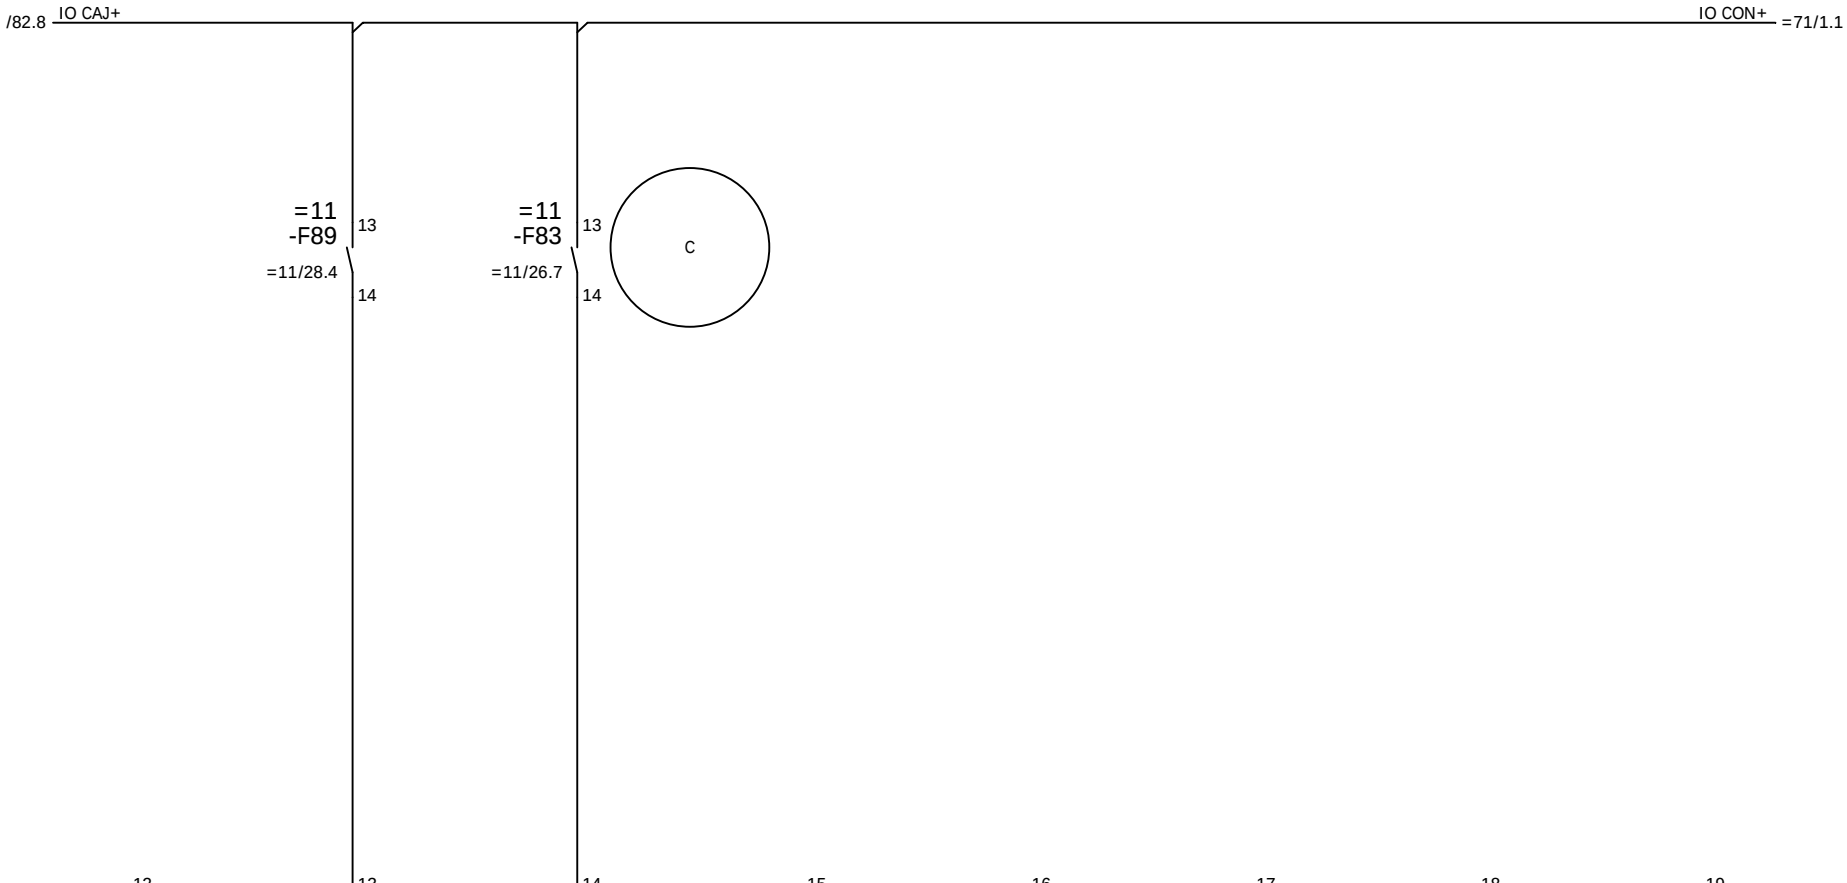

12			13			14			15			16			17			18			19		
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
5	E 63.0	2	5	E 63.1	2	5	E 63.2	2	5	E 63.3	2	5	E 63.4	2	5	E 63.5	2	5	E 63.6	2	5	E 63.7	2
spare			cb cabin heater2 is ok			transformer for swher			spare			spare			spare			spare			spare		
-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3		-D62	/77.3	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

SPS inputs +CAJ
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61 +CAJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	83 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

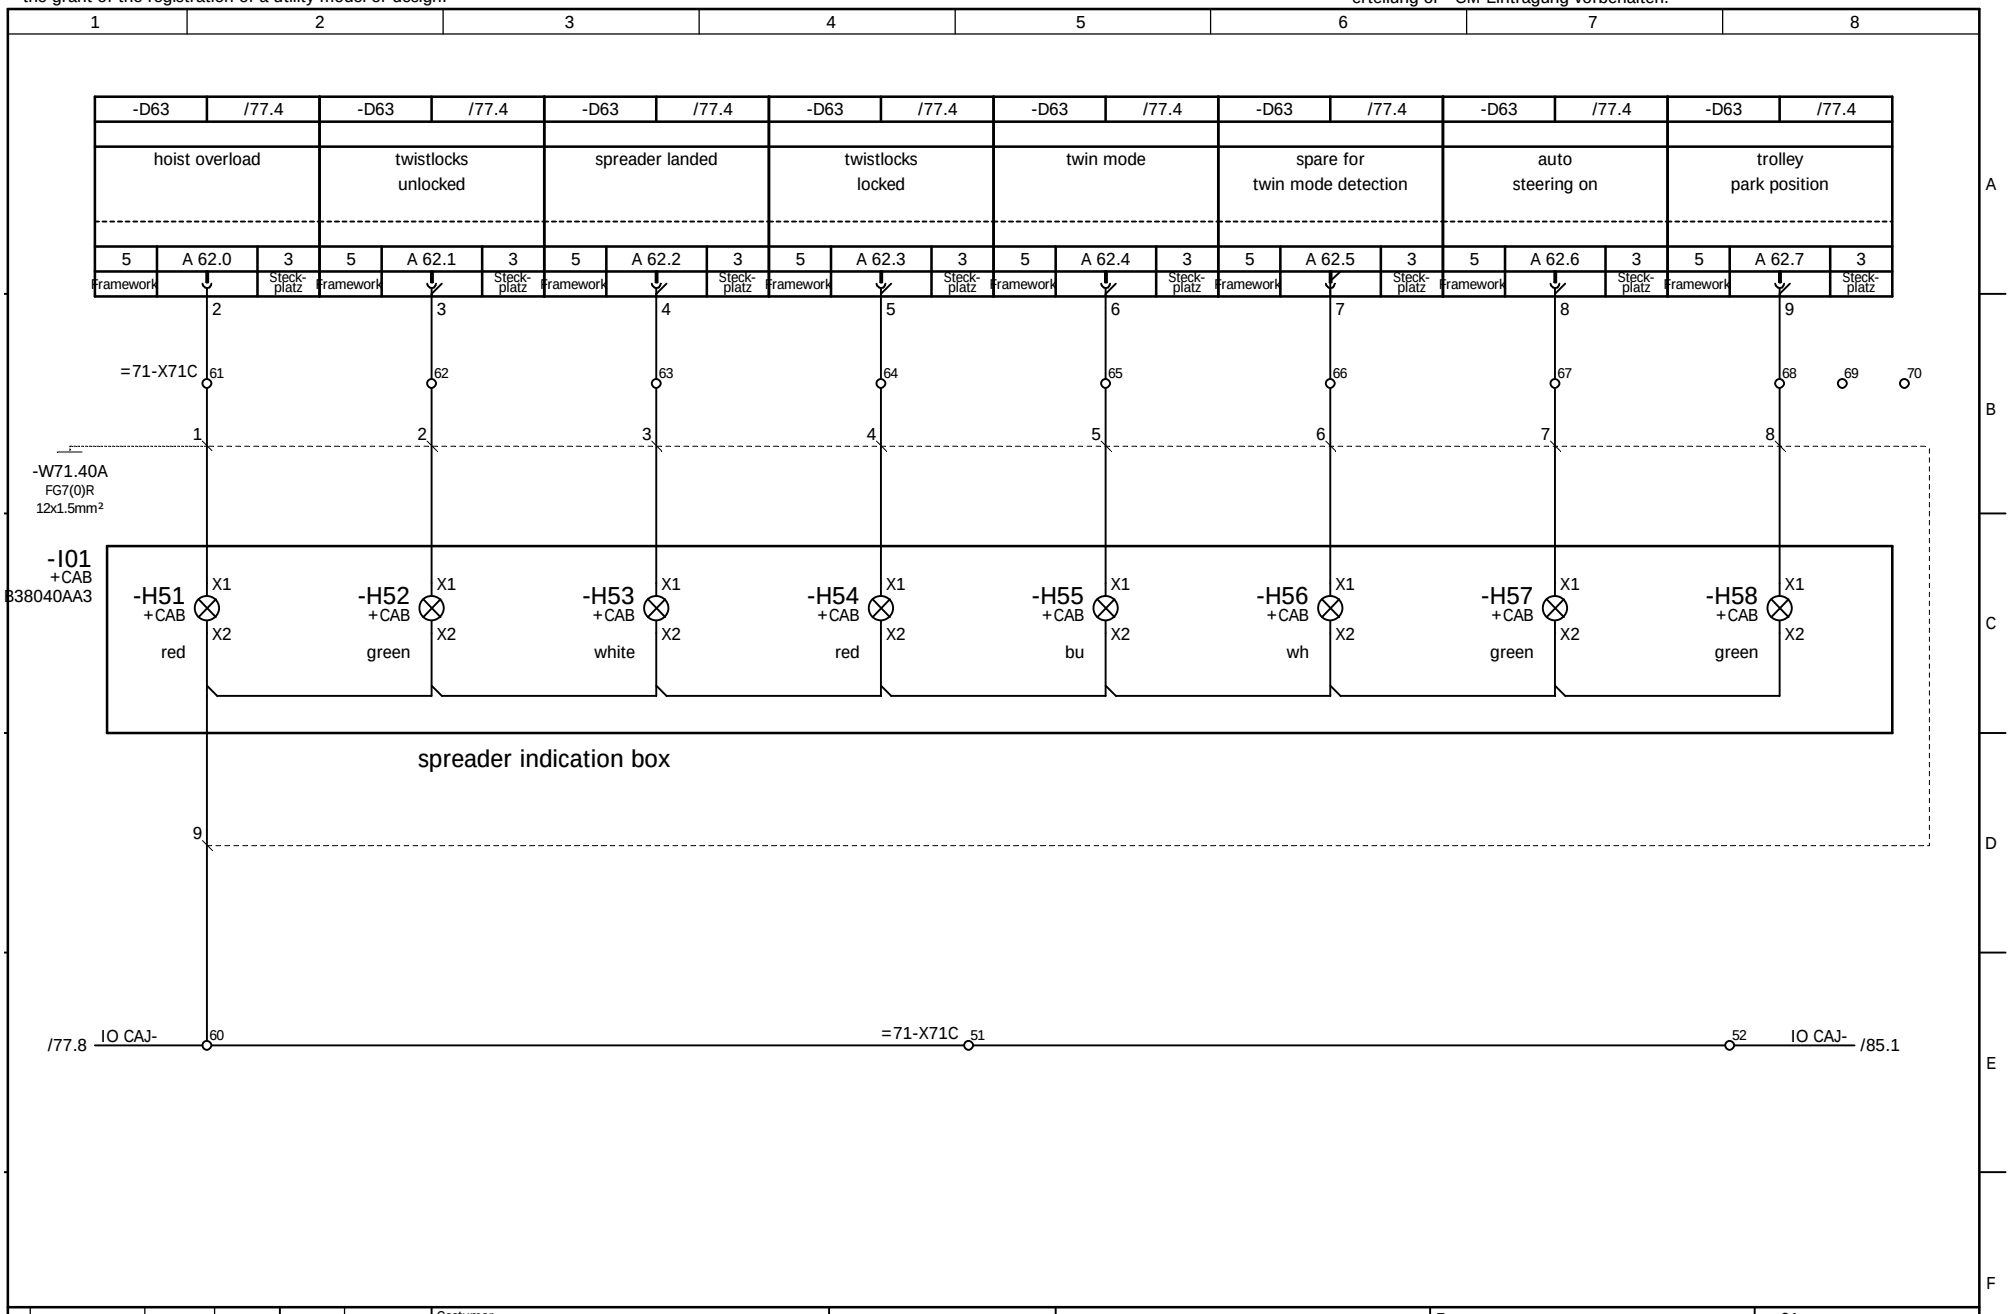

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				=61 +CAJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 84 94 Sh.

NOELL


SPS outputs +CAJ
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8


-D63	/77.4	-D63	/77.4	-D63	/77.4	-D63	/77.4	-D63	/77.4	-D63	/77.4	-D63	/77.4	-D63	/77.4
master controller zero-position		spare		spare		spreader control voltage OK		Genset stop		Genset full speed		diesel ratel speed		spare	
5	A 63.0	3	5	A 63.1	3	5	A 63.2	3	5	A 63.3	3	5	A 63.4	3	5	A 63.5	3	5	A 63.6	3	5	A 63.7	3
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	12			13			14			15			16			17			18			19	

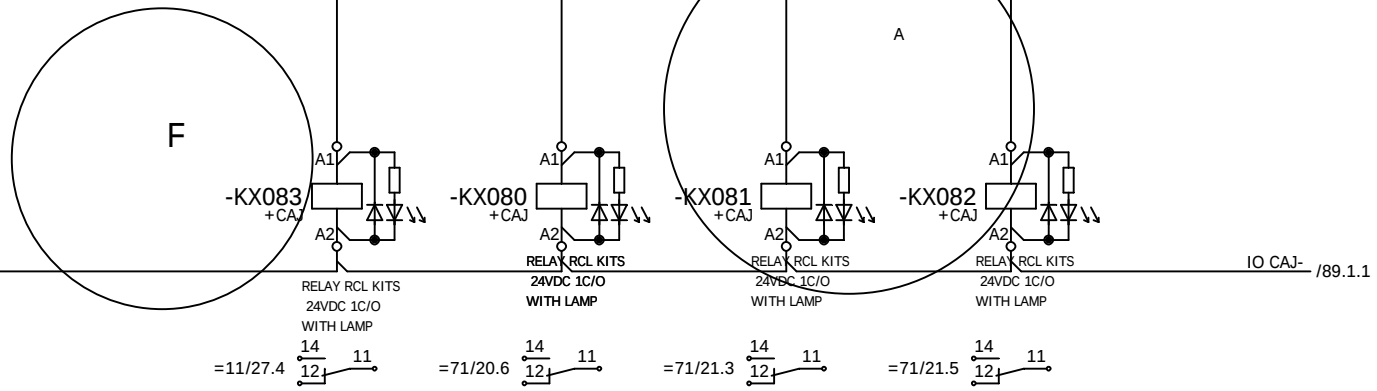

				Date		Costumer	AMPT Egypt	NOELL	SPS outputs +CAJ	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+CAJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:						Sheet 85 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

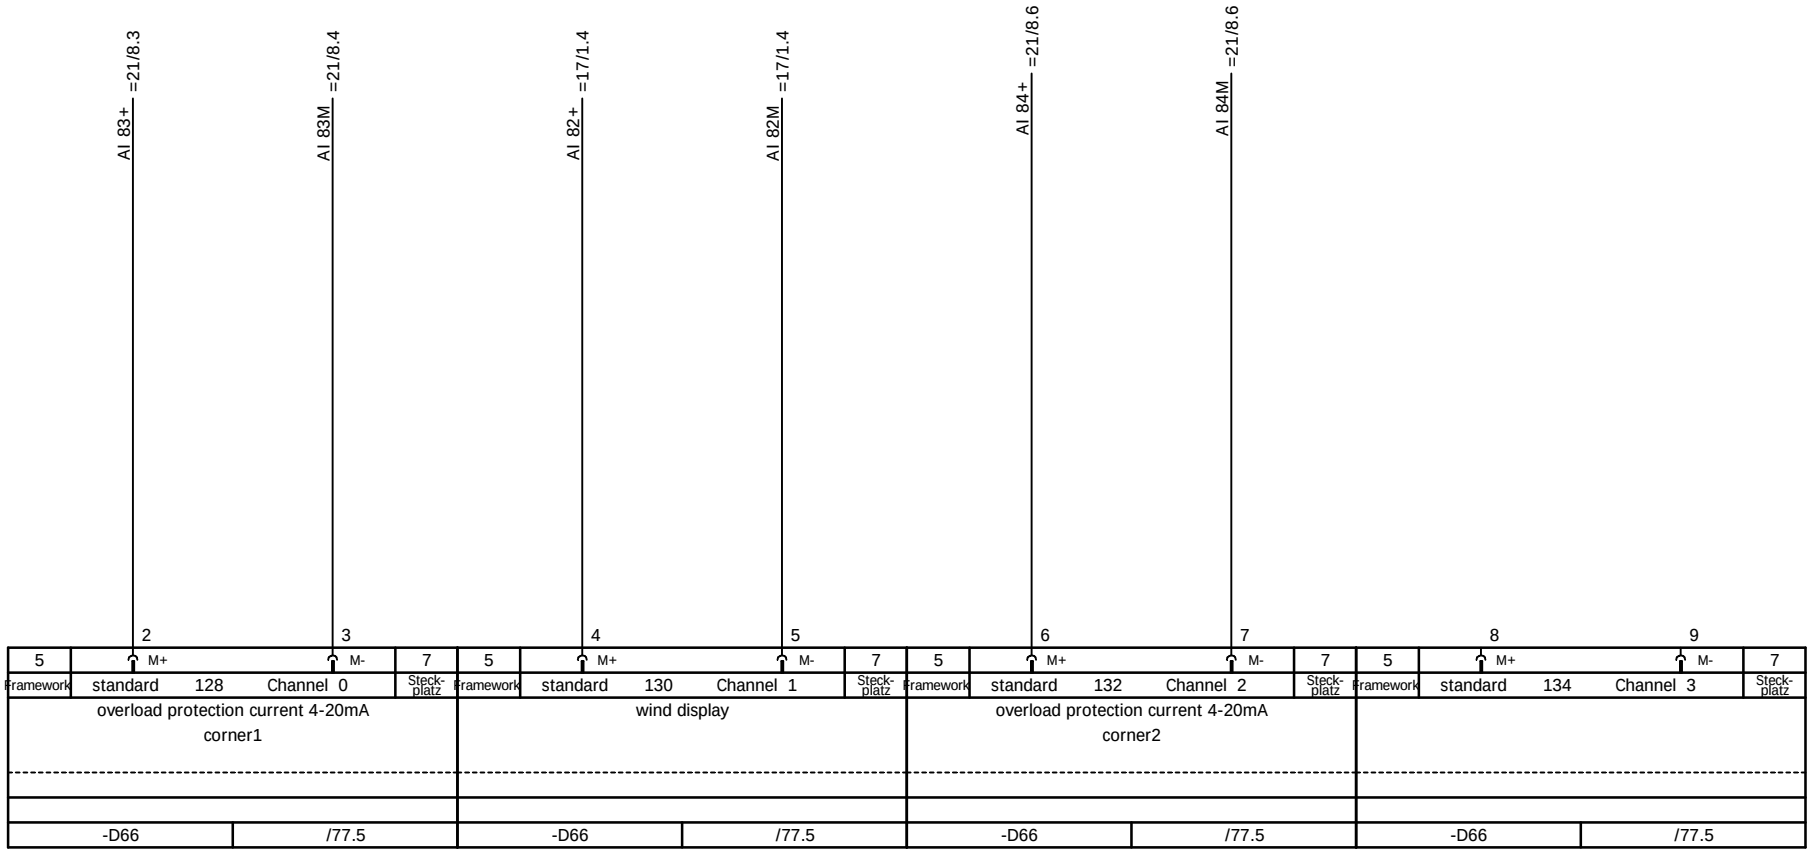

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC =61 +CAJ
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00 Sheet 88 94 Sh.
Ind.	Revision	Date	Name	Standard		Source:			

NOELL

SPS analog inputs +CAJ
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

	12		13			14		15			16		17			18		19		
5	M+		M-		7	5	M+		M-	7	5	M+		M-	7	5	M+		M-	7
Framework	standard	136	Channel	4	Steck-platz	Framework	standard	138	Channel	5	Steck-platz	Framework	standard	140	Channel	6	Steck-platz	Framework	standard	142	Channel	7	Steck-platz
spare						spare						spare						spare					
-D66			/77.5			-D66			/77.5			-D66			/77.5			-D66			/77.5		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D67	/77.6	-D67	/77.6
load signal display		spare	

	standard			Channel 0					standard	2		Channel 1			
Framework		QI/V	S-	S+	M	Steck-platz	Framework		QI/V	S-	S+	M	Steck-platz		
		3	4	5	6				7	8	9	10			


AO 144+ =21/8.7

AO 144COM =21/8.7

				Date		Costumer	AMPT Egypt	NOELL	SPS analog inputs +CAJ	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram			+CAJ
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 89
Ind.	Revision	Date	Name	Standard		Source:						94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

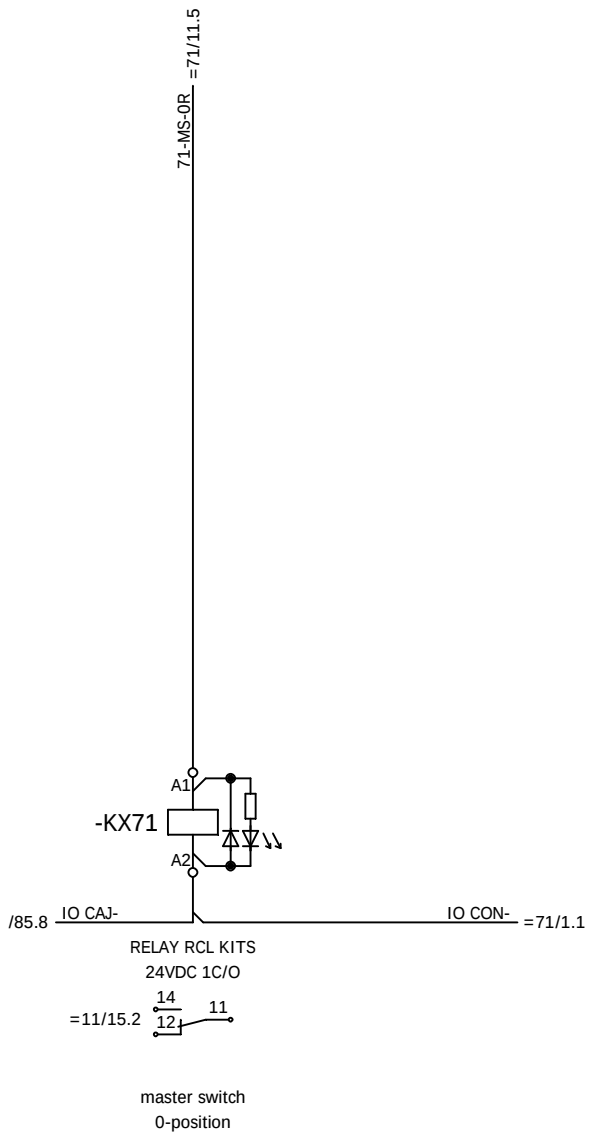

				Date		Costumer	AMPT Egypt		PLC field bus	Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR							+CAJ
				Checked	LIU KP					Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			Sheet 89.1 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

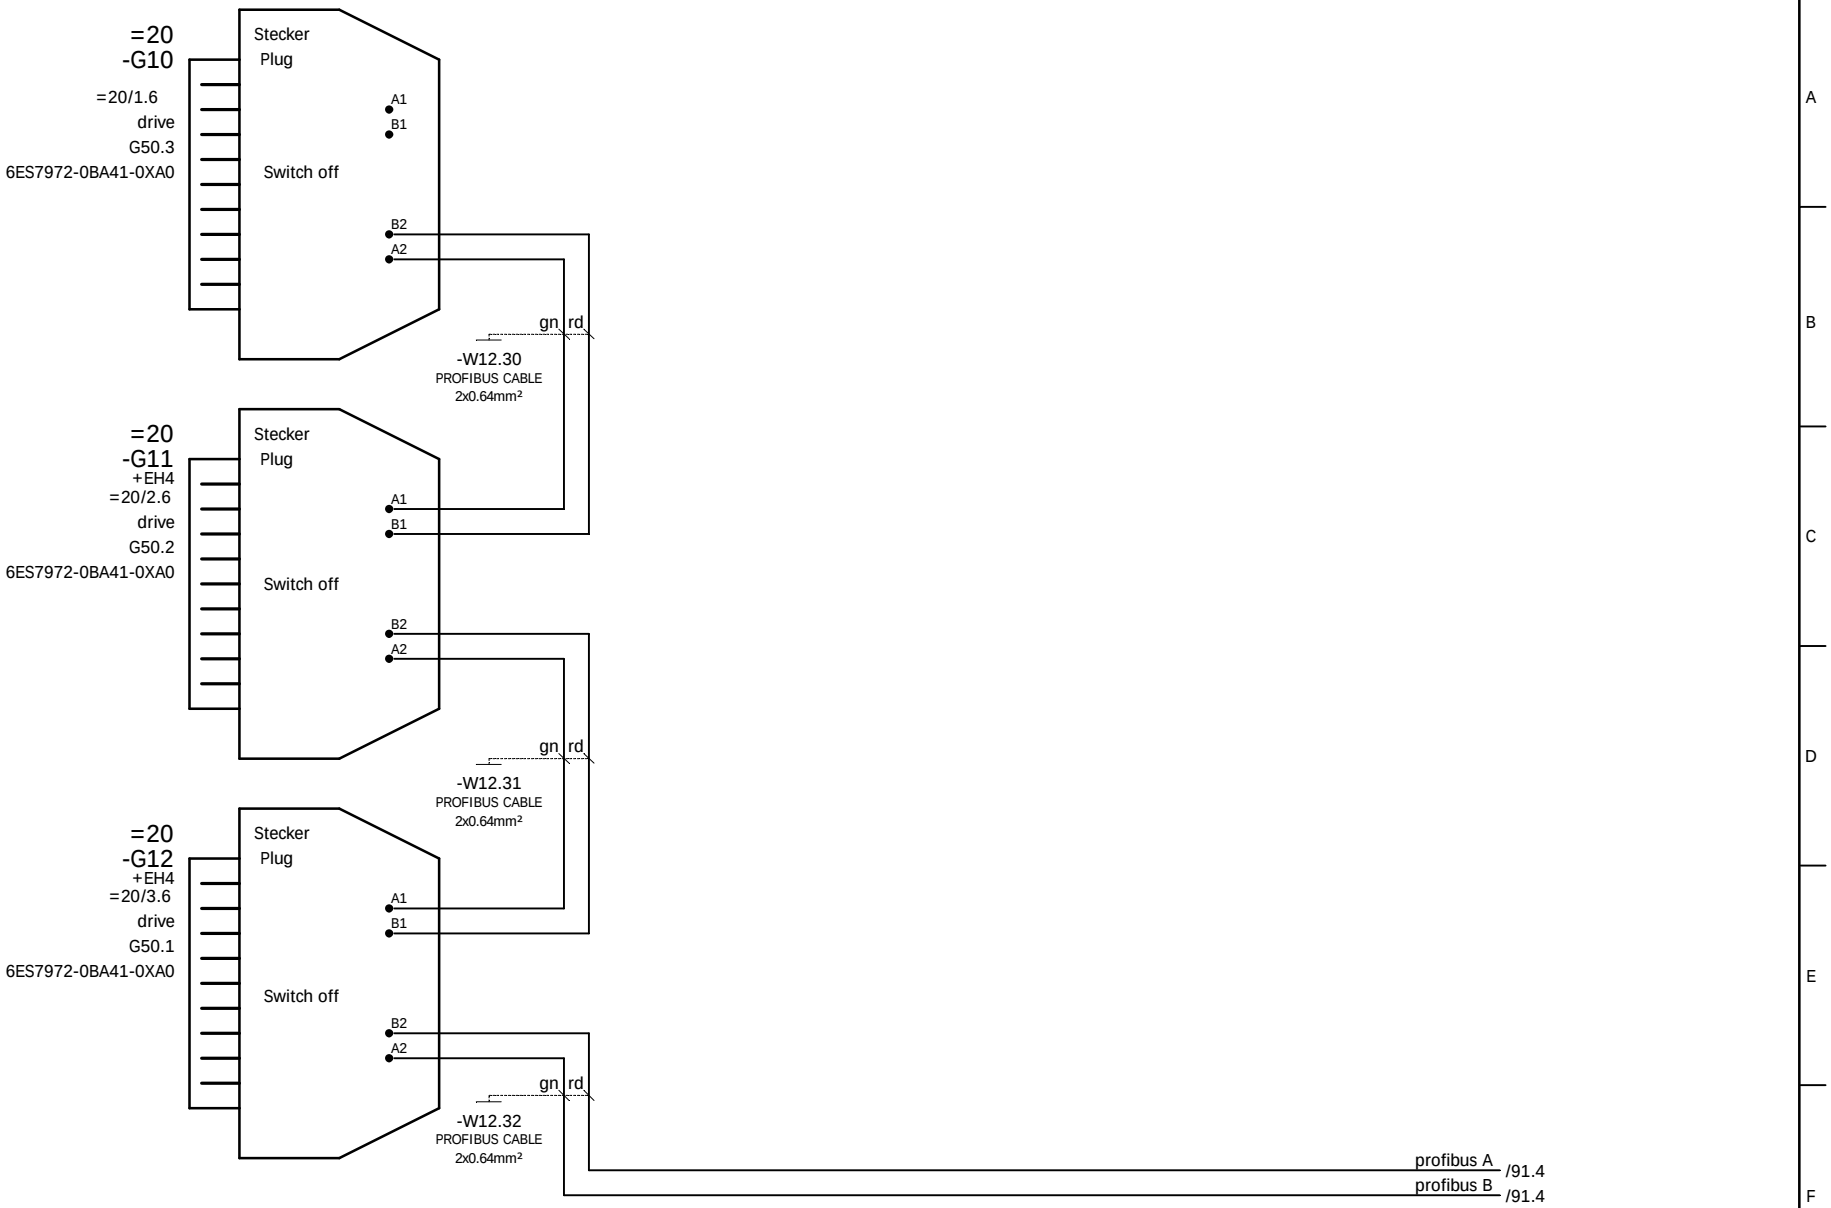

				Date		Costumer	AMPT Egypt	NOELL	PLC field bus	Type RTG 50/26.50/5+1/AC	=61
				Designer	XU HR				Stromlaufplan / Circuit Diagram		+EH1
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00	Sheet 90
Ind.	Revision	Date	Name	Standard		Source:						94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

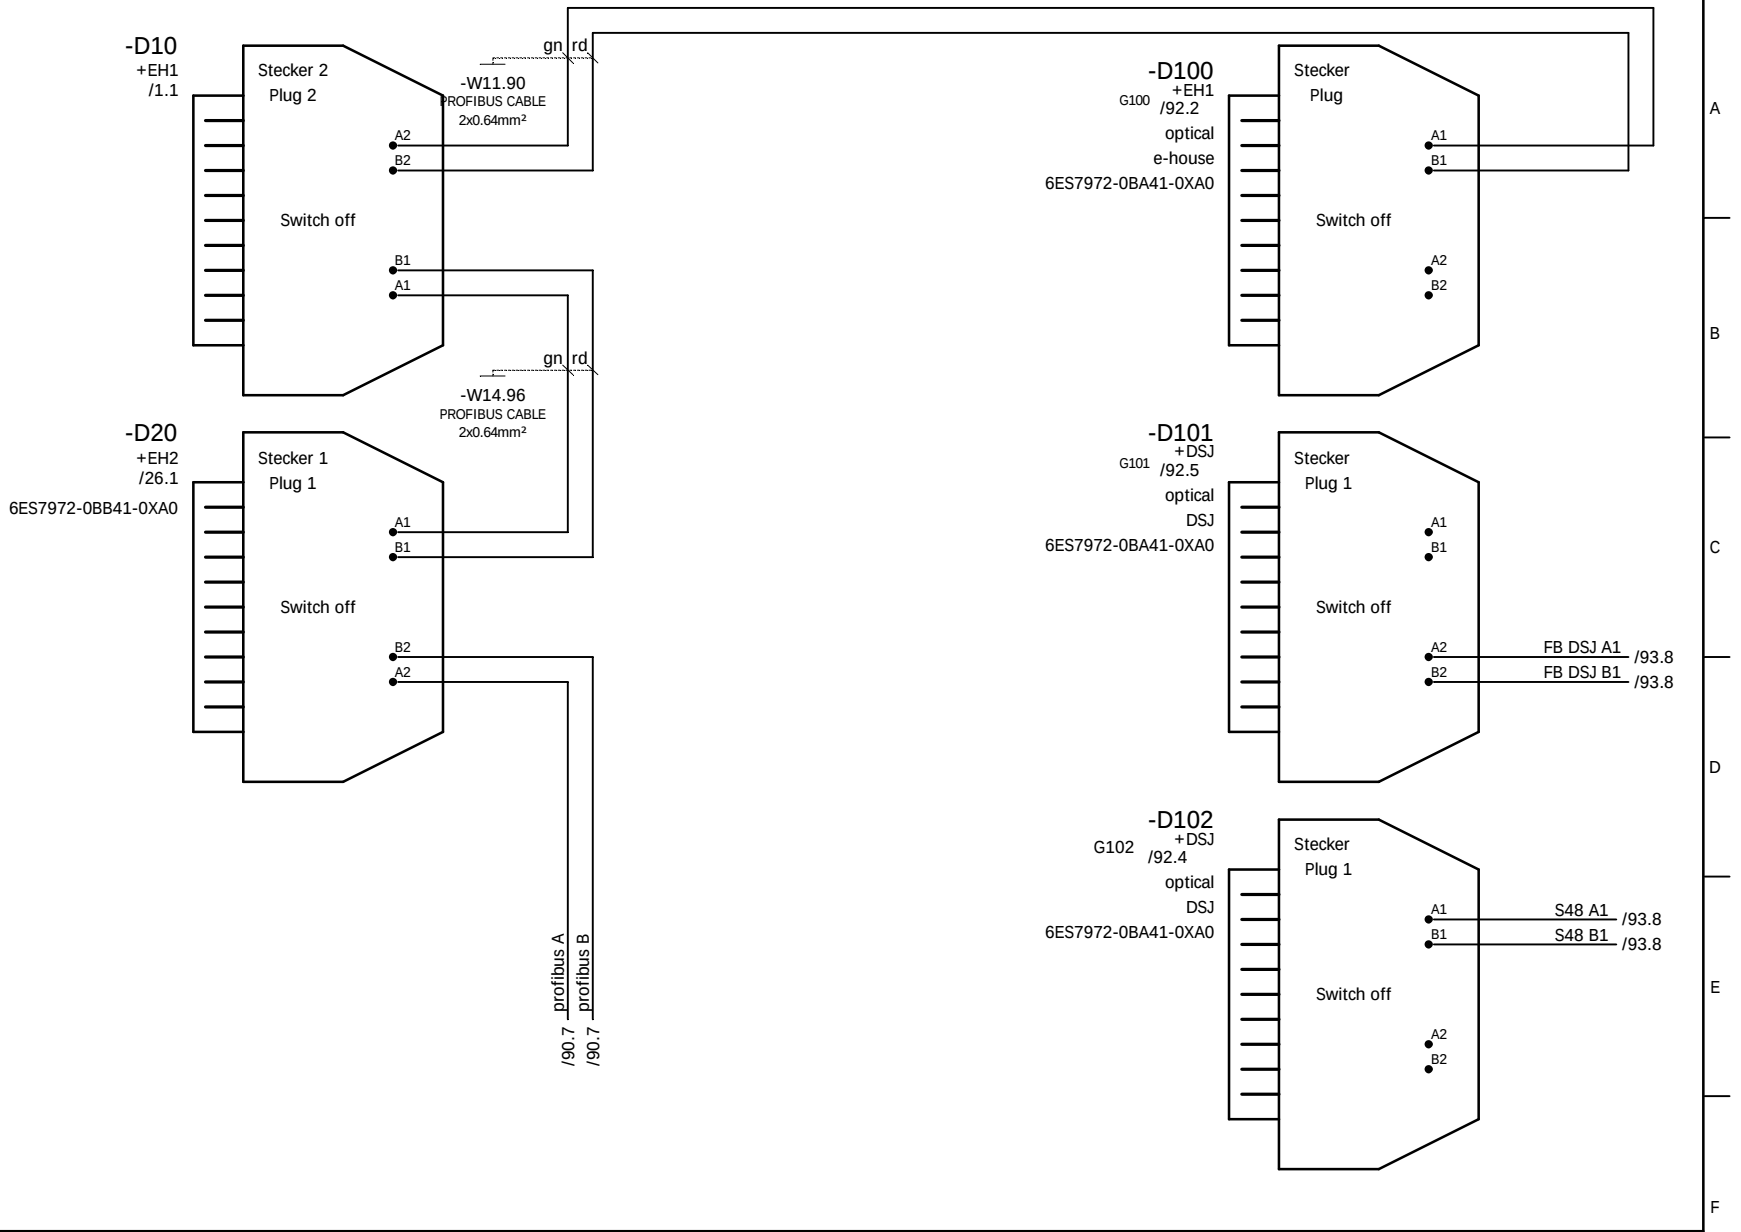

				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=61	+EH1
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Sheet 91	94 Sh.


NOELL

PLC field bus

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

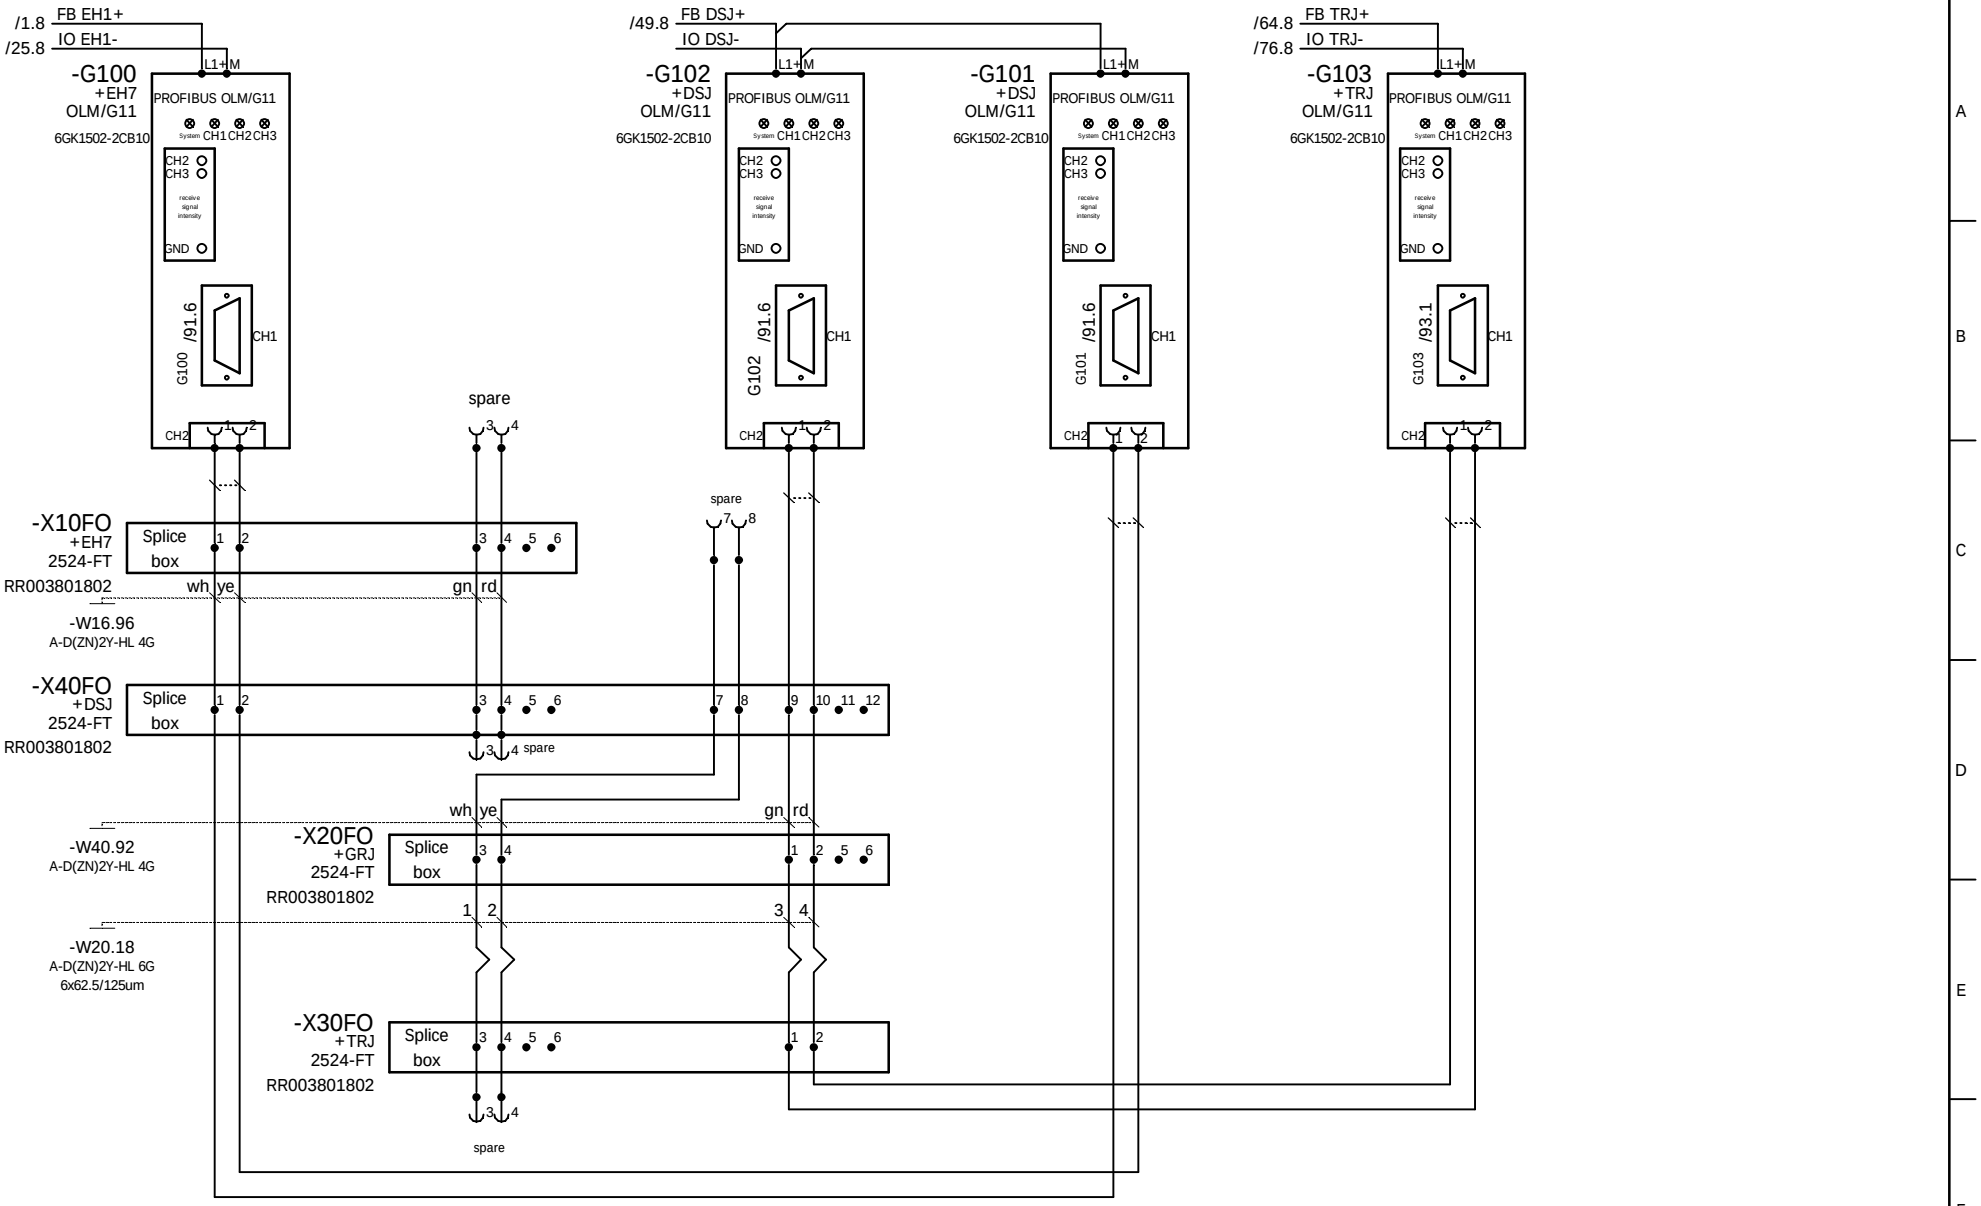

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=61
				Designer	XU HR					+EH1
				Checked	LIU KP	AMPT Egypt	PLC field bus	Job No.	Drawing No.	Sheet 92
Ind.	Revision	Date	Name	Standard		Source:	Stromlaufplan / Circuit Diagram	1255	78.5692.60.00	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

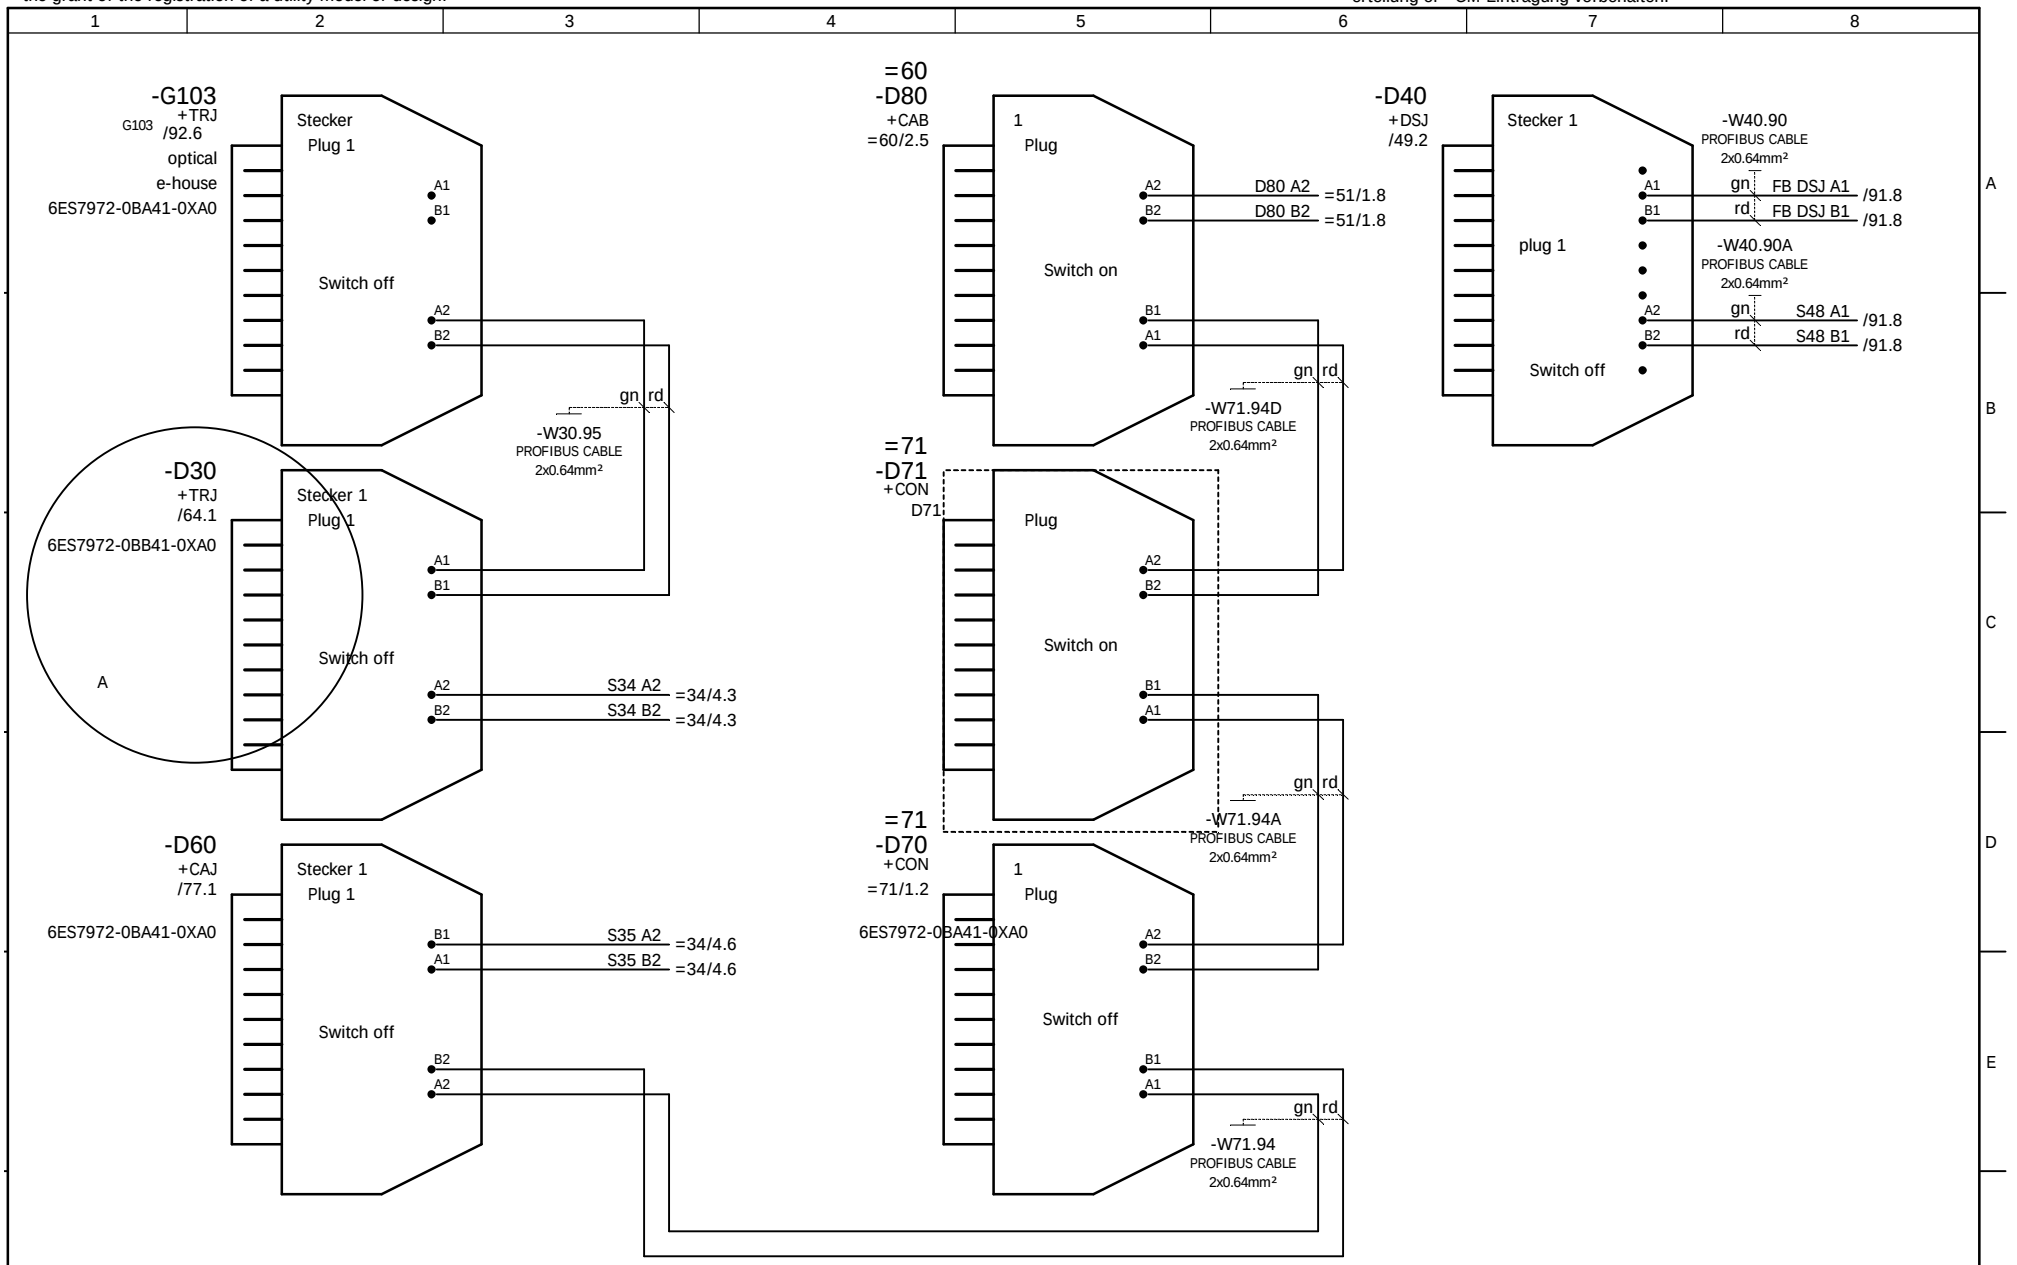


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR			=61	+TRJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Sheet 93	94 Sh.

NOELL


PLC field bus
Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

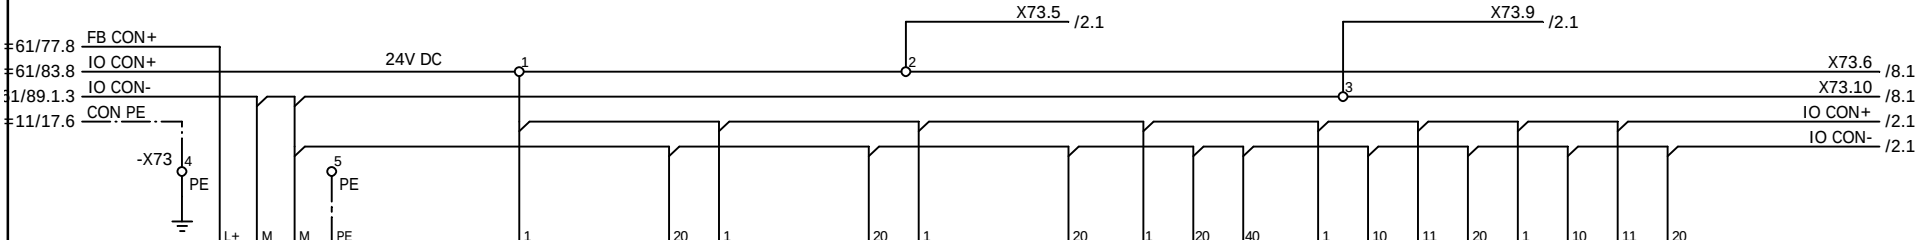


24V DC 6	1	6	2	6	3	6	4	6	6	6	7		
Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location	Framework	Card Location
		revision 64		revision 66		revision 68		revision 80		revision 72		revision 74	
		E 64.0 2		E 66.0 2 /4.2		E 68.0 2 /6.2		IN KL KL IN E 80.0 /8.2 2 22 E 82.0 /10.2		A 72.0 2 /14.2		A 74.0 2 /16.2	
		E 64.1 3		E 66.1 3 /4.2		E 68.1 3 /6.3		E 80.1 /8.2 3 23 E 82.1 /10.2		A 72.1 3 /14.2		A 74.1 3 /16.3	
		E 64.2 4		E 66.2 4 /4.3		E 68.2 4 /6.3		E 80.2 /8.3 4 24 E 82.2 /10.3		A 72.2 4 /14.3		A 74.2 4 /16.3	
		E 64.3 5		E 66.3 5 /4.4		E 68.3 5 /6.4		E 80.3 /8.4 5 25 E 82.3 /10.4		A 72.3 5 /14.4		A 74.3 5 /16.4	
		E 64.4 6		E 66.4 6 /4.5		E 68.4 6 /6.5		E 80.4 /8.5 6 26 E 82.4 /10.5		A 72.4 6 /14.5		A 74.4 6 /16.5	
		E 64.5 7		E 66.5 7 /4.6		E 68.5 7 /6.6		E 80.5 /8.6 7 27 E 82.5 /10.6		A 72.5 7 /14.6		A 74.5 7 /16.6	
		E 64.6 8		E 66.6 8 /4.7		E 68.6 8 /6.7		E 80.6 /8.7 8 28 E 82.6 /10.7		A 72.6 8 /14.7		A 74.6 8 /16.7	
		E 64.7 9		E 66.7 9 /4.8		E 68.7 9 /6.8		E 80.7 /8.8 9 29 E 82.7 /10.8		A 72.7 9 /14.8		A 74.7 9 /16.8	
		E 65.0 12		E 67.0 12 /5.2		E 69.0 12 /7.2		E 81.0 /9.2 12 32 E 83.0 /11.2		A 73.0 12 /15.2		A 75.0 12 /17.2	
		E 65.1 13		E 67.1 13 /5.2		E 69.1 13 /7.3		E 81.1 /9.3 13 33 E 83.1 /11.3		A 73.1 13 /15.2		A 75.1 13 /17.2	
		E 65.2 14		E 67.2 14 /5.3		E 69.2 14 /7.3		E 81.2 /9.3 14 34 E 83.2 /11.3		A 73.2 14 /15.3		A 75.2 14 /17.3	
		E 65.3 15		E 67.3 15 /5.4		E 69.3 15 /7.4		E 81.3 /9.4 15 35 E 83.3 /11.4		A 73.3 15 /15.4		A 75.3 15 /17.4	
		E 65.4 16		E 67.4 16 /5.5		E 69.4 16 /7.5		E 81.4 /9.5 16 36 E 83.4 /11.5		A 73.4 16 /15.5		A 75.4 16 /17.5	
		E 65.5 17		E 67.5 17 /5.6		E 69.5 17 /7.6		E 81.5 /9.6 17 37 E 83.5 /11.6		A 73.5 17 /15.6		A 75.5 17 /17.6	
		E 65.6 18		E 67.6 18 /5.7		E 69.6 18 /7.7		E 81.6 /9.7 18 38 E 83.6 /11.7		A 73.6 18 /15.7		A 75.6 18 /17.7	
		E 65.7 19		E 67.7 19 /5.8		E 69.7 19 /7.8		E 81.7 /9.8 19 39 E 83.7 /11.8		A 73.7 19 /15.8		A 75.7 19 /17.8	
6ES7972-0BA41-0XA0		Digital Input 16x24V DC		Digital Input 16x24V DC		Digital Input 16x24V DC		Digital Input 32x24V DC		Digital Output 16x24V DC/0,5A		Digital Output 16x24V DC/0,5A	
6ES7153-1AA03-0XA4		6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7321-1BH02-0AA0		6ES7322-1BH01-0AA0		6ES7322-1BH01-0AA0	
6ES7390-1AE80-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0		6ES7392-1AJ00-0AA0	
-D70		-D71		-D72		-D73		-D75		-D76		-D77	



				Date		Costumer	AMPT Egypt	NOELL	control desk	Type	RTG 50/26.50/5+1/AC	=71	
				Designer	XU HR							+CON	
				Checked	LIU KP					Job No.	1255	Drawing No.	78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			Sheet	1
													17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

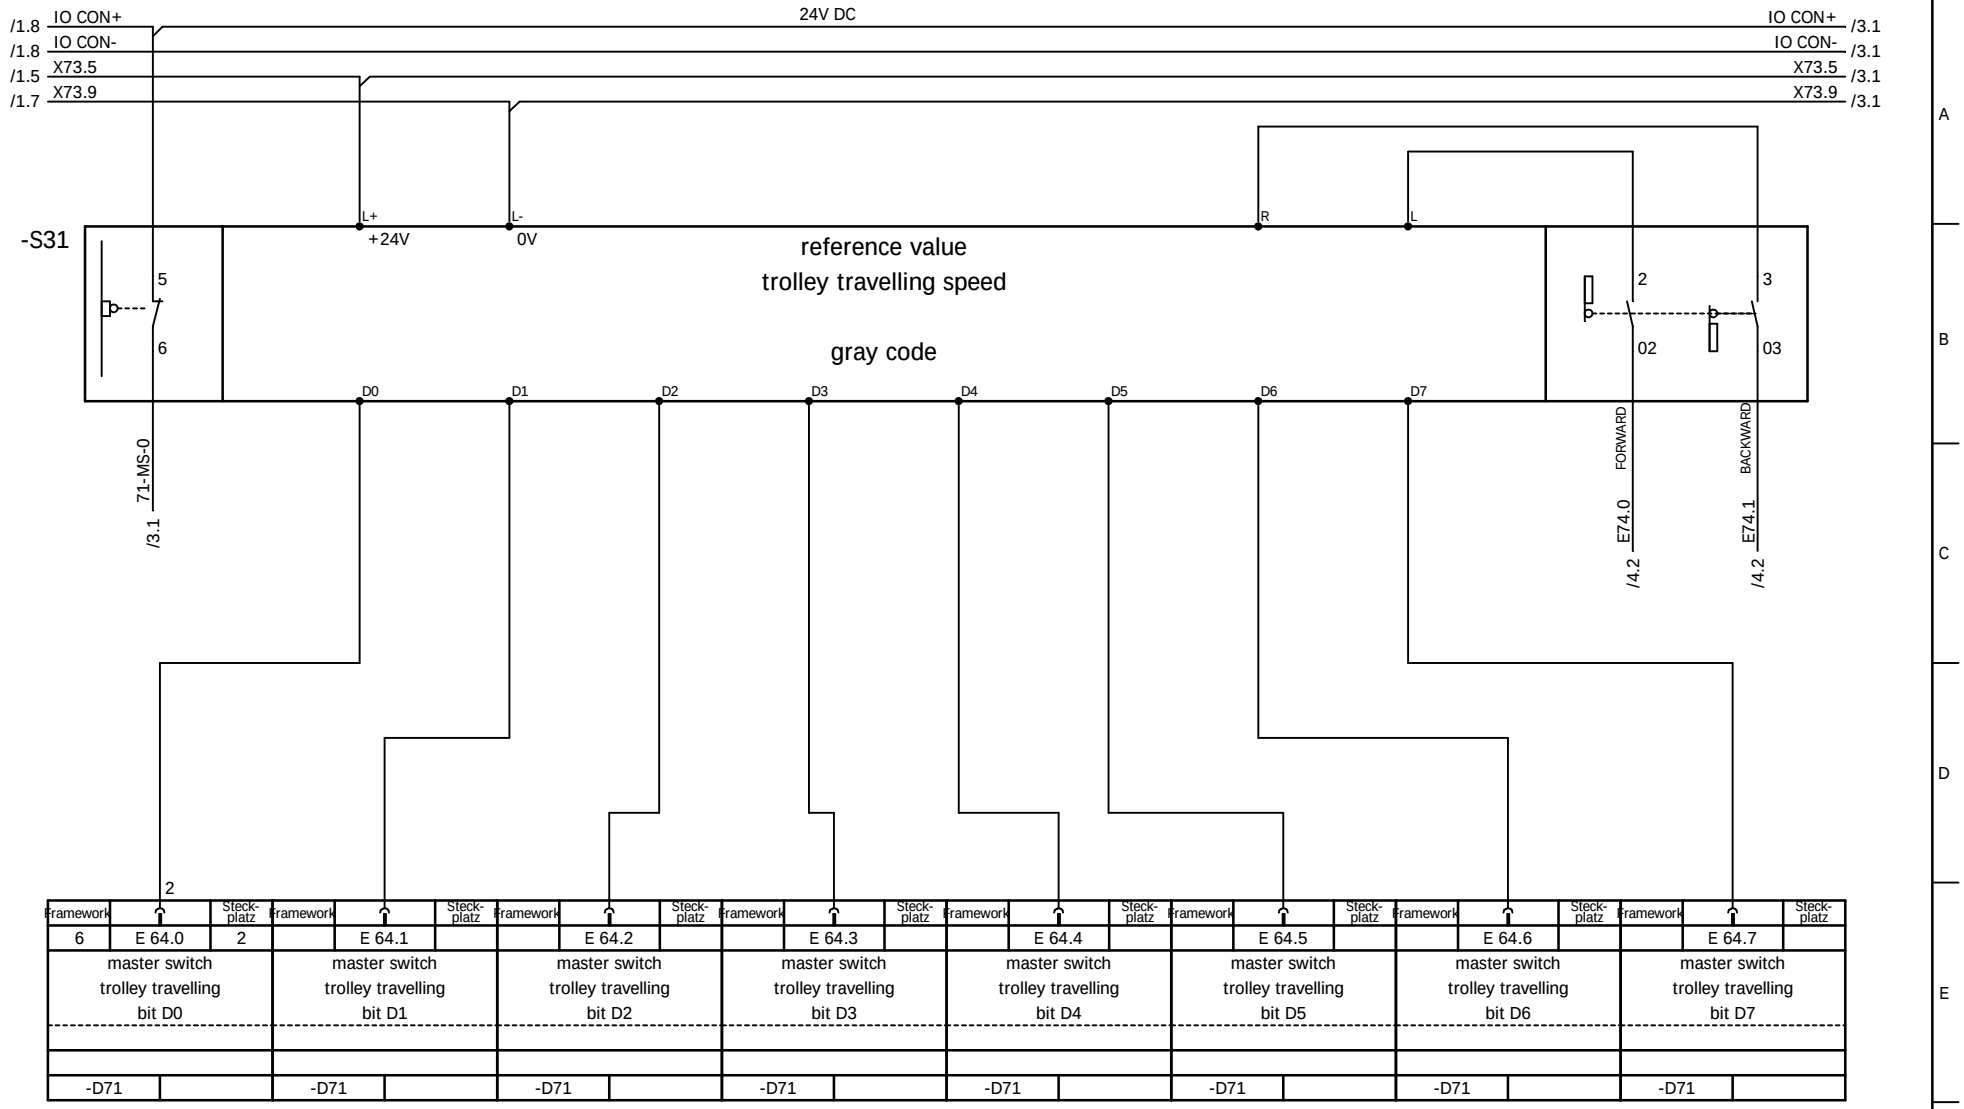

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 64.0	2		E 64.1			E 64.2			E 64.3			E 64.4			E 64.5			E 64.6			E 64.7	
master switch trolley travelling bit D0			master switch trolley travelling bit D1			master switch trolley travelling bit D2			master switch trolley travelling bit D3			master switch trolley travelling bit D4			master switch trolley travelling bit D5			master switch trolley travelling bit D6			master switch trolley travelling bit D7		
-D71			-D71			-D71			-D71			-D71			-D71			-D71			-D71		


				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		

control desk
left-side
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=71	
		+CON	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	2		
	17 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

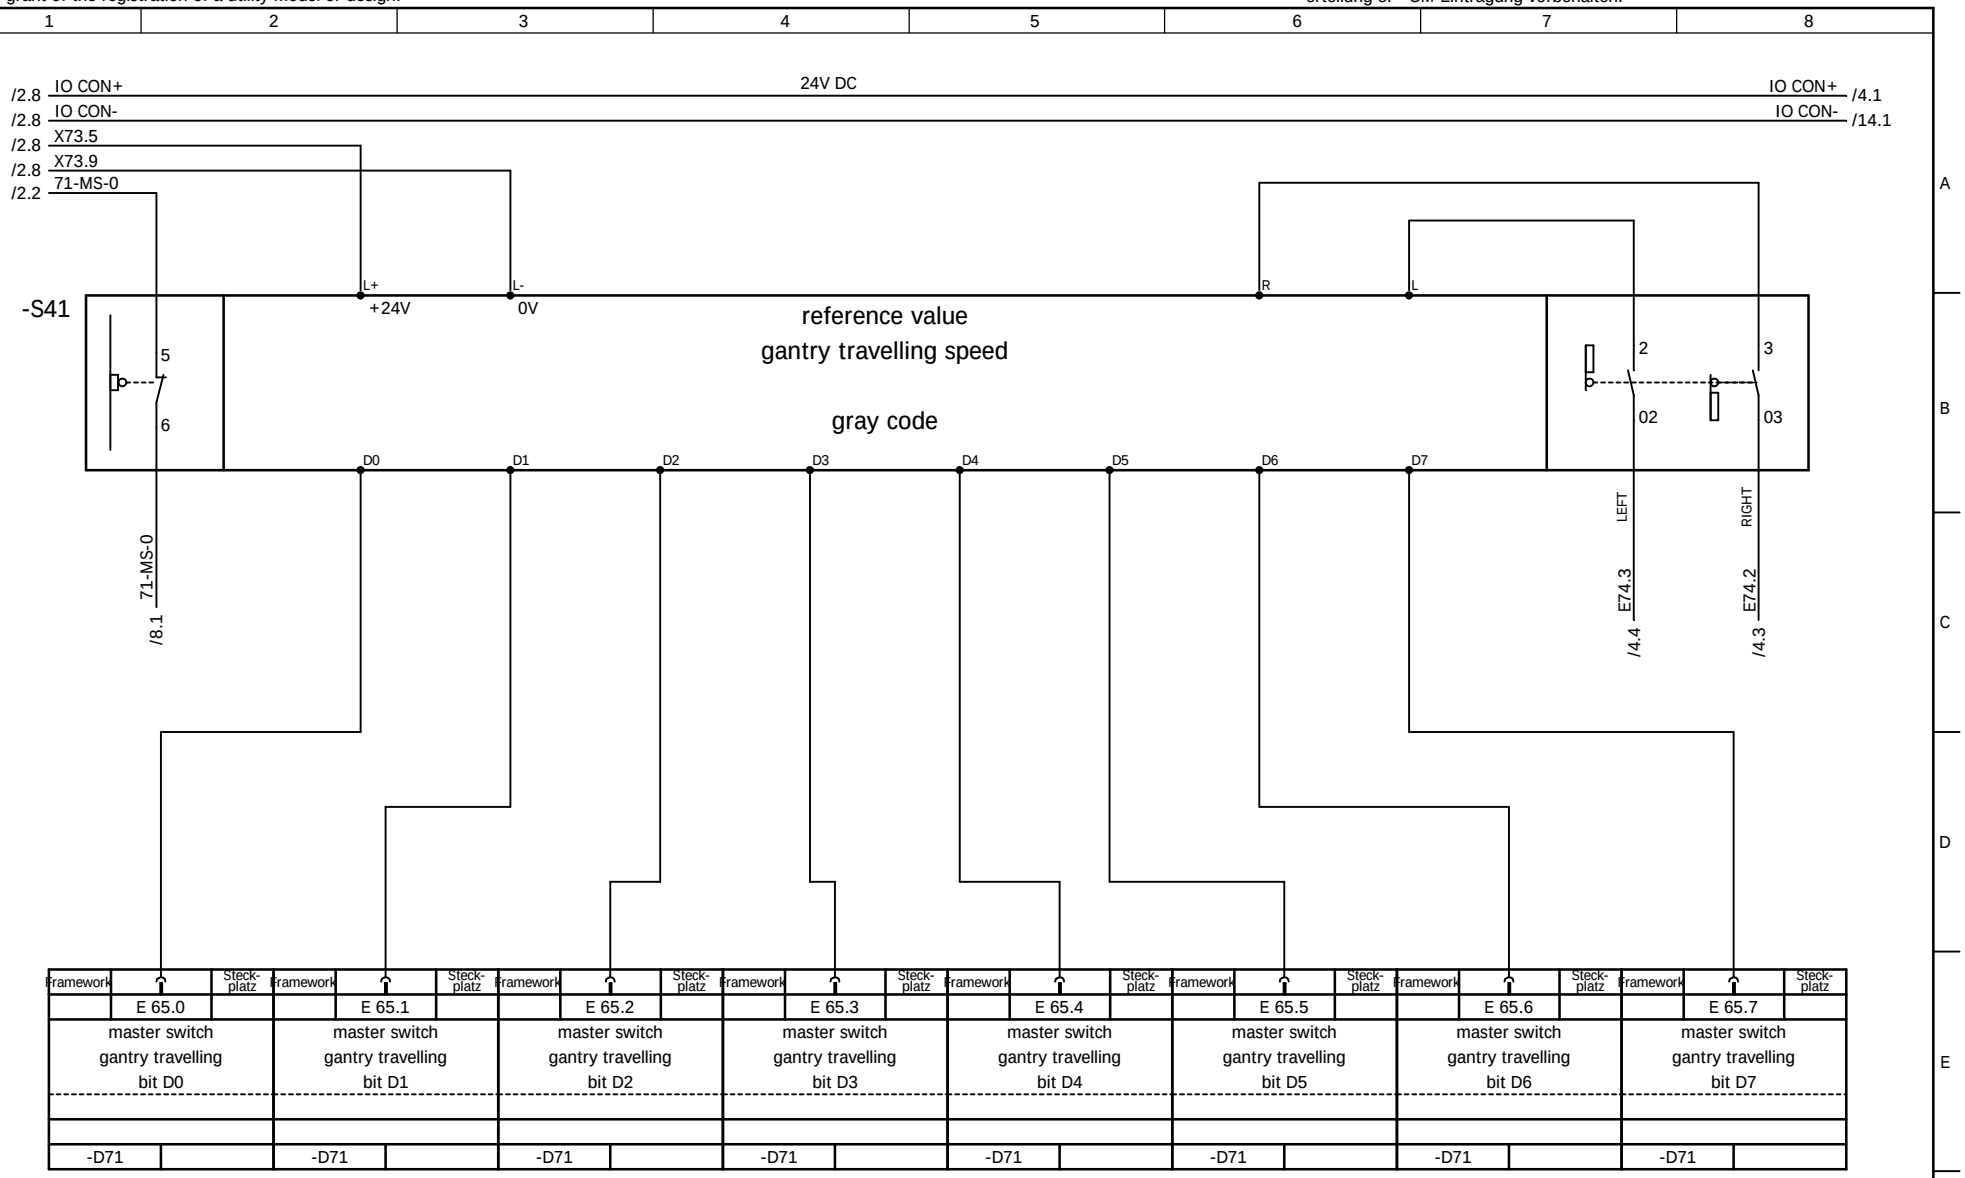

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

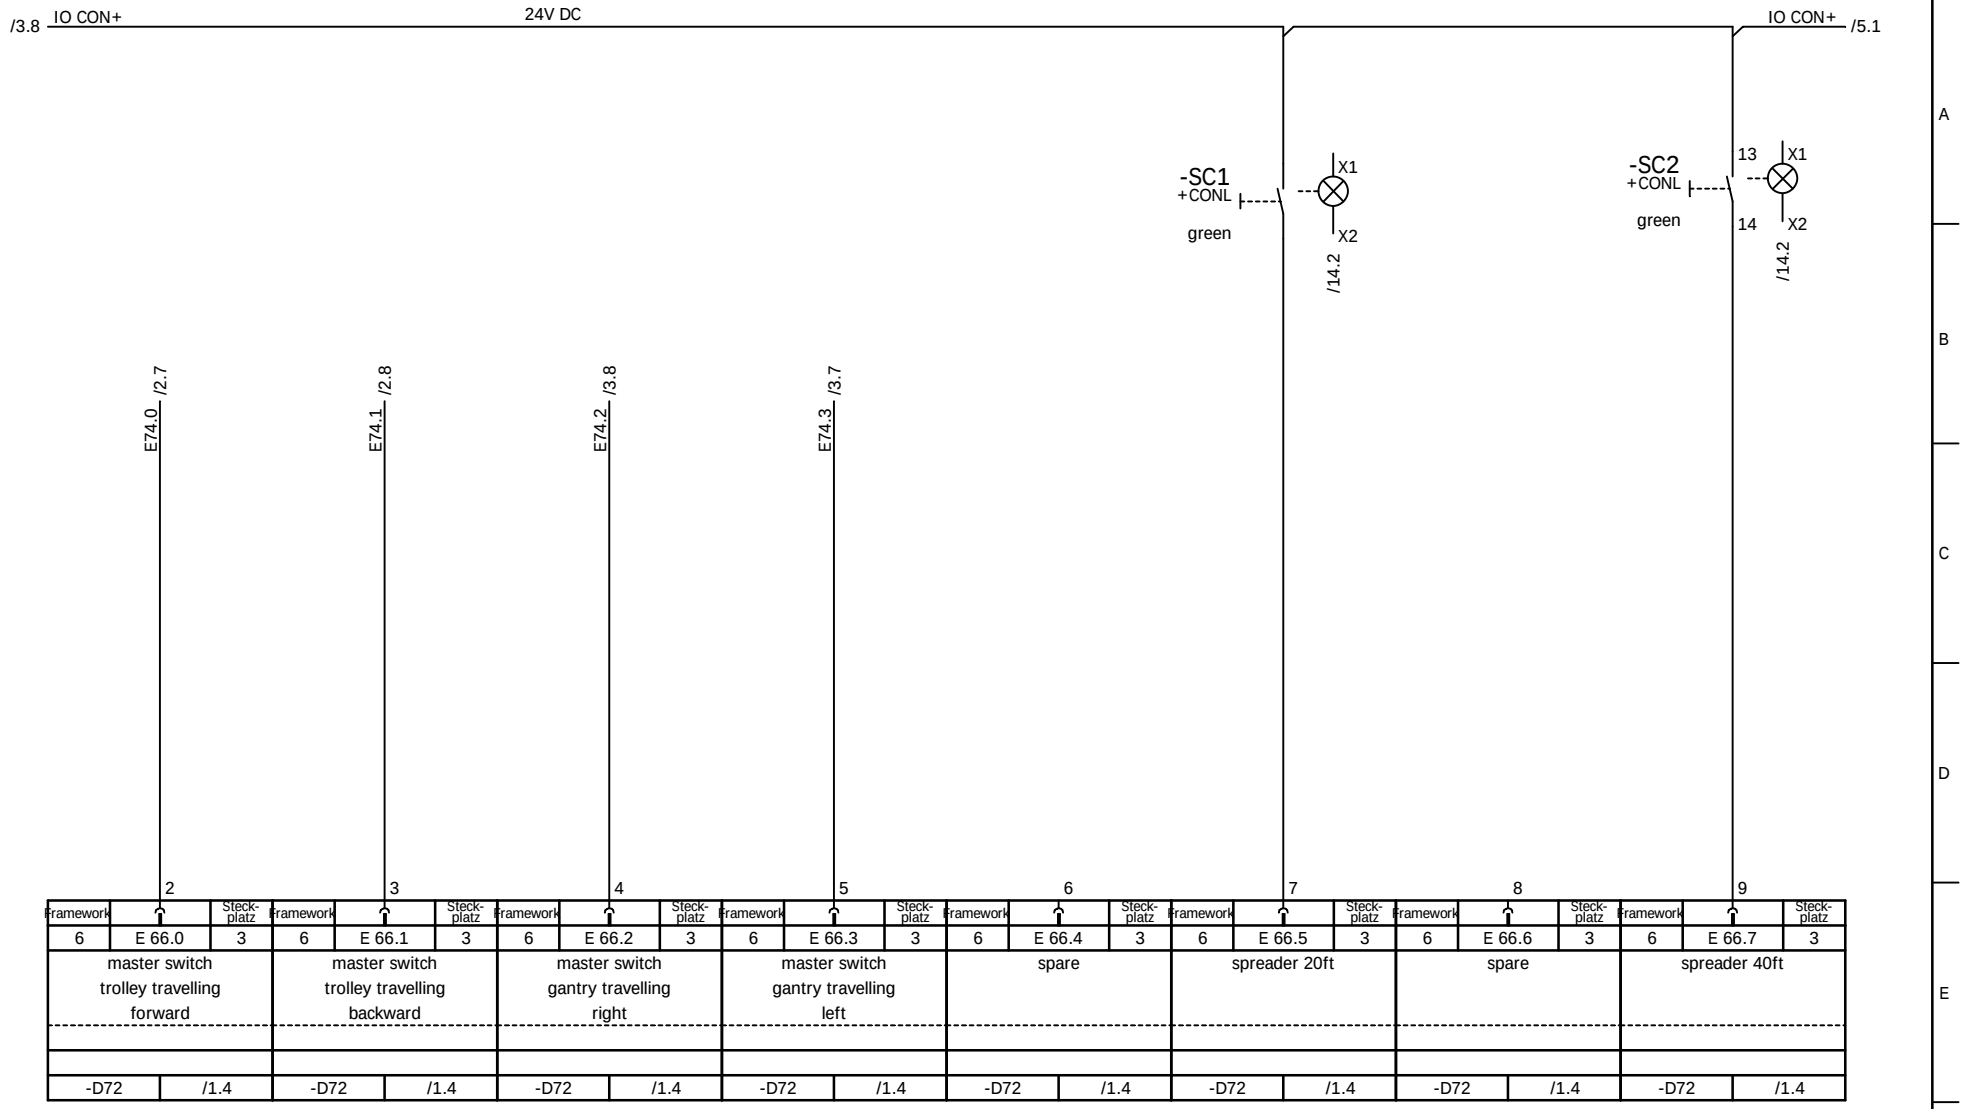


Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 66.0	3	6	E 66.1	3	6	E 66.2	3	6	E 66.3	3	6	E 66.4	3	6	E 66.5	3	6	E 66.6	3	6	E 66.7	3
master switch trolley travelling forward			master switch trolley travelling backward			master switch gantry travelling right			master switch gantry travelling left			spare			spreader 20ft			spare			spreader 40ft		
-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4	

				Date		Costumer	AMPT Egypt	NOELL	control desk left-side	Type	RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR					Job No.	1255	Drawing No. 78.5692.60.00
				Checked	LIU KP							Sheet 4 17 Sh.
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

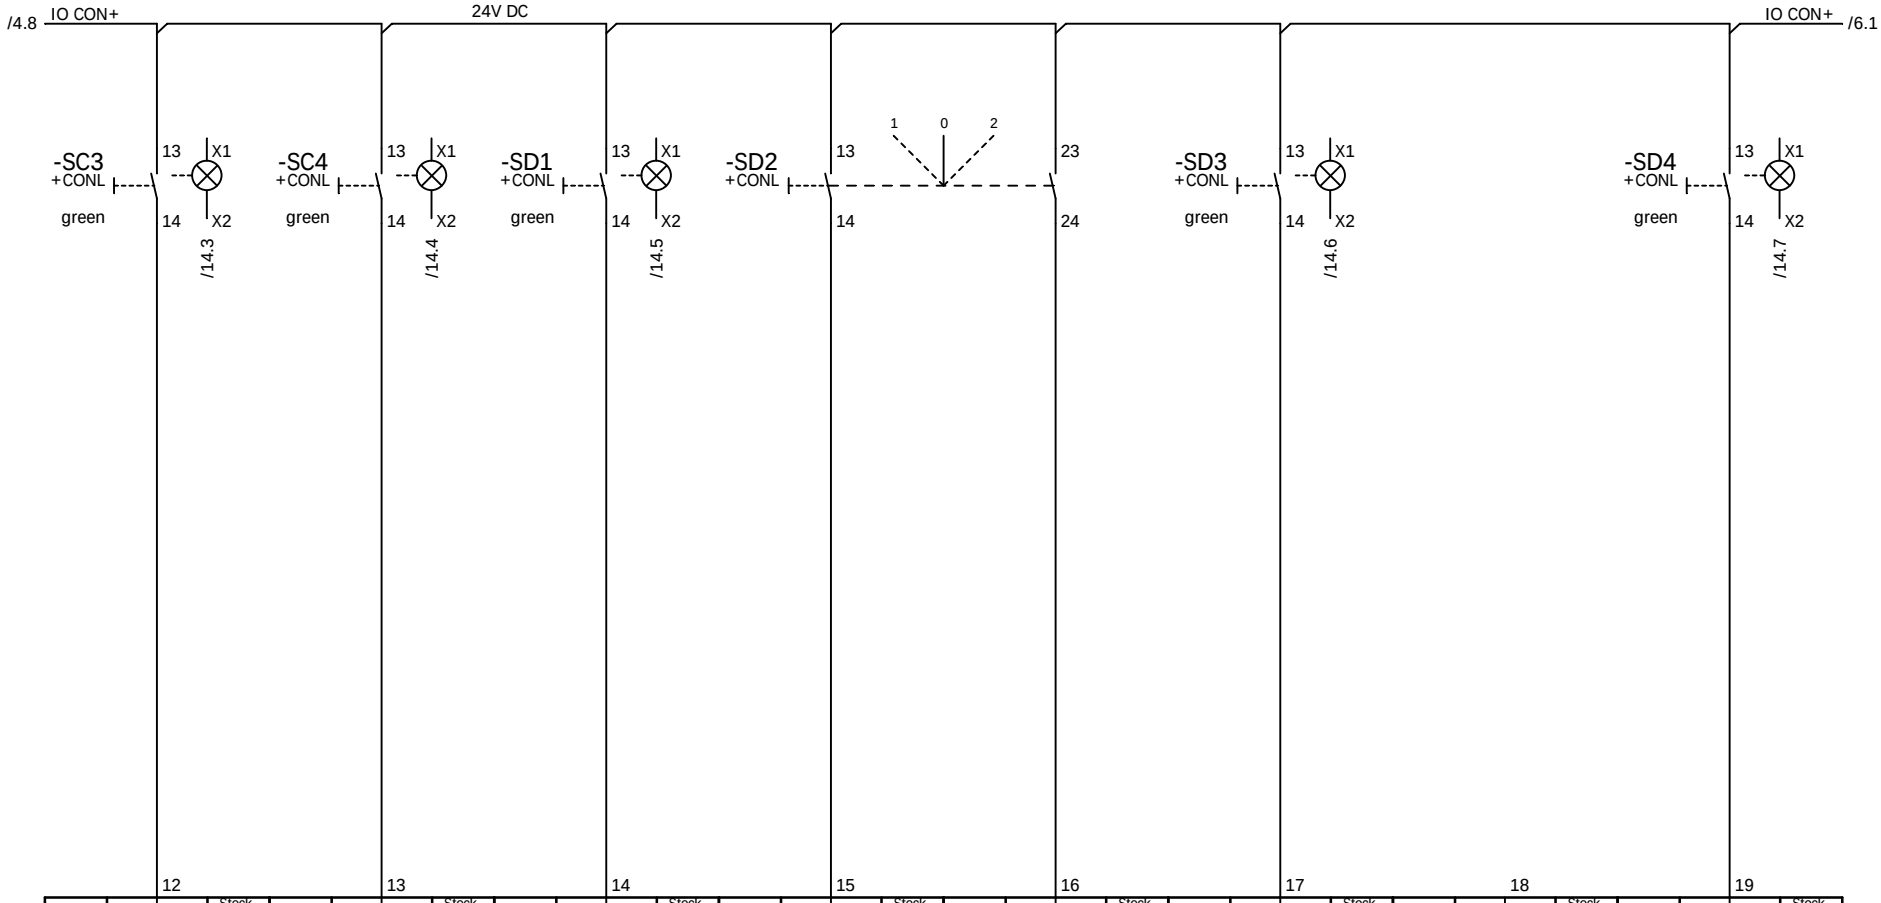

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 67.0	3	6	E 67.1	3	6	E 67.2	3	6	E 67.3	3	6	E 67.4	3	6	E 67.5	3	6	E 67.6	3	6	E 67.7	3
spreader 45ft			twin mode			store long twin			long twin adjustment			long twin adjustment			go to stored position			Reserve spare			0position long twin		
-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4		-D72	/1.4	

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		


NOELL

control desk
left-side
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=71 +CON	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	5 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

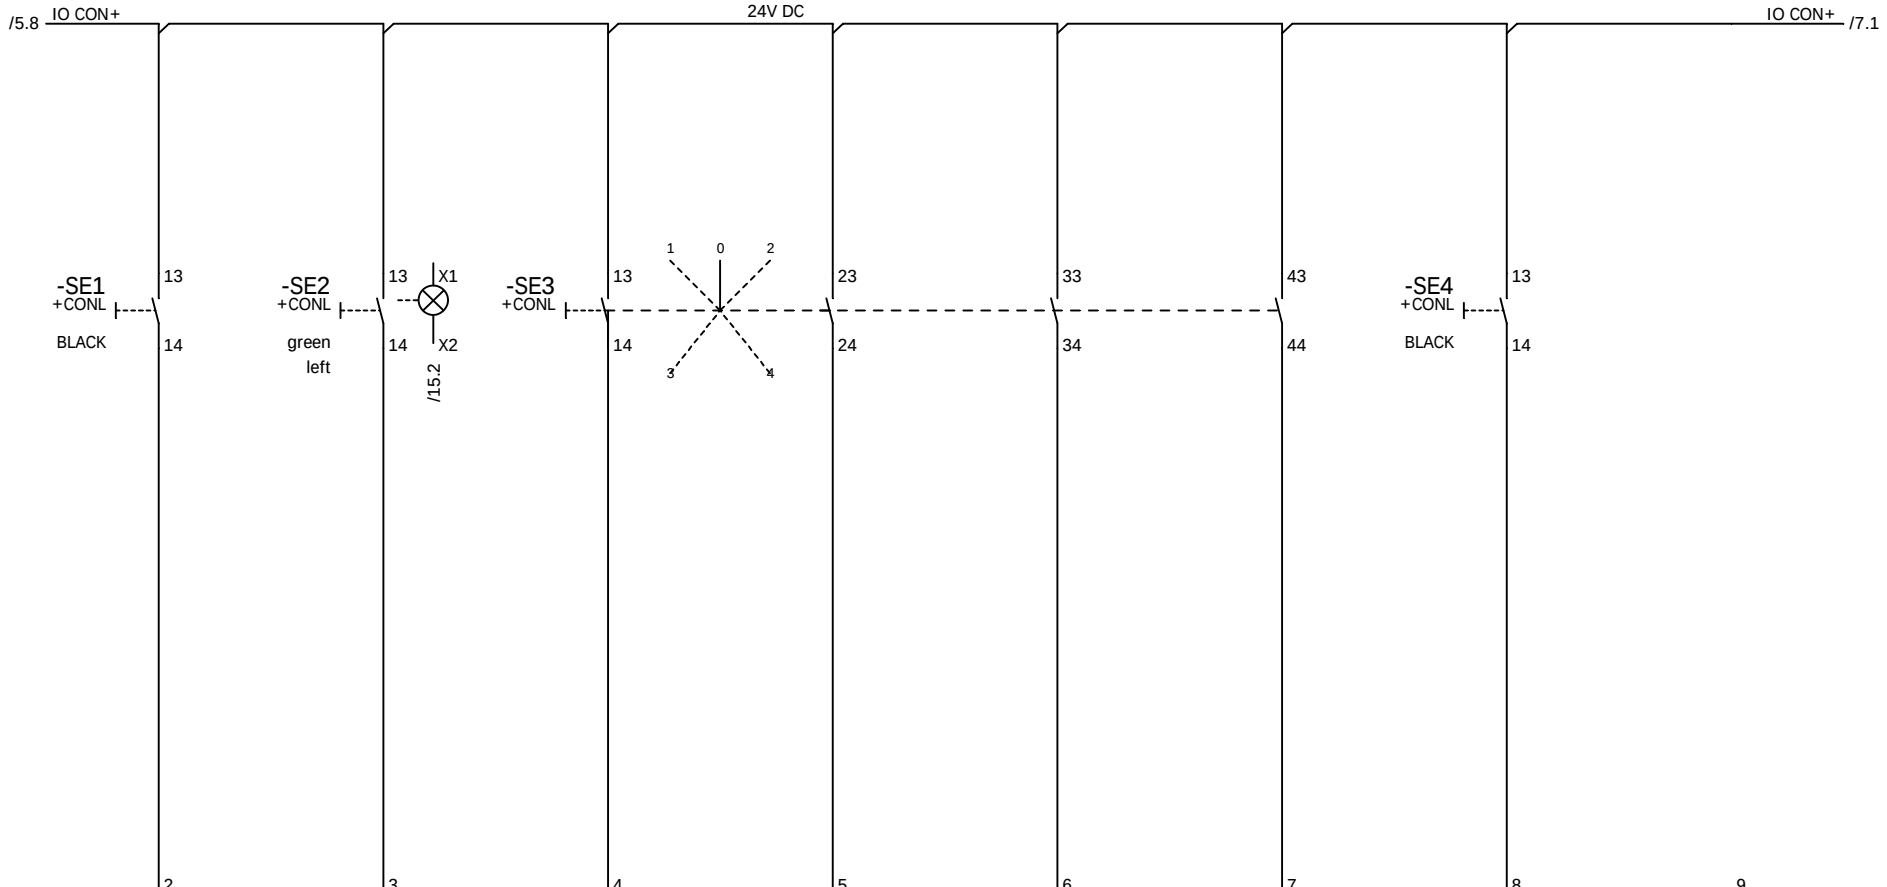


	2			3			4			5			6			7			8			9	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 68.0	4	6	E 68.1	4	6	E 68.2	4	6	E 68.3	4	6	E 68.4	4	6	E 68.5	4	6	E 68.6	4	6	E 68.7	4
twin twenty bypass			spreader pump on			spreader shift forward			spreader shift backward			spreader shift left			spreader shift right			spare			spare		
-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4	

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

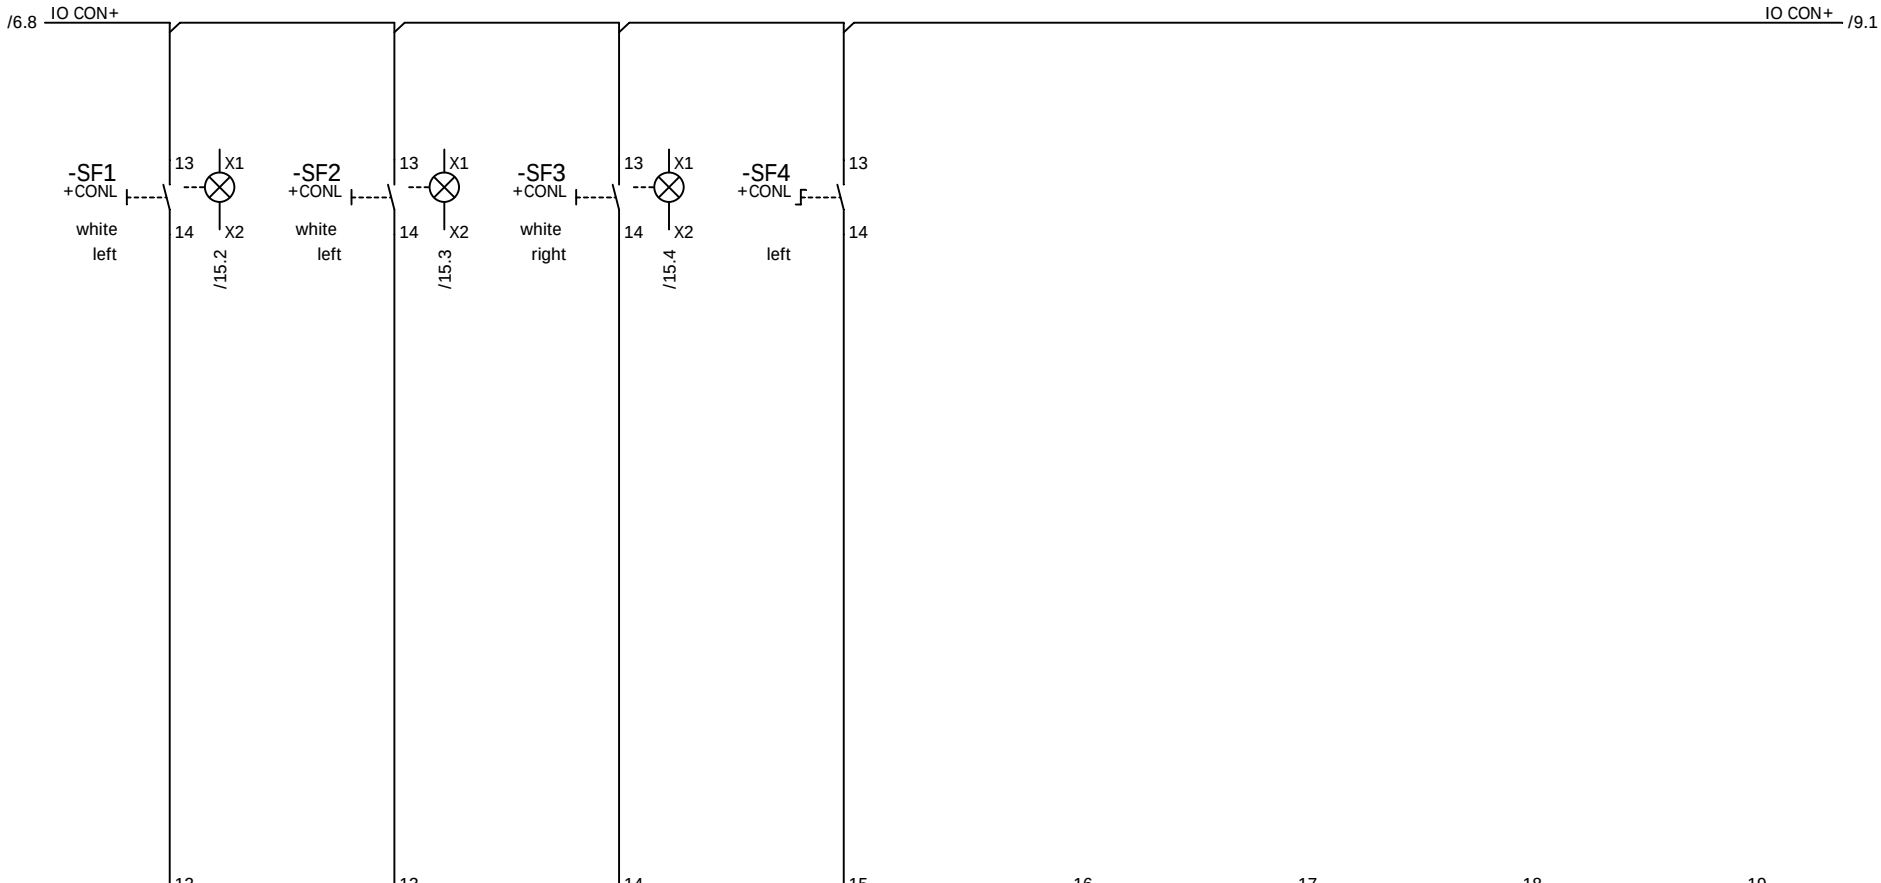


	12			13			14			15			16			17			18			19		
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 69.0	4	6	E 69.1	4	6	E 69.2	4	6	E 69.3	4	6	E 69.4	4	6	E 69.5	4	6	E 69.6	4	6	E 69.7	4
position left			position center			position right			spare			spare			spare			spare			spare		
-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4		-D73	/1.4	

				Date		Costumer	AMPT Egypt	control desk right-side	Type RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR					
				Checked	LIU KP					
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00 Sheet 7 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

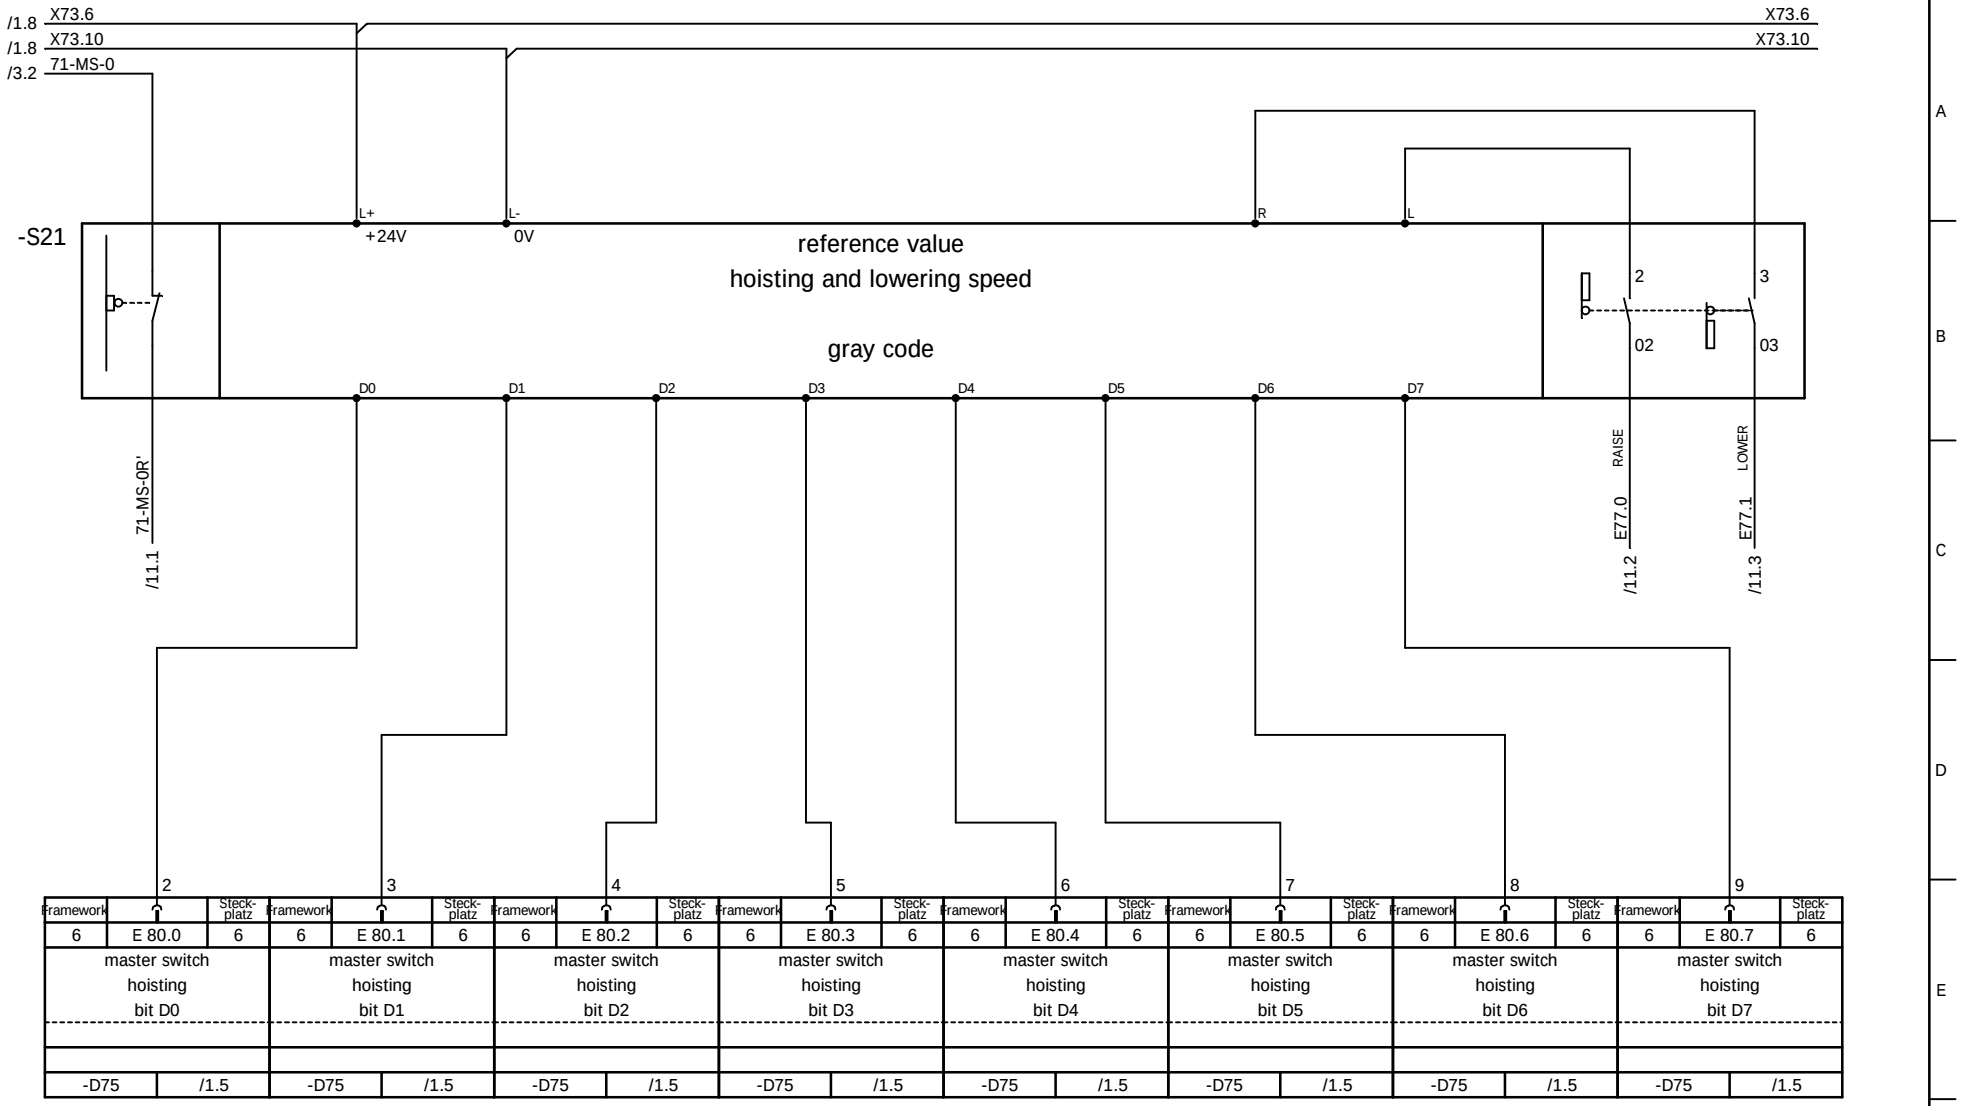

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz					
6	E 80.0	6	6	E 80.1	6	6	E 80.2	6	6	E 80.3	6	6	E 80.4	6	6	E 80.5	6	6	E 80.6	6	6	E 80.7	6								
master switch hoisting bit D0			master switch hoisting bit D1			master switch hoisting bit D2			master switch hoisting bit D3			master switch hoisting bit D4			master switch hoisting bit D5			master switch hoisting bit D6			master switch hoisting bit D7									
-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5								

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

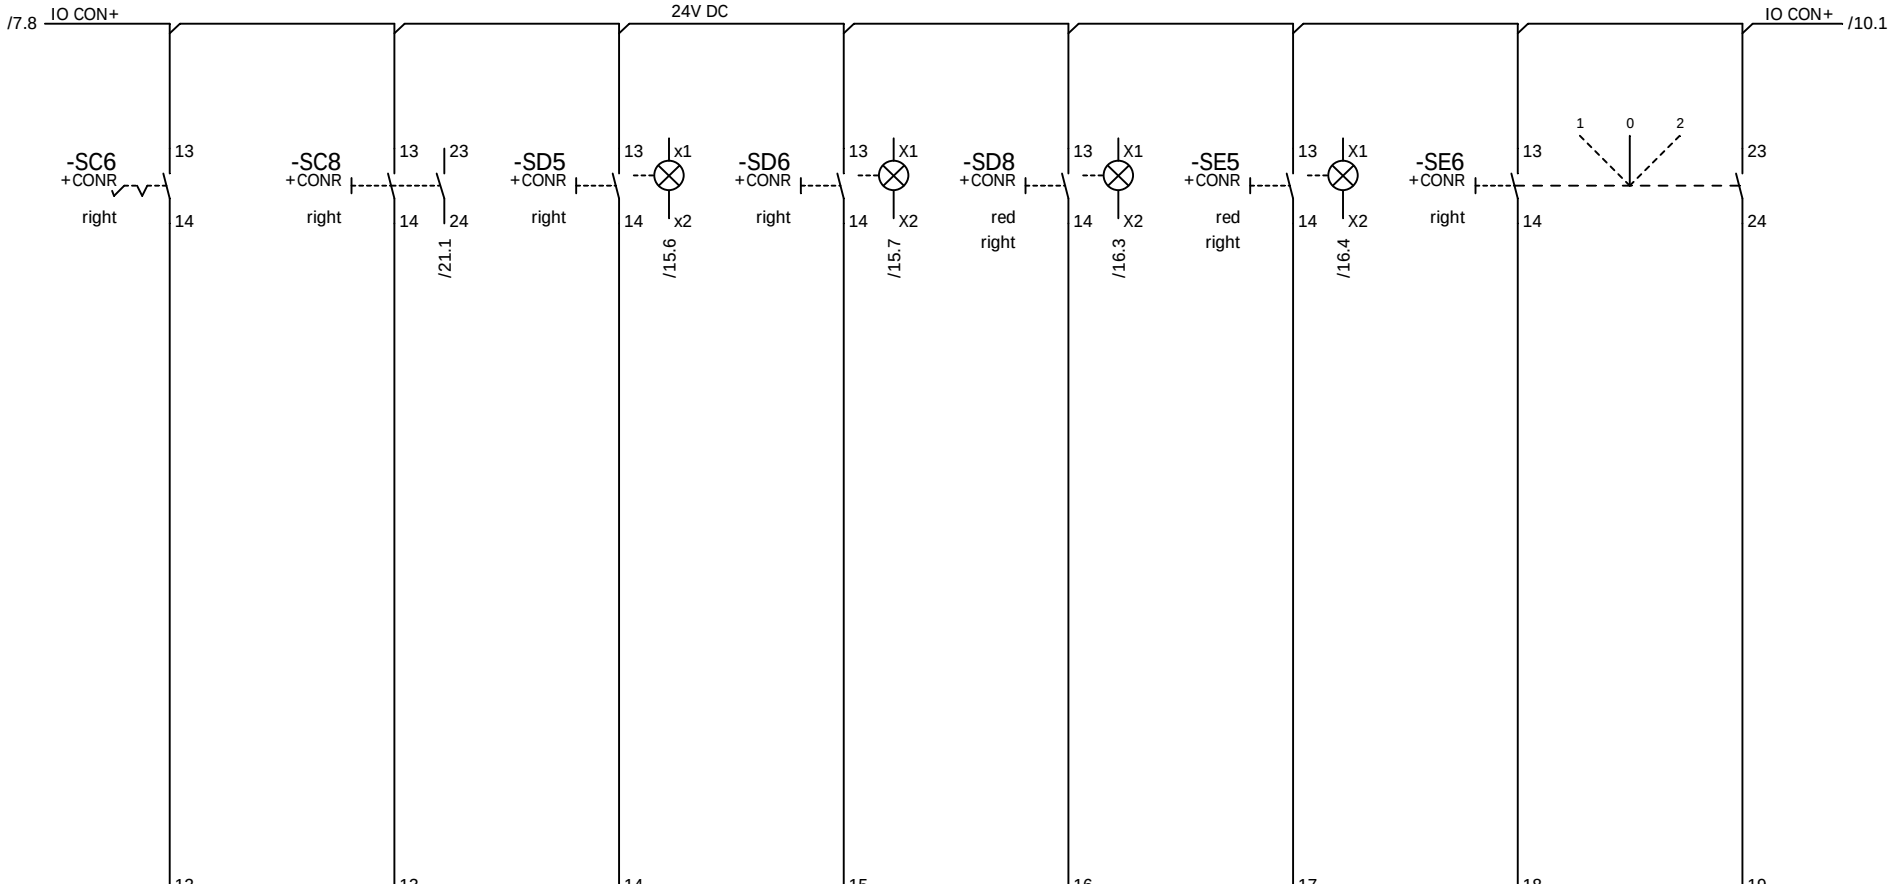

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

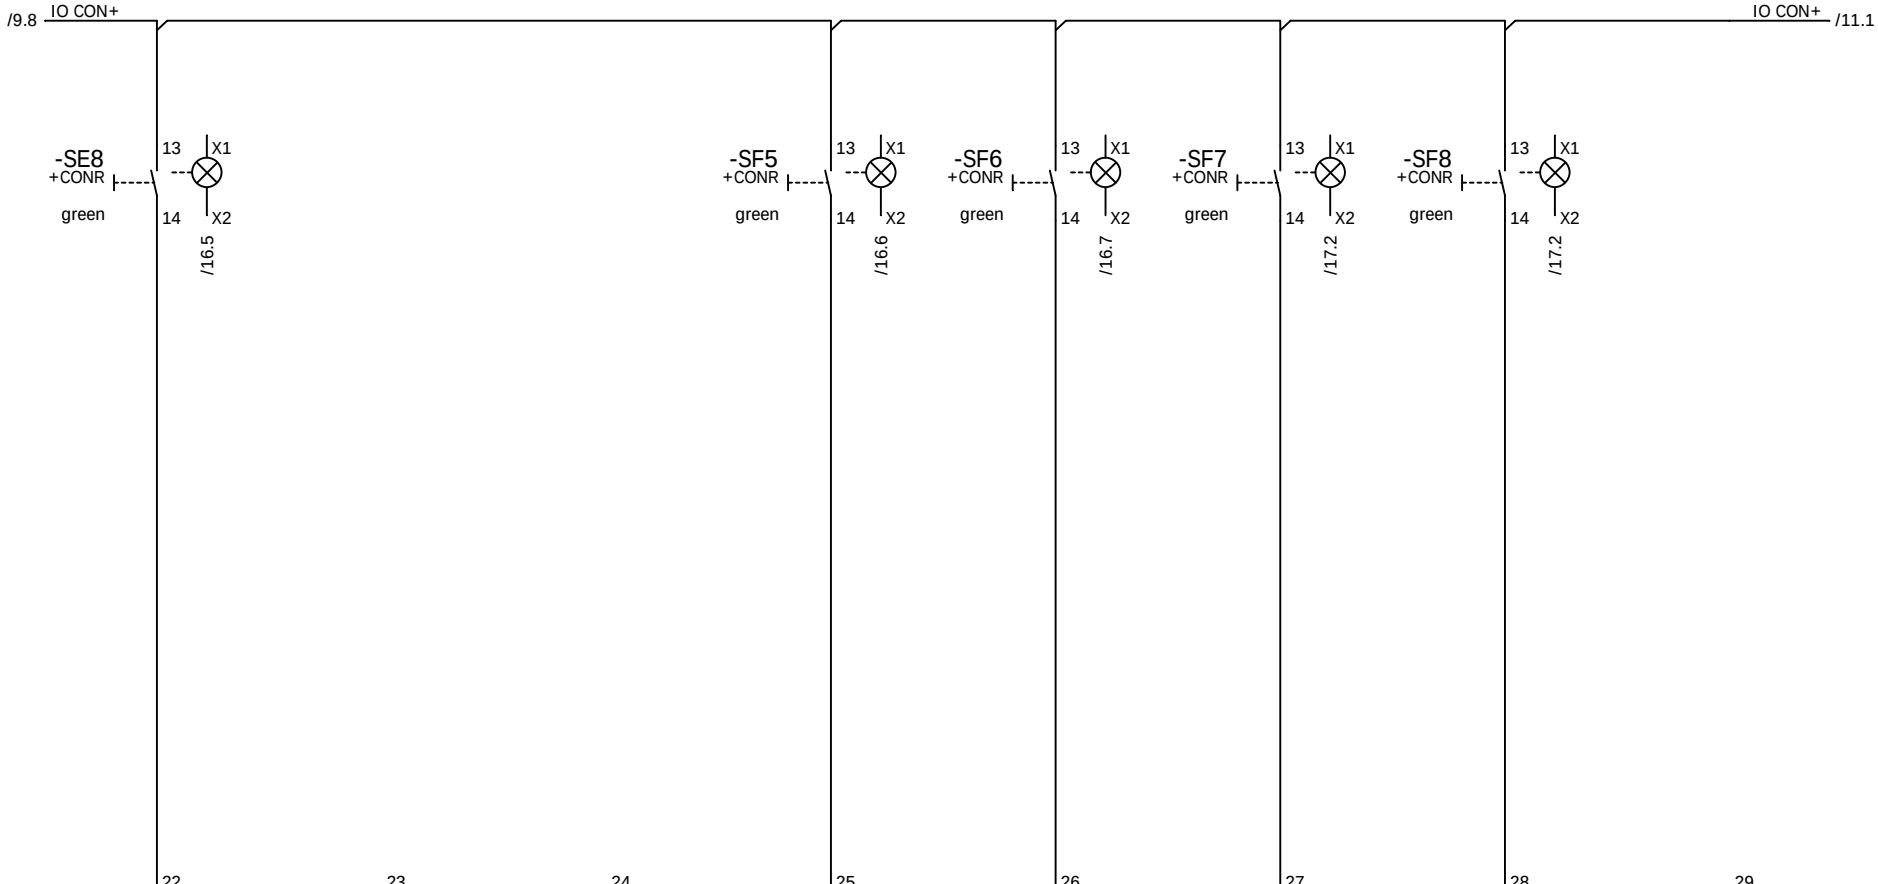

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 82.0	6	6	E 82.1	6	6	E 82.2	6	6	E 82.3	6	6	E 82.4	6	6	E 82.5	6	6	E 82.6	6	6	E 82.7	6
spare			spare			spare			wheels normal position			wheels cross position			wheels spinturn position			wheel park position			80		
-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5	

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

control desk
right side
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=71 +CON
Job No. 1255	Drawing No. 78.5692.60.00	Sheet 10 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

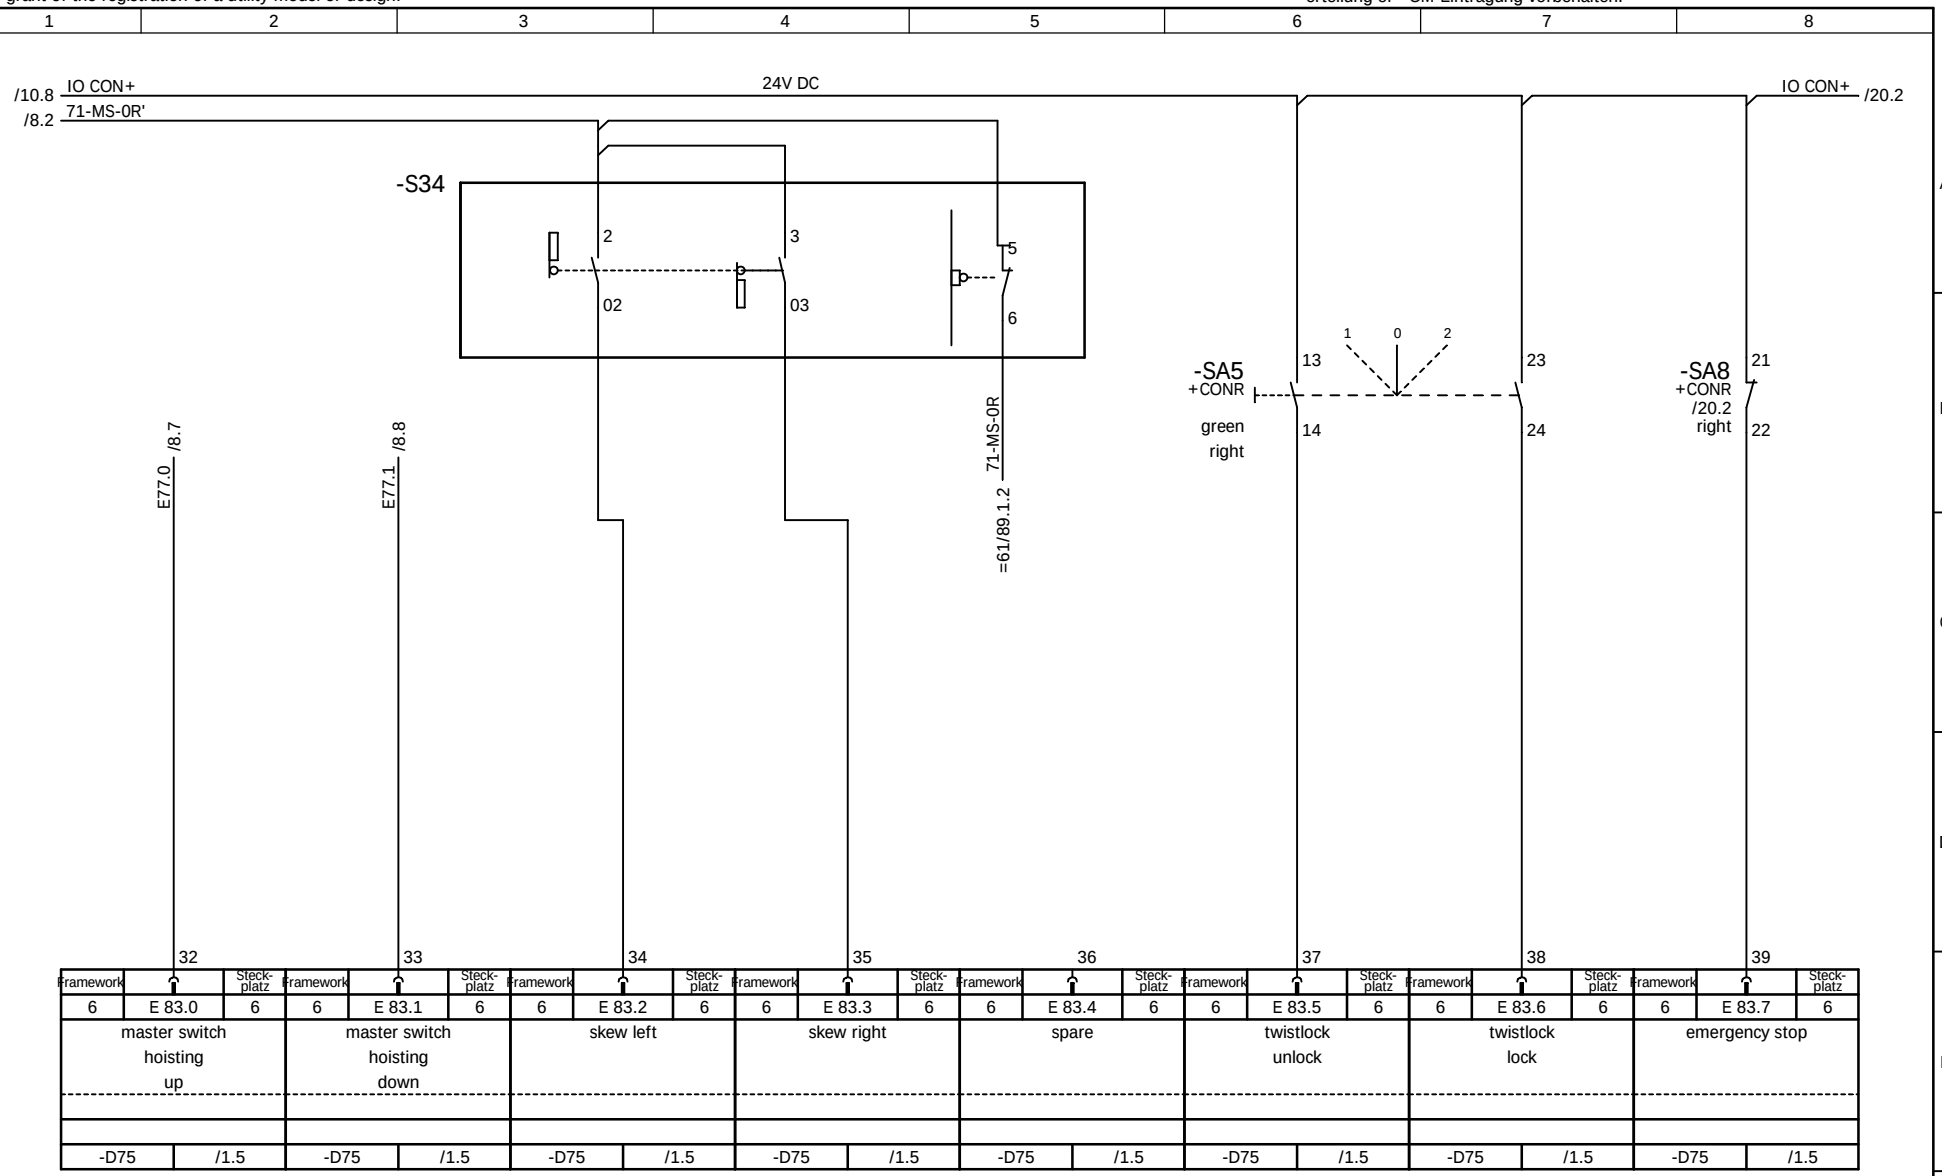

Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
6	E 83.0	6	6	E 83.1	6	6	E 83.2	6	6	E 83.3	6	6	E 83.4	6	6	E 83.5	6	6	E 83.6	6	6	E 83.7	6
master switch hoisting up			master switch hoisting down			skew left			skew right			spare			twistlock unlock			twistlock lock			emergency stop		
-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5		-D75	/1.5	

				Date		Costumer	AMPT Egypt	control desk right side	Type RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR			Stromlaufplan / Circuit Diagram	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11 17 Sh.
				Checked	LIU KP						
Ind.	Revision	Date	Name	Standard		Source:					

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6
spreader 20ft		spreader 40ft		spreader 45ft		twin mode		store long twin		go to stored position		0 position long twin		Reserve spare			
6	A 72.0	7	6	A 72.1	7	6	A 72.2	7	6	A 72.3	7	6	A 72.4	7	6	A 72.5	7	6	A 72.6	7	6	A 72.7	7
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	2			3			4			5			6			7			8			9	

-SC1 +CONL /4.6 X1 X2 green left

-SC2 +CONL /4.8 X1 X2 green left

-SC3 +CONL /5.2 X1 X2 green left

-SC4 +CONL /5.2 X1 X2 green left

-SD1 +CONL /5.3 X1 X2 green left

-SD3 +CONL /5.6 X1 X2 green left

-SD4 +CONL /5.8 X1 X2 green left

/3.8 IO CON- ... IO CON- /15.1

				Date		Costumer	AMPT Egypt	NOELL	control desk left side	Type	RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR					Job No.	1255	Drawing No. 78.5692.60.00
				Checked	LIU KP							Sheet 14 17 Sh.
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6	-D76	/1.6
spreader pump on/off		position left		position center		skew center		crane switch is on		override anticollision		skew center position		fault buzzer on	

6	A 73.0	7	6	A 73.1	7	6	A 73.2	7	6	A 73.3	7	6	A 73.4	7	6	A 73.5	7	6	A 73.6	7	6	A 73.7	7
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz

12 13 14 15 16 17 18 19

-SE2 +CONL /6.3 X1 X2 green left

-SF1 +CONL /7.2 X1 X2 green left

-SF2 +CONL /7.3 X1 X2 green left

-SF3 +CONL /7.3 X1 X2 green left

-HC5 +CONR white right X1 X2

-SD5 +CONR /9.3 X1 X2 green right

-SD6 +CONR /9.4 X1 X2 green right

-HG4 +CONL left X1 X2

/14.8 IO CON- IO CON- /16.1

				Date		Costumer	AMPT Egypt	NOELL	control desk	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR						=71 +CON
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Stromlaufplan / Circuit Diagram		Sheet 15 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D77	/1.7	-D77	/1.7	-D77	/1.7	-D77	/1.7	-D77	/1.7	-D77	/1.7	-D77	/1.7	-D77	/1.7
trolley park/locked		spare		reset fault		spare		spare		wheels normal position		wheels cross position		Reserve spare	
	A 74.0		A 74.1		A 74.2		A 74.3		A 74.4		A 74.5		A 74.6		A 74.7	
Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz	Framework		Steck-platz
	2		3			4			5			6			7			8			9		

-HD7 +CONR white right — X1 / X2

-SD8 +CONR /9.5 green right — X1 / X2

-SE5 +CONR /9.6 green right — X1 / X2

-SE8 +CONR /10.2 green right — X1 / X2

-SF5 +CONR /10.4 green right — X1 / X2

-SF6 +CONR /10.5 green right — X1 / X2

/15.8 IO CON- ... IO CON- /17.1

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-D77 /1.7	-D77 /1.7	-D77 /1.7	-D77 /1.7	-D77 /1.7	-D77 /1.7	-D77 /1.7	-D77 /1.7
Wheels spinturn position	wheels park position	head frame locked	spreader connected	generator fault	spare	spare	Reserve spare
A 75.0	A 75.1	A 75.2	A 75.3	A 75.4	A 75.5	A 75.6	A 75.7
Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz	Framework / Steck-platz
12	13	14	15	16	17	18	19

-SF7 +CONR /10.6 green right — X1 / X2

-SF8 +CONR /10.7 green right — X1 / X2

-HG5 +CONR red right — X1 / X2

-HG6 +CONR white right — X1 / X2


-SH5 +CONR white right

/16.8 IO CON- ——— IO CON-

				Date		Costumer	AMPT Egypt	control desk	Type RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram		Sheet 17 / 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

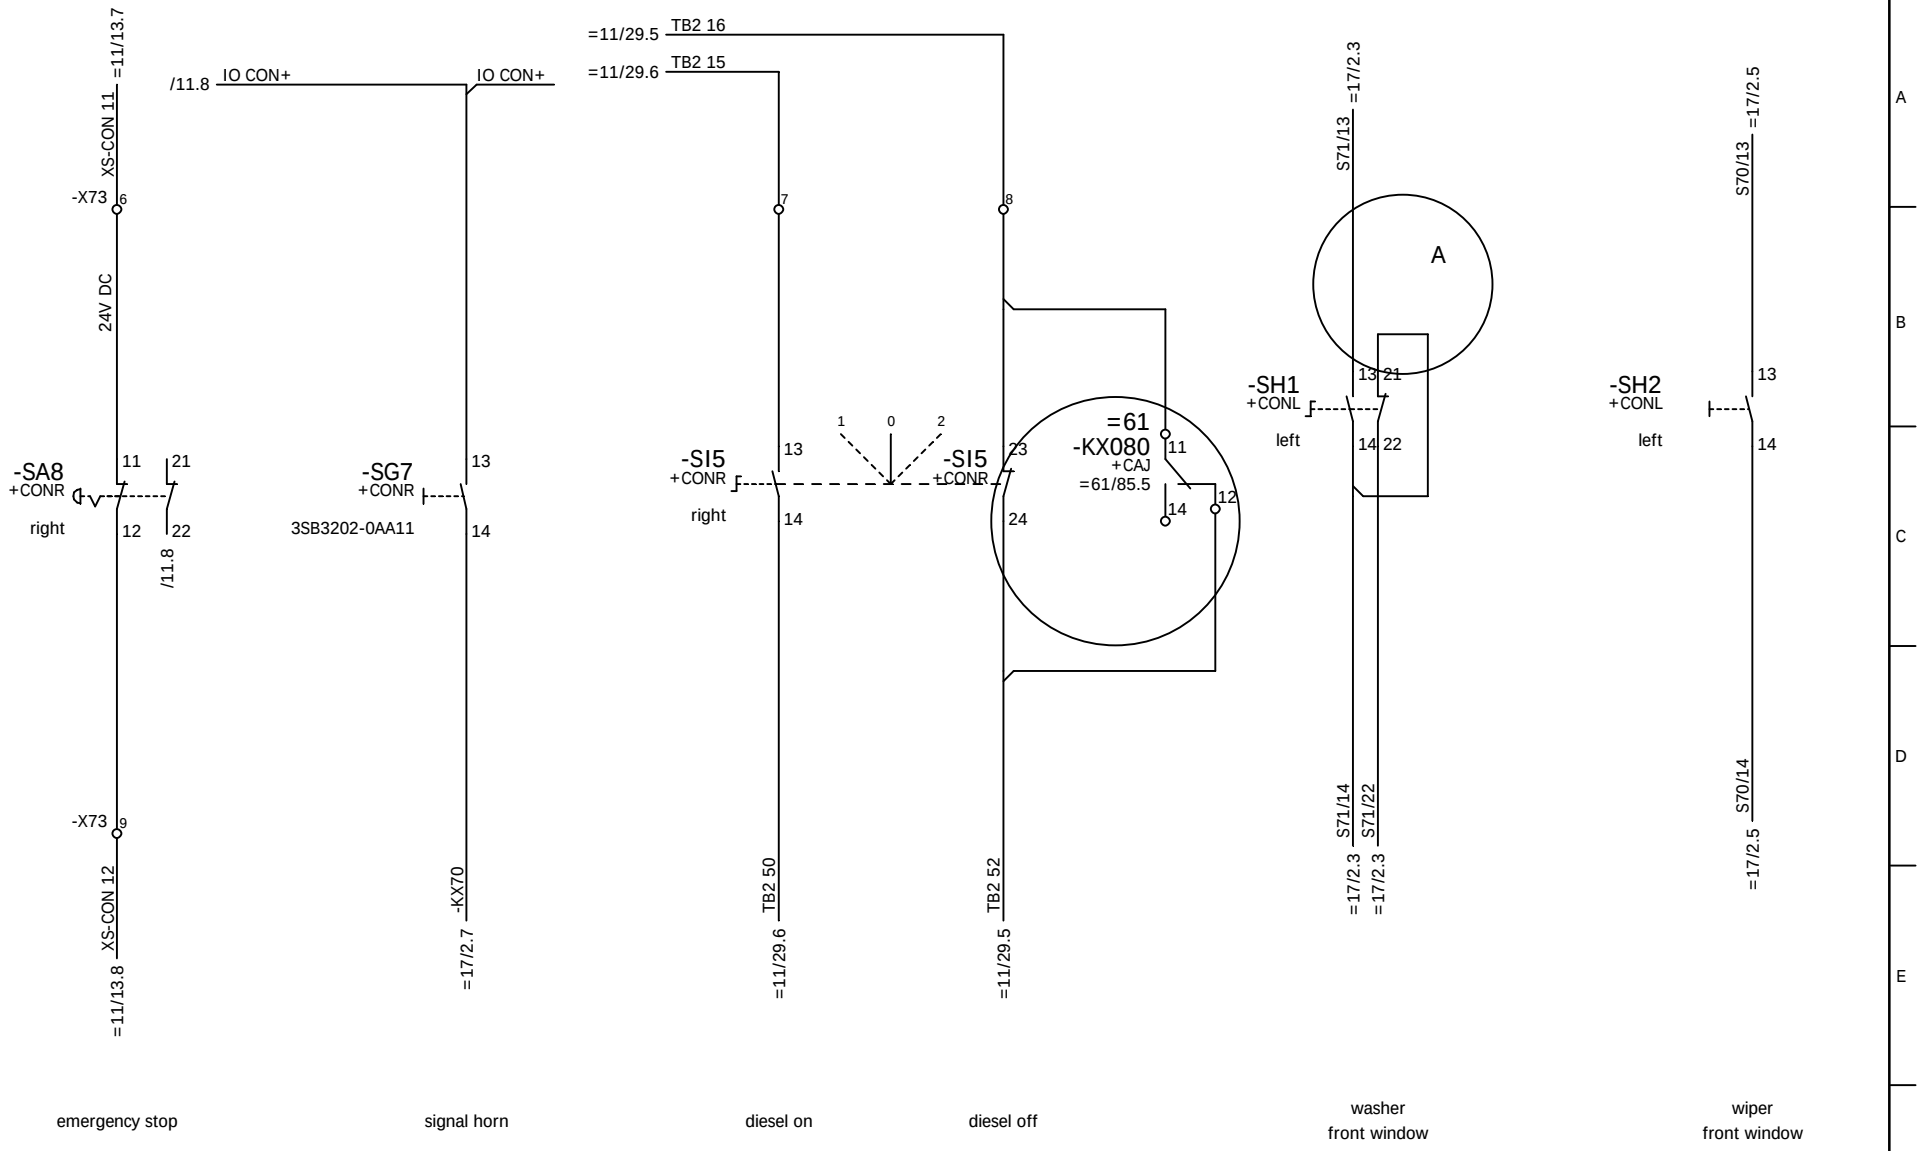


				Date		Costumer	AMPT Egypt	NOELL	STEUERSTAND rechts control desk,
				Designer	XU HR				Stromlaufplan / Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC		=71 +CON
Job No.	1255	Drawing No.	78.5692.60.00
			Sheet 20 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

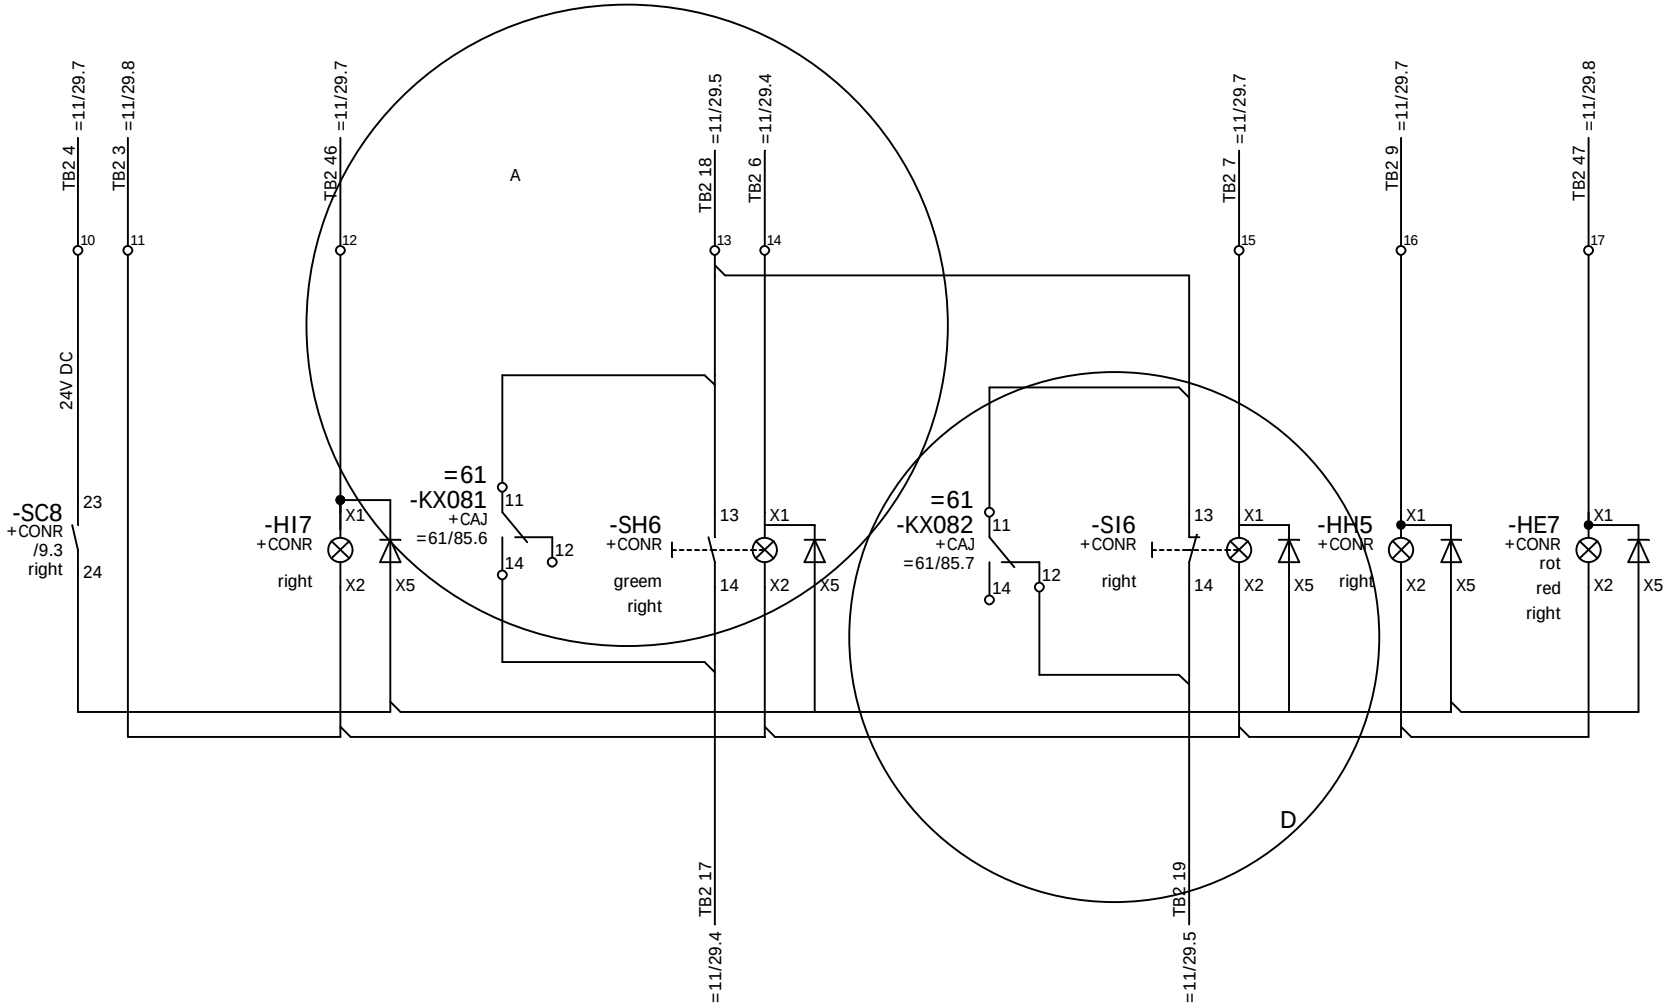

				Date		Costumer	AMPT Egypt	STEUERSTAND rechts control desk, right	Type RTG 50/26.50/5+1/AC	=71 +CON
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Stromlaufplan / Circuit Diagram		Sheet 21 17 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | 5 | | | | | 6 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | | 5 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-W+EH1=12-X11N

Kabelnr. Cable-no.	Kabel-Typ Cable-type	UK35	UK5N	UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU			UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU			UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU	UK5N BU		UK5N BU	UK5N BU	UK5N BU
		X																											
			X		X	X	X	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X

Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.		163	10		17	2	A2	170	43	46	49	53	A2	72	81	65	171	78	111	89	92	95	98	101	115		23	125	
	Kennzeichen Designation		-X11L	-X11L		-X11L	=61+EH5-X15C	-K13	-X11L	-X11L	-X11L	-X11L	-X11L	-K01	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L	-X11L		-X11L	-X11L	
Klemmen-Nr. / Terminal-no.			1	2	4	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Laschenverbindung / Link																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.				12																									13
	Kennzeichen Designation				=11+EH1-S2																									-X11L

conn. -Leiste / terminal strip -X11N number of terminals / number of terminals: 28

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

Kabelnr. Cable-no.	Kabel-Typ Cable-type	=11/5.7	=11/6.4	=11/7.8	=11/8.4	=11/8.5	=11/20.2	=11/20.3	=11/20.5	=11/20.6	=11/20.7	=11/21.2	=11/21.3	=11/21.4	=11/21.6	=11/22.2	=11/22.3	=11/22.5	=11/22.6	=11/23.2	=11/23.3	=11/23.5	=11/23.6	=11/24.3	=11/24.4	=11/24.5	=11/25.3	=11/25.5	=11/7.3
				X																								X

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

ind.	Revision	Date	Name	Date		Costumer	AMPT Egypt	KLEMMENLEISTE-X11N	Type	RTG 50/26.50/5+1/AC	=12 +EH1
				Designer	XU HR				Job No.	1255	Drawing No. 78.5692.60.00
				Checked	LIU KP						Sheet 16
				Standard		Source:		Klemmenplan / Terminal Diagram			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

Kabelnr. / Cable-no. — Kabel-Typ / Cable-type

Zielzeichen / Destination symbol — conn. - bezeichnung / Connection-no. — Kennzeichen / Designation

conn. -Leiste / terminal strip -X15D / number of terminals: 20

number of terminals

Klemmen-Nr. / Terminal-no.

Laschenverbindung / Link

Klemmen-Nr. / Terminal-no.	1	2	4	5	6	7	9	10	11	12	14	15	16	17	19	20	21	22	24	25
Laschenverbindung / Link	●	●	●	●		●	●	●		●	●	●		●	●	●	●	●	●	●
conn. - bezeichnung / Connection-no.	8	8	1	58	9	9	3	59	10	10	5	60	11	11	7	61	sc	sc	9	62
Zielzeichen / Destination symbol	+EH-B10	+EHS-B18	=41+DSJ-X40D	=31+GRJ-X20D	+EH-B10	+EHS-B18	=41+DSJ-X40D	=31+GRJ-X20D	+EH-B10	+EHS-B18	=41+DSJ-X40D	=31+GRJ-X20D	+EH-B10	+EHS-B18	=41+DSJ-X40D	=31+GRJ-X20D	+EH-B10-X	+EHS-B18-X	=41+DSJ-X40D	=31+GRJ-X20D
Kennzeichen / Designation	/1.3	/1.6	/2.4	/3.2	/1.3	/1.7	/2.4	/3.2	/1.3	/1.7	/2.4	/3.2	/1.3	/1.7	/2.4	/3.2	/1.3	/1.7	/2.4	/3.3

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

Kabelnr. / Cable-no.	Kabel-Typ / Cable-type																			
-W15.90	LIYCY 2x2x1.0mm²	1.0				2.0				3.0				4.0				5.0		
-W15.91	LIYCY 2x2x1.0mm²		1.0				2.0				3.0				4.0				5.0	
-W15.93	LIYCY 2x2x1.0mm²			1.0				2.0				3.0				4.0				5.0
-W15.94	LIYCY 2x2x1.0mm²				1.0				2.0				3.0				4.0				5.0

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

nd.	Revision	Date	Name	Date	
				Designer	XU HR
				Checked	LIU KP
				Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X15D

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =18 +EH5

Job No. 1255 | Drawing No. 78.5692.60.00 | Sheet 17 | 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

Kabelnr. Cable-no.	Kabel-Typ Cable-type						
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	37	38	2	3	4	
	Kennzeichen Designation	=61+EH2-D24	=61+EH2-D24	=61+EH2-D25	=61+EH2-D25	=61+EH2-D25	
Klemmen-Nr. / Terminal-no.		189	190	191	192	193	
Laschenverbindung / Link							
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	36	37	38	39	40	
	Kennzeichen Designation	=11+ESJ-X18	=11+ESJ-X18	=11+ESJ-X18	=11+ESJ-X18	=11+ESJ-X18	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=42/12.2	=42/12.3	=42/12.5	=42/12.6	=42/12.7	
-W11.054B	FG7(0)R 12x1.5mm²	1	2	3	4	5	

-Leiste / terminal strip -X12C

number of terminals / number of terminals: 102

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name	Date	
				Designer	XU HR
				Checked	LIU KP
				Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X12C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=20 +EH2
Job No.	1255	
Drawing No.	78.5692.60.00	
Sheet	21	
	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4				5						6						7						8						
											UK16	UK16	UK16	USLKG16																										
								X					X																											
	4mm					X	X																																
	6 mm										X	X																											
-W12.60	FG7(0)R 24x2.5mm²	12	13	14	24																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																					
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	78	79	80	81	2	4	6		2	4	6																										
	Kennzeichen Designation	=31+GRJ-X20P	=31+GRJ-X20P	=31+GRJ-X20P	=31+GRJ-X20P	=50+EH2-K52	=50+EH2-K52	=50+EH2-K52		=42+EH3-K45	=42+EH3-K45	=42+EH3-K45																										
Klemmen-Nr. / Terminal-no.		54	55	56	PE 57	58	59	60	PE 61	62	63	64	PE 65																									
Laschenverbindung / Link																																						
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	2	4	6		82	83	84	85	1	2	3	4																									
	Kennzeichen Designation	=21+EH3-Q22	=21+EH3-Q22	=21+EH3-Q22		=31+GRJ-X20P	=31+GRJ-X20P	=31+GRJ-X20P	=31+GRJ-X20P	=42+EHS-X45	=42+EHS-X45	=42+EHS-X45	=42+EHS-X45																									
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/2.7	=21/2.7	=21/2.7	=21/2.7	=50/1.5	=50/1.6	=50/1.6	=50/1.6	=42/1.3	=42/1.3	=42/1.3	=42/1.3																									
-W12.51	FG7(0)R 4x10mm²									1.0	2.0	3.0	4.0																									
-W12.60	FG7(0)R 24x2.5mm²					4	5	6	7																													
				X																																		
		X	X	X																																		

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X12P

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=20	+EH2
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	23	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-W12.62	Li2YCYv 4x2x0.5mm²	1.0	2.0	3.0	4.0	7.0	8.0	9.0	5.0	6.0	
Kabelnr. Cable-no.	Kabel-Typ Cable-type										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=31+GRJ-X20D 28	=31+GRJ-X20D 29	=31+GRJ-X20D 30	=31+GRJ-X20D 31	=31+GRJ-X20D 34	=31+GRJ-X20D 35	=31+GRJ-X20D 36	=31+GRJ-X20D 32	=31+GRJ-X20D 33	
	Kennzeichen Designation	46	47	48	49	50	51	52	53	54	
Klemmen-Nr. / Terminal-no.											
Laschenverbindung / Link											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	+EH5-U50.2 X521.1	+EH5-U50.2 X521.2	+EH5-U50.2 X521.3	+EH5-U50.2 X521.4	+EH5-U50.2 X521.5	+EH5-U50.2 X521.6	+EH5-U50.2 X521.8	+EH5-U50.2 X531.1	+EH5-U50.2 X531.2	
	Kennzeichen Designation	/18.5	/18.6	/18.6	/18.6	/18.6	/18.6	/18.6	/18.7	/18.7	
Kabelnr. Cable-no.	Kabel-Typ Cable-type										

conn. -Leiste / terminal strip -X12D

number of terminals / number of terminals: 36

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date			
Designer	XU HR		
Checked	LIU KP		
Standard			

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X12D

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=20 +EH3	
Job No.	1255	Drawing No. 78.5692.60.00	Sheet 25 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| Kabelnr. Cable-no. | Kabel-Typ Cable-type | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

Kabelnr. / Cable-no. — Kabel-Typ / Cable-type

Zielzeichen / Destination symbol — conn. - bezeichnung / Connection-no. — Kennzeichen / Designation

conn. -Leiste / terminal strip -X12C — number of terminals / number of terminals: 1

Klemmen-Nr. / Terminal-no.

Laschenverbindung / Link

Kabelnr. / Cable-no.	Kabel-Typ / Cable-type	conn. - bezeichnung / Connection-no.	Kennzeichen / Designation	Klemmen-Nr. / Terminal-no.
		A1	=31+EH2-K032	24
		44	=31+GRJ-X20C	
			=31/7.8	
-W12.60	FG7(0)R 24x2.5mm²			2

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X12C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=20	+TRJ
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 27	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6						7						8								
		UK5N				UK5N																																						
		X																																									
-W20.12	CF 9.25.18 18x2.5mm²								6.0	7.0																																	
-W20.10	CF 9.25.18 18x2.5mm²				2.0	1.0	3.0	4.0																																			
-W11.50	FG7(0)R 24x2.5mm²		2	7																																							
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	11	76	77	1	71	9	10	18	20																																	
	Kennzeichen Designation	=11+GRJ-S026	=11+EH1-X11C	=11+EH1-X11C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C																																	
Klemmen-Nr. / Terminal-no.		1	2	3	4	5	6	7	12	13																																	
Laschenverbindung / Link																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	75	21	22	12	78	27	28	63	67																																	
	Kennzeichen Designation	=11+EH1-X11C	=11+013-S028	=11+013-S028	=11+GRJ-S026	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=11/13.4	=11/13.5	=11/13.5	=11/13.5	=11/13.8	=11/15.2	=11/15.2	=11/19.6	=11/19.6																																	
-W11.50	FG7(0)R 24x2.5mm²	1				8	3	4																																	
-W11.50A	FG7(0)R 12x1.5mm²								7	8																																	
			X	X	X																																					

-X20C -Leiste / terminal strip / number of terminals: 58

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
nd.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X20C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=31	
		+GRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	28
			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3										4					5							6							7							8						
																UK5N	UK5N	UK5N	UK5N	UK5N		UK5N																							
-W20.13	CF 9.25.18 18x2.5mm²															16.0	17.0	15.0																											
-W20.12	CF 9.25.18 18x2.5mm²																		9.0	10.0	11.0	12.0																							
-W20.10	CF 9.25.18 18x2.5mm²																						12.0																						
-W20.9	CF 9.25.18 18x2.5mm²	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0		11.0	12.0	13.0																													
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	22	23	24	25	26	27	28	29	30	31		32	33	39	81	82	83	92	93	103	104	123																					
	Kennzeichen Designation	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C		+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C																					
Klemmen-Nr. / Terminal-no.		14	15	16	17	18	19	20	21	22	23	PE 24	25	26	27	30	31	32	40	41	42	43	44																					
Laschenverbindung / Link																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	6	17	18	19	16	15	52	50	7	4	42	9	13	14	15	16	17	20	21	22	23	24																					
	Kennzeichen Designation	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-BT2	=10+DGS-G1-BT2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=10+DGS-G1-TB2	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+TRJ-X12C																					
conn. -Leiste / terminal strip -X20C	number of terminals / number of terminals: 58																																										
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=11/29.4	=11/29.4	=11/29.5	=11/29.5	=11/29.5	=11/29.6	=11/29.5	=11/29.6	=11/29.7	=11/29.7	=11/29.7	=11/29.7	=11/29.7	=11/29.8	=21/6.2	=21/6.3	=21/6.4	/1.4	/1.4	/2.5	/2.5	/7.8																					
-W10.71	FG7(0)R 12x1.5mm²									1	2	12	4	5	6																													
-W10.71A	FG7(0)R 12x1.5mm²	1	2	3	4	5	6	7	8																																			
-W12.50	FG7(0)R 24x2.5mm²																		16	17	18	19																							
-W12.53	FG7(0)R 24x2.5mm²															1	2	16																										
-W12.60	FG7(0)R 24x2.5mm²																						2																						

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

			Date		
			Designer	XU HR	
			Checked	LIU KP	
nd.	Revision	Date	Name	Standard	

Costumer: AMPT Egypt

Source:

KLEMMENLEISTE-X20C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=31 +GRJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 29	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3								4							5						6								7								8							
		UK5N	UK5N	UK5N	UK5N												UK5N		UK5N																											
-W20.10	CF 9.25.18 18x2.5mm²									15.0	16.0	13.0	14.0																																	
-W20.9	CF 9.25.18 18x2.5mm²					17.0	15.0																																					
-W20.8A	CF 9.25.18 18x2.5mm²													4.0	5.0	1.0	2.0	16.0	17.0																											
-W20.8	CF 50.25.18 18x2.5mm²	5.0	6.0	7.0	8.0			1.0	2.0																																			
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	142	143	152	153	198	199	206	207	214	215	222	223	77	76	162	163	252	253																											
	Kennzeichen Designation	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C	+TRJ-X30C																											
Klemmen-Nr. / Terminal-no.		45	46	47	48	50	51	52	53	54	55	56	57	62	63	64	65	66	67																											
Laschenverbindung / Link																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	25	26	27	28	61	62	63	64	65	66	67	68	88	85	75	76	77	78																											
	Kennzeichen Designation	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=11+EH1-X11C	=11+EH1-X11C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C	=20+EH2-X12C																											
conn. -Leiste / terminal strip -X20C	number of terminals / number of terminals: 58																																											
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=34/2.6	=34/2.6	=34/3.6	=34/3.6	=50/4.4	=50/4.5	=50/5.5	=50/5.5	=50/6.5	=50/6.5	=50/7.5	=50/7.5	=11/9.8	=11/9.8	/3.5	/3.5	/4.5	/4.5																											
-W11.50	FG7(0)R 24x2.5mm²													10	12																													
-W12.53	FG7(0)R 24x2.5mm²	12	13	14	15											20	21	18	19																											
-W12.60	FG7(0)R 24x2.5mm²					10	11	18	19	16	17	20	21																															

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
nd.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X20C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=31 +GRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	30
			94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5							6							7							8						
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N			UK5N																									
-W20.60A	CF 11.05.04.02 4x2x0.5mm²																													1	2	3	4	5	6	7	8	9						
-W20.60	CF 11.05.04.02 4x2x0.5mm²																			1	2	3	4	5	6	7	8	9																
-W20.16	CF 11.05.04.02 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																		
-W20.14	CF 11.05.04.02 4x2x0.5mm²										1	2	3	4	5	6	7	8	9																								
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	80	81	82	83	84	85	86	87	88						
	Kennzeichen Designation	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D						
Klemmen-Nr. / Terminal-no.		1	2	3	4	5	6	7	8	9 sc	10	11	12	13	14	15	16	17	18 sc	19	20	21	22	23	24	25	26	27 sc	28	29	30	31	32	33	34	35	36 sc						
Laschenverbindung / Link																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	3	4	5	6	1	2	7	8	9	10	11	12	13	17	18	14	15	16	37	38	39	40	44	45	41	42	43	46	47	48	49	53	54	50	51	52						
	Kennzeichen Designation	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D	=20+EH3-X12D						
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	/1.6	/1.6	/1.7	/1.7	/1.7	/1.7	/1.7	/1.7	/1.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.8	=50/4.8	=50/4.8	=50/5.7	=50/5.8	=50/5.8	=50/5.8	=50/5.8	=50/5.8	=50/5.8	=50/5.8	=50/5.8	=50/5.8						
-W12.61	Li2YCYv 4x2x0.5mm²																			1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0																
-W12.62	Li2YCYv 4x2x0.5mm²																												1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0						
-W12.90	Li2YCYv(TP) 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																		
-W13.95	Li2YCYv(TP) 4x2x0.5mm²										1	2	3	4	5	6	7	8	9																								

-X20D -Leiste / terminal strip / number of terminals: 59

conn. number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

KLEMMENLEISTE-X20D

Klemmenplan / Terminal Diagram

Type RTG 50/26.50/5+1/AC =31 +GRJ

Job No. 1255 Drawing No. 78.5692.60.00 Sheet 33 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5							6								7								8							
-W20.61A	CF 11.05.04.02 4x2x0.5mm²										1	2	3	4	5	6	7	8	9																												
-W20.61	CF 11.05.04.02 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																						
-W20.15	CF 11.05.04.02 4x2x0.5mm²																			1	2	3	4	9																								
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																														
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	58	59	60	61	62																							
	Kennzeichen Designation	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D	+TRJ-X30D																							
Klemmen-Nr. / Terminal-no.		37	38	39	40	41	42	43	44	sc 45	46	47	48	49	50	51	52	53	sc 54	58	59	60	61	SC 62																							
Laschenverbindung / Link																																														
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	55	56	57	58	62	63	59	60	61	64	65	66	67	71	72	68	69	70	5	10	15	20	25																							
	Kennzeichen Designation	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=20+EH5-X12D	=18+EH5-X15D	=18+EH5-X15D	=18+EH5-X15D	=18+EH5-X15D	=18+EH5-X15D																							
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=50/6.7	=50/6.7	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/7.7	=50/7.7	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=18/3.2	=18/3.2	=18/3.2	=18/3.2	=18/3.3																							
-W12.63	Li2YCYv 4x2x0.5mm²	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0																																				
-W12.64	Li2YCYv 4x2x0.5mm²										1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0																												
-W15.94	LIYCY 2x2x1.0mm²																			1.0	2.0	3.0	4.0	5.0																							

conn. -Leiste / terminal strip -X20D

number of terminals / number of terminals: 59

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X20D

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=31 +GRJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 34	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3								4					5							6							7							8						
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	USLKG4																													
-W20.28	FG7(0)R 3x1.5mm²												2.0	3.0																													
-W20.12	CF 9.25.18 18x2.5mm²									4.0	5.0																															
-W20.11	CF 9.25.18 18x2.5mm²	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0																																	
-W20.10	CF 9.25.18 18x2.5mm²											5.0																															
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	2	3	4	5	6	7	8	10	19	29	X2	PE																													
	Kennzeichen Designation	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	+TRJ-X30L	=12+GR1-E41	=12+GR1-E41																													
Klemmen-Nr. / Terminal-no.		1	2	3	4	5	6	7	8	9	10	11	13	PE 14																													
Laschenverbindung / Link																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	20		21		22		23		24	27	155	111																													
	Kennzeichen Designation	=12+EH1-X11L		=12+EH1-X11L		=12+EH1-X11L		=12+EH1-X11L		=12+EH1-X11L	=12+EH1-X11L	=12+EH1-X11L	=12+EH1-X11L																													
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=11/25.3	=11/25.3	=11/25.3	=11/25.3	=11/25.4	=11/25.4	=11/25.4	=11/25.4	=12/1.2	=12/1.3	=12/2.6	=12/10.2	=12/10.3																													
-W11.50	FG7(0)R 24x2.5mm²											11																															
-W11.50A	FG7(0)R 12x1.5mm²									5	6		2																													
-W11.52	FG7(0)R 5x6mm²	1.0		2.0		3.0		4.0																																	

conn. -Leiste / terminal strip -X20L / number of terminals: 42

number of terminals

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X20L

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =31 +GRJ

Job No. 1255

Drawing No. 78.5692.60.00

Sheet 35
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | 5 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5							6							7							8						
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	USLKG4																																			
			X		X		X																																						
-W20.101	FG7(0)R 3x2.5mm²										1.0	2.0	3.0																																	
-W20.100	FG7(0)R 5x6mm²	1.0		2.0		3.0		4.0		5.0																																			
-W20.11	CF 9.25.18 18x2.5mm²								13.0																																				
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=12+GR1-XS20 L1	=12+GRJ-Q01 1	=12+GR1-XS20 L2	=12+GRJ-Q01 3	=12+GR1-XS20 L3	=12+GRJ-Q01 5	=12+GR1-XS20 N	+TRJ-X30L 64	=12+GR1-XS20 PE	=12+GR1-XS20A-X L	=12+GR1-XS20A-X N	=12+GR1-XS20A-X PE																																	
	Kennzeichen Designation																																												
Klemmen-Nr. / Terminal-no.		33	34	35	36	37	38	39	40	41 PE	43	44	45 PE																																
Laschenverbindung / Link																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=12+EH1-X11L 138		=12+EH1-X11L 140		=12+EH1-X11L 142		=12+EH1-X11L 144		=12+EH1-X11L 146																																		
	Kennzeichen Designation																																												
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=12/23.7	=12/24.5	=12/23.7	=12/24.5	=12/23.7	=12/24.6	=12/23.7	=12/24.6	=12/23.7	=12/24.2	=12/24.2	=12/24.2																																
-W11.57	FG7(0)R 5x6mm²	1.0		2.0		3.0		4.0		5.0																																		

-X20L -Leiste / terminal strip / number of terminals: 42

conn. number of terminals

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

Ind.	Revision	Date	Name

Date	
Designer	XU HR
Checked	LIU KP
Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X20L

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC
	=31 +GRJ
Job No.	1255
Drawing No.	78.5692.60.00
Sheet	37
	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

-W20.102	FG7(0)R 3x2.5mm²	1.0	2.0	3.0
Kabelnr. Cable-no.	Kabel-Typ Cable-type			
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=12+GR1-XS20B-X L	=12+GR1-XS20B-X N	=12+GR1-XS20B-X PE
	Kennzeichen Designation			
Klemmen-Nr. / Terminal-no.		46	47	PE 48
Laschenverbindung / Link				
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			
	Kennzeichen Designation			
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=12/24.4	=12/24.4	=12/24.4

conn. -Leiste / terminal strip -X20L

number of terminals / number of terminals: 42

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name		
				Date	
				Designer	XU HR
				Checked	LIU KP
				Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X20L

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =31 | +GRJ

Job No. 1255 | Drawing No. 78.5692.60.00 | Sheet 38 | 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3											4					5							6							7							8					
		UKH95	UKH95	UKH95	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N																																	
-W20.13	CF 9.25.18 18x2.5mm²				1.0	2.0	3.0	18.0	4.0	5.0	6.0	7.0																																	
-W20.5	CF 300.120.01 1x120mm²			1																																									
-W20.4A	CF 300.120.01 1x120mm²		1																																									
-W20.4	CF 300.120.01 1x120mm²	1																																										
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	W1	W1	PE	2	3	4	5	6	7	8	9																																	
	Kennzeichen Designation	=21+TR-M21	=21+TR-M21	=21+TR-M21	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P																																	
Klemmen-Nr. / Terminal-no.		3	3A	4	5	6	7	8	9	10	11	12																																	
				PE				PE				PE																																	
Laschenverbindung / Link																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			PE	2	3	4	5	6	7	8																																	
	Kennzeichen Designation	=20+EH6-G21		=20+EH6-G21	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/1.2	=21/1.2	=21/1.3	=21/2.2	=21/2.2	=21/2.2	=21/2.2	=21/2.5	=21/2.5	=21/2.5	=21/2.5																																	
-W12.50	FG7(0)R 24x2.5mm²				1	2	3	24	4	5	6																																	
-W13.4	FG7(0)R 1x120mm²			1																																								

-X20P -Leiste / terminal strip / number of terminals: 73

conn. number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X20P

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =31 | +GRJ

Job No. 1255 | Drawing No. 78.5692.60.00 | Sheet 40 | 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | 4 | | | | | | 5 | | | | | | 6 | | | | | | 7 | | | | | | 8 | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4							5							6							7							8						
										PE																																					
-W20.53	CF 35.40.04 4x4mm²										1	2	3	4																															
-W20.52	CF 35.40.04 4x4mm²					1	2	3	4																																				
-W20.51	CF 35.40.04 4x4mm²	1	2	3	4																																							
-W20.8	CF 50.25.18 18x2.5mm²														13.0	14.0	15.0	16.0																												
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	36	37	38	39	40	41	42	43	49	50	51	52	45	46	47	48																												
	Kennzeichen Designation	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P																												
Klemmen-Nr. / Terminal-no.		36	37	38	39 PE	40	41	42	43 PE	44	45	46	47 PE	52	53	54	55 PE																												
Laschenverbindung / Link																																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	x	y	z	PE	x	y	z	PE	x	y	z	PE	13	14	15																													
	Kennzeichen Designation	=20+EH4-L50.1	=20+EH4-L50.1	=20+EH4-L50.1	=20+EH4-G50.1	=20+EH4-L50.2	=20+EH4-L50.2	=20+EH4-L50.2	=20+EH4-G50.2	=20+EH4-L50.3	=20+EH4-L50.3	=20+EH4-L50.3	=20+EH4-G50.3	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P																												
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=50/5.2	=50/5.2	=50/5.2	=50/5.2	=50/6.2	=50/6.2	=50/6.2	=50/6.2	=50/7.2	=50/7.2	=50/7.2	=50/7.2	=34/3.2	=34/3.3	=34/3.3	=34/3.3																												
-W12.53	FG7(0)R 24x2.5mm²													7	8	9																												
-W18.41	FG7(0)R 4x4mm²	1	2	3	4																																							
-W18.42	FG7(0)R 4x4mm²					1	2	3	4																																			
-W18.43	FG7(0)R 4x4mm²									1	2	3	4																															

-Leiste / terminal strip -X20P

number of terminals / number of terminals: 73

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

KLEMMENLEISTE-X20P

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =31 | +GRJ

Job No. 1255 | Drawing No. 78.5692.60.00 | Sheet 42 | 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6							7							8						
		UK5N	UK5N	UK5N	UK5N	UK5N				UK5N																																		
-W20.13	CF 9.25.18 18x2.5mm²													8.0	9.0	10.0	11.0	12.0	13.0																									
-W20.11	CF 9.25.18 18x2.5mm²	14.0	15.0	16.0	18.0																																					
-W20.7A	CF 34.60.04 4x6mm²									1	2	3	4																													
-W20.6A	CF 34.60.04 4x6mm²					1	2	3	4																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	31	32	33	34	57	58	59	60	61	62	63	64	65	66	67	68	69	70																									
	Kennzeichen Designation	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P	+TRJ-X30P																									
Klemmen-Nr. / Terminal-no.		56	57	58	59	60	61	62	PE 63	64	65	66	PE 67	68	69	70	71	72	73																									
Laschenverbindung / Link																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	31	32	33	34	2	4	6		2	4	6		17	18	19	20	21	22																									
	Kennzeichen Designation	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	+EH5-Q33	+EH5-Q33	+EH5-Q33		+EH5-Q33A	+EH5-Q33A	+EH5-Q33A		=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P																									
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/4.2	=21/4.2	=21/4.2	=21/4.2	/3.2	/3.2	/3.2	/3.2	/4.2	/4.2	/4.2	/4.2	=51/1.3	=51/1.3	=51/1.3	=51/1.3	=51/1.3	=51/1.3																									
-W12.50	FG7(0)R 24x2.5mm²	20	21	22	23																																					
-W12.53	FG7(0)R 24x2.5mm²													3	4	5	6	10	11																									
-W14.5	FG7(0)R 4x6mm²					1	2	3																																			
-W14.6	FG7(0)R 4x6mm²									1	2	3																															

conn. -Leiste / terminal strip -X20P / number of terminals: 73

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
nd.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X20P

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=31 +GRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	43 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | | 4 | | | | 5 | | | | | 6 | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | | 5 | | | | | | 6 | | | | | | 7 | | | | | | 8 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6										7								8			
										UK5N	UK5N	UK5N	UK5N		UK5N													UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5					
										X	X			X	X				X	X																X						
-W20.9	CF 9.25.18 18x2.5mm²																																						14.0				
-W20.8A	CF 9.25.18 18x2.5mm²											16.0	17.0																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.									T1	T2	66	67	11	13				18	19																		8	72				
	Kennzeichen Designation									-F83	-F83	+GRJ-X20C	+GRJ-X20C	-K030.1	=61+TRJ-D31				=61+TRJ-D32	=61+TRJ-D32																		=61+TRJ-D35	+GRJ-X20C				
Klemmen-Nr. / Terminal-no.		241	242	243	244	246	247	248	249	250	251	252	253	254	256	PE257	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283			
Laschenverbindung / Link										6	7	10	11	bn	bk	PE	1	2	3	4																							
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	X41	X42	X41	X42																																8	73				
	Kennzeichen Designation	=34+TR-S34	=34+TR-S34	=34+TR-S35	=34+TR-S35					+TR-M33A	+TR-M33A	+TR-M33A	+TR-M33A	+TR-M33A	+TR-M33A	+TR-M33A	+TR-X31.2	+TR-X31.2	+TR-X31.2	+TR-X31.2																	=50+HBJ-X50C	=71+CAJ-X71C				
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=34/4.2	=34/4.2	=34/4.5	=34/4.5	/8.7	/8.7	/8.7	/8.8	/4.4	/4.4	/4.5	/4.5	/4.6	/4.6	/4.7	/8.2	/8.2	/8.2	/8.3	=50/4.6	=50/4.6	=50/5.6	=50/5.7	=50/6.6	=50/6.7	=50/7.6	=50/7.7	=34/2.7	=34/2.7	=34/3.7	=34/3.7	/2.6	/2.6	/3.6	/3.6	/4.6	/4.6	=50/3.4	=11/29.8			
-W30.35	FG7(0)R 12x1.5mm²									3	4	5	6	7	9	12																										
-W30.53	YSLToe-J 48x2.5mm²																																						14				
-W30.54	FG7(0)R 24x1.5mm²																																							14				
-W30.72	FG7(0)R 5x2.5mm²																1.0	2.0	3.0	4.0																							
-W30.75	FG7(0)R 3x0.75mm²	1.0	2.0																																								
-W30.76	FG7(0)R 3x0.75mm²			1.0	2.0																																					

-X30C

conn. -Leiste / terminal strip

number of terminals / number of terminals: 226

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

KLEMMENLEISTE-X30C

Klemmenplan / Terminal Diagram

Type RTG 50/26.50/5+1/AC =31 +TRJ

Job No. 1255

Drawing No. 78.5692.60.00

Sheet 51
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5							6							7							8					
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N			UK5N																									
-W20.61	CF 11.05.04.02 4x2x0.5mm²																													1	2	3	4	5	6	7	8	9					
-W20.60	CF 11.05.04.02 4x2x0.5mm²																			1	2	3	4	5	6	7	8																	
-W20.16	CF 11.05.04.02 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																		
-W20.14	CF 11.05.04.02 4x2x0.5mm²										1	2	3	4	5	6	7	8	9																								
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26			37	38	39	40	41	42	43	44	45					
	Kennzeichen Designation	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D			+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D					
Klemmen-Nr. / Terminal-no.		1	2	3	4	5	6	7	8	9 sc	10	11	12	13	14	15	16	17	18 sc	19	20	21	22	23	24	25	26	27 sc		37	38	39	40	41	42	43	44	45 sc					
Laschenverbindung / Link																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	K1	!K1	K2	!K2	+	-	Z	!Z	s	A	!A	B	!B	+	-	Z	!Z	SC	A	!A	B	!B	+	-	Z	!Z	27	SC	A	!A	B	!B	+	-	Z	!Z	SC					
	Kennzeichen Designation	+TR-M21-G1	+TR-M21-G1	+TR-M21-G1	+TR-M21-G1	+TR-M21-G1	+TR-M21-G1	+TR-M21-X	+TR-M21-X	+TR-M21-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M31-G1	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+TR-M50-X	+GRJ-X20D	+TR-M50-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X	+TR-M50.2-X					
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	=21/1.7	/1.6	/1.6	/1.7	/1.7	/1.7	/1.7	/1.7	/1.7	/1.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.7	=50/4.8	=50/4.8	=50/4.8		=50/6.7	=50/6.7	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8	=50/6.8					
-W20.60	CF 11.05.04.02 4x2x0.5mm²																											9														
-W30.62	Li2YCYv 4x2x0.5mm²																			1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0		9.0														
-W30.66	Li2YCYv 4x2x0.5mm²																													1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0					
-W30.92	Li2YCYv(TP) 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																		
-W30.97	Li2YCYv(TP) 4x2x0.5mm²										1	2	3	4	5	6	7	8	9																								

conn. -Leiste / terminal strip -X30D / number of terminals: 61

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

KLEMMENLEISTE-X30D

Klemmenplan / Terminal Diagram

Type RTG 50/26.50/5+1/AC =31 +TRJ

Job No. 1255

Drawing No. 78.5692.60.00

Sheet 52
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6							7							8						
																					UK5 N	UK5 N																						
-W71.94B	PROFIBUS CABLE 2x0.64mm²																				1	2																						
-W71.80	LIYCY 2x2x1.0mm²																				5.0																						
-W20.61A	CF 11.05.04.02 4x2x0.5mm²	1	2	3	4	5	6	7	8	9																																	
-W20.15	CF 11.05.04.02 4x2x0.5mm²										1		2		3		4		9																								
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																									
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	46	47	48	49	50	51	52	53	54	58		59		60		61		62	sc	+	-																					
	Kennzeichen Designation	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D	+GRJ-X20D		+GRJ-X20D		+GRJ-X20D		+GRJ-X20D		+GRJ-X20D	=18+CAB-B70-X	=51+CAJ-B30	=51+CAJ-B30																					
Klemmen-Nr. / Terminal-no.		46	47	48	49	50	51	52	53	54 sc	58		59		60		61		62 SC		63	64																					
Laschenverbindung / Link																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	A	!A	B	!B	+	-	Z	!Z	SC	8	8	9	9	10	12	11	13	sc		1	2																					
	Kennzeichen Designation	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=18+TR-B30	=18+CAB-B70	=18+TR-B30	=18+CAB-B70	=18+TR-B30	=18+CAB-B70	=18+TR-B30	=18+CAB-B70	=18+TR-B30-X		=50+HBJ-X50D	=50+HBJ-X50D																					
conn. -Leiste / terminal strip -X30D	number of terminals / number of terminals: 61																																									
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=50/7.7	=50/7.7	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=50/7.8	=18/3.2		=18/3.2		=18/3.2		=18/3.2		=18/3.3		=51/1.8	=51/1.8																					
-W30.53	YSLToe-J 48x2.5mm²																				10	11																					
-W30.69	Li2YCYv 4x2x0.5mm²	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0																																	
-W30.91	LIYCY 2x2x1.0mm²										1.0		2.0		3.0		4.0		5.0																								
-W71.80	LIYCY 2x2x1.0mm²											1.0		2.0		3.0		4.0																								

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date	
Designer	XU HR
Checked	LIU KP
Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X30D

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC
	=31 +TRJ
Job No.	1255
Drawing No.	78.5692.60.00
Sheet	53
	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | 4 | | | | | | 5 | | | | | | 6 | | | | | | 7 | | | | | | 8 | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3								4							5					6		7		8			
		UK5N	UK5N	UK5N	USLKG4	UK5N	UK5N	UK5N	USLKG4				UK10N				USLKG4												
-W30.15	FG7(0)R 4x2.5mm²																	1.0	2.0	3.0	4.0								
-W20.13	CF 9.25.18 18x2.5mm²	1.0	2.0	3.0	18.0	4.0	5.0	6.0	7.0																				
-W20.8	CF 50.25.18 18x2.5mm²													9.0	10.0	11.0	18.0												
-W20.7	CF 34.60.04 4x6mm²									1.0	2.0	3.0	4.0																
Kabelnr. Cable-no.	Kabel-Typ Cable-type																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	5	6	7	8	9	10	11	12	13	14	15	16	21	22	23	24	U	V	W	PE								
	Kennzeichen Designation	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	=21+TR-M22	=21+TR-M22	=21+TR-M22	=21+TR-M22	=21+TR-M22								
Klemmen-Nr. / Terminal-no.		2	3	4	PE 5	6	7	8	PE 9	10	11	12	PE 13	14	15	16	PE 17	18	19	20	PE 21	PE 24							
Laschenverbindung / Link																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	U	V	W	PE	U	V	W	PE	V1	U1	W1	PE	U	V	W	PE	78	79	80	81	7								
	Kennzeichen Designation	=21+TR-M70	=21+TR-M70	=21+TR-M70	=21+TR-M70	=21+TR-M80	=21+TR-M80	=21+TR-M80	=21+TR-M80	+TR-M32	+TR-M32	+TR-M32	+TR-M32	=34+TR-M34	=34+TR-M34	=34+TR-M34	=34+TR-M34	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	=50+HBJ-X50P								
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=21/2.2	=21/2.2	=21/2.2	=21/2.2	=21/2.5	=21/2.5	=21/2.5	=21/2.5	/2.2	/2.2	/2.2	/2.2	=34/2.2	=34/2.2	=34/2.2	=34/2.3	=21/2.7	=21/2.7	=21/2.7	=21/2.7	=51/1.5								
-W20.8A	CF 9.25.18 18x2.5mm²																	8.0	9.0	10.0	18.0								
-W30.6	FG7(0)R 4x6mm²									2	1	3	4																
-W30.10	FG7(0)R 4x2.5mm²	1.0	2.0	3.0	4.0																								
-W30.11	FG7(0)R 4x2.5mm²					1.0	2.0	3.0	4.0																				
-W30.53	YSLToe-J 48x2.5mm²																					7							
-W30.70	FG7(0)R 5x2.5mm²													1.0	2.0	3.0	5.0												

number of terminals: 73 / number of terminals -Leiste / terminal strip conn. -X30P

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X30P

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC =31 +TRJ

Job No. 1255 Drawing No. 78.5692.60.00 Sheet 59 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4							5							6							7							8						
						UK5N	UK5N	UK5N	USLKG4																																							
-W30.60B	FG7(0)R 4x4mm²													1	2	3	4																														
-W30.60A	FG7(0)R 4x4mm²									1	2	3	4																																		
-W30.60	FG7(0)R 4x4mm²	1	2	3	4																																									
-W20.11	CF 9.25.18 18x2.5mm²					14.0	15.0	16.0	18.0																																						
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=50+TR-M50-X	=50+TR-M50-X	=50+TR-M50-X	=50+TR-M50-X	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	=50+TR-M50.1	=50+TR-M50.1	=50+TR-M50.1	=50+TR-M50.1	=50+TR-M50.2-X	=50+TR-M50.2-X	=50+TR-M50.2-X	=50+TR-M50.2-X																																
	Kennzeichen Designation	U1	V1	W1	PE	56	57	58	59	U1	V1	W1	PE	U1	V1	W1	PE																														
Klemmen-Nr. / Terminal-no.		25	26	27	28	31	32	33	34	36	37	38	39	40	41	42	43																												
Laschenverbindung / Link					PE				PE				PE				PE																												
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	32	33	34	35	U	V	W	PE	36	37	38	39	40	41	42	43																														
	Kennzeichen Designation	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	=21+TR-M71	=21+TR-M71	=21+TR-M71	=21+TR-M71	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=50/4.2	=50/4.2	=50/4.2	=50/4.2	=21/4.2	=21/4.2	=21/4.2	=21/4.2	=50/5.2	=50/5.2	=50/5.2	=50/5.2	=50/6.2	=50/6.2	=50/6.2	=50/6.2																														
-W20.50A	CF 35.40.04 4x4mm²	1	2	3	4																																								
-W20.51	CF 35.40.04 4x4mm²									1	2	3	4																																
-W20.52	CF 35.40.04 4x4mm²													1	2	3	4																												
-W30.8	FG7(0)R 4x2.5mm²					1.0	2.0	3.0	4.0																																						

conn. -Leiste / terminal strip -X30P / number of terminals: 73

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date	
				Designer	XU HR
				Checked	LIU KP
nd.	Revision	Date	Name	Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X30P

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC | =31 | +TRJ

Job No. 1255 | Drawing No. 78.5692.60.00 | Sheet 60 | 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4							5						6							7							8						
					USLKG4									UK10N				UK10N																										
-W30.60C	FG7(0)R 4x4mm²					1	2	3	4																																		
-W20.8	CF 50.25.18 18x2.5mm²	13.0	14.0	15.0	16.0																																						
-W20.7A	CF 34.60.04 4x6mm²													1	2	3	4																										
-W20.6A	CF 34.60.04 4x6mm²									1	2	3	4																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	52	53	54	55	U1	V1	W1	PE	60	61	62	63	64	65	66	67																										
	Kennzeichen Designation	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	=50+TR-M50.3-X	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P																										
Klemmen-Nr. / Terminal-no.		45	46	47	PE 48	49	50	51	PE 52	57	58	59	PE 60	61	62	63	PE 64																										
Laschenverbindung / Link																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	U	V	W	PE	44	45	46	47	V1	U1	W1	PE	V1	U1	W1	PE																										
	Kennzeichen Designation	=34+TR-M35	=34+TR-M35	=34+TR-M35	=34+TR-M35	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+GRJ-X20P	+TR-M33	+TR-M33	+TR-M33	+TR-M33	+TR-M33A	+TR-M33A	+TR-M33A	+TR-M33A																										
Kabelnr. Cable-no.	Kabel-Typ Cable-type	=34/3.2	=34/3.3	=34/3.3	=34/3.3	=50/7.2	=50/7.2	=50/7.2	=50/7.2	/3.2	/3.2	/3.2	/3.2	/4.2	/4.2	/4.2	/4.2																										
-W20.53	CF 35.40.04 4x4mm²					1	2	3	4																																		
-W30.7	FG7(0)R 4x6mm²									2	1	3	4																														
-W30.7A	FG7(0)R 4x6mm²													2	1	3	4																										
-W30.71	FG7(0)R 5x2.5mm²	1.0	2.0	3.0	5.0																																						

conn. -Leiste / terminal strip -X30P / number of terminals: 73

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date	
Designer	XU HR
Checked	LIU KP
Standard	

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X30P

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC
	=31 +TRJ
Job No.	1255
Drawing No.	78.5692.60.00
Sheet	61
	94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

-X40C -Leiste / terminal strip / number of terminals: 118

| Kabelnr. Cable-no. | Kabel-Typ Cable-type | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3										4				5							6							7							8						
-W15.93	LIYCY 2x2x1.0mm²	1.0		2.0		3.0		4.0		5.0																																
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																									
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	-X40D	number of terminals: 10	4		9		14		19		24		-X40F	number of terminals: 13	14	14	14	14	14	14	14	14	14	14	14	14	14	14														
	Kennzeichen Designation	conn. -Leiste / terminal strip		=18+EH5-X15D		=18+EH5-X15D		=18+EH5-X15D		=18+EH5-X15D		=18+EH5-X15D		conn. -Leiste / terminal strip		=61+DSJ-KX42	=61+DSJ-KX43	=61+DSJ-KX46	=61+DSJ-KX035	=61+DSJ-KX37	=61+DSJ-KX38	=61+DSJ-KX39	=61+DSJ-KX40	=61+DSJ-KX41	=61+DSJ-KX052	=61+DSJ-KX053	=61+DSJ-KX054	=61+DSJ-KX055														
Klemmen-Nr. / Terminal-no.				1	2	3	4	5	6	7	8	9	10			2A 1	2A 2	2A 3	2A 4	2A 5	2A 6	2A 7	2A 8	2A 9	2A 10	2A 11	2A 12	2A 13														
Laschenverbindung / Link																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			8	8	9	9	10	10	11	11	sc	sc			26	27	28	29	30	31	32	33	34	35	36	37	38														
	Kennzeichen Designation		number of terminals	=18+DS-B40	=18+DSP-B41	=18+DS-B40	=18+DSP-B41	=18+DS-B40	=18+DSP-B41	=18+DS-B40	=18+DSP-B41	=18+DS-B40-X	=18+DSP-B41-X		number of terminals	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46	=42+DS-X46														
Kabelnr. Cable-no.	Kabel-Typ Cable-type			=18/2.4	=18/2.7	=18/2.4	=18/2.7	=18/2.4	=18/2.7	=18/2.4	=18/2.7	=18/2.4	=18/2.8			=42/9.2	=42/9.2	=42/9.3	=42/9.4	=42/9.5	=42/9.6	=42/9.6	=42/9.7	=42/9.8	=42/15.5	=42/15.6	=42/15.7	=42/15.8														
-W40.4	LIYCY 2x2x1.0mm²	1.0		2.0		3.0		4.0		5.0																																
-W40.5	LIYCY 2x2x1.0mm²		1.0		2.0		3.0		4.0		5.0																																
-W40.50	FG7(0)R 24x2.5mm²															3	4	5	6	7	8	9	10	11	19	20	21	22														

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

| | | | | | | | | | | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | 5 | | | | | | 6 | | | | | 7 | | | | | | | | 8 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4	5	6	7	8
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N					
-W40.50	FG7(0)R 24x2.5mm²	5	6	7	8	9	10	11	19	20					
Kabelnr. Cable-no.	Kabel-Typ Cable-type														
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	3	4	5	6	7	8	9	10	11					
	Kennzeichen Designation	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40F					
Klemmen-Nr. / Terminal-no.		28	29	30	31	32	33	34	35	36					
Laschenverbindung / Link															
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	1	1	1	1	1	1	1	1					
	Kennzeichen Designation	-Y3b	-Y4a	-Y5b	-Y6a	-Y7b	-Y8a	-Y9b	-Y32a	-Y33b					
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/9.3	/9.4	/9.5	/9.6	/9.6	/9.7	/9.8	/15.5	/15.6					
-W46.5	H05RN-F 3x0.75mm²	1													
-W46.6	H05RN-F 3x0.75mm²		1												
-W46.7	H05RN-F 3x0.75mm²			1											
-W46.8	H05RN-F 3x0.75mm²				1										
-W46.9	H05RN-F 3x0.75mm²					1									
-W46.10	H05RN-F 3x0.75mm²						1								
-W46.11	H05RN-F 3x0.75mm²							1							
-W46.121	H05RN-F 3x0.75mm²								1						
-W46.131	H05RN-F 3x0.75mm²									1					

-X46 -Leiste / terminal strip / number of terminals: 72

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X46

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +DS	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	75 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6						7						8								
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N																																	
-W40.50	FG7(0)R 24x2.5mm²	21	22	13																																							
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	12	13	82																																							
	Kennzeichen Designation	=41+DSJ-X40F	=41+DSJ-X40F	=41+DSJ-X40C																																							
Klemmen-Nr. / Terminal-no.		37	38	39	40	41	42	43	44	45																																	
Laschenverbindung / Link				●	●	●	●	●	●	●																																	
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	1	2	2	2	2	2	2	2																																	
	Kennzeichen Designation	-Y42a	-Y43b	-Y1a	-Y2a	-Y3b	-Y4a	-Y5b	-Y6a	-Y7b																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/15.7	/15.8	/9.2	/9.2	/9.3	/9.4	/9.5	/9.6	/9.6																																	
-W46.3	H05RN-F 3x0.75mm²			2																																							
-W46.4	H05RN-F 3x0.75mm²				2																																						
-W46.5	H05RN-F 3x0.75mm²					2																																					
-W46.6	H05RN-F 3x0.75mm²						2																																				
-W46.7	H05RN-F 3x0.75mm²							2																																			
-W46.8	H05RN-F 3x0.75mm²								2																																		
-W46.9	H05RN-F 3x0.75mm²									2																																	
-W46.14	H05RN-F 3x0.75mm²	1																																								
-W46.15	H05RN-F 3x0.75mm²		1																																							

-X46 -Leiste / terminal strip / number of terminals: 72

conn. number of terminals 1 1 2 2 2 2 2 2 2 2

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X46

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +DS	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	76 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3								4						5						6						7						8						
				UK5N	UK5N	UK5N	UK5N	USLKG4	USLKG4	USLKG4																														
				X																																			
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																							
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			82																																				
	Kennzeichen Designation			=41+DSJ-X40C																																				
Klemmen-Nr. / Terminal-no.	-X46 -Leiste / terminal strip / number of terminals: 72			48	49	50	51	52 PE	53 PE	54 PE																														
Laschenverbindung / Link																																								
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			2	2	2	2	PE	PE	PE																														
	Kennzeichen Designation	number of terminals	conn.	-Y32a	-Y33b	-Y42a	-Y43b	-Y1a	-Y2a	-Y3b																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/9.7	/9.8	/15.5	/15.6	/15.7	/15.8	/9.2	/9.3	/9.3																														
-W46.3	H05RN-F 3x0.75mm²							3																																
-W46.4	H05RN-F 3x0.75mm²								3																																
-W46.5	H05RN-F 3x0.75mm²									3																																
-W46.10	H05RN-F 3x0.75mm²	2																																						
-W46.11	H05RN-F 3x0.75mm²		2																																					
-W46.14	H05RN-F 3x0.75mm²					2																																		
-W46.15	H05RN-F 3x0.75mm²						2																																	
-W46.121	H05RN-F 3x0.75mm²			2																																				
-W46.131	H05RN-F 3x0.75mm²				2																																			

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X46

Klemmenplan / Terminal Diagram

Type RTG 50/26.50/5+1/AC =42 +DS

Job No. 1255

Drawing No. 78.5692.60.00

Sheet 77
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

Kabelnr. / Cable-no. — Kabel-Typ / Cable-type

Zielzeichen / Destination symbol — conn. - bezeichnung / Connection-no. — Kennzeichen / Designation

-X46 -Leiste / terminal strip / number of terminals: 72

Klemmen-Nr. / Terminal-no.: PE 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72

Laschenverbindung / Link

Zielzeichen / Destination symbol — conn. - bezeichnung / Connection-no. — Kennzeichen / Designation

number of terminals: PE | -Y43b

Kabelnr. / Cable-no. — Kabel-Typ / Cable-type: /15.8 | /9.7 | /9.7 | /9.7 | /9.7 | /9.8 | /9.8 | /9.8 | /9.8

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

-W46.15	H05RN-F 3x0.75mm²	3

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type
Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X46

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +DS	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 79	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5							6										7								8					
		UK5N	UK5N	UK5N	UK5N						UK5N	UK5N		UK5N	UK5N	UK5N	UK5N							UK5N	UK5N	UK5N	UK5N																				
-W42.71	FG7(0)R 24x2.5mm²	1												2									3	4	5	6	7	8	9	10	11	12	13													
-W12.23	FG7(0)R 12x1.5mm²																																	3	4	5	6	7	8	9					
-W11.75	FG7(0)R 5x1.5mm²										1.0	2.0	4.0																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	=11+EH1-X11C 124									=11+EH1-X11C 90	=11+EH1-X11C 92	=11+EH1-X11C 82	=11+EH1-X11C 129									=11+EH1-X11C 211	=11+EH1-X11C 212	=11+EH1-X11C 93	=11+EH1-X11C 94	=11+EH1-X11C 95	=11+EH1-X11C 96	=11+EH1-X11C 97	=11+EH1-X11C 98	=11+EH1-X11C 99	=11+EH1-X11C 100	=11+EH1-X11C 101	=20+EH2-X12C 37	=20+EH2-X12C 38	=20+EH2-X12C 39	=20+EH2-X12C 40	=20+EH2-X12C 41	=20+EH2-X12C 42	=20+EH2-X12C 43				
	Kennzeichen Designation																																												
Klemmen-Nr. / Terminal-no.	-Leiste / terminal strip -X42C / number of terminals: 41	1	2	3	4	5	6	7	8	9	10	11	12	14	15	16	17	18	19	20	21	22	30	31	32	33	34	35	36	37	38	39	PE 40	50	51	52	53	54	55	56					
Laschenverbindung / Link																																													
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	1	+	1	1	1	1			1	3	4	3	3	-	3	3	3	3			4	4	4	4	4	4	4					6	7	10	11	bn	bu	bk					
	Kennzeichen Designation	-S42.1	-S42.2	-S42.3	-S42.4	-S42.5	-S42.6	-S42.7			=41+EHS-S48.2	=41+EHS-S48.2	=41+EHS-S48.2	-S42.1	-S42.2	-S42.3	-S42.4	-S42.5	-S42.6	-S42.7			-S42.1	-S42.2	-S42.3	-S42.4	-S42.5	-S42.6	-S42.7					=41+EHS-M42	=41+EHS-M42	=41+EHS-M42	=41+EHS-M42	=41+EHS-M42	=41+EHS-M42	=41+EHS-M42					
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/4.2	/4.3	/4.4	/4.4	/4.5	/4.6	/4.7	/4.8	/4.8	=41/8.3	=41/8.3	=41/9.3	/4.2	/4.3	/4.4	/4.5	/4.5	/4.6	/4.7	/4.8	/4.8	/4.2	/4.3	/4.4	/4.4	/4.5	/4.6	/4.7	/4.7	/4.7	/4.8	/4.8	=41/2.4	=41/2.4	=41/2.5	=41/2.5	=41/2.6	=41/2.6	=41/2.6					
-W12.20A	CF 9.25.18 12x1.5mm²																																	4	5	6	7	8	9	10					
-W42.1	PUR 3x0.34mm²	1.0												2.0									3.0																							
-W42.2	PUR 3x0.34mm²		1.0												2.0									3.0																					
-W42.3	PUR 3x0.34mm²			1.0												2.0									3.0																				
-W42.4	PUR 3x0.34mm²				1.0												2.0									3.0																			
-W42.5	PUR 3x0.34mm²					1.0												2.0									3.0																		
-W42.6	PUR 3x0.34mm²						1.0												2.0									3.0																	
-W42.7	PUR 3x0.34mm²							1.0												2.0									3.0																

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X42C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +EHS	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	82 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

1	2	3										4					5					6					7									8								
		UK16	UK16	UK16	USLKG16	UK5N	UK5N		UK5N	UK5N	UK5N															UK5N																
-W42.53A	FG7(0)R 12x2.5mm²											8.0	1.0			3.0	2.0		5.0	4.0		9.0	6.0			7.0																
-W42.53	FG7(0)R 24x2.5mm²					1	2		22	23																	3	4														
-W12.51	FG7(0)R 4x10mm²	1.0	2.0	3.0	4.0																																					
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																									
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	62	63	64	65	150	170		152	172		IO EHS+	107			108	125		220	126		IO EHS-	221			222	113	114														
	Kennzeichen Designation	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=20+EH2-X12P	=12+EH1-X11L	=12+EH1-X11L		=12+EH1-X11L	=12+EH1-X11L			=11+EH1-X11C			=11+EH1-X11C	=11+EH1-X11C		=11+EH1-X11C	=11+EH1-X11C			=11+EH1-X11C			=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C													
Klemmen-Nr. / Terminal-no.	-Leiste / terminal strip -X45 / number of terminals: 72	1	2	3	4 PE	5	6	7 PE	8	9	10 PE	11	12	13 PE	14	15	16	17	18	19	20	21	22	23	24	25	26	27													
Laschenverbindung / Link	conn. number of terminals																																								
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	U	V	W	PE	1	2	PE	1	2	PE	1	4	PE	1	2	4	1	2	4	1	3	4	1	3	4	1	1													
	Kennzeichen Designation	-M45	-M45	-M45	-M45	-M45-E1	-M45-E1	-M45-E1	-M45-R1	-M45-R1	-M45	-S45.1	-S45.1	+EH1-S45	-S45.2	-S45.2	-S45.2	-S45.3	-S45.3	-S45.3	-S45.4	-S45.4	-S45.4	-S45.4	-S45.5	-S45.5	-S45.5	-Y1a	-Y2a													
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/1.3	/1.3	/1.3	/1.3	/1.3	/1.4	/1.4	/1.4	/1.4	/1.4	/8.2	/8.2	/8.3	/8.4	/8.4	/8.4	/8.5	/8.5	/8.5	/8.6	/8.6	/8.6	/8.6	/8.7	/8.7	/8.7	/7.2	/7.2													
-W45.1	FG7(0)R 4x6mm²	1	2	3	4																																					
-W45.2	H07RN-F 3G2.5mm²					1	2	3																																		
-W45.2A	H07RN-F 3G2.5mm²								1	2	3																															
-W45.3	H05RN-F 3x0.75mm²																										1														
-W45.4	H05RN-F 3x0.75mm²																											1													
-W45.12	H05RN-F 3x0.75mm²											1	2	3																											
-W45.13	H07RN-F 7G1.5mm²														1	2	3	4	5	6																					
-W45.13A	H05RN-F 3x0.75mm²																				1	3	2																		
-W45.13B	H05RN-F 3x0.75mm²																							1	3	2															

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

Ind.	Revision	Date	Name

Date
Designer XU HR
Checked LIU KP
Standard

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X45

Klemmenplan / Terminal Diagram

Type RTG 50/26.50/5+1/AC =42 +EHS

Job No. 1255

Drawing No. 78.5692.60.00

Sheet 84
94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6						7						8							
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N																																		
-W42.53	FG7(0)R 24x2.5mm²	5	6	7	8	9	10	11	19	20																																
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																									
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	115	116	117	118	119	120	121	172	173																																
	Kennzeichen Designation	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C																																
Klemmen-Nr. / Terminal-no.		28	29	30	31	32	33	34	35	36																																
Laschenverbindung / Link																																									
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	1	1	1	1	1	1	1	1																																
	Kennzeichen Designation	-Y3b	-Y4a	-Y5b	-Y6a	-Y7b	-Y8a	-Y9b	-Y12a	-Y13b																																
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/7.3	/7.4	/7.5	/7.5	/7.6	/7.7	/7.8	/15.2	/15.3																																
-W45.5	H05RN-F 3x0.75mm²	1																																							
-W45.6	H05RN-F 3x0.75mm²		1																																						
-W45.7	H05RN-F 3x0.75mm²			1																																					
-W45.8	H05RN-F 3x0.75mm²				1																																				
-W45.9	H05RN-F 3x0.75mm²					1																																			
-W45.10	H05RN-F 3x0.75mm²						1																																		
-W45.11	H05RN-F 3x0.75mm²							1																																	
-W45.121	H05RN-F 3x0.75mm²								1																																
-W45.131	H05RN-F 3x0.75mm²									1																																

-X45 -Leiste / terminal strip / number of terminals: 72

number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X45

Klemmenplan / Terminal Diagram

Type: RTG 50/26.50/5+1/AC =42 +EHS

Job No. 1255 Drawing No. 78.5692.60.00 Sheet 85 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3									4						5						6						7						8								
		UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N	UK5N																																	
-W42.53	FG7(0)R 24x2.5mm²	21	15	12																																							
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	174	175	104																																							
	Kennzeichen Designation	=11+EH1-X11C	=11+EH1-X11C	=11+EH1-X11C																																							
Klemmen-Nr. / Terminal-no.		37	38	39	40	41	42	43	44	45																																	
Laschenverbindung / Link				●	●	●	●	●	●	●																																	
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	1	1	2	2	2	2	2	2	2																																	
	Kennzeichen Designation	-Y22a	-Y23b	-Y1a	-Y2a	-Y3b	-Y4a	-Y5b	-Y6a	-Y7b																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/15.3	/15.4	/7.2	/7.2	/7.3	/7.4	/7.5	/7.5	/7.6																																	
-W45.3	H05RN-F 3x0.75mm²			2																																							
-W45.4	H05RN-F 3x0.75mm²				2																																						
-W45.5	H05RN-F 3x0.75mm²					2																																					
-W45.6	H05RN-F 3x0.75mm²						2																																				
-W45.7	H05RN-F 3x0.75mm²							2																																			
-W45.8	H05RN-F 3x0.75mm²								2																																		
-W45.9	H05RN-F 3x0.75mm²									2																																	
-W45.14	H05RN-F 3x0.75mm²	1																																								
-W45.15	H05RN-F 3x0.75mm²		1																																							

-X45 conn. -Leiste / terminal strip / number of terminals: 72 — number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X45

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +EHS	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	86	94 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3								4						5						6						7						8						
				UK5N	UK5N	UK5N	UK5N	USLKG4	USLKG4	USLKG4																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																							
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.																																							
	Kennzeichen Designation																																							
Klemmen-Nr. / Terminal-no.		46	47	48	49	50	51	52	53	54																														
Laschenverbindung / Link								PE	PE	PE																														
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	2	2	2	2	2	2	PE	PE	PE																														
	Kennzeichen Designation	-Y8a	-Y9b	-Y12a	-Y13b	-Y22a	-Y23b	-Y1a	-Y2a	-Y3b																														
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/7.7	/7.8	/15.2	/15.3	/15.3	/15.4	/7.2	/7.3	/7.3																														
-W45.3	H05RN-F 3x0.75mm²							3																																
-W45.4	H05RN-F 3x0.75mm²								3																																
-W45.5	H05RN-F 3x0.75mm²									3																																
-W45.10	H05RN-F 3x0.75mm²	2																																						
-W45.11	H05RN-F 3x0.75mm²		2																																					
-W45.14	H05RN-F 3x0.75mm²					2																																		
-W45.15	H05RN-F 3x0.75mm²						2																																	
-W45.121	H05RN-F 3x0.75mm²			2																																				
-W45.131	H05RN-F 3x0.75mm²				2																																			

-X45 -Leiste / terminal strip / number of terminals: 72

conn. number of terminals

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

☐ = Kabelconn. above / Cable connection top
☒ = Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL

KLEMMENLEISTE-X45

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=42 +EHS	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	87 94 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3	4	5	6	7	8

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | | 5 | | | | | | 6 | | | | | | 7 | | | | | | 8 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1	2	3										4						5						6						7						8								
-W50.78	PUR 3x0.34mm²											2.0																																
-W50.77	PUR 3x0.34mm²		2.0																																									
-W50.76	PUR 3x0.34mm²	2.0																																									
-W30.53	YSLToe-J 48x2.5mm²			16	17	18																																				
Kabelnr. Cable-no.	Kabel-Typ Cable-type																																										
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.	3	3	193	194	195						3																																
	Kennzeichen Designation	+HB-S50.6	+HB-S50.7	=31+TRJ-X30C	=31+TRJ-X30C	=31+TRJ-X30C						+HB-S50.8																																
Klemmen-Nr. / Terminal-no.		24	25	26	27	28	29	30	31	32	33																																
Laschenverbindung / Link																																											
Zielzeichen Destination symbol	conn. - bezeichnung Connection-no.			1	1	1	1	1	1	1																																
	Kennzeichen Designation			+HB-S50.5	+HB-S50.6	+HB-S50.7	+HB-S50.6	+HB-S50.7	+HB-S50.8	+HB-S50.9																																	
Kabelnr. Cable-no.	Kabel-Typ Cable-type	/2.4	/2.5	/2.3	/2.4	/2.5	/2.4	/2.5	/2.6	/2.7	/2.6																																
-W50.75	PUR 3x0.34mm²			3.0																																						
-W50.76	PUR 3x0.34mm²				3.0		1.0																																				
-W50.77	PUR 3x0.34mm²					3.0		1.0																																			
-W50.78	PUR 3x0.34mm²								1.0																																			
-W50.79	PUR 3x0.34mm²									1.0																																		

conn. -Leiste / terminal strip -X50C
number of terminals / number of terminals: 39

conn. -Leiste waagrecht, left ; senkrecht, right
Terminal strip horizontal, left; vertical, right

= Kabelconn. above / Cable connection top
= Kabelconn. down / Cable connection bottom

Reihenklemmen-Typ / Line-up terminal type

Klemme/Terminal _____ Klemme/Terminal _____

Allgemeiner Hinweis / General remarks

conn. von page / from sheet

Adern insgesamt aufgelegt / total no. of cores

conn. n

				Date		
				Designer	XU HR	
				Checked	LIU KP	
Ind.	Revision	Date	Name	Standard		

Costumer: AMPT Egypt

Source:

NOELL

KLEMMENLEISTE-X50C

Klemmenplan / Terminal Diagram

Type	RTG 50/26.50/5+1/AC	=50	
		+HBJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 92	94 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

| 1 | 2 | 3 | | | | | | | | | | 4 | | | | | 5 | | | | | | | 6 | | | | | | | 7 | | | | | | | 8 | | | | | | | | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.


1 | 2 | 3 | 4 | 5 | 6 | 7 | 8


| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

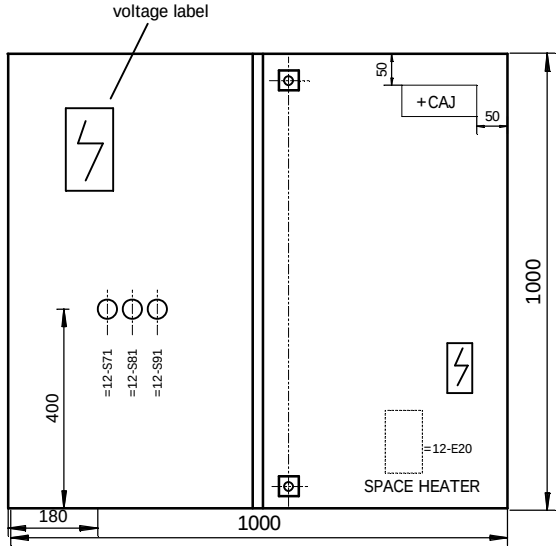

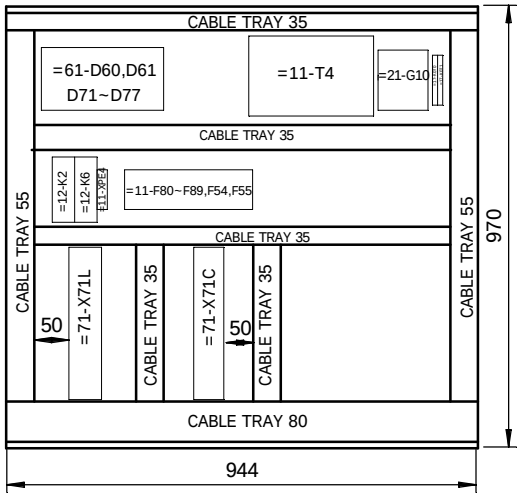

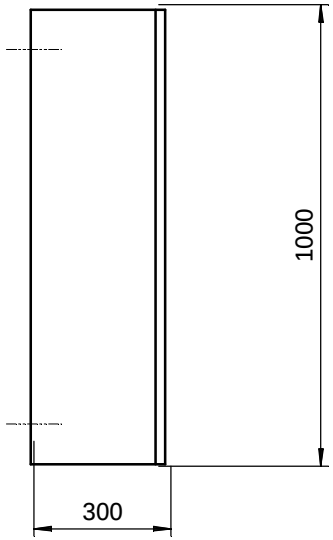

view inside

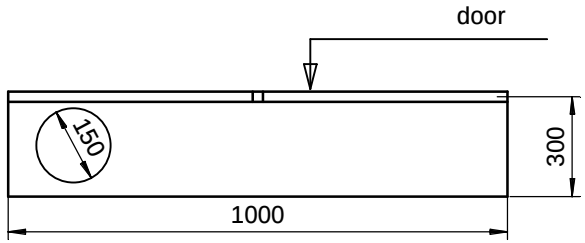

view from bottom

item	code	comment
1	=12-S71	access &walkway linght
2	=12-S81	flood light gantry
3	=12-S91	flood light trolley

Material: steel


IP class: IP55

Painting color: RAL7030

				Date		Costumer	AMPT Egypt	Cabin junctionbox layout	Type RTG 50/26.50/5+1/AC	=LAD +CAJ
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout		Sheet 1 1 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

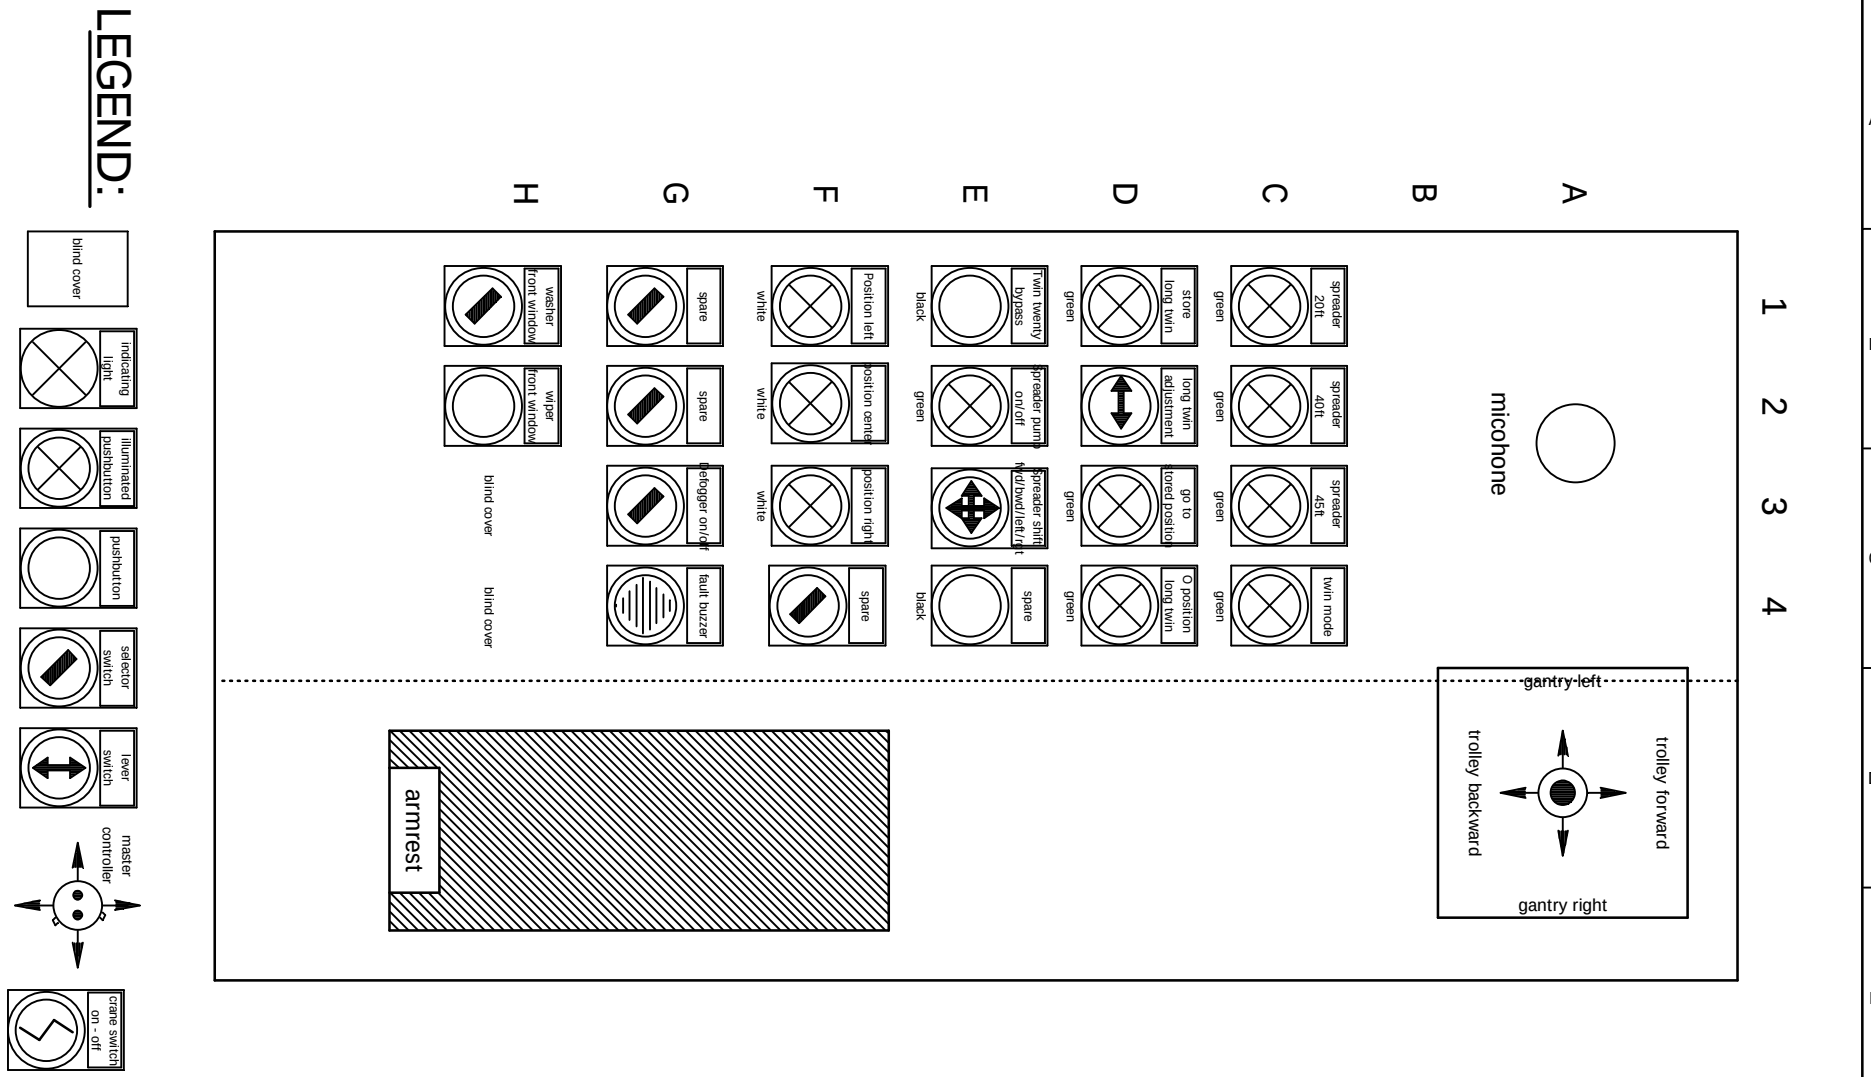


				Date		Costumer	AMPT Egypt	Type	RTG 50/26.50/5+1/AC
				Designer	XU HR				
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Sheet 1 / 2 Sh.

NOELL

Stromlaufplan / Circuit Diagram

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

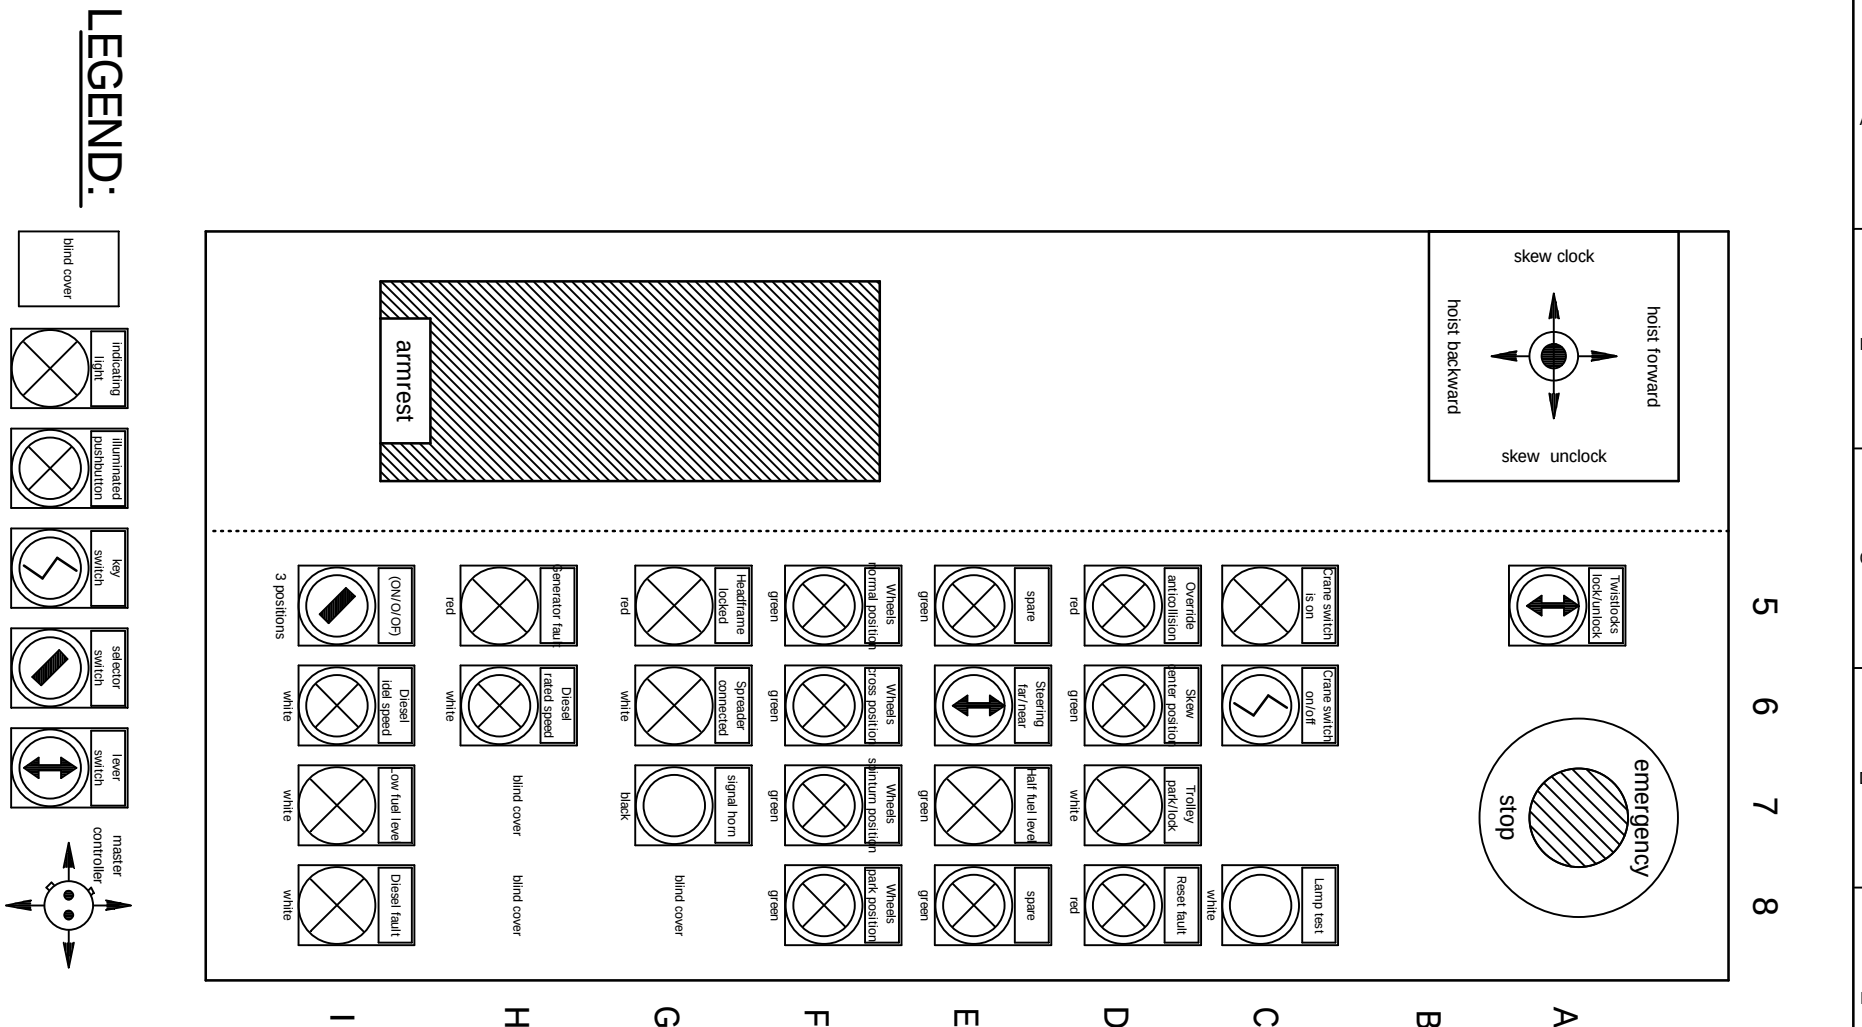

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL


Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC		
Job No. 1255	Drawing No. 78.5692.60.00	Sheet 2	2 Sh.


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

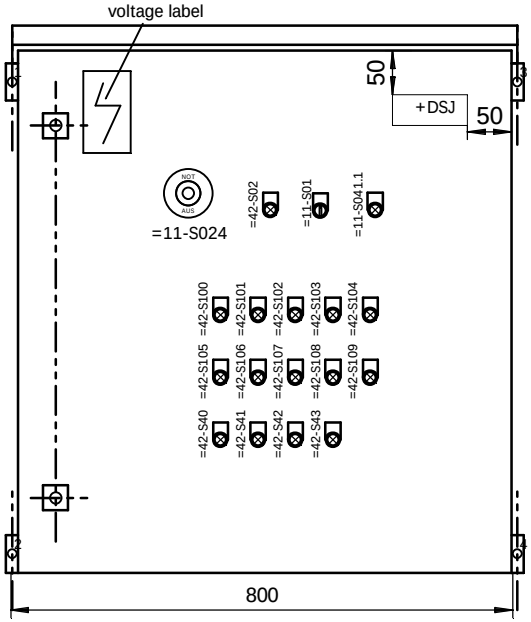

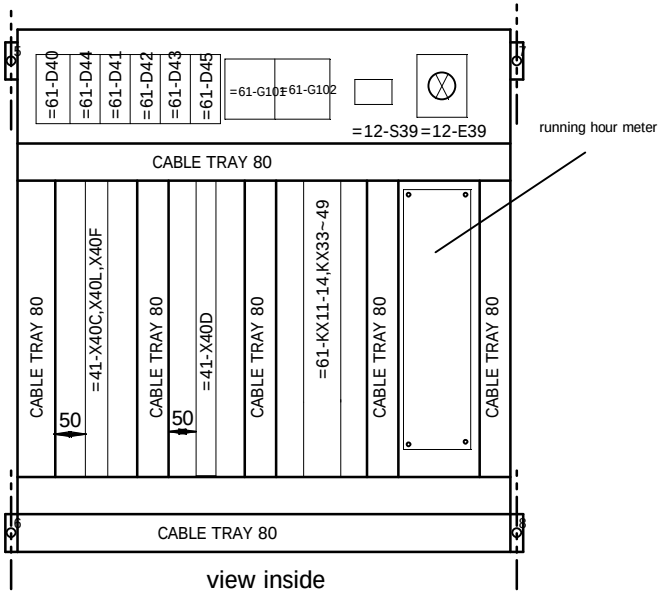

view inside

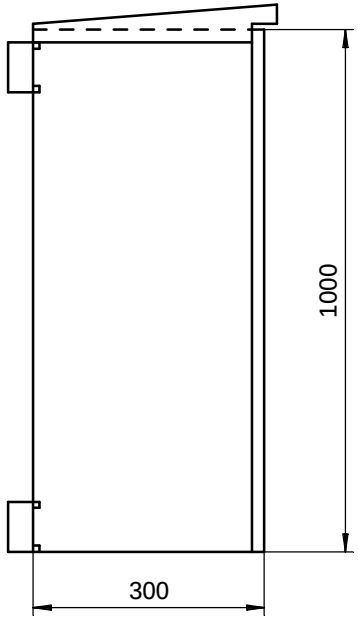

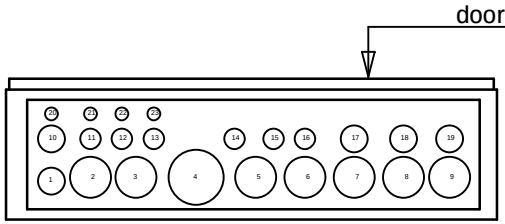

view from bottom

item	code	comment
1	=11-S024	E-STOP
2	=42-S02	+DSJ CONTROL ON
3	=11-S01	GENSETER/SHORE POWER
4	=11-S041.1	fault reset
5	=42-S100	corner 3 90position
6	=42-S101	corner3 0position
7	=42-S102	corner3 spinturn position
8	=42-S103	cylinder 3 lock
9	=42-S104	cylinder 3 unlock
10	=42-S105	corner 4 90position
11	=42-S106	corner4 0position
12	=42-S107	corner 4 spinturn position
13	=42-S108	cylinder 4 lock
14	=42-S109	cylinder 4unlock
15	=42-S40	jack corner3 up
16	=42-S41	jack corner3 down
17	=42-S42	jack corner4 up
18	=42-S43	jack corner4down

Material: Stainless steel, AISI 304

IP class: IP66

Painting color: RAL3020

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


Diesel side junctionbox layout

/ Installation layout

Type	RTG 50/26.50/5+1/AC		=LAD +DSJ
Job No.	1255	Drawing No.	78.5692.60.00
			Sheet 1 2 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

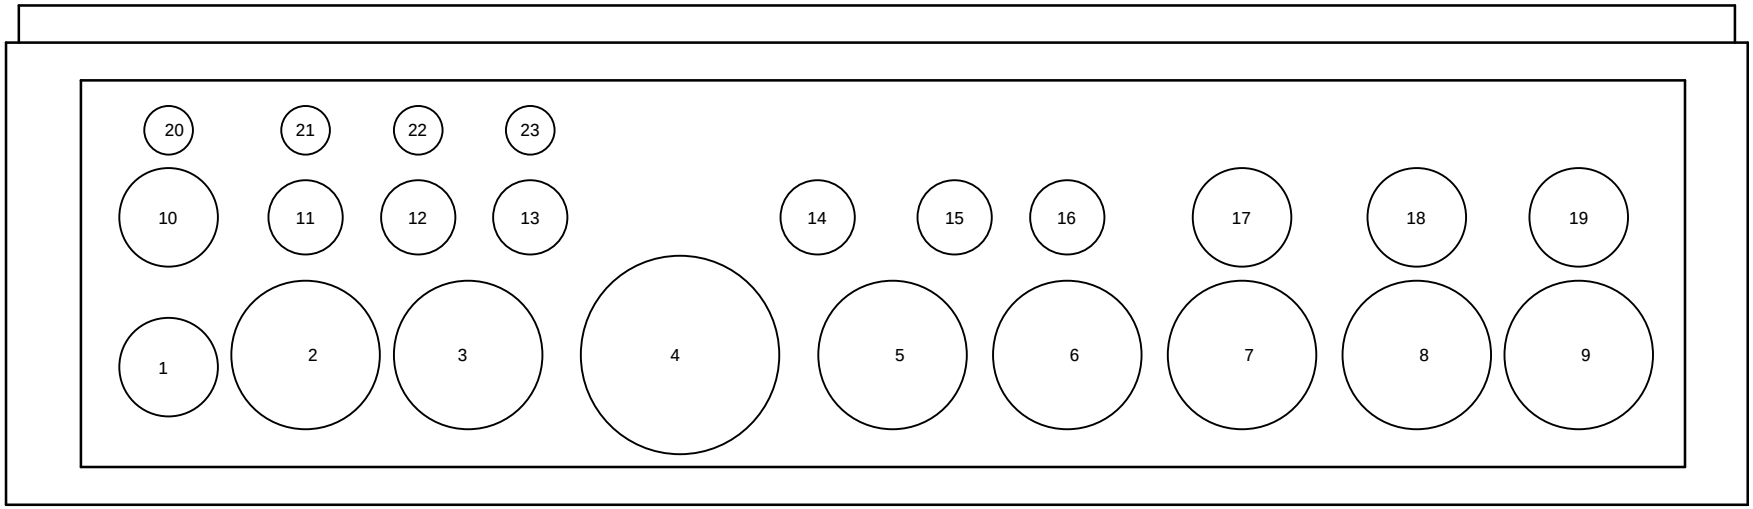

Hole diameter 48mm - PG36 : 4
Hole diameter 38mm - PG29 : 2,3,5,6,7,8,9
Hole diameter 29mm - PG21 : 1, 10, 17, 18, 19
Hole diameter 24mm - PG16 : 11, 12, 13, 14, 15, 16
Hole diameter 20mm - PG13.5: 20, 21, 22, 23

Material: Stainless steel, AISI 304

IP class: IP66

Painting color: RAL7035

				Date		Costumer		Type	RTG 50/26.50/5+1/AC	=LAD
				Designer	XU HR		AMPT Egypt			+DSJ
				Checked	LIU KP			Job No.	1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 2 / 2 Sh.


NOELL


Diesel side junctionbox layout


/ Installation layout

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

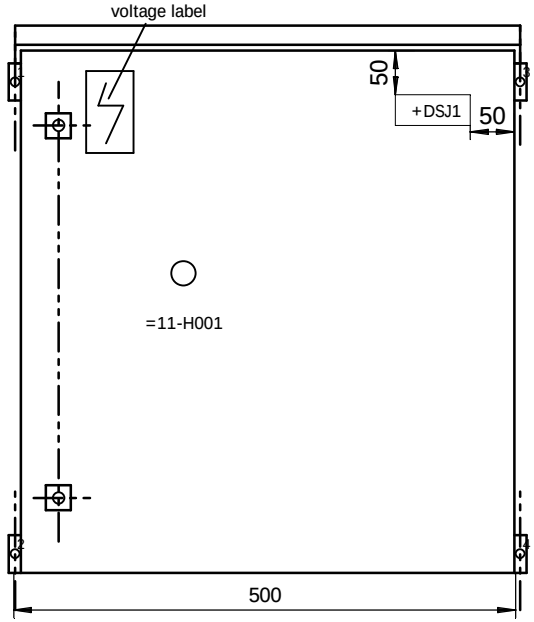

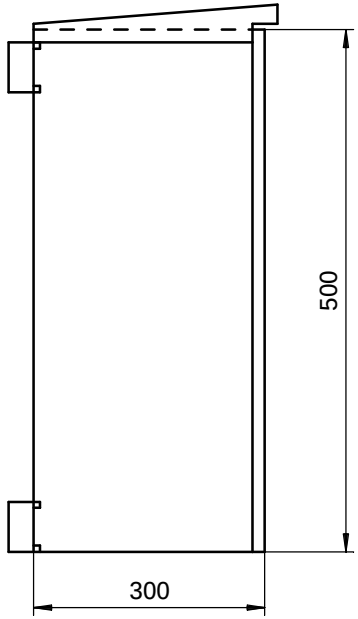

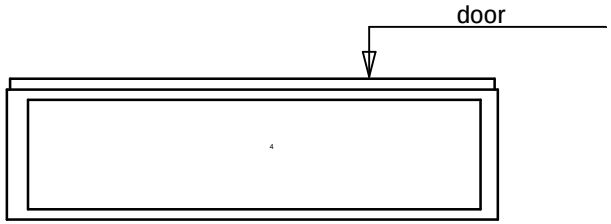

view from bottom

Material: Stainless steel, AISI 304

IP class: IP66


Painting color: RAL3020

				Date		Costumer	AMPT Egypt	NOELL	feeding, power outlets
				Designer	XU HR				Stromlaufplan // Circuit Diagram
				Checked	LIU KP				
Ind.	Revision	Date	Name	Standard		Source:			

Type	RTG 50/26.50/5+1/AC	=11 +EH1	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	1 1 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

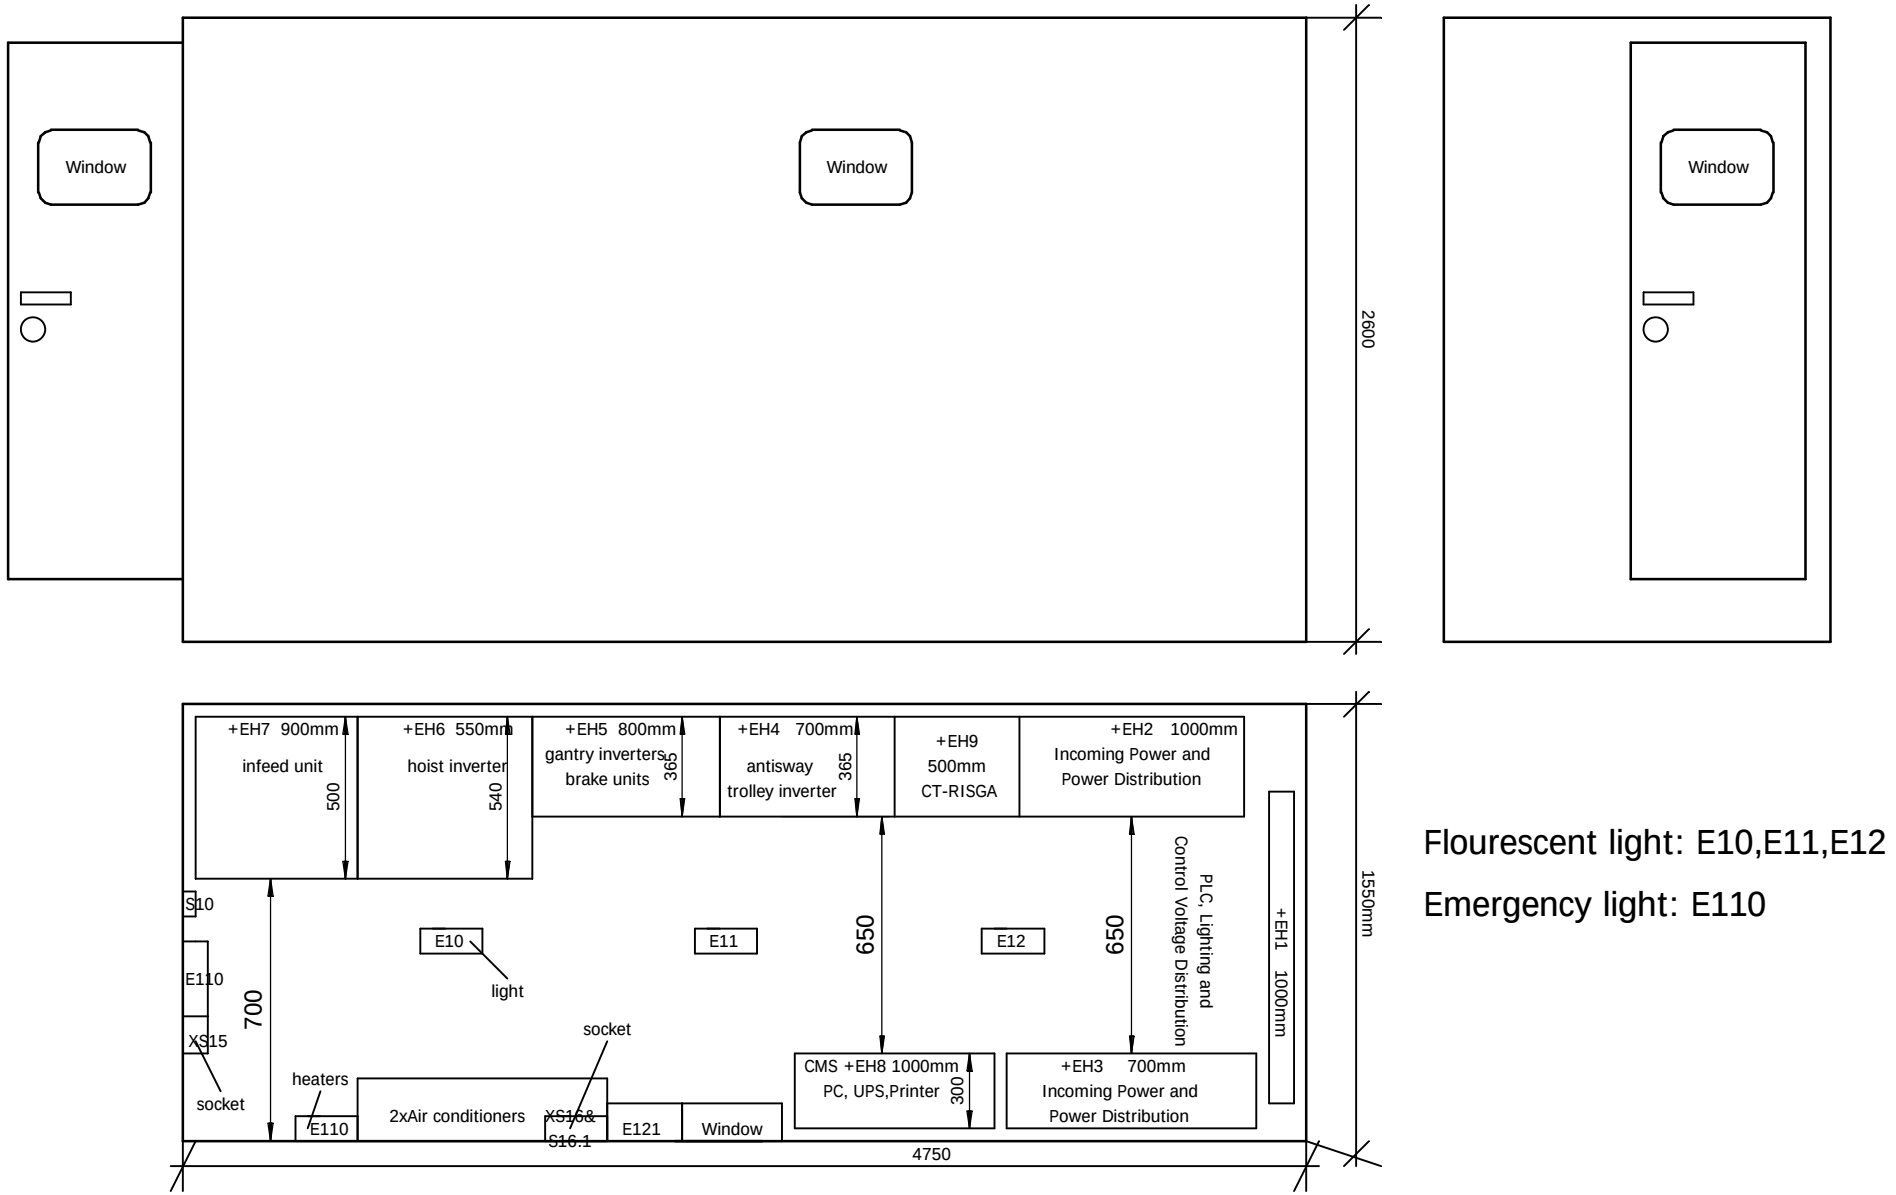


Flourescent light: E10,E11,E12

Emergency light: E110

				Date	2008.09.01	Costumer	AMPT Egypt	E-house general layout	Type RTG 50/26.50/5+1/AC	=LAD +EH
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout		Sheet 1 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

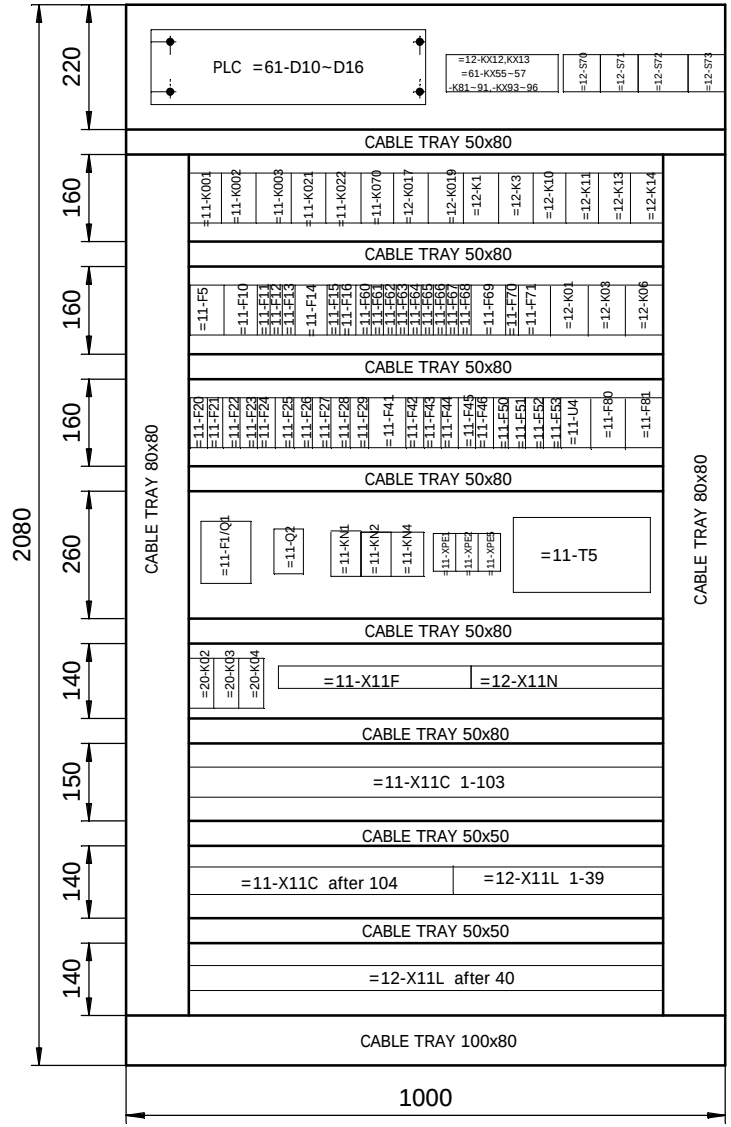

				Date		Costumer	AMPT Egypt	E-house panel 1	Type RTG 50/26.50/5+1/AC	=LAD +EH1
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout		Sheet 2 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

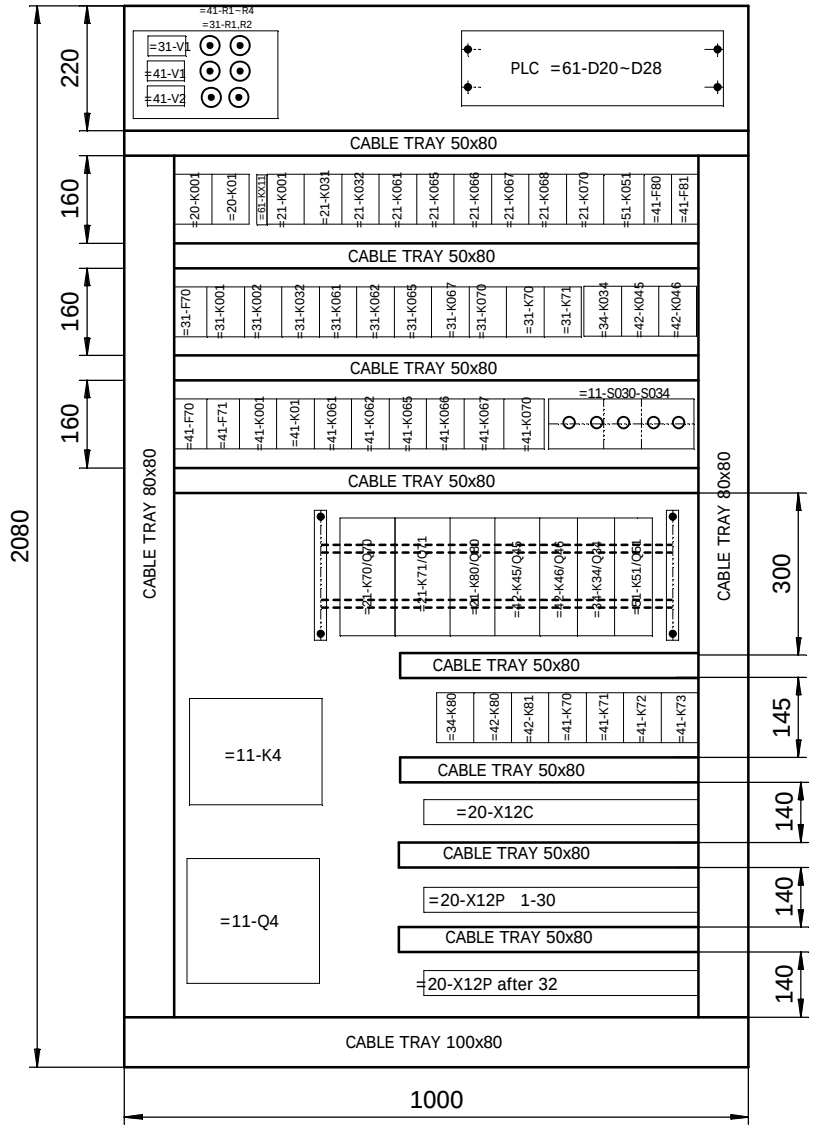


				Date		Costumer	AMPT Egypt	E-house panel 2	Type RTG 50/26.50/5+1/AC	=LAD +EH2
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout		Sheet 3 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Electrical room control station

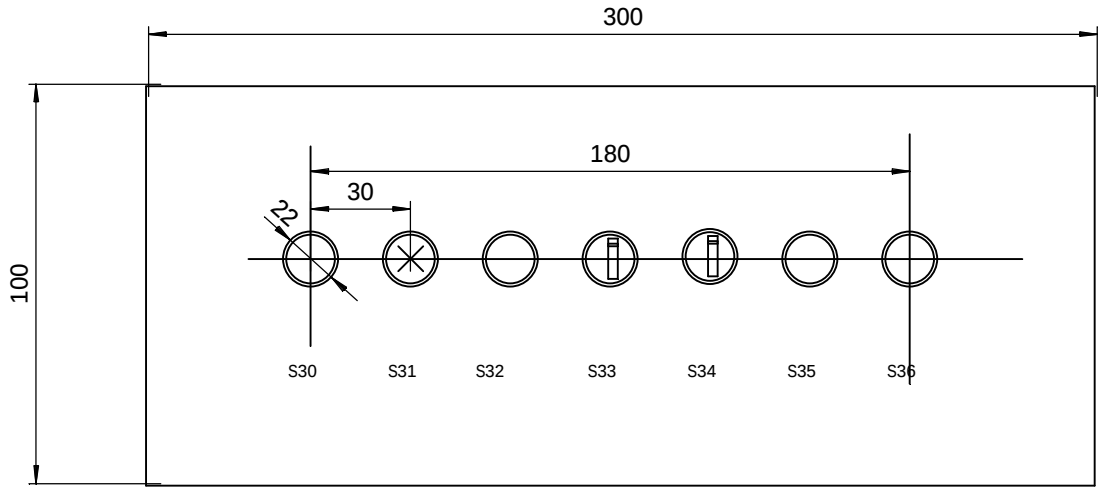


S30	reset
S31	crane switch on command
S32	crane switch off command
S33	hoist&trolley overtravel bypass
S34	spare
S35	loadcell calibration
S36	spare

				Date		Costumer		E-house panel 2	Type RTG 50/26.50/5+1/AC	=LAD
				Designer	XU HR		AMPT Egypt			+EH2
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 4
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout			11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

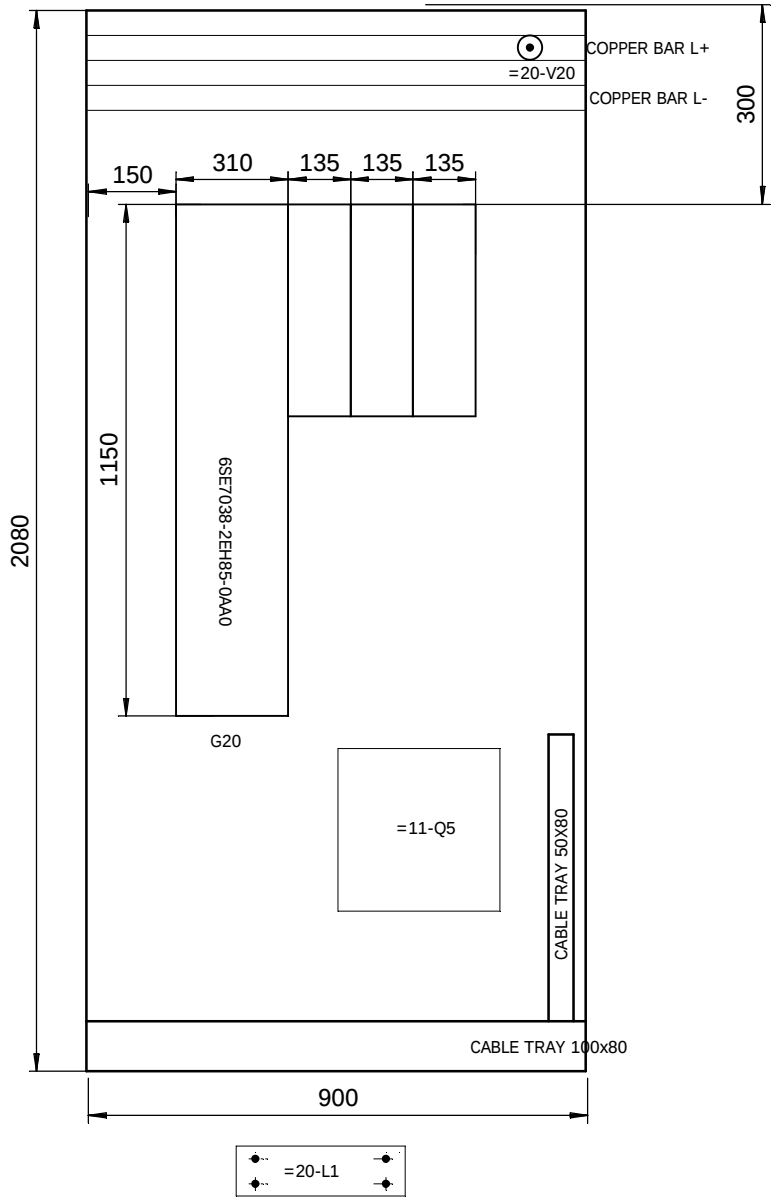

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


E-house panel 7

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD +EH7	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 5	11 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

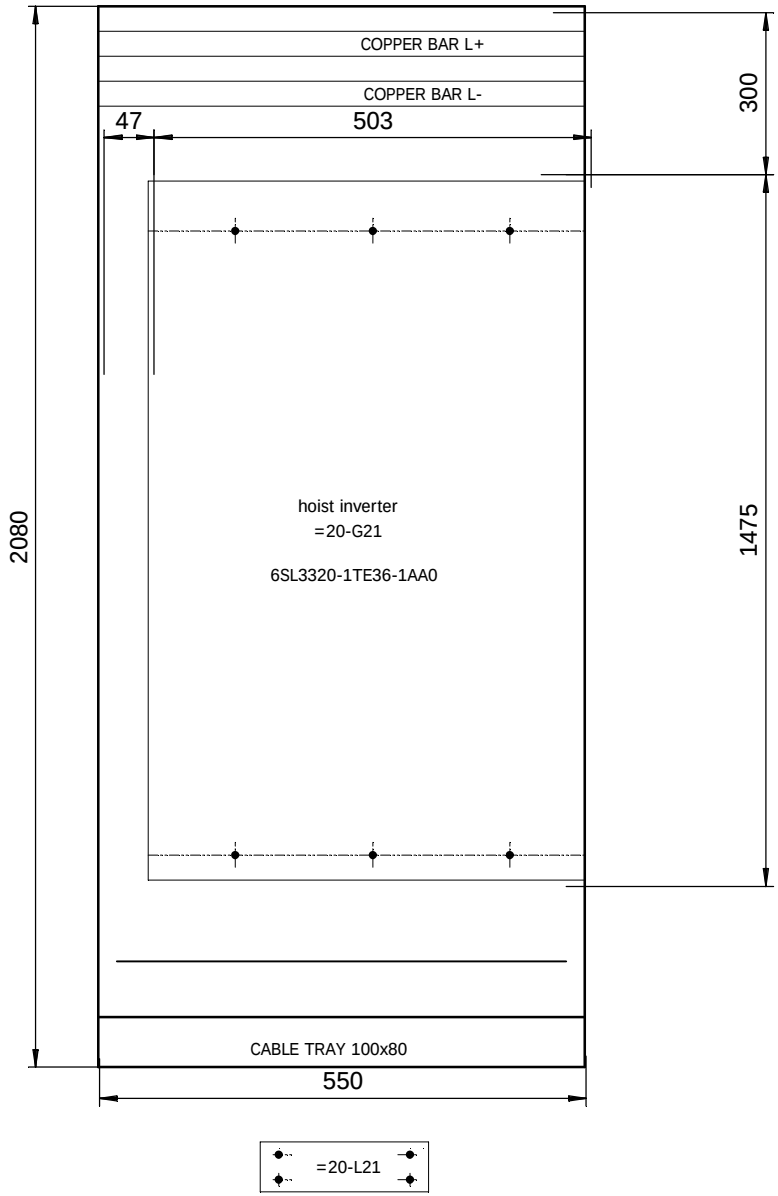

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


E-house panel 6

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD +EH6	
Job No.	1255	Drawing No. 78.5692.60.00	Sheet 6 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

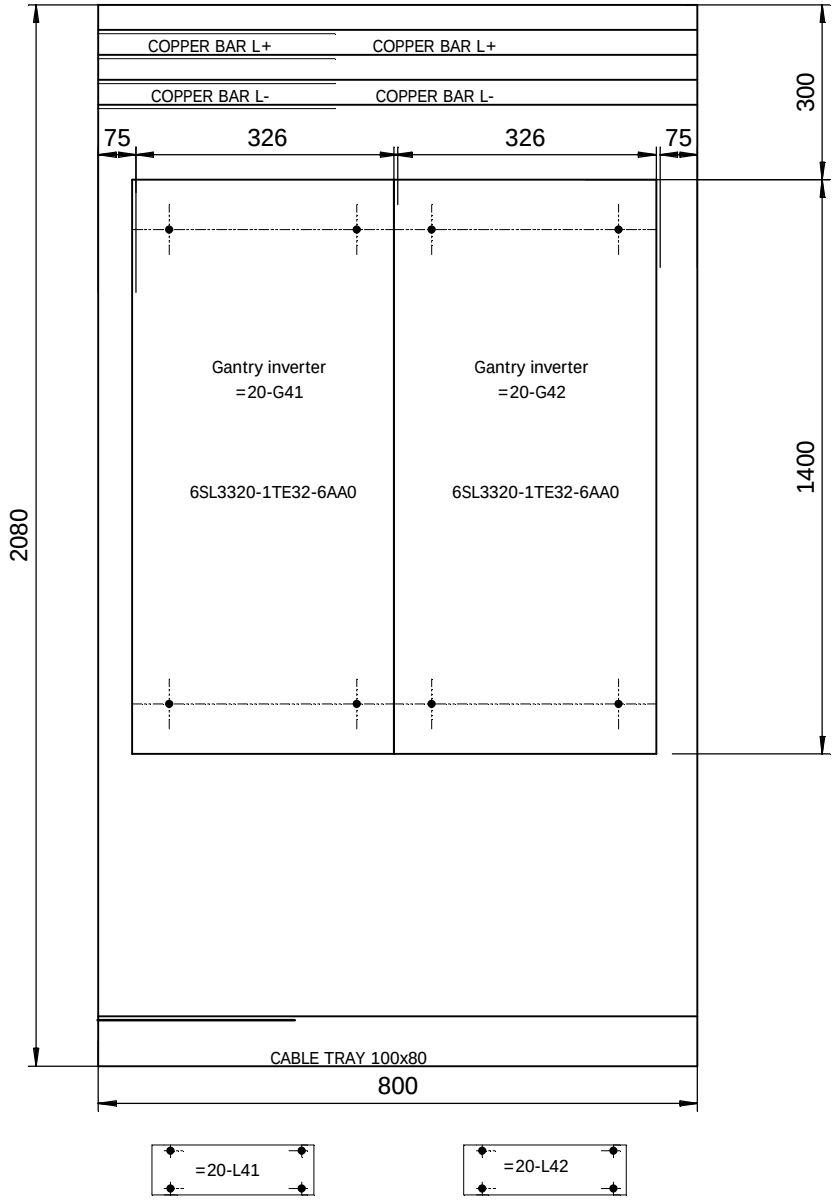

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


E-house panel 5

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD +EH5	
Job No.	1255	Drawing No. 78.5692.60.00	Sheet 7 11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

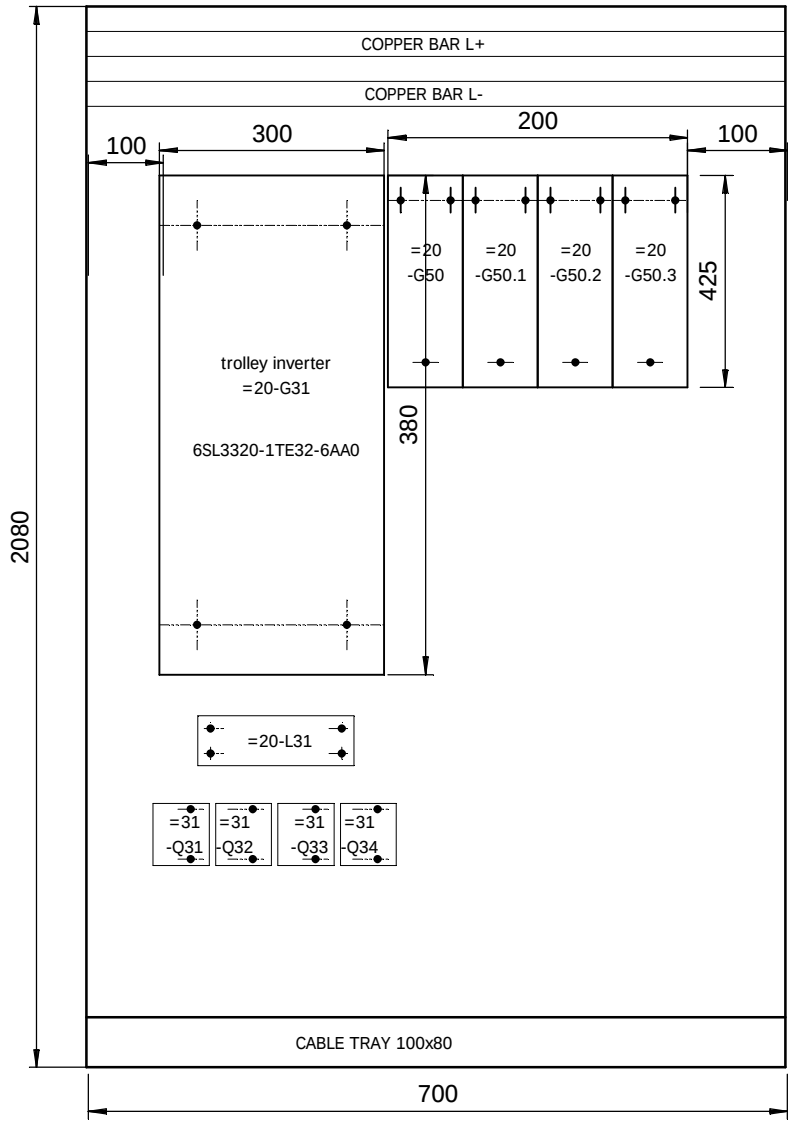

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


E-house panel 4

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD +EH4	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	8	11 Sh.	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

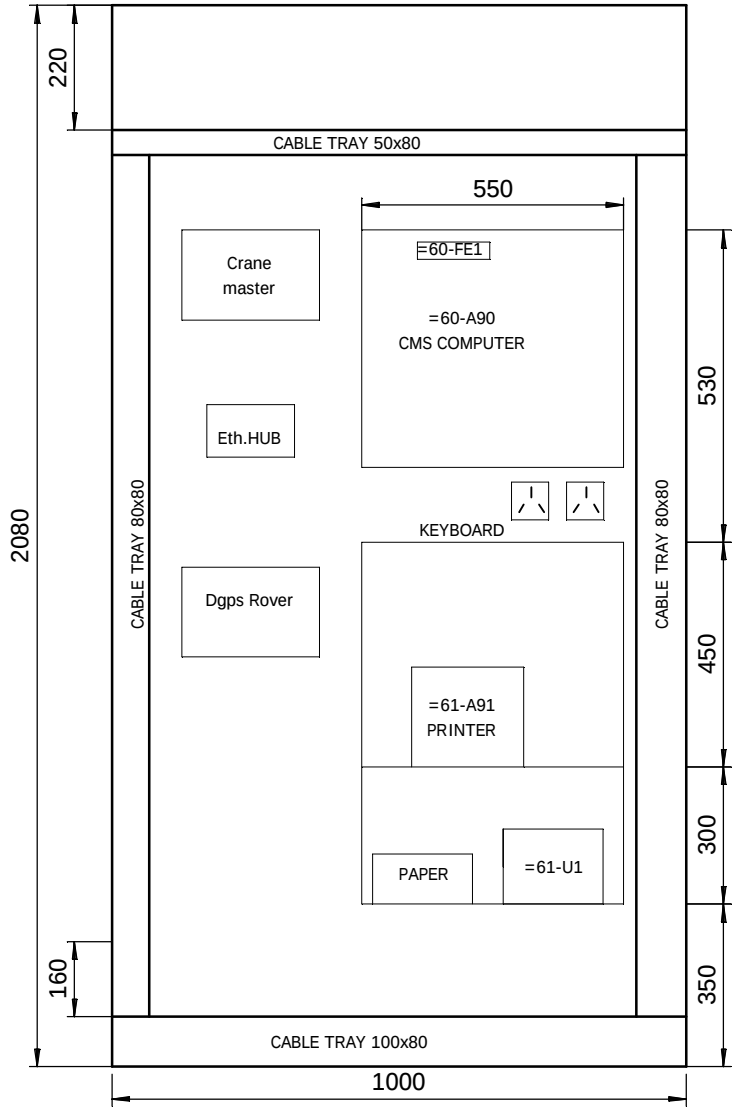

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


E-house panel 8

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD	
		+EH8	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	9		
	11 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf ihres Inhaltes nicht gestattet,soweit nicht ausdr handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent- erteilung or GM-Eintragung vorbehalten.

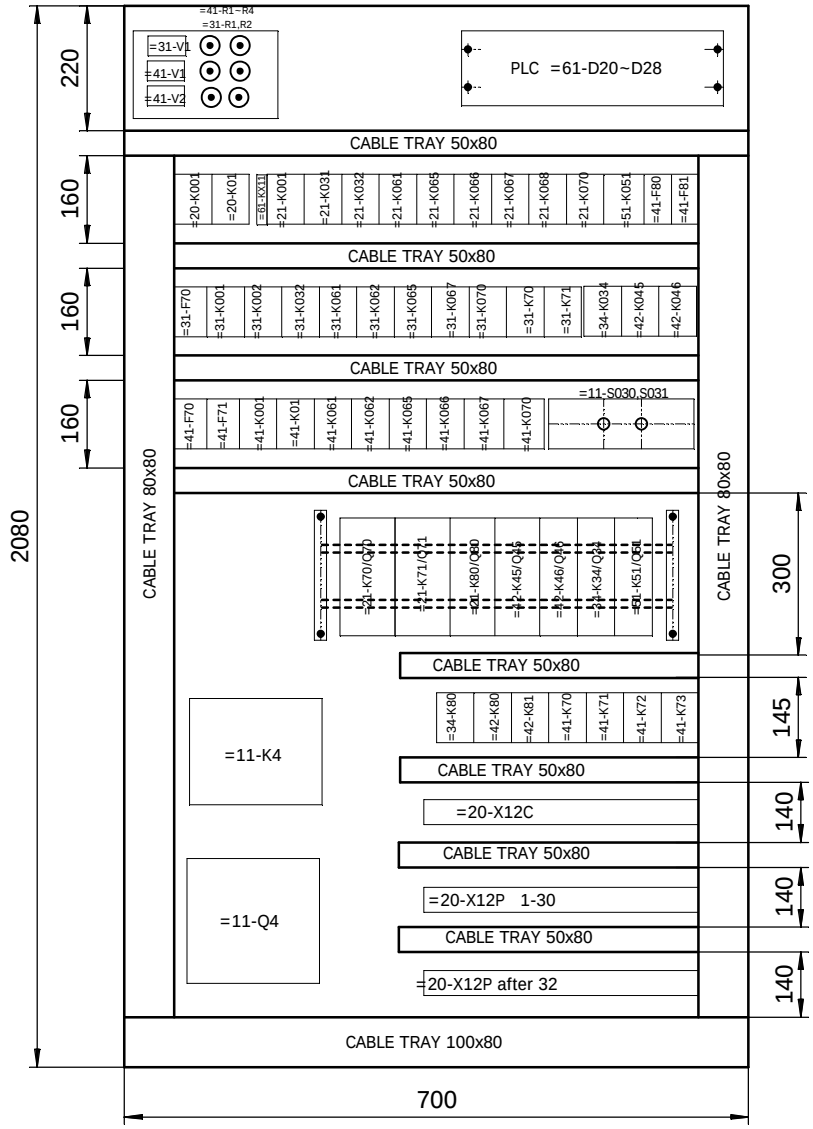

				Date		Costumer		Type	RTG 50/26.50/5+1/AC
				Designer	XU HR		AMPT Egypt		=LAD +EH3
				Checked	LIU KP			Job No.	1255
Ind.	Revision	Date	Name	Standard		Source:		Drawing No.	78.5692.60.00
							E-house panel 3	Sheet	10
							/ Installation layout		11 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

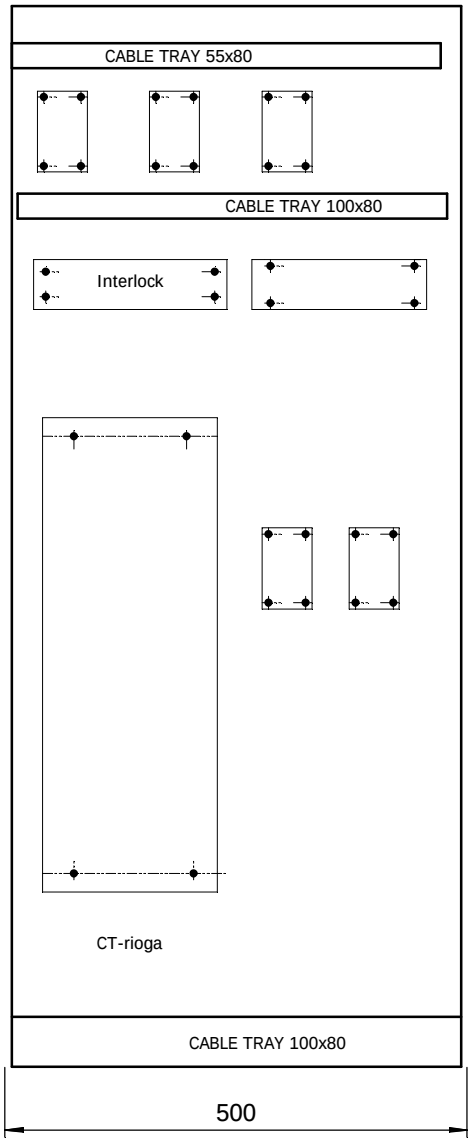

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
nd.	Revision	Date	Name	Standard		Source:	


NOELL


E-house panel 9
CT-rioga
/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD	
		+EH9	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet 11	11 Sh.		


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

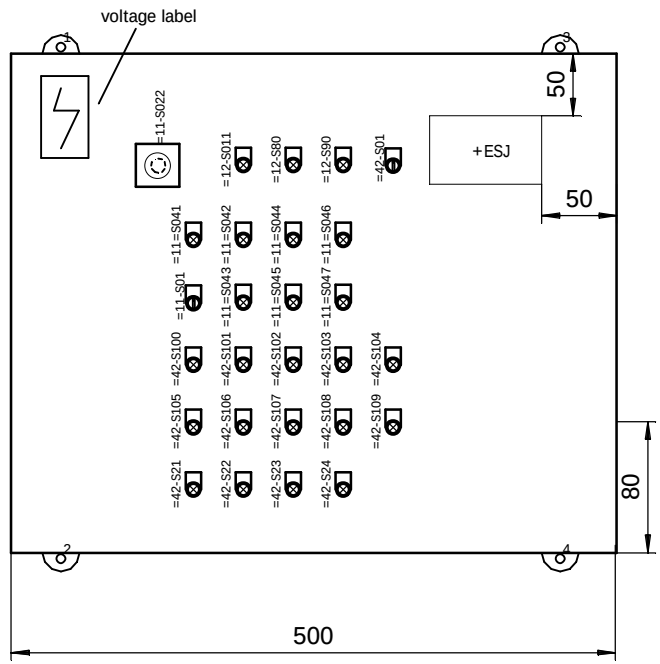

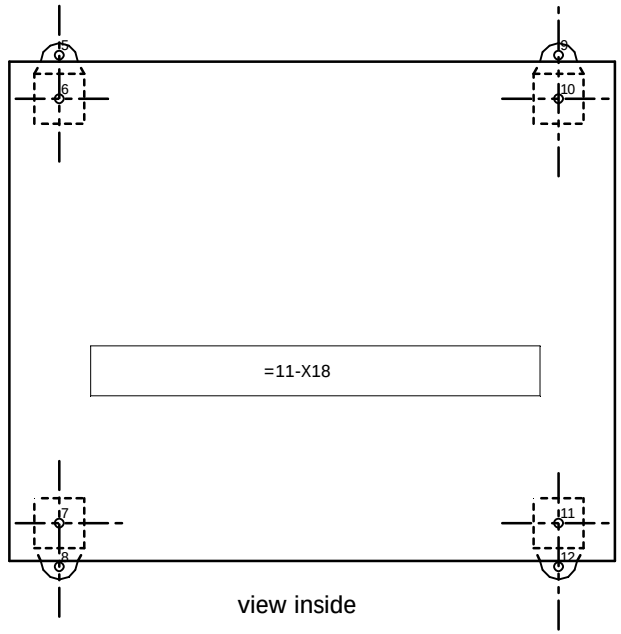

view inside

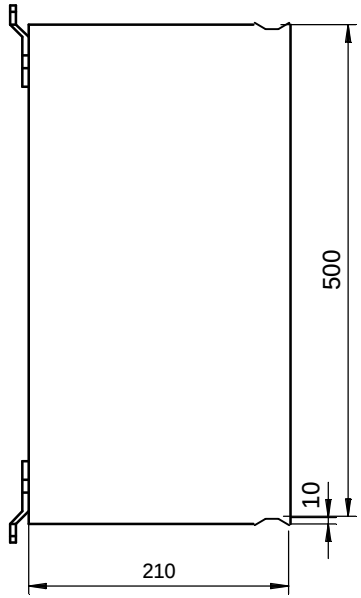

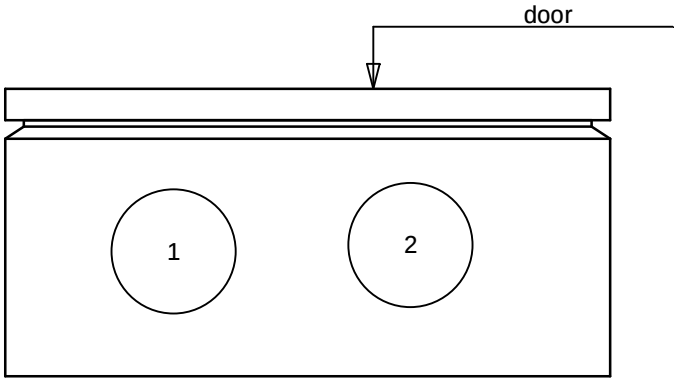

PG29: 1, 2

view from bottom

item	code	comment	item	code	comment
1	=11-S022	E-STOP	20	=42-S105	corner 2 90position
2	=12-S011	access &walkway linght	21	=42-S106	corner 2 0position
3	=12-S80	flood light gantry	22	=42-S107	corner 2 spinturn position
4	=12-S90	flood light trolley	23	=42-S108	cylinder 2 lock
5	=42-S01	+ESJ CONTROL ON	24	=42-S109	cylinder 2 unlock
6	=11-S041	fault reset	25	=42-S21	jack corner1 up
7	=11-S042	hoist raise	26	=42-S22	jack corner1 down
8	=11-S043	hoist low	27	=42-S23	jack corner2 up
9	=11-S044	gantry left	28	=42-S24	jack corner2 down
10	=11-S045	gantry right	29		
11	=11-S046	trolley forward	30		
12	=11-S047	trolley backward			
13	=11-S01	spreader reboot			
14	=42-S100	corner 1 90position			
15	=42-S101	corner 1 0position			
16	=42-S102	corner 1 spinturn position			
17	=42-S103	cylinder 1 lock			
18	=42-S104	cylinder 1 unlock			

Material: Stainless steel, AISI 304


IP class: IP66

Painting color: RAL3020

				Date		Costumer	AMPT Egypt	E-house side junctionbox layout	Type RTG 50/26.50/5+1/AC	=LAD +ESJ
				Designer	XU HR					
				Checked	LIU KP					
Ind.	Revision	Date	Name	Standard		Source:		/ Installation layout	Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1 1 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

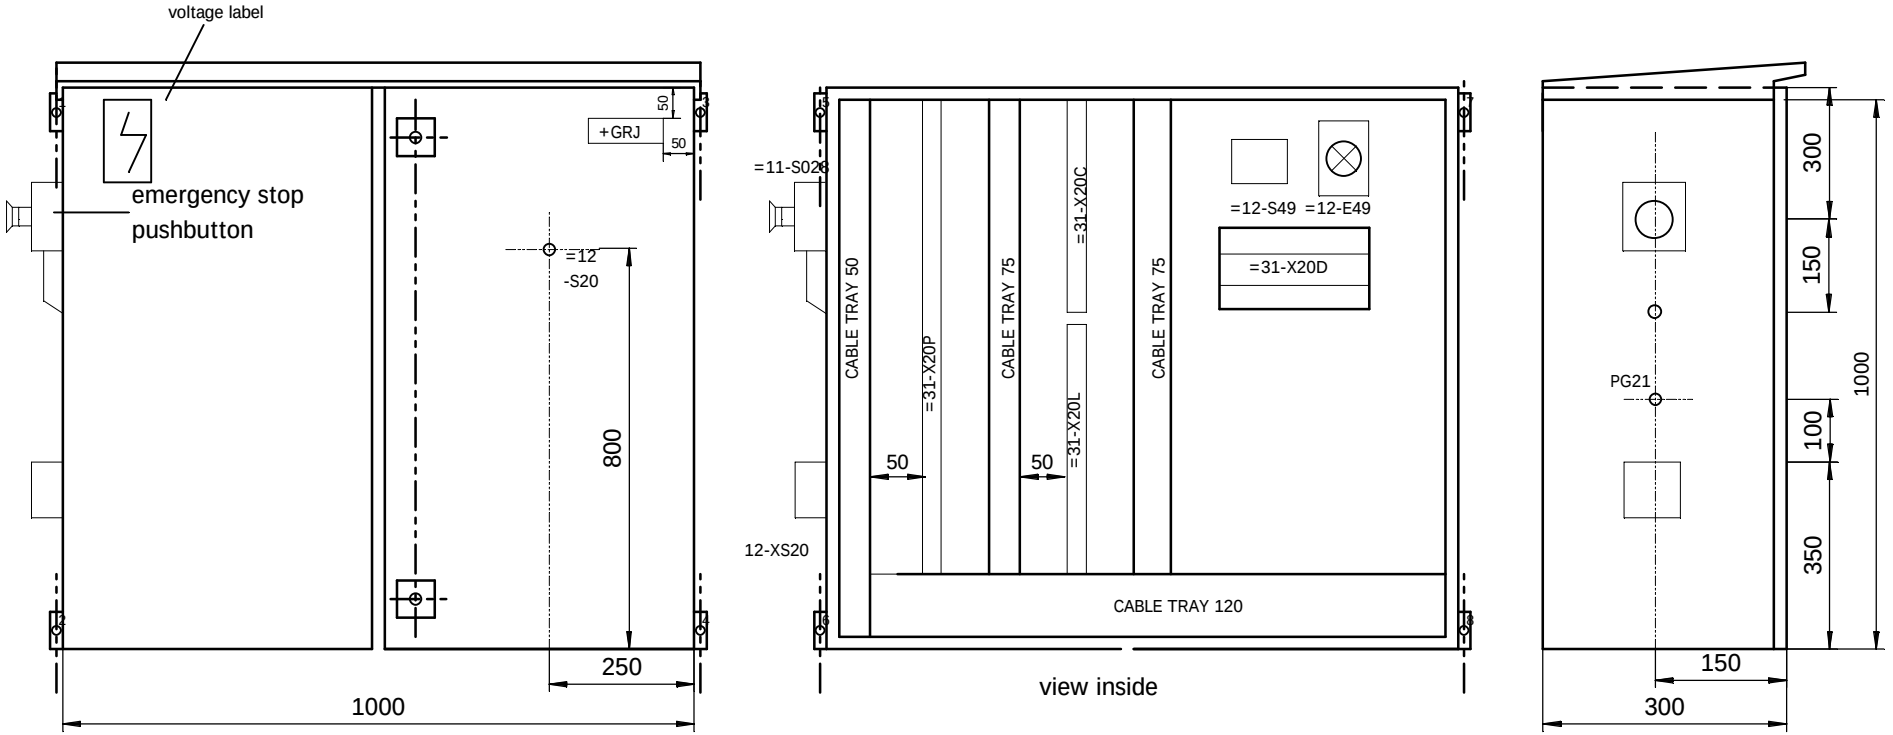

item	code	comment
1	=12-S20	access &walkway light

Material: Stainless steel, AISI 304

IP class: IP55

Painting color: RAL3020

				Date		Costumer	AMPT Egypt	
				Designer	XU HR			
				Checked	LIU KP			
Ind.	Revision	Date	Name	Standard		Source:		

NOELL


Girder junctionbox layout

/ Installation layout

Type	RTG 50/26.50/5+1/AC	=LAD +GRJ
Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1 2 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

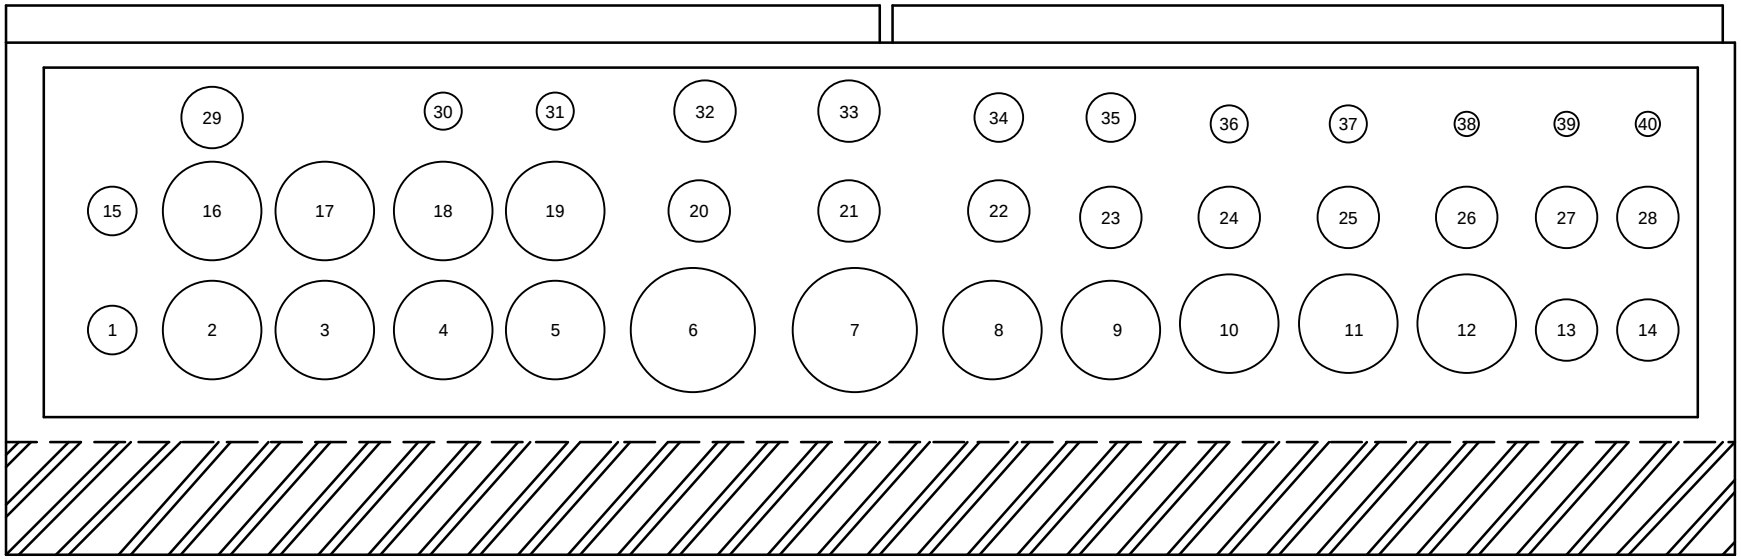



Hole diameter 48mm - PG36 : 6, 7
Hole diameter 38mm - PG29 : 2, 3, 4, 5, 8, 9, 10, 11, 12, 16, 17, 18, 19
Hole diameter 29mm - PG21 : 13, 14, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 32, 33
Hole diameter 24mm - PG16 : 1, 15, 34, 35
Hole diameter 20mm - PG13.5: 30, 31, 36, 37
Hole diameter 20mm - PG11 : 38, 39, 40


				Date		Costumer	Girder junctionbox layout	Type RTG 50/26.50/5+1/AC	=LAD
				Designer	XU HR	AMPT Egypt			+GRJ
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	/ Installation layout		Sheet 2 / 2 Sh.


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

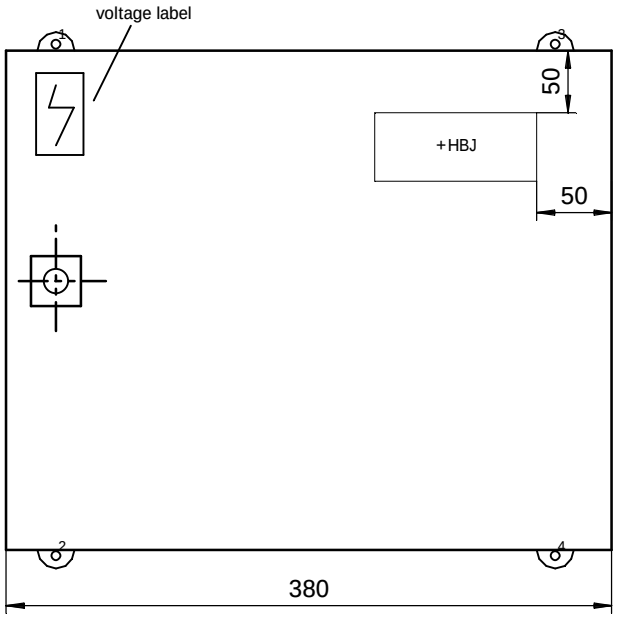

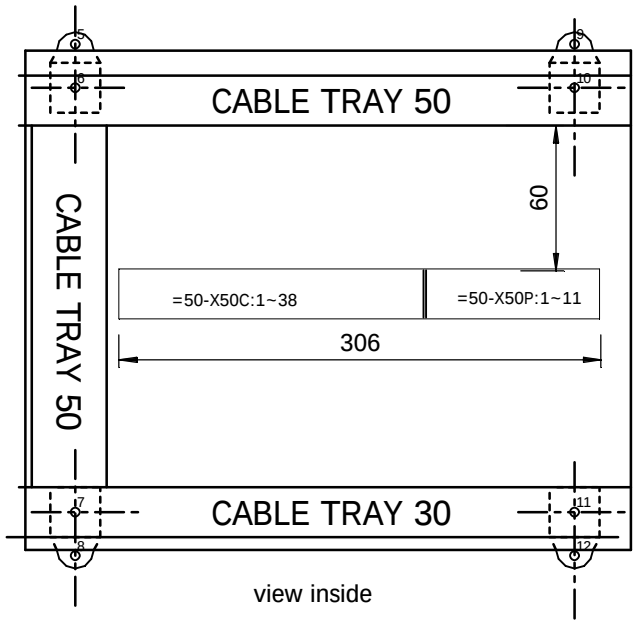

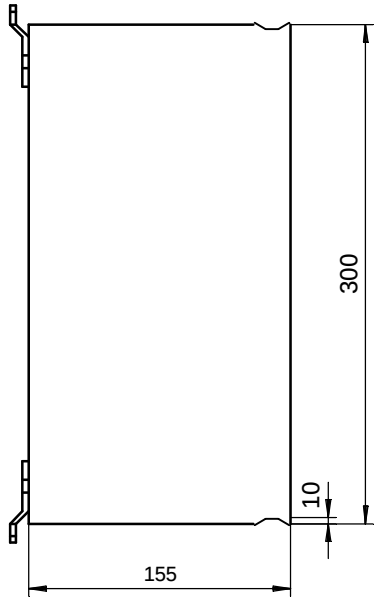

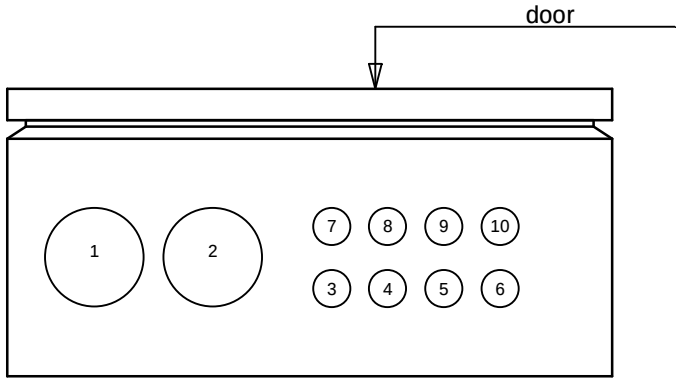

M50: 1, 2
M20: 3, 4, 5, 6 ,7, 8, 9, 10

view from bottom

NOTE: we use one row of terminal, the quantity of terminals is 60pcs(including the 10% spare terminals), each terminal width is 5.1mm, so the total width of the terminal is 306mm.

Material: Stainless steel, AISI 304

IP class: IP66


Painting color: RAL3020

				Date	2008.09.01	Costumer	AMPT Egypt	Headblock junctionbox layout	Type RTG 50/26.50/5+1/AC =LAD +HBJ
				Designer	XU HR				
				Checked	LIU KP			/ Installation layout	Job No. 1255 Drawing No. 78.5692.60.00 Sheet 1 1 Sh.
nd.	Revision	Date	Name	Standard		Source:			

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Operator's spreader incidation box: +CAO3

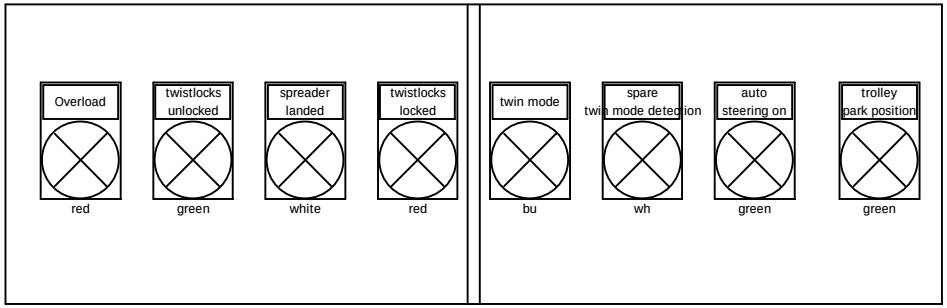



Material: plastic

				Date		Costumer		Operator's spreader indication box / Installation layout	Type RTG 50/26.50/5+1/AC	=LAD +CAO3
				Designer	XU HR	AMPT Egypt				
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 1 1 Sh.
Ind.	Revision	Date	Name	Standard		Source:				


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

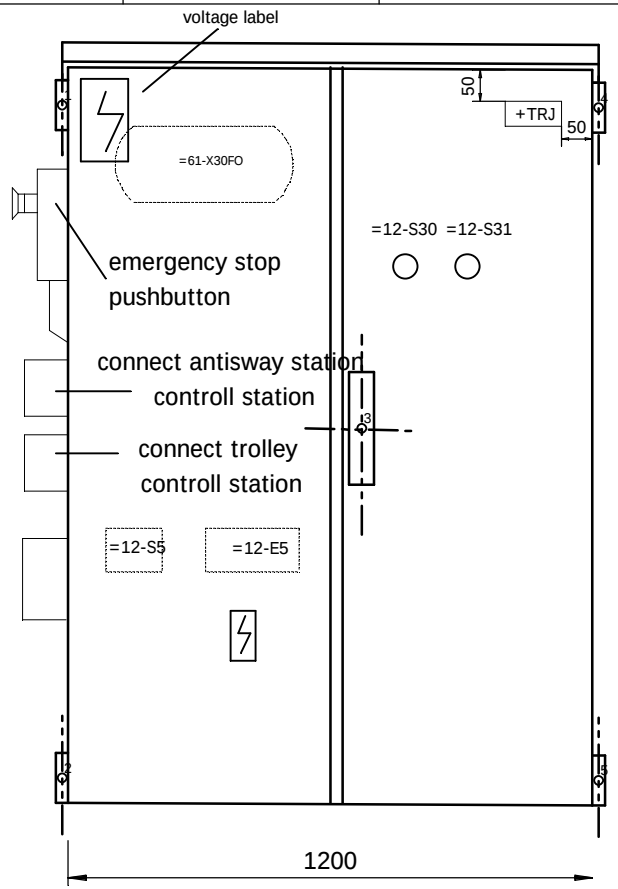

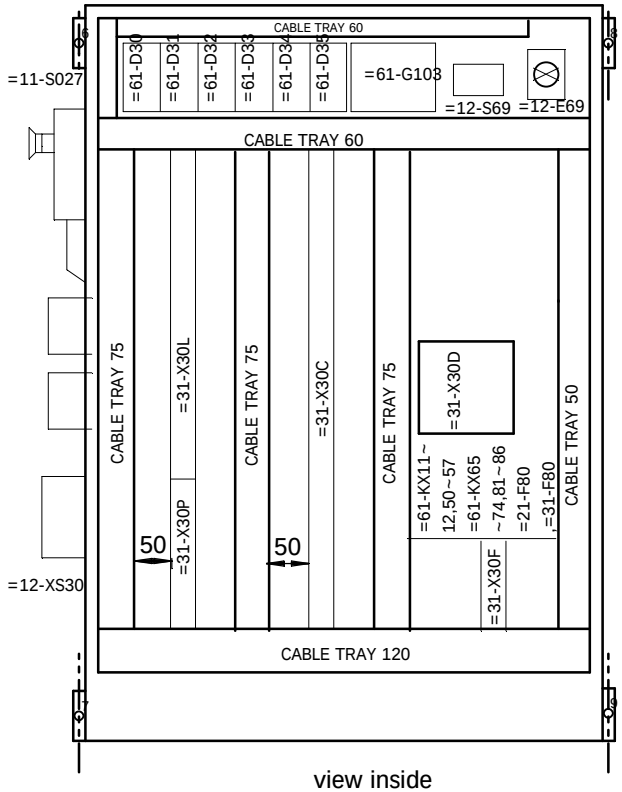


view inside

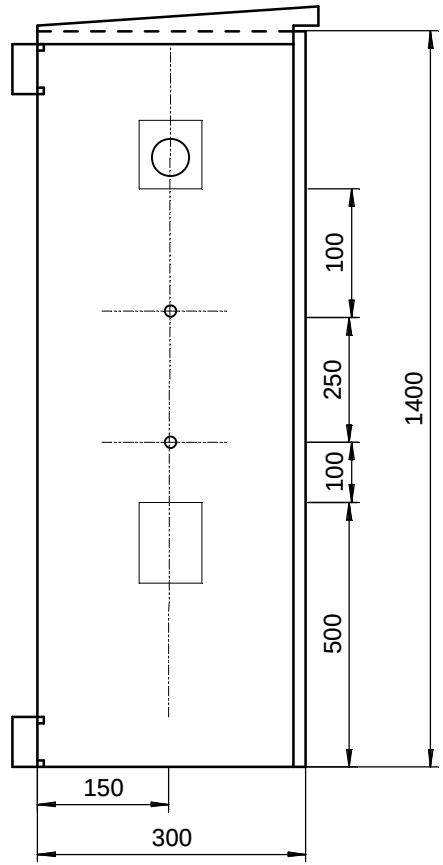

Material: Stainless steel, AISI 304

IP class: IP55

Painting color: RAL3020

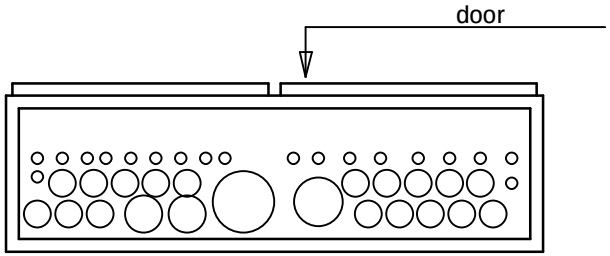

view from bottom

Note: 1200*1400*300, protection class IP 55

item	code	comment
1	=12-S30:	flourescent light
2	=12-S31:	maintenance light on/off
3		

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=LAD +TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	1 4 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

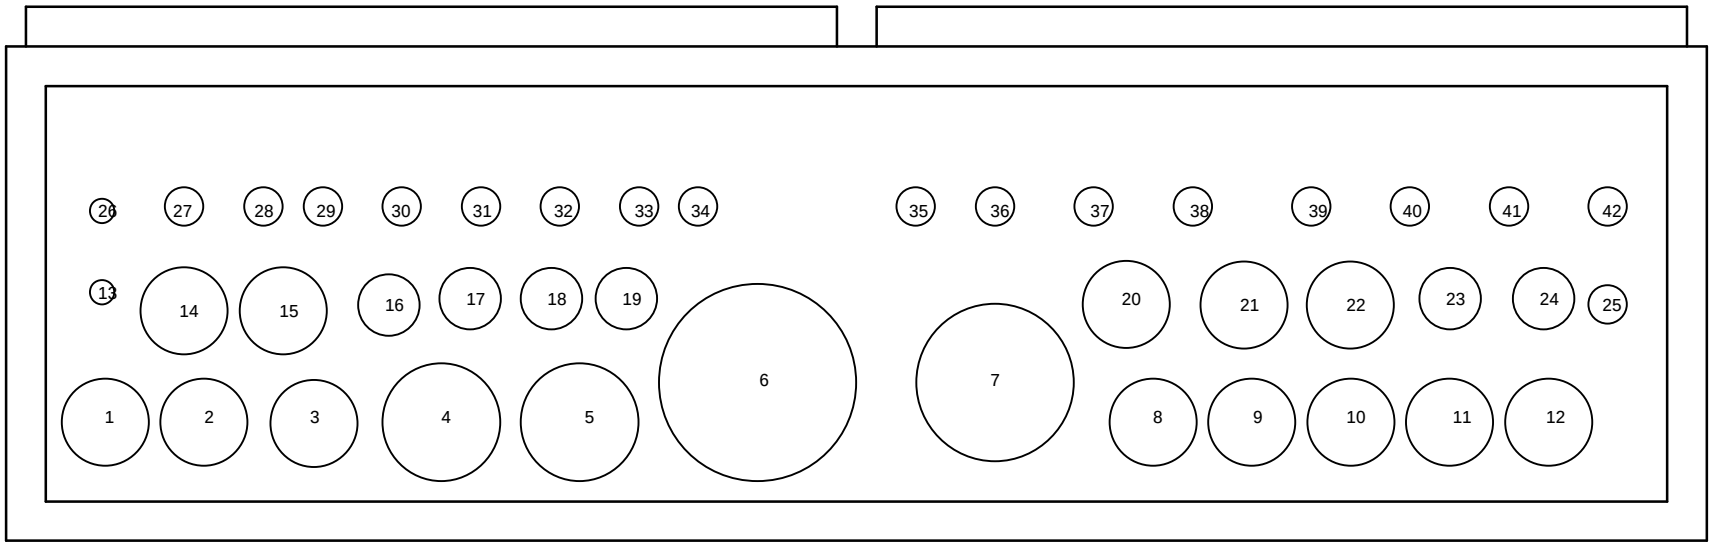


Hole diameter 60mm - PG48 : 6
Hole diameter 54mm - PG42 : 7
Hole diameter 48mm - PG36 : 4, 5
Hole diameter 38mm - PG29 : 1, 2, 3, 8, 9, 10, 11, 12, 14, 15, 20, 21, 22
Hole diameter 29mm - PG21 : 16, 17, 18, 19, 23, 24
Hole diameter 20mm - PG13.5: 25 ,27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37
38, 39, 40, 41, 42
Hole diameter 20mm - PG11 : 13, 26

				Date		Costumer	Trolley junctionbox layout	Type RTG 50/26.50/5+1/AC =LAD +TRJ
				Designer	XU HR	AMPT Egypt	/ Installation layout	
				Checked	LIU KP			Job No. 1255 Drawing No. 78.5692.60.00 Sheet 2 4 Sh.
Ind.	Revision	Date	Name	Standard		Source:		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

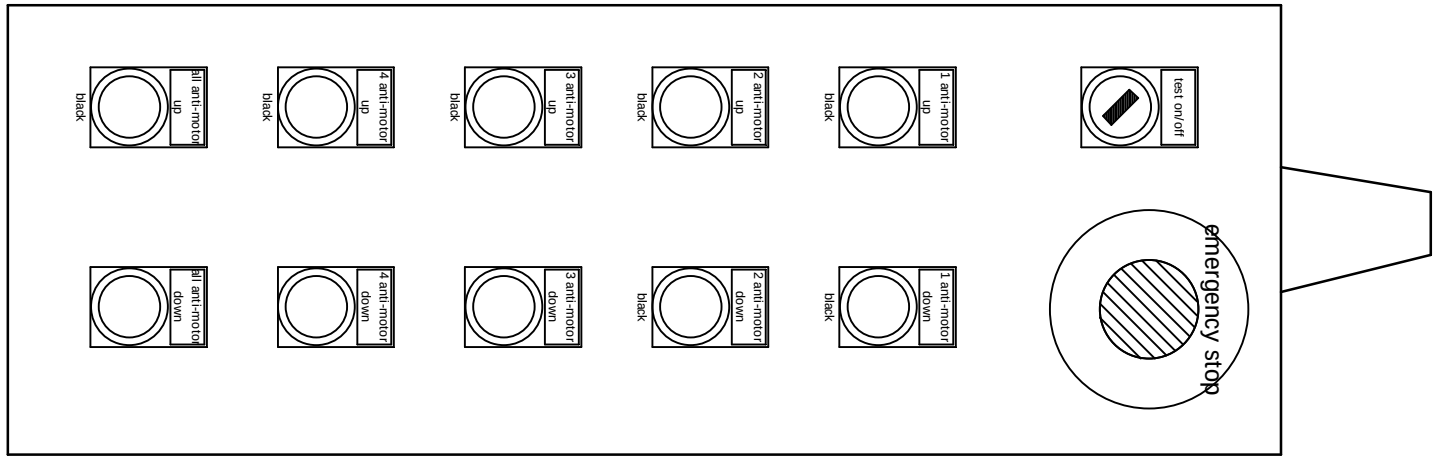

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	


NOELL

antisway control station
Stromlaufplan / Circuit Diagram

Type	RTG 50/26.50/5+1/AC	=61	
		+TRJ	
Job No.	1255	Drawing No.	78.5692.60.00
Sheet	3		
	4 Sh.		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

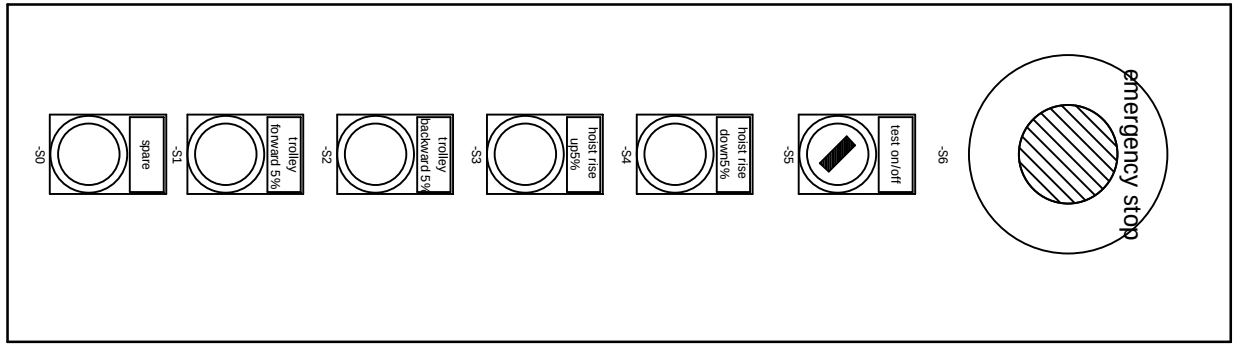

-S0- -S4 NO pushbutton

-S5 two position select switch

-S6 emergency stop switch

				Date		Costumer	AMPT Egypt	trolley controll station	Type RTG 50/26.50/5+1/AC	=61
				Designer	XU HR			Stromlaufplan / Circuit Diagram		+TRJ
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:				Sheet 4 / 4 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

Noell Crane Systems
(China) Limited

China Merchants
Zhangzhou Development Zone
Zhangzhou 363105, Fujian, China

Phone: +86 596 685 1888
Fax: +86 596 685 1889

SINGLE LINE DIAGRAM

RTG 50/26.50/5+1/AC

AMPT Egypt

Clarify:

The over voltage protection for:

1) control sourec line, we update it, pls refer to page 2rd;

2) plc power sounce line, we update it, pls refer to page 2rd;

3) remote I/O power source line, we will update it in circuit diagram

Job No.: 1255

Costumer: AMPT Egypt

Year of manufacturing: 2012-02-17

Revision: A


Drawings approved:

---------- ----------
City, Date Signature NOELL's job manager

---------- ----------
City, Date Signature Costumer

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

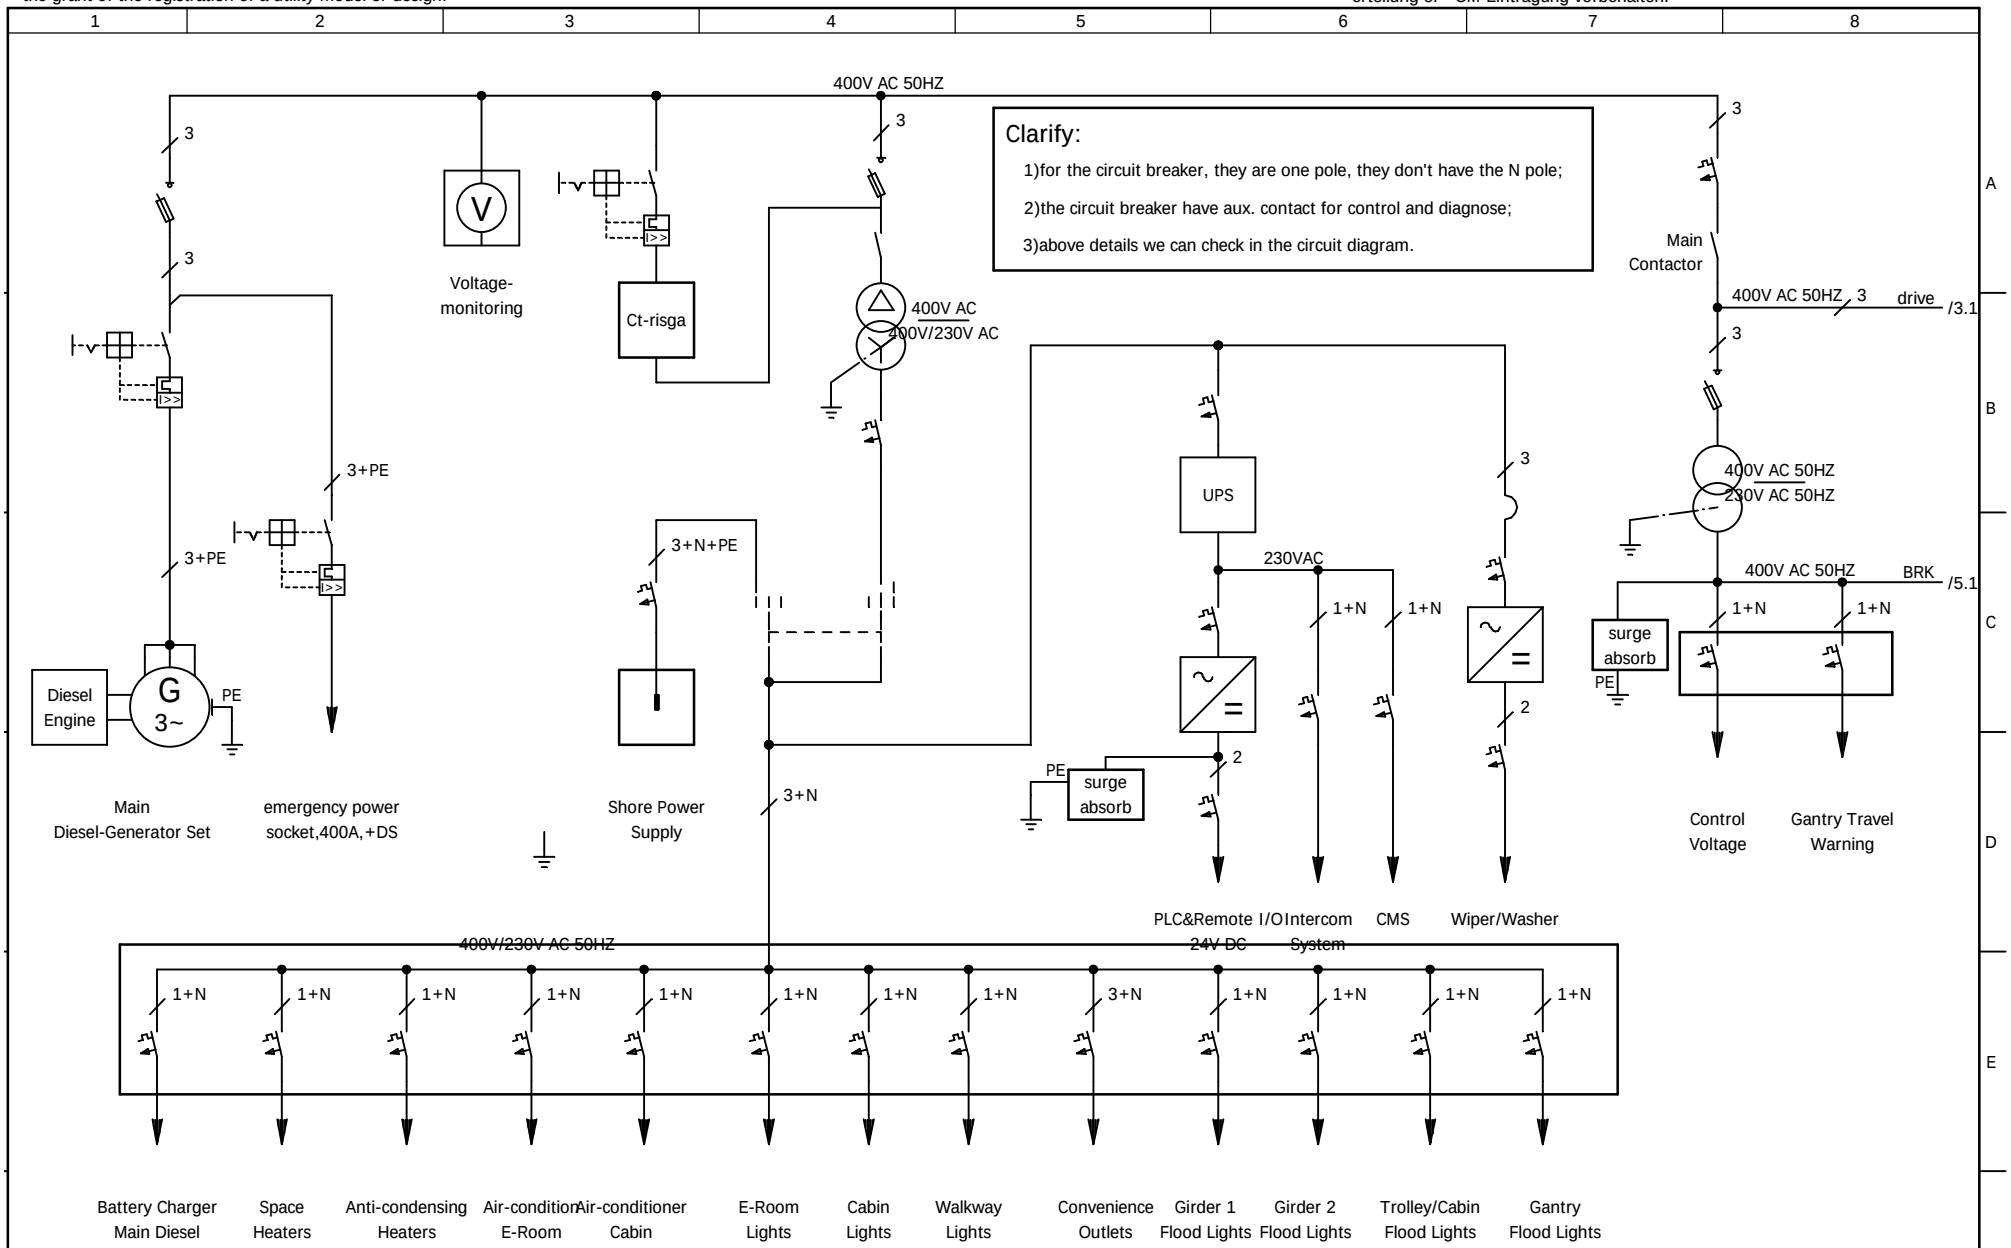

				Date		Costumer	AMPT Egypt	Feeding / Distribution	Type RTG 50/26.50/5+1/AC =SLD
				Designer	XU HR				
				Checked	LIU KP				Job No. 1255 Drawing No. 78.5692.60.00 Sheet 2 12 Sh.
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram	

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

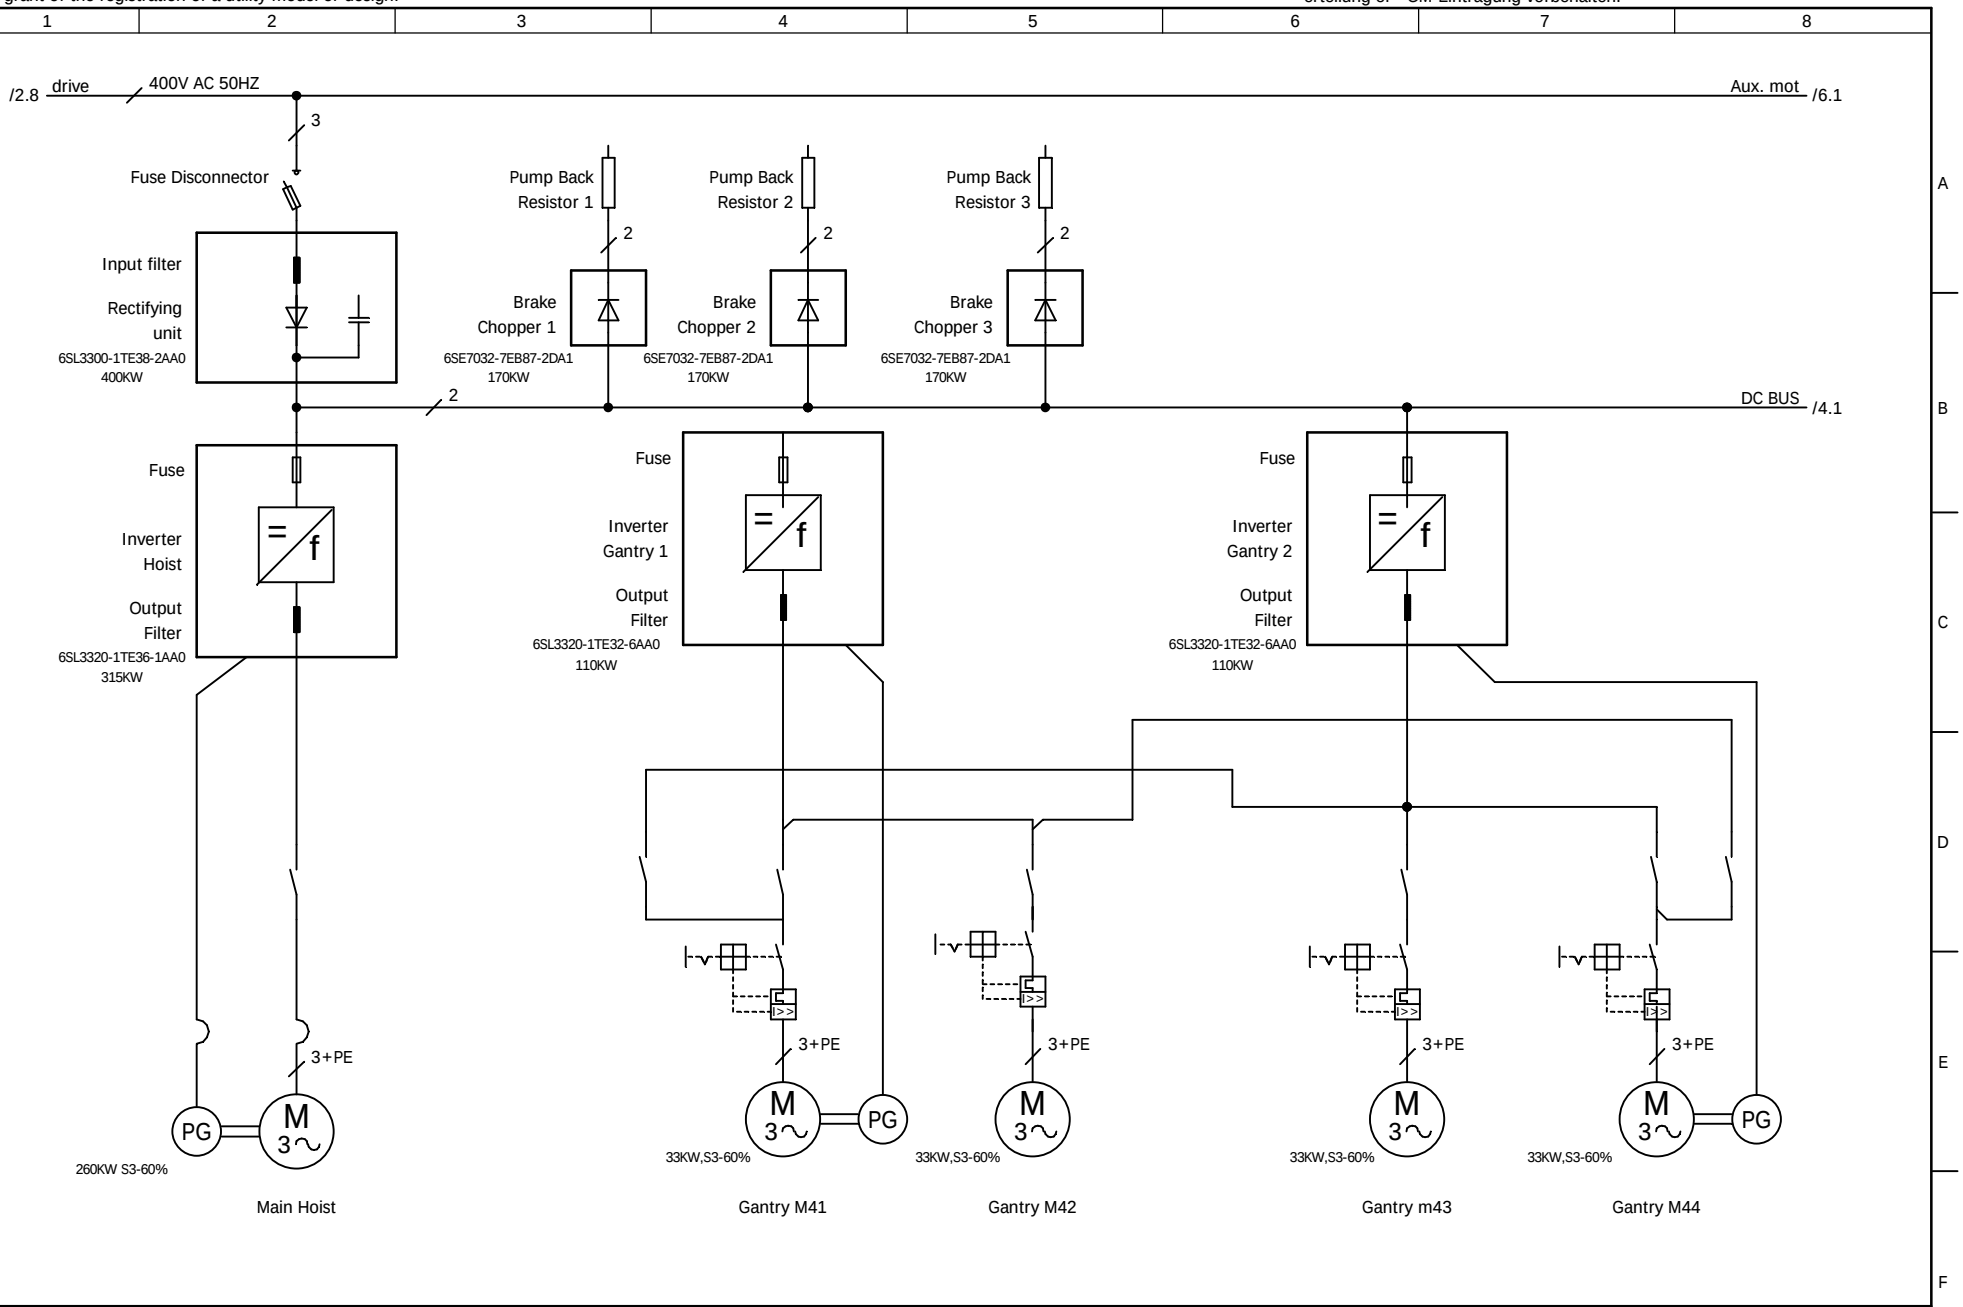

				Date		Costumer	AMPT Egypt	Main Drives	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram		Sheet 3 / 12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

clarify:

1) the hoist motor module power requirement in DC BUS is 726A DC,

2) the antisway motor module power requirement in DC BUS is 22A DC,


3)as our experience, and after checking with Siemens
the drive system configuration is ok.

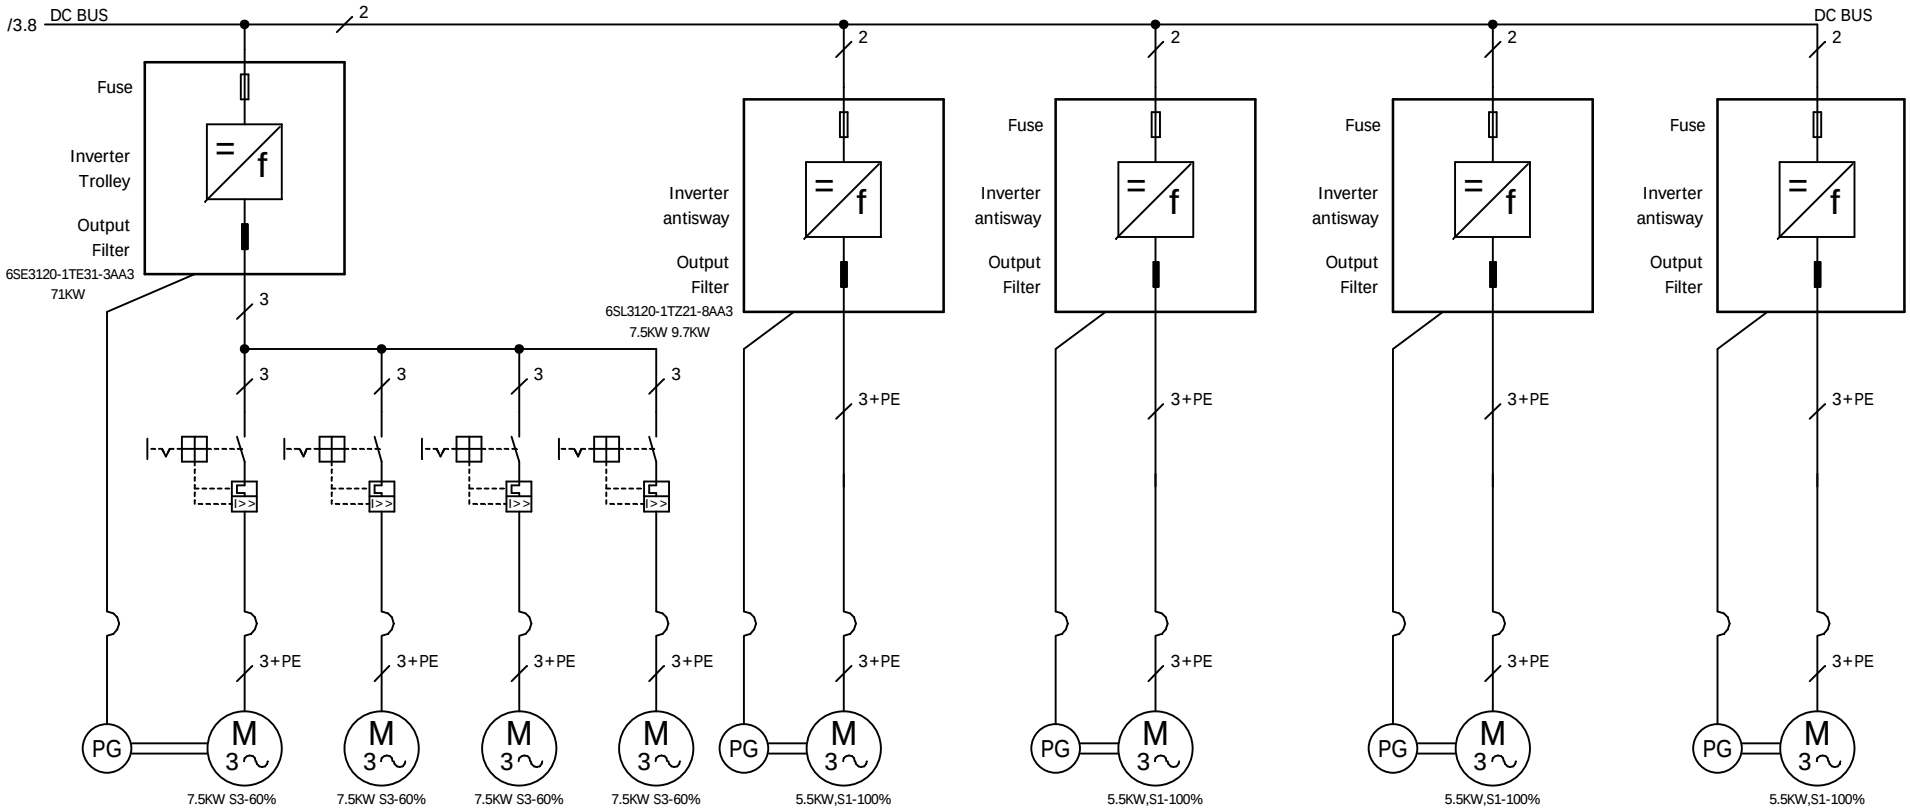

				Date		Costumer	AMPT Egypt	NOELL	Main Drives	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR						
				Checked	LIU KP					Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:			Single line diagram		Sheet 4 / 12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

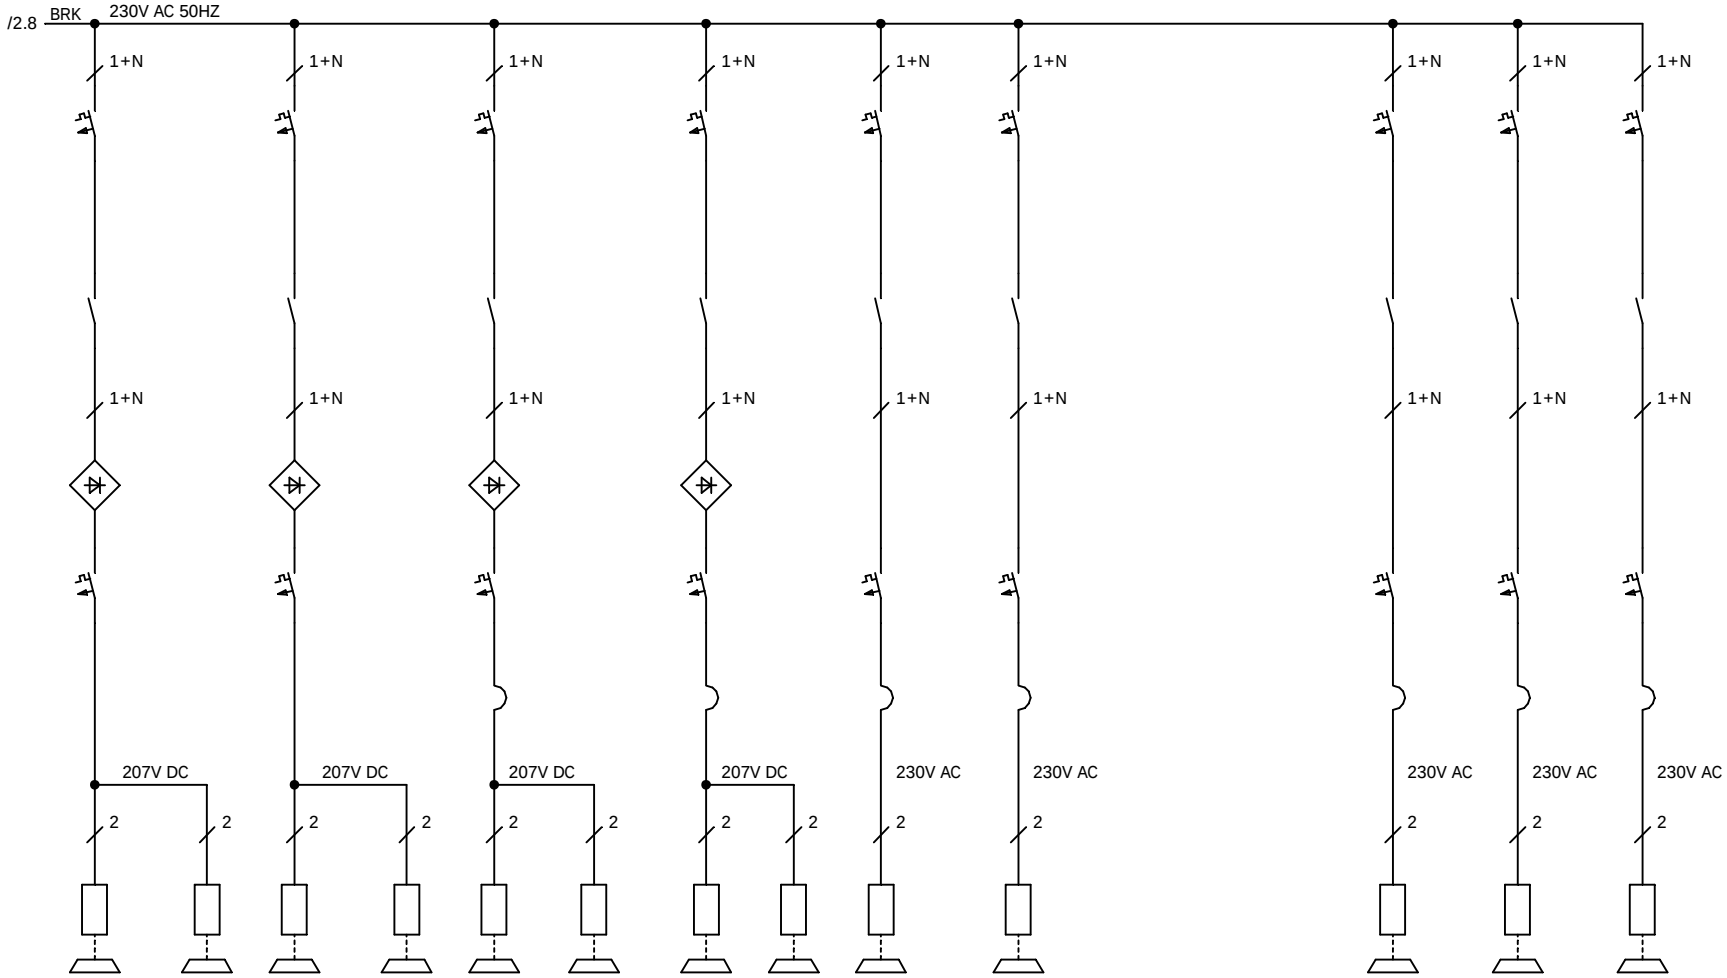

| | | |

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

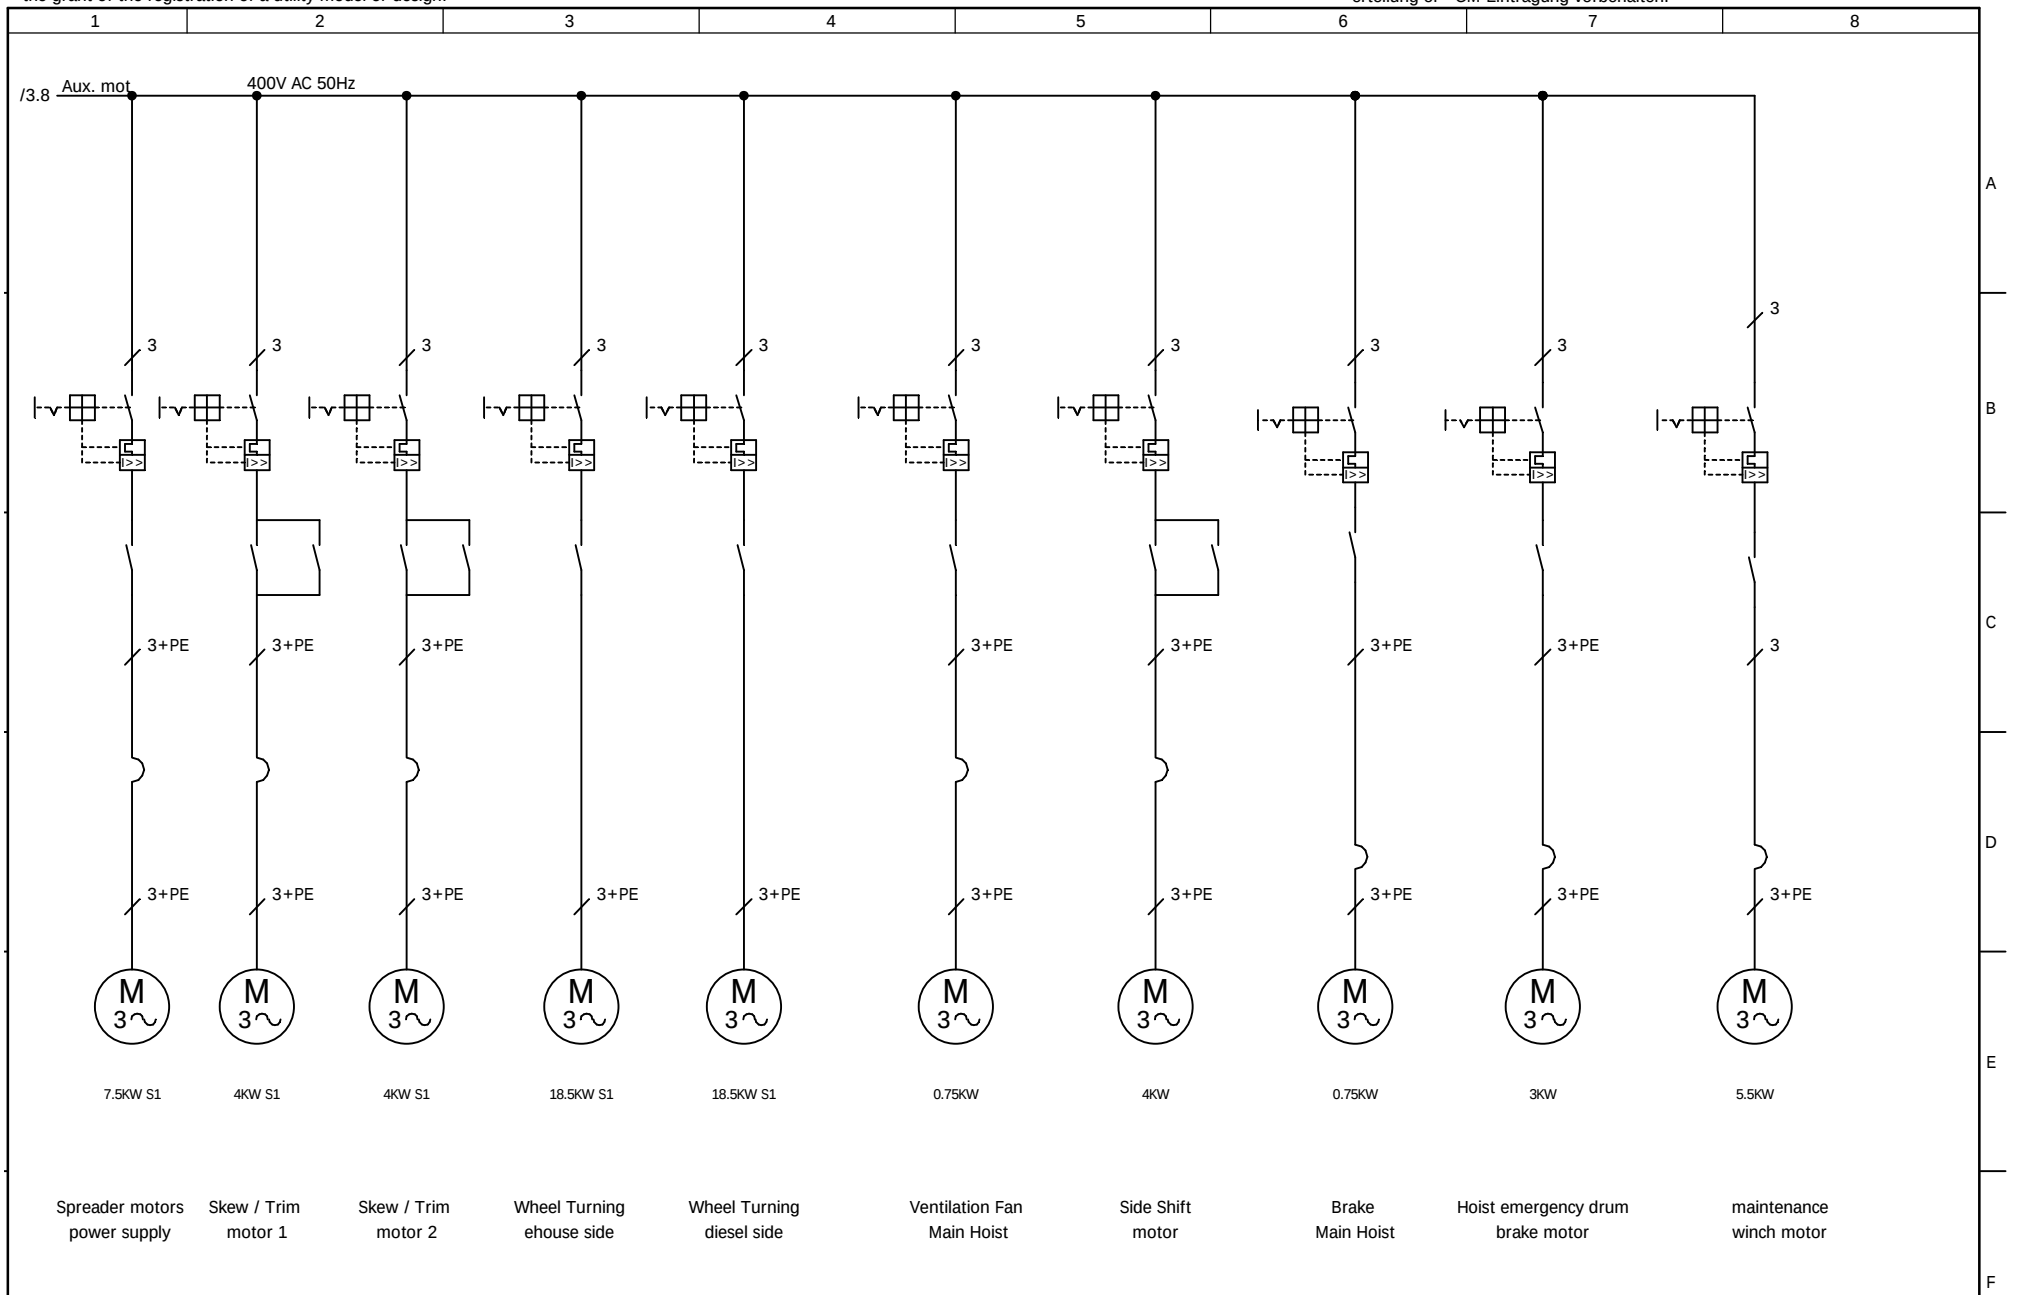

				Date		Costumer	AMPT Egypt	Auxiliary Drives	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram		Sheet 6 / 12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

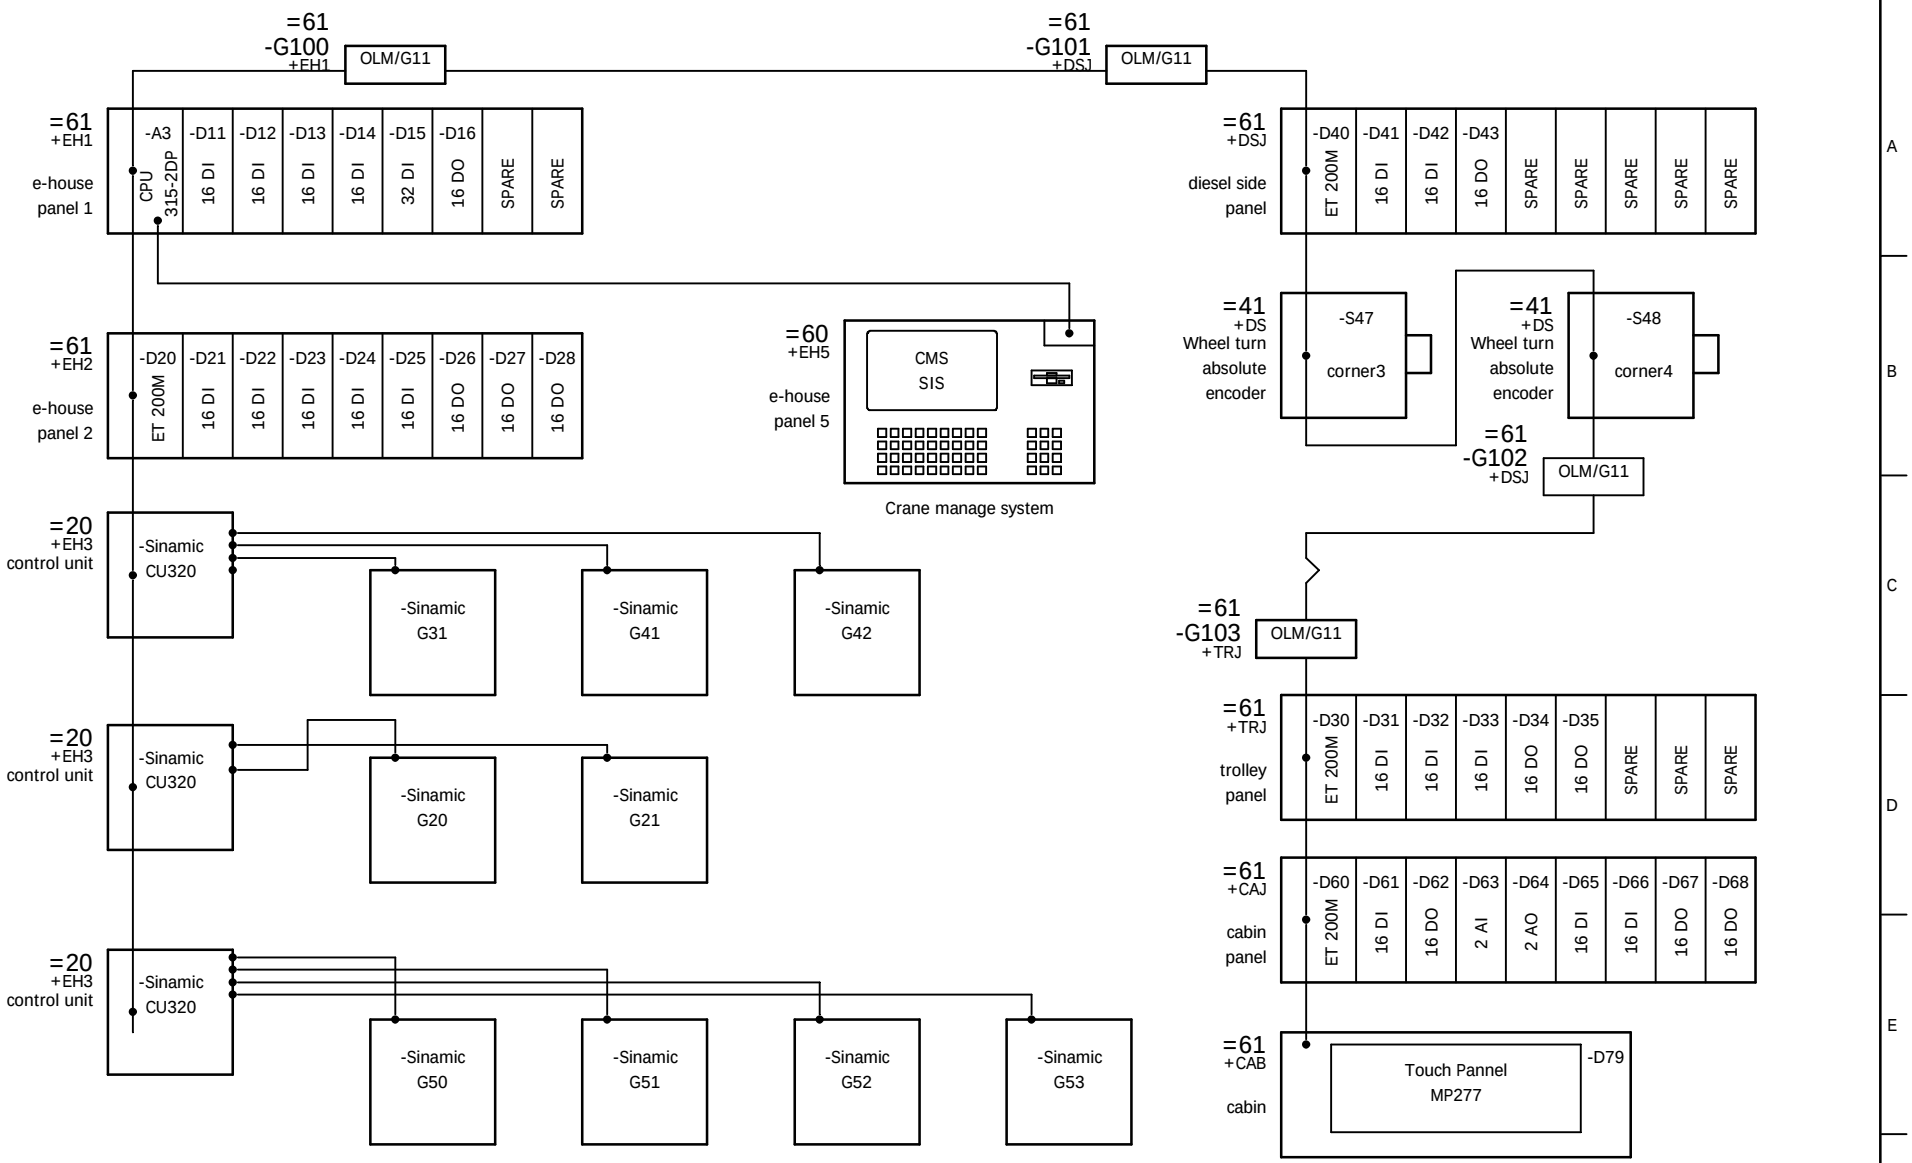

				Date		Costumer	PLC and remote-I/O structure	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR	AMPT Egypt			
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00	Sheet 7 12 Sh.
Ind.	Revision	Date	Name	Standard		Source:	Single line diagram		

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

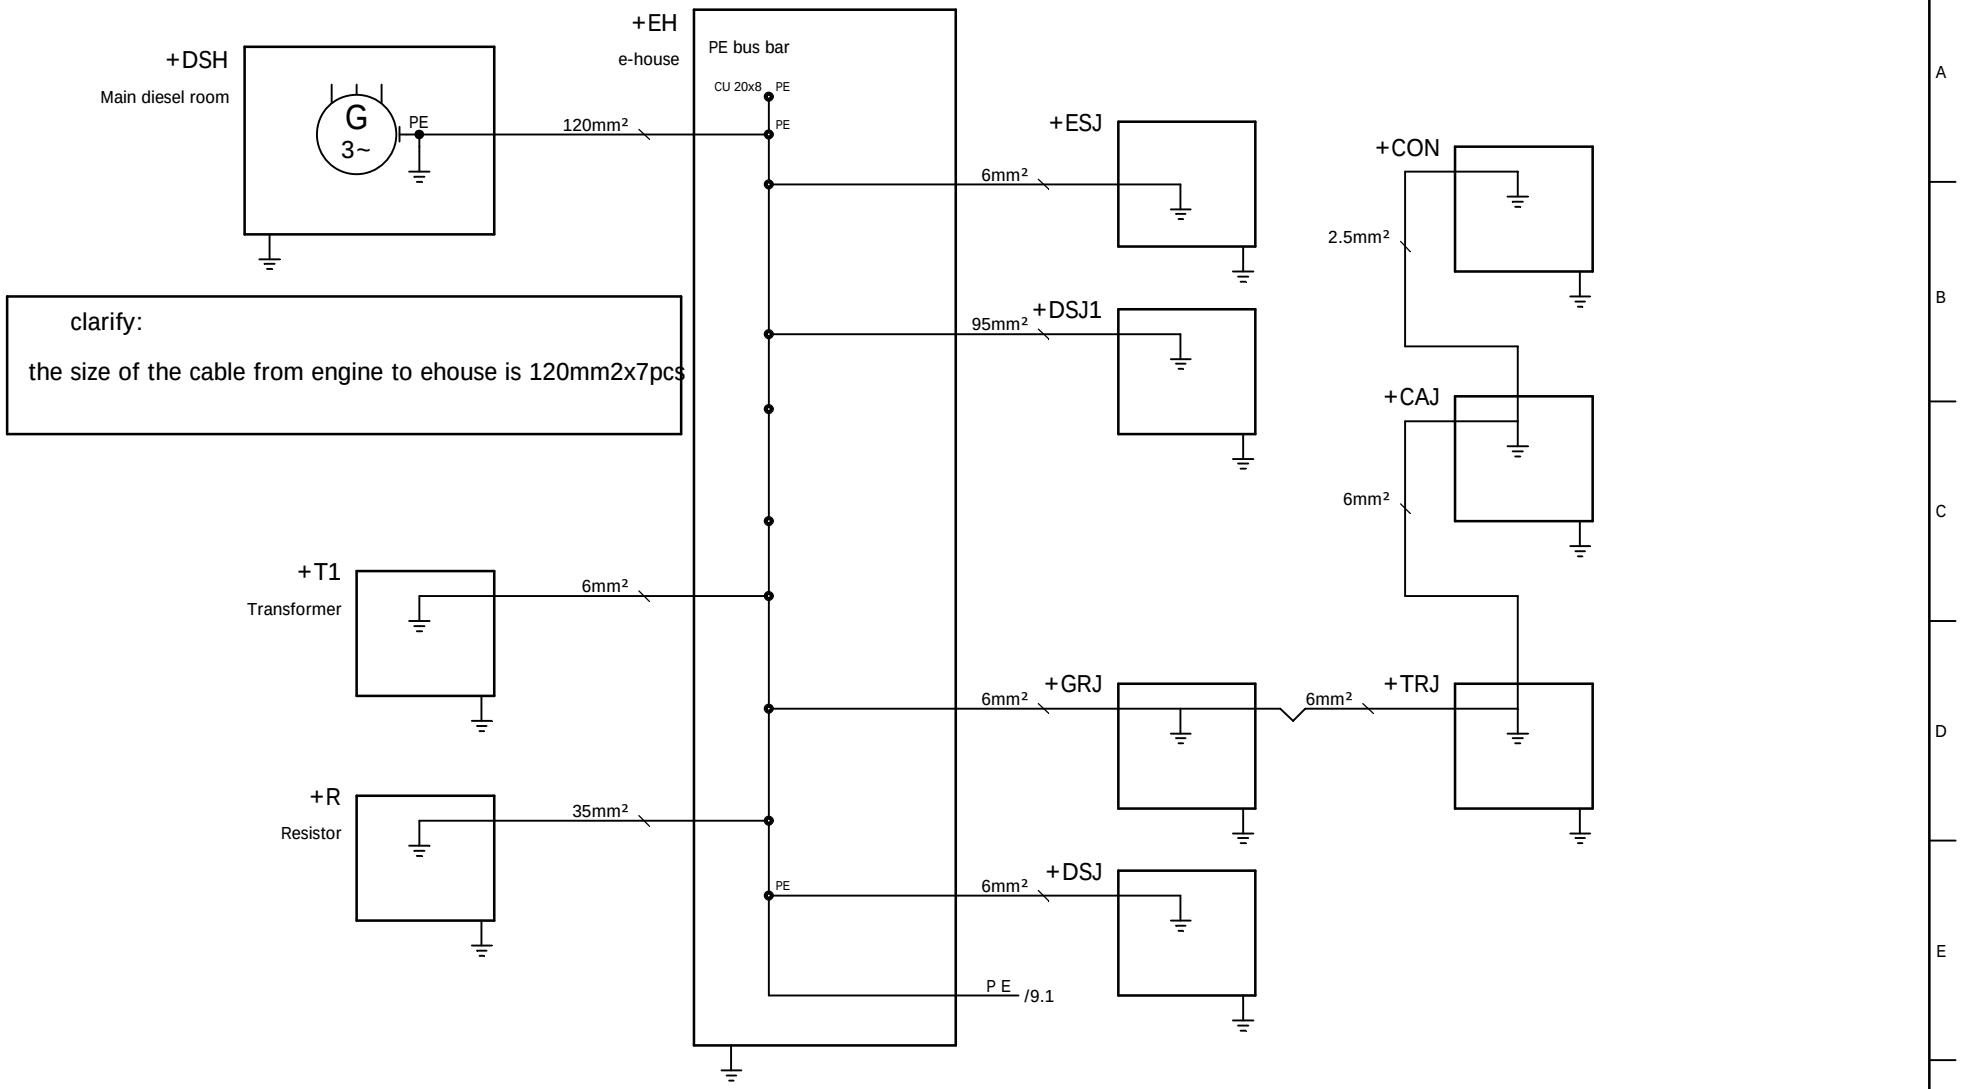

				Date		Costumer	AMPT Egypt
				Designer	XU HR		
				Checked	LIU KP		
Ind.	Revision	Date	Name	Standard		Source:	

NOELL


Grounding system

Single line diagram

Type	RTG 50/26.50/5+1/AC		=SLD
Job No.	1255	Drawing No.	78.5692.60.00
		Sheet	8
			12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

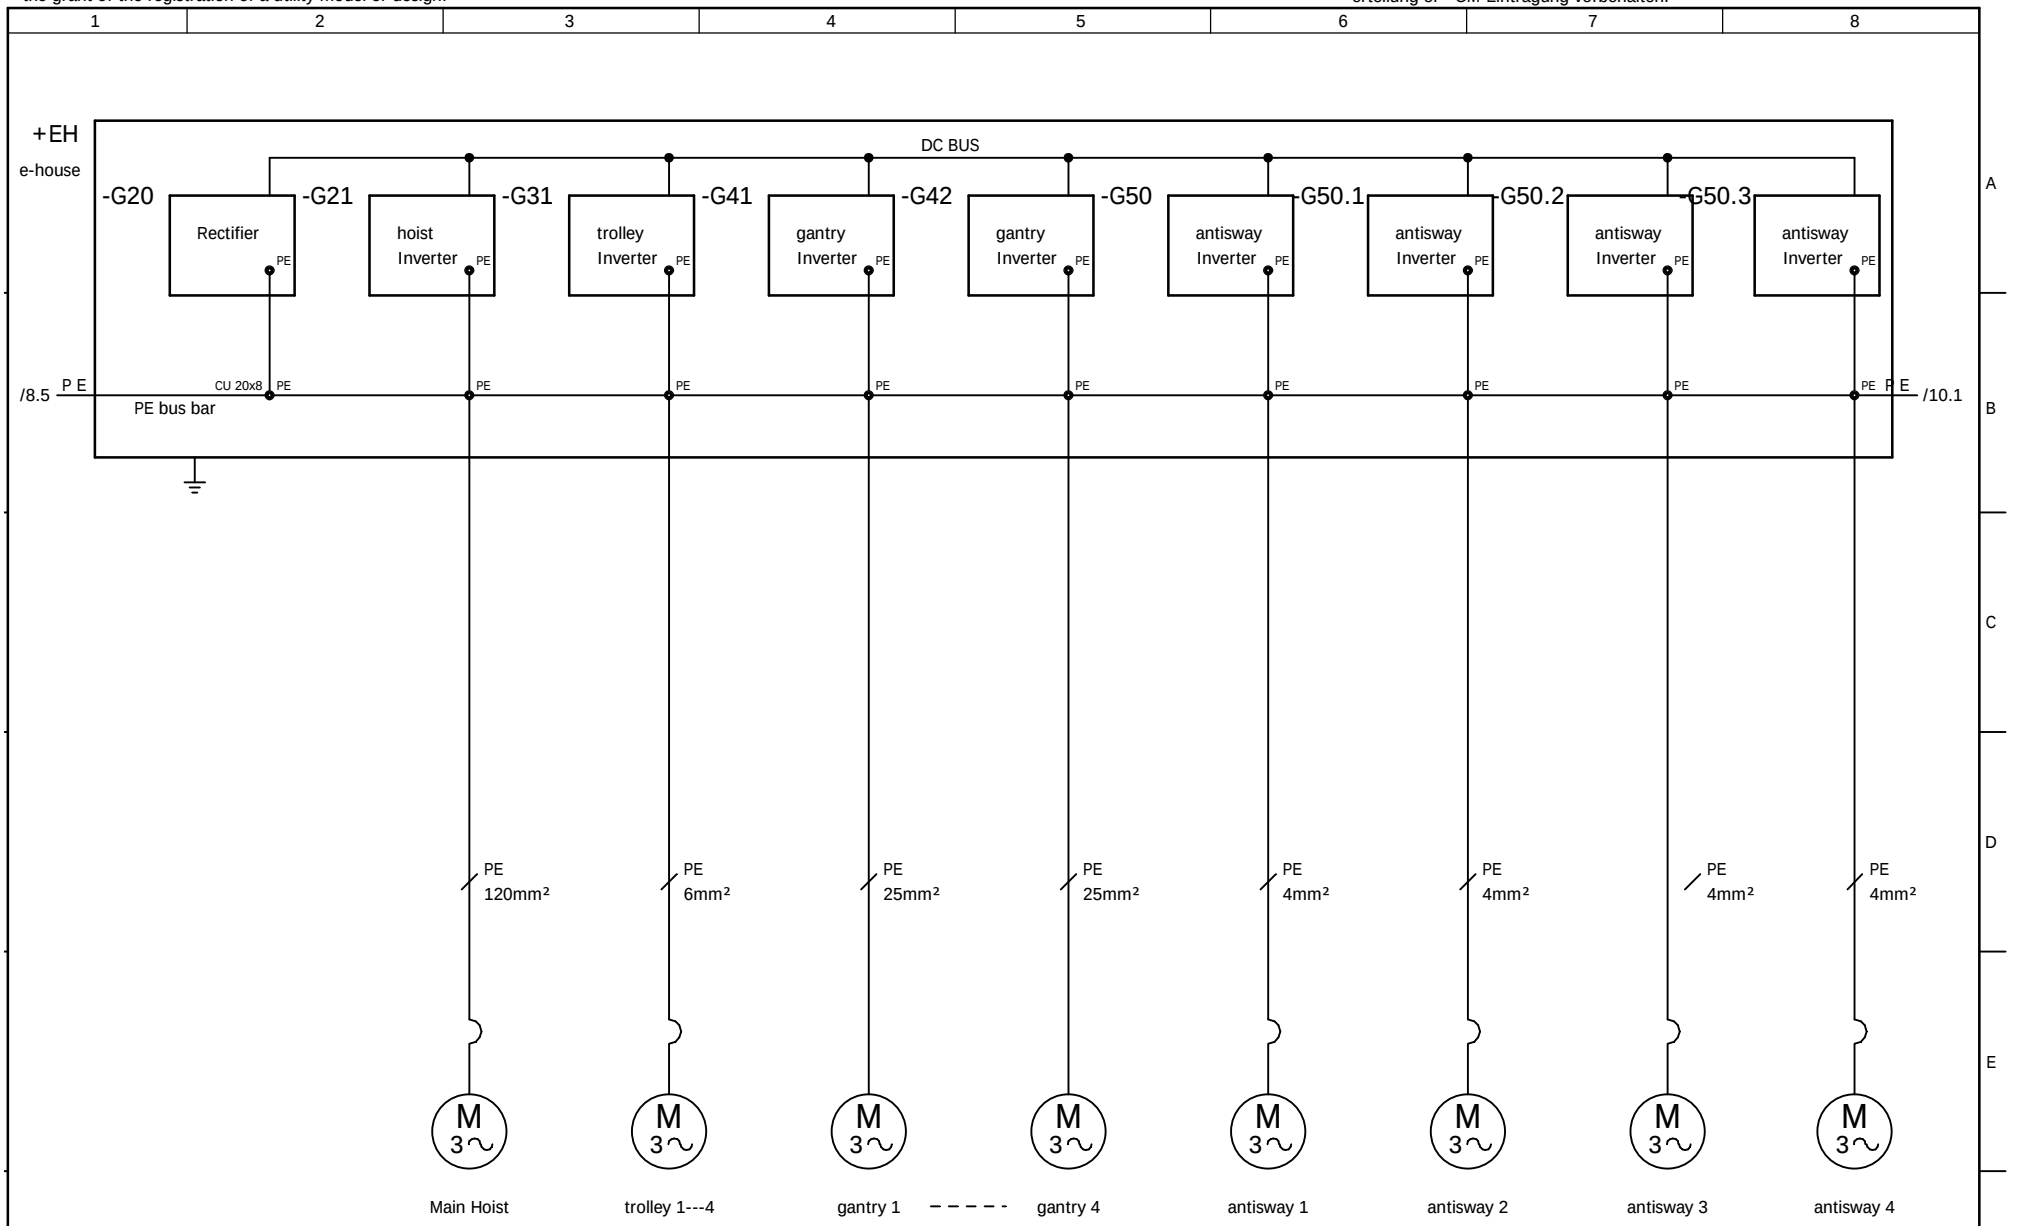

				Date		Costumer	AMPT Egypt	Grounding system	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram		Sheet 9 / 12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.


Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

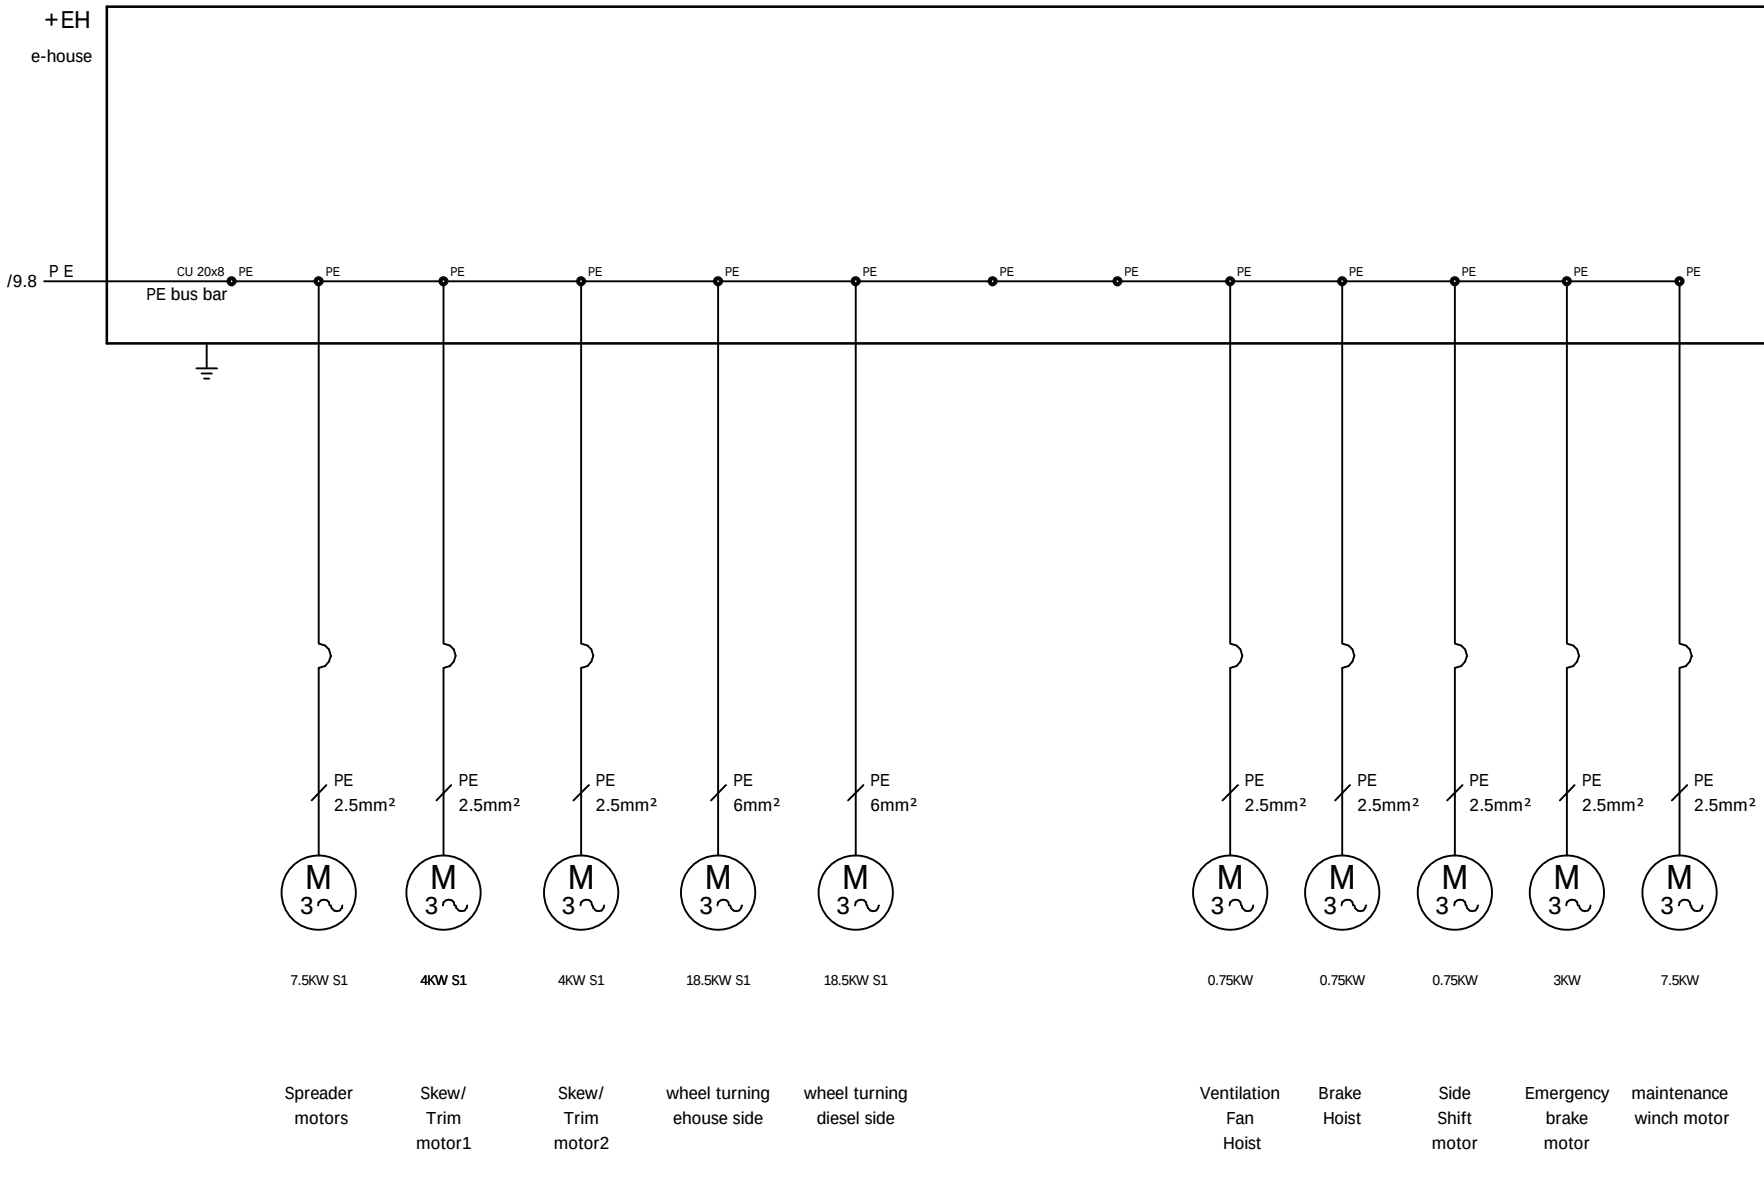

				Date		Costumer	Grounding system	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR	AMPT Egypt			
				Checked	LIU KP			Job No. 1255	Drawing No. 78.5692.60.00
Ind.	Revision	Date	Name	Standard		Source:	Single line diagram		Sheet 10 / 12 Sh.

Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

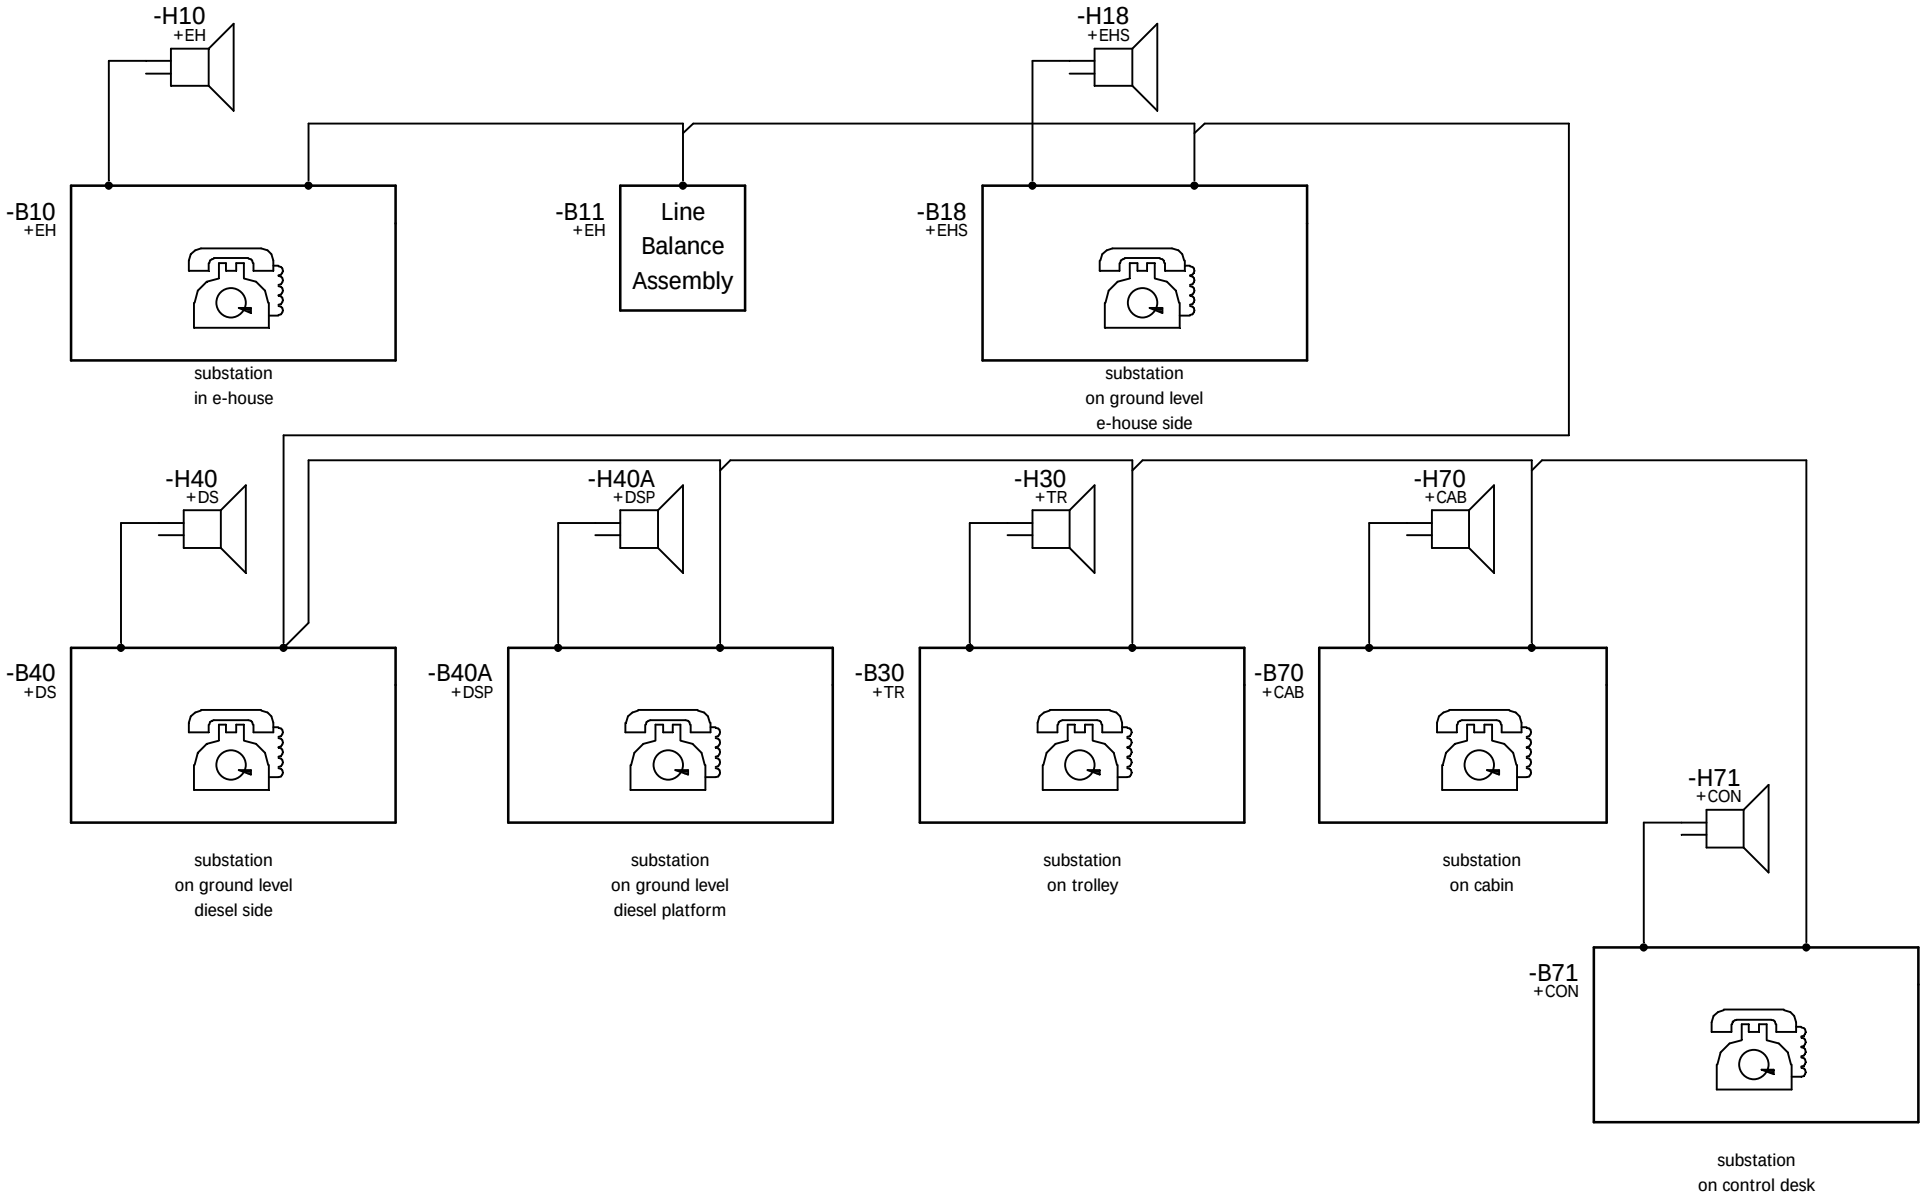

				Date		Costumer	AMPT Egypt	Intercom system	Type RTG 50/26.50/5+1/AC	=SLD
				Designer	XU HR					
				Checked	LIU KP				Job No. 1255	Drawing No. 78.5692.60.00	Sheet 11 12 Sh.
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram		


Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of the registration of a utility model or design.

Weitergabe sowie Vervielf
ihres Inhaltes nicht gestattet,soweit nicht ausdr
handlungen verpflichten to Schadenersatz.Alle Rechte for den Fall of Patent-
erteilung or GM-Eintragung vorbehalten.

1 2 3 4 5 6 7 8

A B C D E F


LOAD-DISCONNECT SWITCH


MANUAL MOTOR STARTER

FUSE


MINIATURE CIRCUIT BREAKER



EARTH LEAKAGE PROTECTION


THERMAL OVERLOAD RELAY




UNDERVOLTAGE RELAY


TIME DELAY CONTACTOR



HOUR METER



PULSE METER


PHASE SEQUENCE RELAY


TRANSFORMER


TRANSFORMER WITH RECTIFIER


HEATER



VOLTMETER



AMPEREMETER


TRUSH COIL


CURRENT TRANSFORMER

CONTACTOR




THERMISTOR


VARISTOR



INDUCTION MOTOR
SQUIRREL MOTOR



DC MOTOR




TACHOMETER




BRAKE


EMERGENCY STOP
PUSHBUTTON




PULSE RELAY



FLOURESCENT


FLOODLIGHT



OVERSPEED
SWITCH


SOLENOID VALVE


MAGNETIC SENSOR


INDUCTIVE SENSOR


ULTRONIC SENSOR


INDICATE LIGHT


PUSH BUTTON


SELECTOR
SWITCH

				Date		Costumer	AMPT Egypt	Intercom system	Type RTG 50/26.50/5+1/AC =SLD
				Designer	XU HR				
				Checked	LIU KP				Job No. 1255 Drawing No. 78.5692.60.00 Sheet 12
Ind.	Revision	Date	Name	Standard		Source:		Single line diagram	12 Sh.