


ESP32-S3-WROOM-1 pinout

ESP32 Pinout Studio - esp32pin.com/esp32s3 - 2026-08-31

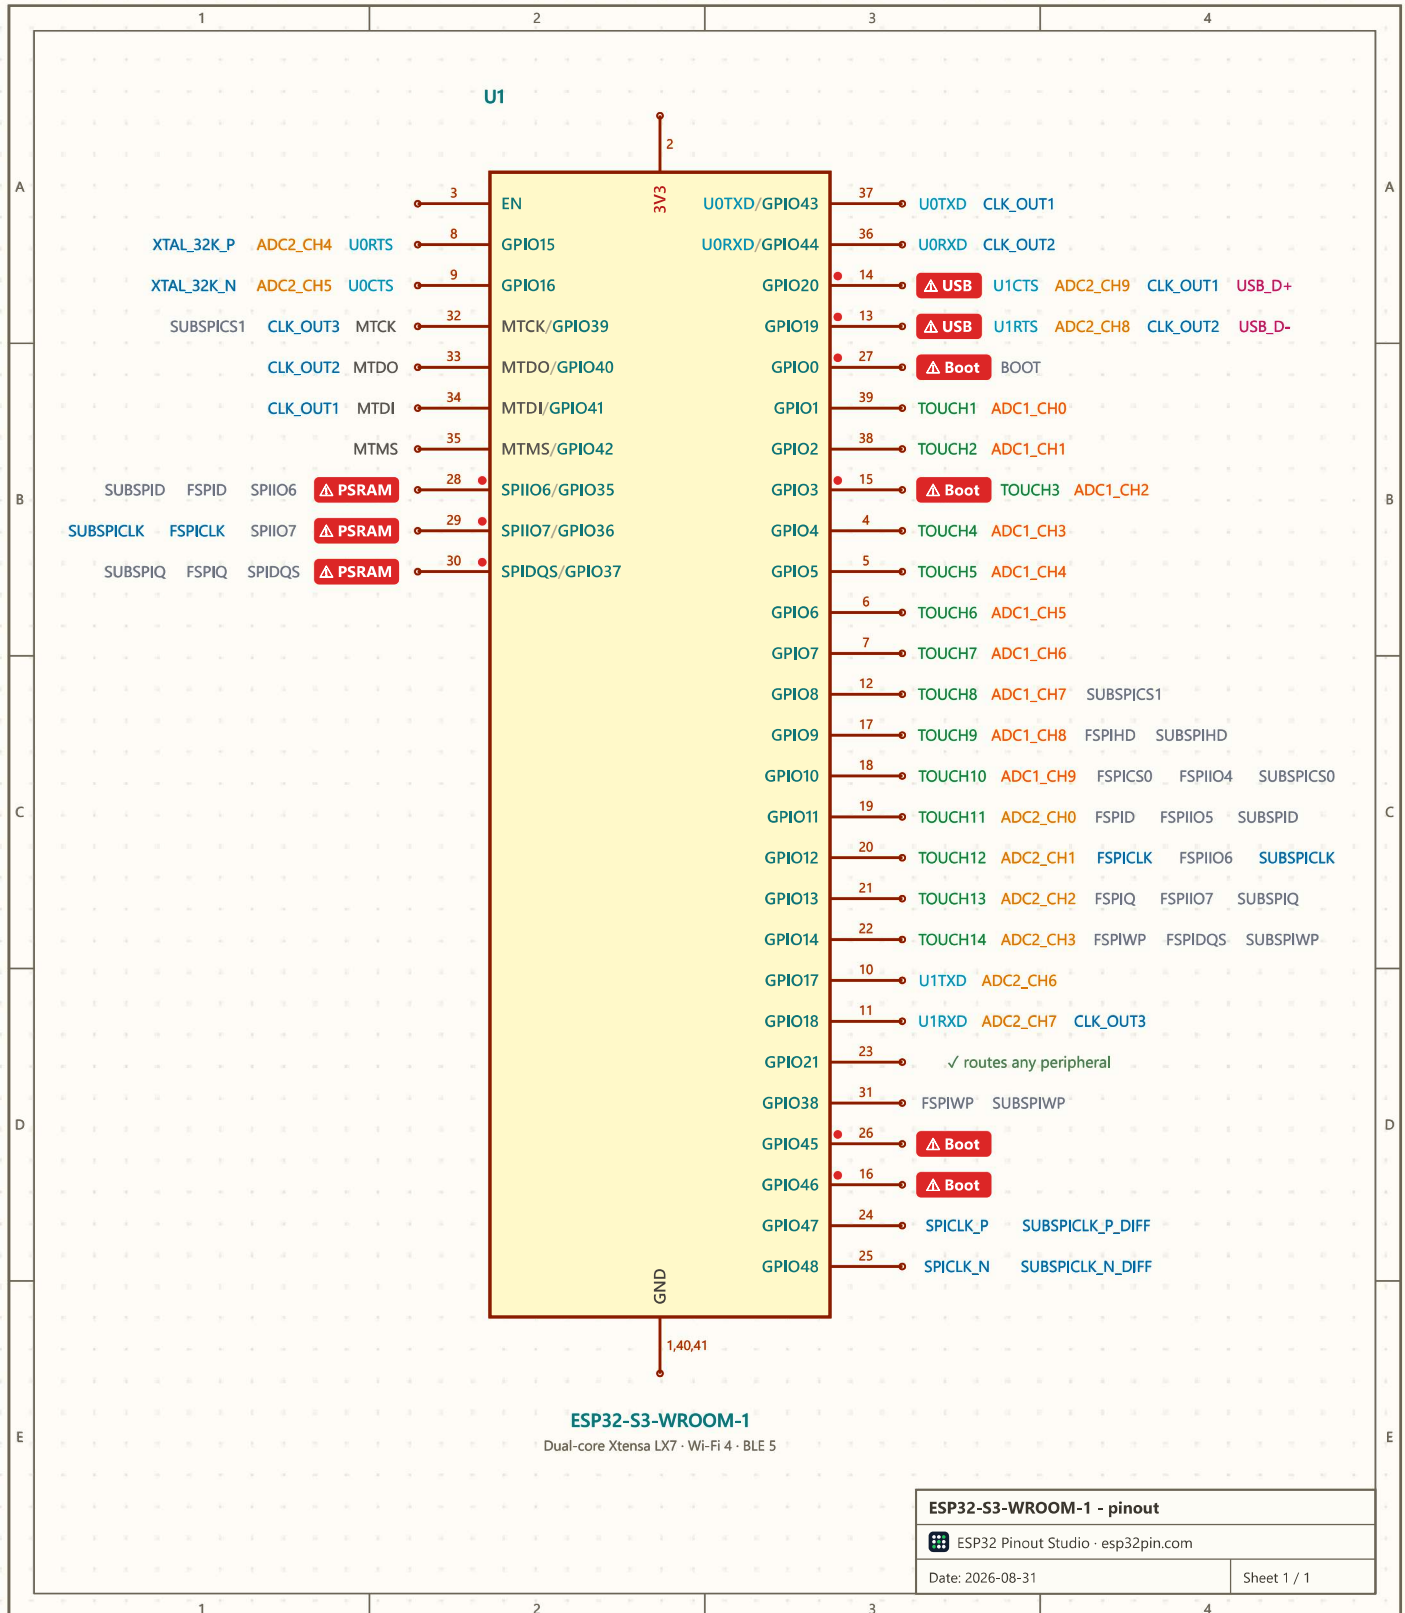

Known gotchas

- No ADC2/Wi-Fi conflict - the S3 redesigned the ADC/Wi-Fi arbitration.
- GPIO19/20 are USB Serial/JTAG D-/D+. Do not use as GPIO while USB is connected.
- GPIO0 is a strapping pin (HIGH = normal boot, LOW = download mode).
- GPIO3/45/46 are strapping pins - avoid driving them at boot.
- GPIO35/36/37 are used by the Octal SPI PSRAM on R8/R16V variants (e.g. N8R8/N16R8 modules) - not available there.
- No DAC on the S3.

Interactive version with live conflict checking: <https://esp32pin.com/esp32s3>

esp32pin.com

