SMD Power Inductor CDRH8D58/LD









- Ferrite drum core construction.
- · Magnetically shielded.


Description


- L × W × H:8.3 × 8.3 × 6.0 mm Max.
- Product weight: 1.3g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Dimension - [mm]









Environmental Data

- Operating temperature range: -40 °C ~+105 °C (including coil's self temperature rise)
- Storage temperature range: -40°C ~+105°C
- Solder reflow temperature: 260 [°]C peak.


Packaging


- · Carrier tape and reel packaging
- 13"diameter reel
- 500pcs per reel

Applications


· Ideally used in Notebook PC, Game machine, DVD, LCD TV ,STB etc as DC-DC converter inductors.

Land pattern and Schematics - [mm]






 $(2.8 \mu H \sim 10 \mu H)$



 $(15.0\mu H \sim 47.0\mu H)$



 $(68 \mu H \sim 100 \mu H)$

Revised: 9-Jan-17 Page 1 of 4

SMD Power Inductor CDRH8D58/LD



Electrical Characteristics

Part Name	Stamp	Inductance (µH) [within] ※1	D.C.R. (mΩ) Max. (Typ.) (at 20℃)	Saturation Current (A) ※2		Temperature Rise Current
				at 20°C	at 100℃	(A) ※3
CDRH8D58/LDNP-2R8NC	2R8	2.8±30%	15.0(12)	4.7	4.0	6.90
CDRH8D58/LDNP-3R9NC	3R9	3.9±30%	16.3(13)	4.1	3.5	6.30
CDRH8D58/LDNP-5R0NC	5R0	5.0±30%	17.5(14)	3.8	3.1	6.00
CDRH8D58/LDNP-6R2NC	6R2	6.2±30%	20.0(16)	3.3	2.7	5.50
CDRH8D58/LDNP-100NC	100	10±30%	25.6(20.5)	2.6	2.2	4.50
CDRH8D58/LDNP-150NC	150	15±30%	36.3(29.0)	2.3	1.9	3.60
CDRH8D58/LDNP-220NC	220	22±30%	45.3(36.2)	1.7	1.4	3.30
CDRH8D58/LDNP-330NC	330	33±30%	65.3(52.2)	1.5	1.3	2.70
CDRH8D58/LDNP-470NC	470	47±30%	90.5(72.4)	1.2	1.0	2.20
CDRH8D58/LDNP-680NC	680	68±30%	130(104)	1.0	0.9	1.70
CDRH8D58/LDNP-101NC	101	100±30%	175(140)	0.8	0.7	1.40

^{%1.} Inductance measuring conditions at 100kHz.


Page 2 of 4 Revised: 9-Jan-17

^{**2.} Saturation current: The DC current at which the inductance decreases to 65% of its nominal value.

[%]3. Temperature rise current: The DC current at which the temperature rise is $\triangle t = 40 \, ^{\circ}\text{C.} (Ta = 20 \, ^{\circ}\text{C.})$

SMD Power Inductor CDRH8D58/LD



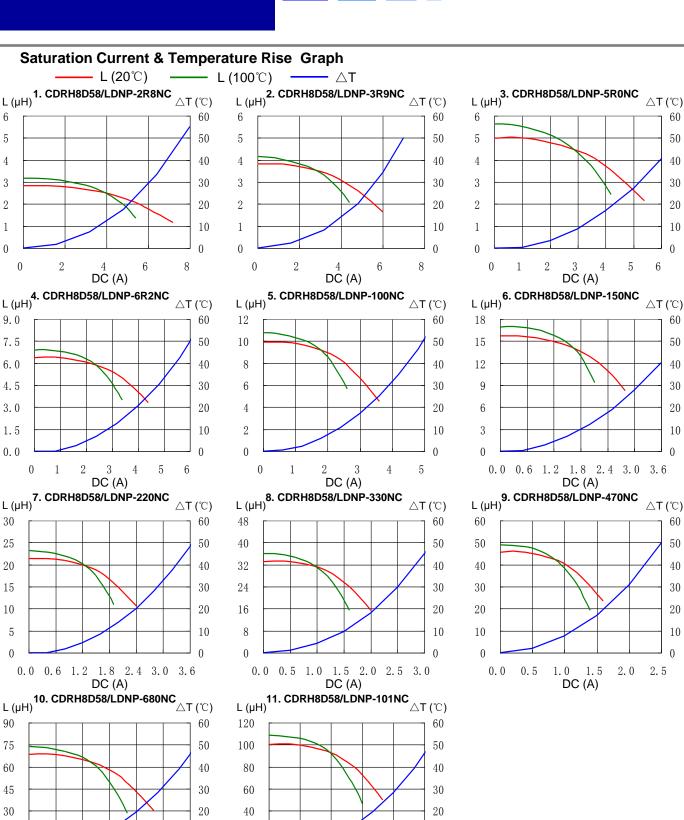

Page 3 of 4

DC (A)

0.6 0.9 1.2

0.0

0.3

0.0 0.3 0.6 0.9 1.2 1.5 1.8


DC (A)


Revised: 9-Jan-17

SMD Power Inductor CDRH8D58/LD



Solder Reflow Condition

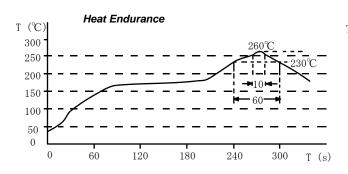

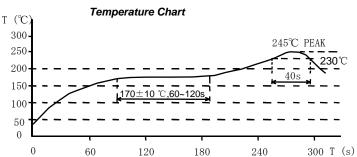

Please refer to the sales offices on our website - http://www.sumida.com

Hong Kong

Tel.+852-2880-6781 FAX.+852-2565-9600 sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300 FAX.+81-48-691-7340 sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700 FAX. +1-847-545-6720 sales@us.sumida.com Shanghai

Tel.+86-21-5836-3299 FAX.+86-21-5836-3266

shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777 FAX.+82-2-6237-0778

sales@kr.sumida.com

Obernzell Tel.+49-8591-937-0

FAX. +49-8591-937-103 contact@eu.sumida.com Shenzhen

Tel.+86-755-8291-0228 FAX.+86-755-8291-0338

shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388 FAX.+65-6841-4426

Neumarkt

Tel.+49-9181-4509-110 FAX. +49-9181-4509-310 infocomp@eu.sumida.com

sales@sg.sumida.com

Page 4 of 4

Taipei Tel.+886-2-8751-2737 FAX.+886-2-8751-2738 sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660 FAX.+1-408-321-9308 sales@us.sumida.com

Revised: 9-Jan-17