
X88	AC connector		
31	Battery -		
30	Battery +		
B54	Crankshaft position (CKP) sensor		
X1	Data link connector (DLC)		
A35	Engine control module (ECM)		
B24	Engine coolant temperature (ECT) sensor		
Y104	Evaporative emission (EVAP) canister purge valve		
M12	Fuel pump		
F	Fuse		
B72	Heated oxygen sensor (HO2S)		
Y99	Idle air control (IAC) valve		
T1	Ignition coil		
15	Ignition switch - ignition ON		
A162	Immobilizer control module		
S39	Inertia fuel shut-off (IFS) switch		
Y3	Injector		
A5	Instrument panel - MIL light		
B25	Intake air temperature (IAT) sensor		
B69	Knock sensor (KS)		
B83	Manifold absolute pressure (MAP) sensor		
S259	Park/neutral position (PNP) switch		
K46	Relay module		
C3	Suppressor		
R10	Throttle body heater		
B147	Throttle position (TP) sensor		
B33	Vehicle speed sensor (VSS)		



bl = blue	br = brown	el = cream	ge = yellow
gn = green	gr = grey	nf = neutral	og = orange
rs = pink	rt = red	sw = black	vi = violet
ws = white	hbl = light blue	hgn = light green	rbr = maroon
x = braided cable	y = high tension	z = non-cable connection	


NOTE: In certain diagrams (Citroen, Peugeot & Renault), colour codes are replaced by numbers which are used to

 Manufacturer: Citroen
 Model: Xantia 1,8 16V

 Engine code: LFY (XU7JP4)
 Output: 81 (112) 5500

 Tuned for: Motronic MP5 1 1
 Year: 1995-97

V8 500- /Autodata

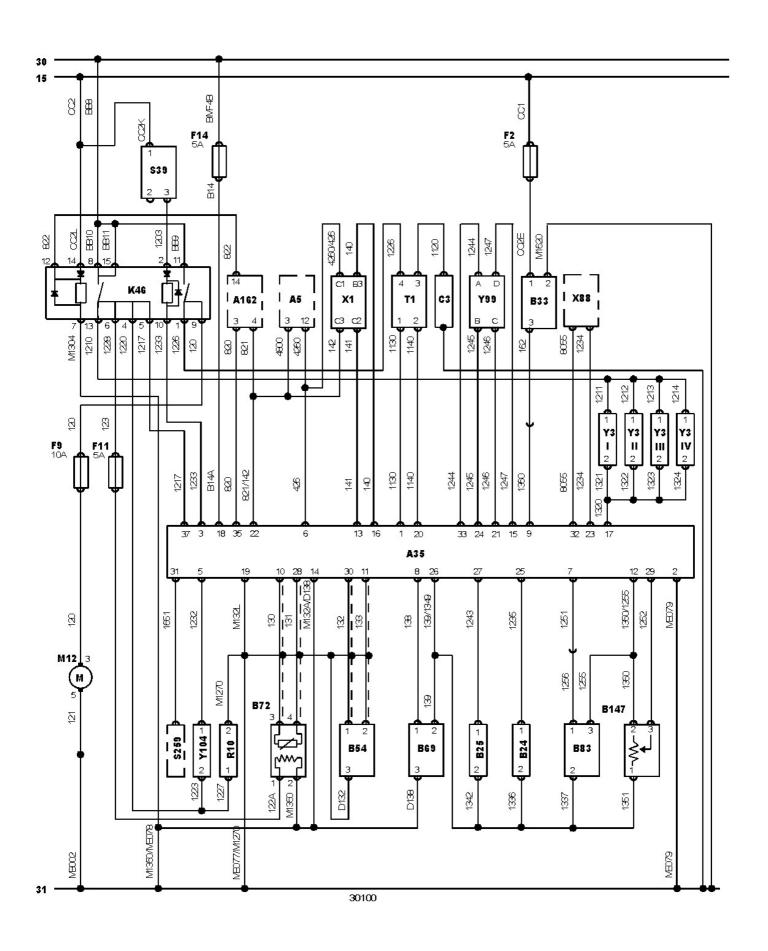

V8 500- /Autodata