

1.5 A very low drop voltage regulator IC

Datasheet - production data

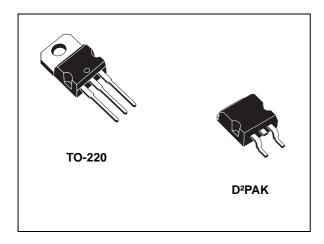


 Table 1. Device summary

 Order code
 Output voltages

 TO-220
 D²PAK

 L4940V5
 L4940D2T5-TR
 5 V

 L4940V85
 8.5 V

 L4940D2T12-TR
 12 V

Features

- Precise 5, 8.5, 12 V outputs
- Low dropout voltage (450 mV typ. at 1 A)
- · Very low quiescent current
- Thermal shutdown
- Short-circuit protection
- · Reverse polarity protection

Description

The L4940 series of three-terminal positive regulators is available in TO-220 and D²PAK packages and with several fixed output voltages, making it useful in a wide range of industrial and consumer applications. Thanks to their very low input/output voltage drop, these devices are particularly suitable for battery-powered equipment, reducing consumption and prolonging battery-life. Each type employs internal current limiting, anti-saturation circuit, thermal shutdown and safe area protection.

Contents L4940

Contents

1	Bloc	k diagram
2	Pin (configuration4
3	Max	imum ratings
4	Test	circuits6
5	Elec	trical characteristics7
6	Perf	ormance characteristics9
7	Арр	lication circuits
8	Pacl	kage information
	8.1	TO-220 (dual gauge) package information
	8.2	TO-220 (dual gauge) packing information
	8.3	D ² PAK package information
	8.4	D²PAK packing information
9	Revi	sion history



L4940 Block diagram

1 Block diagram


IN OUT 0 PREREGULATOR SOA PROTECT. AND & ANTISAT. PROTECTION CIRCUIT REFERENCE ERROR VOLTAGE AMPLIFIER THERMAL SHUTDOWN GND CS25740

Figure 1. Block diagram

Pin configuration L4940

2 Pin configuration

Figure 2. Pin connections (top view)

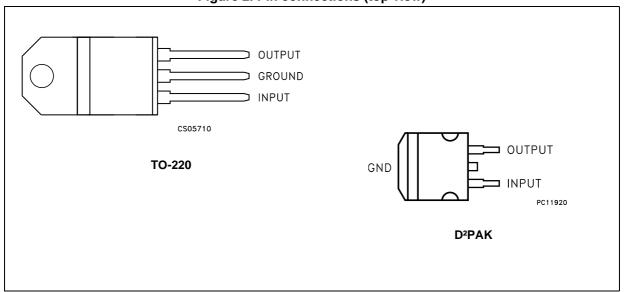

L4940 Maximum ratings

3 Maximum ratings

Table 2. Absolute maximum ratings

Symbol	Paran	Value	Unit	
VI	Forward input voltage		30	V
		$V_0 = 5 \text{ V}, R_0 = 100 \Omega$	-15	V
V_{IR}	Reverse input voltage	$V_O = 8.5 \text{ V}, R_O = 180 \Omega$	-15	V
		$V_{O} = 12 \text{ V}, R_{O} = 240 \Omega$	-15	V
Io	Output current		Internally limited	mA
P _D	Power dissipation		Internally limited	mW
T _{stg}	Storage temperature range		-40 to +150	°C
T _{op}	Operating junction temperature r	ange	-40 to +150	°C

Note:

Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

Table 3. Thermal data

Symbol	Parameter	TO-220	D²PAK	Unit
R _{thJC}	Thermal resistance junction-case	3	3	°C/W
R _{thJA}	Thermal resistance junction-ambient	50	62.5	°C/W

Test circuits L4940

4 Test circuits

Figure 3. DC parameters

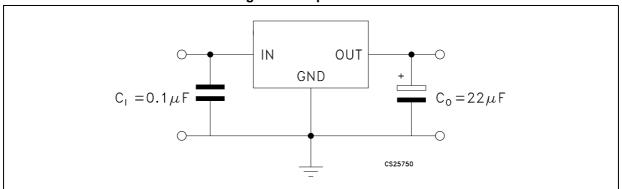


Figure 4. Load regulation


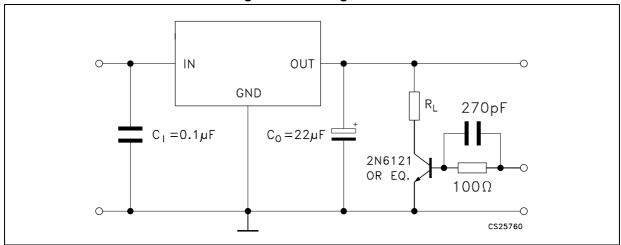


Figure 5. Ripple rejection

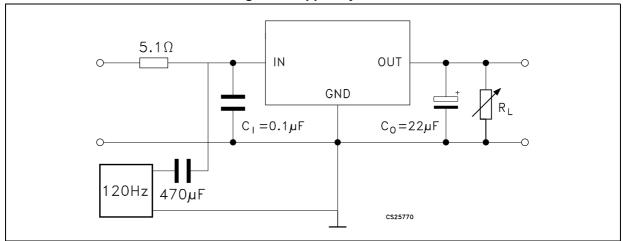

5 Electrical characteristics

Refer to test circuit, V_I = 7 V, C_I = 0.1 μ F, C_O = 22 μ F, T_J = 25 $^{\circ}$ C, unless otherwise specified.

Table 4. L4940#5 electrical characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
Vo	Output voltage	I _O = 500 mA	4.9	5	5.1	V
Vo	Output voltage	$I_{O} = 5 \text{ mA to } 1.5 \text{ A}, V_{I} = 6.5 \text{ to } 15 \text{ V}$	4.8	5	5.2	V
VI	Maximum input voltage	I _O = 5 mA			17	V
ΔV_{O}	Line regulation	V _I = 6 to 17 V, I _O = 5 mA		4	10	mV
41/	Load regulation	I _O = 5 mA to 1.5 A		8	25	mV
ΔV_{O}	Load regulation	I _O = 0.5 A to 1 A		5	15	mV
	Quies cent current	I _O = 5 mA		5	8	mA
I _q	Quiescent current	I _O = 1.5 A, V _I = 6.5 V		30	50	mA
	Quiescent current change	I _O = 5 mA			3	mA
Δl_q		I _O = 1.5 A, V _I = 6.5 to 16 V			15	mA
$\Delta V_{O} / \Delta T$	Output voltage drift			0.5		mV/°C
SVR	Supply voltage rejection	f = 120 Hz, I _O = 1 A	58	68		dB
\/	Dranaut valtage	I _O = 0.5 A		200	400	mV
V_d	Dropout voltage	I _O = 1.5 A		500	900	mV
	Chart aircuit aurrant	V _I = 14 V		2	2.7	۸
I _{sc}	Short-circuit current	V _I = 6.5 V		2.2	2.9	Α

Refer to test circuit, V_I = 10.5 V, C_I = 0.1 μ F, C_O = 22 μ F, T_J = 25 °C, unless otherwise specified.

Table 5. L4940#85 electrical characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
Vo	Output voltage	I _O = 500 mA	8.3	8.5	8.7	V
Vo	Output voltage	$I_O = 5 \text{ mA to } 1.5 \text{ A}, V_I = 10.2 \text{ to } 15 \text{ V}$	8.15	8.5	8.85	V
VI	Maximum input voltage	I _O = 5 mA			17	V
ΔV _O	Line regulation	$V_{I} = 9.5 \text{ to } 17 \text{ V}, I_{O} = 5 \text{ mA}$		4	9	mV
4)/	Load regulation	I _O = 5 mA to 1.5 A		12	30	mV
ΔV _O		I _O = 0.5 A to 1 A		8	16	mV
	Quiescent current	I _O = 5 mA		4	8	mA
Iq		I _O = 1.5 A, V _I = 10.2 V		30	50	mA
Δl_{q}	Quioscopt current change	I _O = 5 mA			2.5	mA
	Quiescent current change	I _O = 1.5 A, V _I = 10.2 to 16 V			15	mA



Electrical characteristics L4940

Table 5. L4940#85 electrical characteristics (continued)

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
$\Delta V_{O} / \Delta T$	Output voltage drift			0.8		mV/°C
SVR	Supply voltage rejection	f = 120 Hz, I _O = 1 A	58	66		dB
V _d	Dropout voltage	I _O = 0.5 A		200	400	mV
		I _O = 1.5 A		500	900	mV
	Short-circuit current	V _I = 14 V		2	2.7	Α
I _{sc}	Short-circuit current	V _I = 10.2 V		2.2	2.9	A

Refer to test circuit, V $_I$ = 14 V, C $_I$ = 0.1 $\mu F,$ C $_O$ = 22 $\mu F,$ T $_J$ = 25 °C, unless otherwise specified.

Table 6. L4940#12 electrical characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
Vo	Output voltage	I _O = 500 mA	11.75	12	12.25	V
Vo	Output voltage	$I_O = 5 \text{ mA to } 1.5 \text{ A}, V_I = 13.8 \text{ to } 15 \text{ V}$	11.5	12	12.5	V
VI	Maximum input voltage	I _O = 5 mA			17	V
ΔV _O	Line regulation	V _I = 13 to 17 V, I _O = 5 mA		3	7	mV
A\/ -	Load regulation	I _O = 5 mA to 1.5 A		15	35	mV
ΔV _O	Load regulation	I _O = 0.5 A to 1 A		10	25	mV
	Quiescent current	I _O = 5 mA		4	8	mA
I _q	Quiescent current	I _O = 1.5 A, V _I = 13.8 V		30	50	mA
Al	Quiescent current change	I _O = 5 mA			1.5	mA
ΔI_q	Quiescent current change	I _O = 1.5 A, V _I = 13.8 to 16 V			10	mA
$\Delta V_{O}/\Delta T$	Output voltage drift			1.2		mV/°C
SVR	Supply voltage rejection	f = 120 Hz, I _O = 1 A	55	61		dB
\/	Drangut valtage	I _O = 0.5 A		200	400	mV
V _d	Dropout voltage	I _O = 1.5 A		500	900	mV
I _{sc}	Short-circuit current	V _I = 14 V		2	2.7	Α
Z _O	Output impedance	f = 120 Hz, I _O = 0.5 A		40		mΩ

6 Performance characteristics

Figure 6. Dropout voltage vs. output current

Vd
(V)
0.6
0.5
0.4
0.3
0.2
0.1
0
0.2 0.4 0.6 0.8 1 1.2 I_O (A)

Figure 7. Dropout voltage vs. temperature (V) Io =1.5 A 0.6 0.5 14 0.4 0.3 0.2 5mA 0.1 75 T j (°C) -50 0 25 50 100

Figure 8. Output voltage vs. temperature (L4940V5)

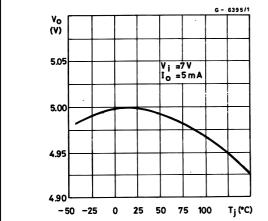


Figure 9. Output voltage vs. temperature (L4940V85)




Figure 10. Output voltage vs. temperature (L4940V12)




Figure 11. Quiescent current vs. temperature (L4940V5)



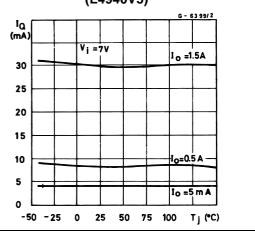




Figure 12. Quiescent current vs. input voltage | Figure 13. Quiescent current vs. output current (L4940V5)



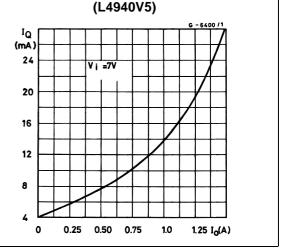

(L4940V5)

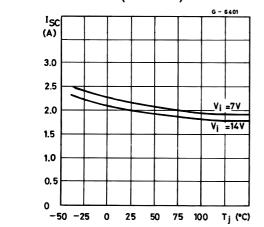


Figure 14. Short-circuit current vs. temperature | Figure 15. Peak output current vs. input/output differential voltage (L4940V5)




Figure 16. Low voltage behavior (L4940V5)



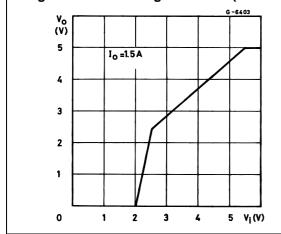


Figure 17. Low voltage behavior (L4940V85)



DocID2141 Rev 14 10/25

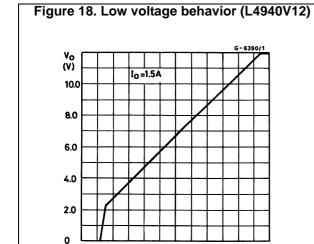

2

Figure 19. Supply voltage rejection vs. frequency (L4940V5)

(dB)

(dB)

(dB)

(C₀=100µF*

100µF

22µF*

30

0.1 0.3 1 3 10 f (KHz)

Figure 20. Supply voltage rejection vs. output current (L4940V5)


6

4

8

10

۷_i (۷)

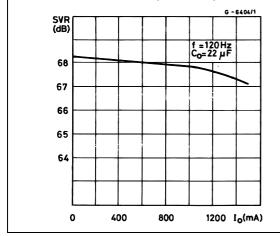




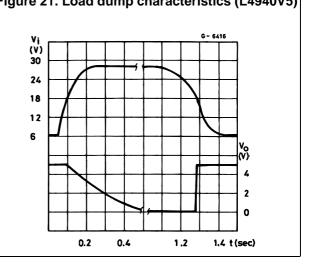


Figure 22. Line transient response (L4940V5)

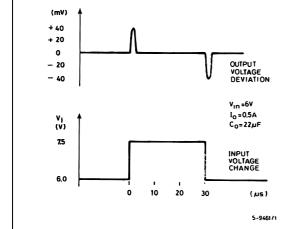

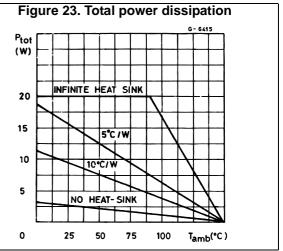

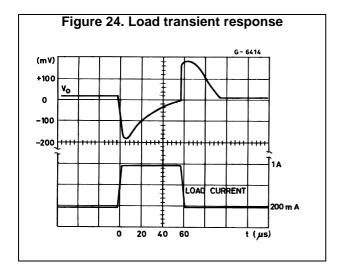

L4940 Application circuits

7 Application circuits

Figure 25. Distributed power supply with the L4960, L4940 and the L4941


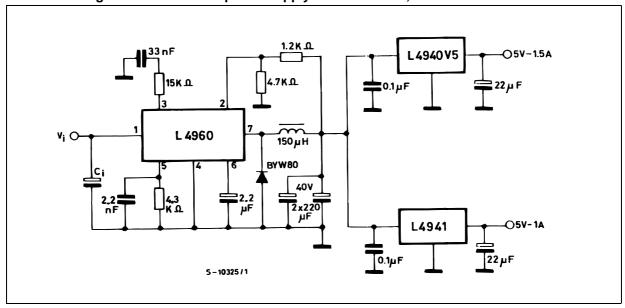


Figure 26. Distributed power supply with the L296, L4940, and the L4941

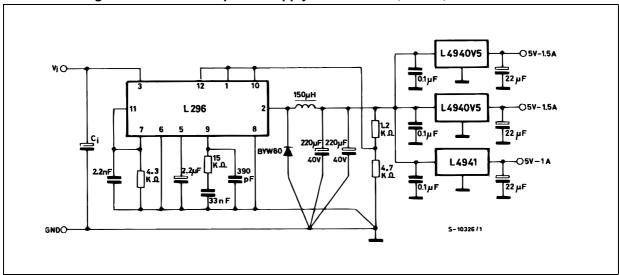

Note: Advantages of these applications are:

On-card regulation with short-circuit and thermal protection on each output. Very high total system efficiency due to the switching pre-regulation and very low drop post-regulation.

Application circuits L4940

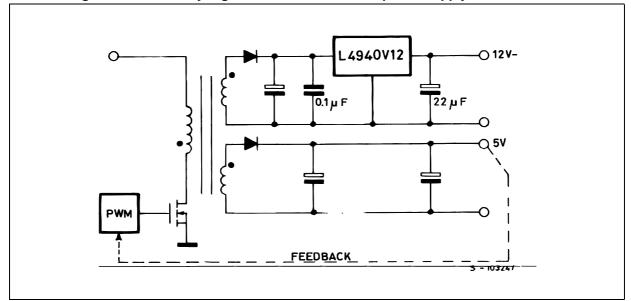


Figure 27. Secondary regulation for switch mode power supply with the L4940

Note: Advantages of this configuration are:

Very high regulation (line and load on both the output voltage. 12 V output short-circuit and thermal protection. Very high efficiency on the 12 V output due to the low drop regulator.

L4940 Package information


8 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.



Package information L4940

8.1 TO-220 (dual gauge) package information

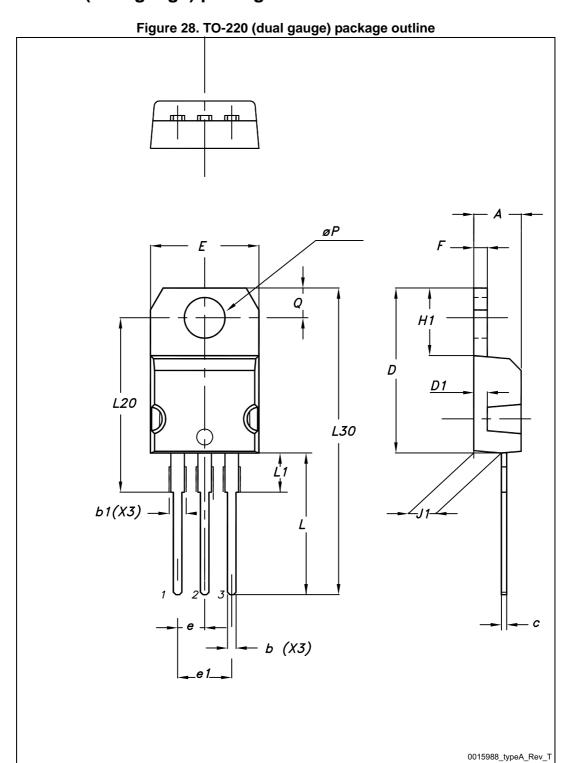



L4940 Package information

Table 7. TO-220 (dual gauge) mechanical data

D:		mm	
Dim.	Min.	Тур.	Max.
А	4.40		4.60
b	0.61		0.88
b1	1.14		1.70
С	0.48		0.70
D	15.25		15.75
D1		1.27	
Е	10		10.40
е	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13		14
L1	3.50		3.93
L20		16.40	
L30		28.90	
ØP	3.75		3.85
Q	2.65		2.95

Package information L4940

8.2 TO-220 (dual gauge) packing information

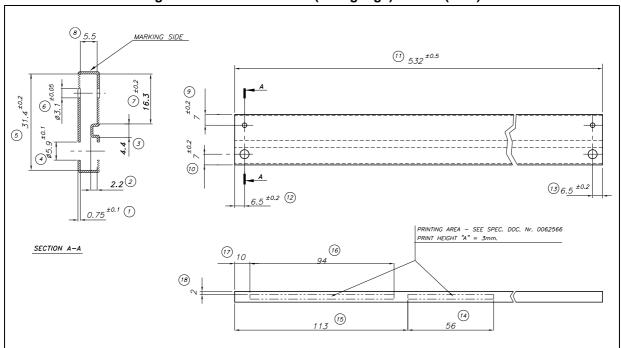


Figure 29. Tube for TO-220 (dual gauge) outline (mm.)

L4940 Package information

8.3 D²PAK package information

SEATING PLANE
COPLANARITY A1

SEATING PLANE
COPLANARITY A1

SATURE PLANE
COPLANARITY A1

O079457_T

Figure 30. D²PAK package outline

Package information L4940

Table 8. D2PAK mechanical data

Dim		mm	
Dim.	Min.	Тур.	Max.
А	4.40		4.60
A1	0.03		0.23
b	0.70		0.93
b2	1.14		1.70
С	0.45		0.60
c2	1.23		1.36
D	8.95		9.35
D1	7.50		
E	10		10.40
E1	8.50		
е		2.54	
e1	4.88		5.28
Н	15		15.85
J1	2.49		2.69
L	2.29		2.79
L1	1.27		1.40
L2	1.30		1.75
R		0.4	
V2	0°		8°

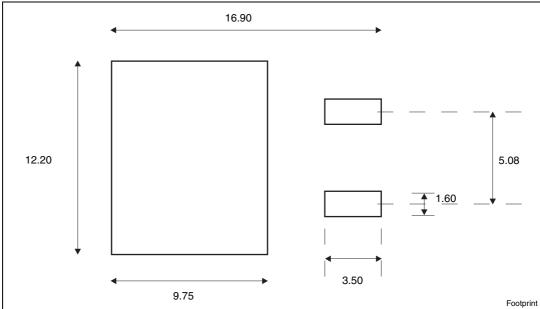


Figure 31. D²PAK recommended footprint^(a)

a. All dimensions are in millimeters.

Package information L4940

8.4 D²PAK packing information

Figure 32. D²PAK tape outline

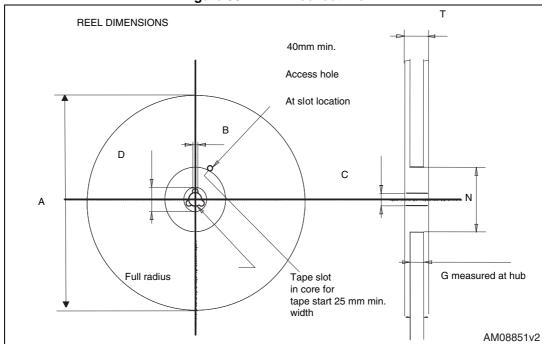


Figure 33. D²PAK reel outline

Table 9. D2PAK tape and reel mechanical data

	Таре			Reel		
Dim.	n	nm	Dim.	mm		
Dilli.	Min.	Max.	Diiii.	Min.	Max.	
A0	10.5	10.7	А		330	
В0	15.7	15.9	В	1.5		
D	1.5	1.6	С	12.8	13.2	
D1	1.59	1.61	D	20.2		
Е	1.65	1.85	G	24.4	26.4	
F	11.4	11.6	N	100		
K0	4.8	5.0	Т		30.4	
P0	3.9	4.1				
P1	11.9	12.1		Base qty	1000	
P2	1.9	2.1		Bulk qty	1000	
R	50					
Т	0.25	0.35				
W	23.7	24.3				

Revision history L4940

9 Revision history

Table 10. Document revision history

Date	Revision	Changes	
04-Feb-2005	6	Added new package D²PAK/A.	
18-Sep-2006	7	Order codes and new template have been updated.	
31-May-2007	8	Order codes have been updated.	
19-Sep-2007	9	Added <i>Table 1</i> to cover page.	
20-Feb-2008	10	Modified: Table 1 on page 1.	
29-Jul-2009	11	Modified: Table 1 on page 1.	
16-Dec-2009	12	Modified: Table 6 on page 8.	
04-Nov-2013	13	The L4940XX5, L4940XX85, L4940XX10, L4940XX12 have been changed into the L4940. Updated: the title and the description in cover page. Updated Section 4: Test circuits, Section 5: Electrical characteristics, Section 6: Performance characteristics and Section 8: Package information. Added Section 8.4: D²PAK packing information. Minor text changes.	
08-Apr-2015	14	Updated title in <i>Table 1: Device summary</i> . Updated <i>Section 8: Package information</i> . Minor text changes.	

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics - All rights reserved



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics:

<u>L4940V85</u> <u>L4940V5</u> <u>L4940D2T5-TR</u> <u>L4940D2T12-TR</u>