

SOFENO ТОХИРГОО ХИЙХ ЗААВАР



1. Интернет сүлжээн холбож тогонд залган асаана
2. Интернет утас нь ассаны дараа автоматаар тухайн сүлжээний интернет хаяг авах бөгөөд аппаратны нүүрэн хэсэгт байрлах **Menu/Status** хэсэгрүү орж **ipv4** харна.
3. Тухайн сүлжээнээс Web ээр дээрхи авсан хаягаар орно

SIP PHONE

Login

General IP Phone

☐ Remember me

Login

Login дэлгэц


4. Sofeno Web ээр хандан орох default

User name: **admin**

Password: **admin**

5. Тохиргоо

- Үндсэн дэлгэцийн Account сонгож тохиргоо хийнэ.

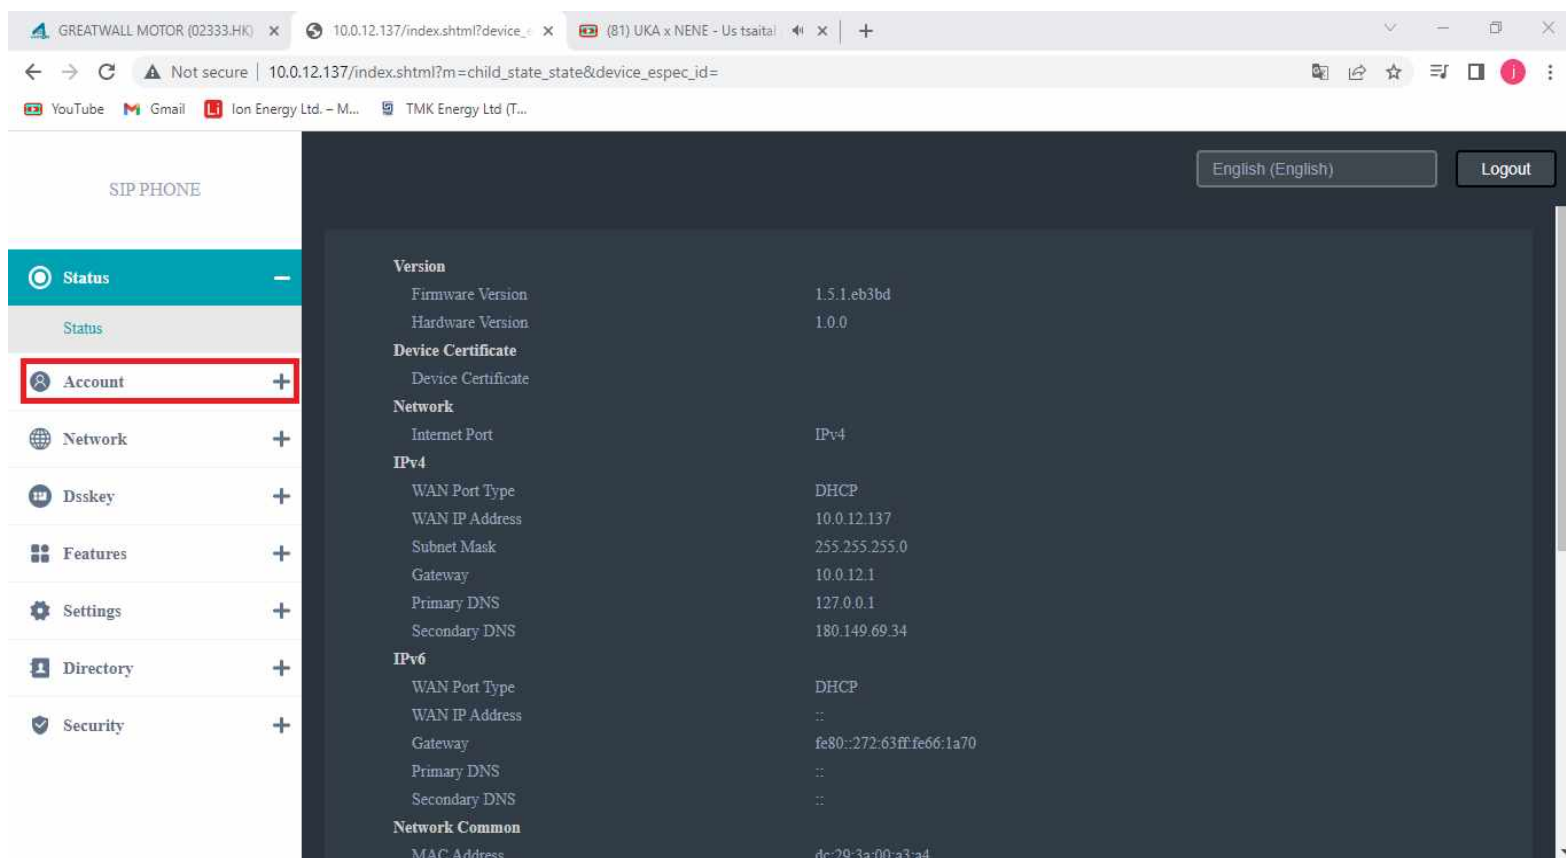

1. Account settings: Account setting дээр дарж дараах мэдээллүүдийг сонгон зөвөөр бөглөнө. ./ “Authenticate Password” цонхонд хэрэглэгчийн бүртгэлтэй майл хаяганд очсон нууц үгийг оруулахыг ахнаарнау?/ **Confirm** дарж хадгална.

SIP PHONE

Status +

Account -

Register

Basic

Codec

Advanced

Network +

Dsskey +

Features +

Settings +

Directory +

English (English)

Logout

Account1

Registered

Enabled

Label

Display Name11331399

Register Name11331399

Username11331399

Password*****

SIP Server 1

Server Hostmtc70.mtccone.netPort5060

TransportUDP

Server Expires(Seconds)300

Server Retry Counts10

SIP Server 2

SIP PHONE

Status +

Account -

Register

Basic

Codec

Advanced

Network +

Dsskey +

Features +

Settings +

Directory +

English (English)

Logout

TransportUDP

Server Expires(Second)300

Server Retry Counts10

Enable Outbound Proxy ServerDisabled

Outbound Proxy Server1mtc70.mtccone.netPort

Outbound Proxy Server2Port


NATDisabled

Confirm

Cancel

© 2019 - 2022 - All Rights Reserved.

2. Codecs Settings: **Account/codes** setting дээр дарж дараах мэдээллүүдийг сонгон зөвөөр бөглөнө. **Confirm** дарж хадгална.

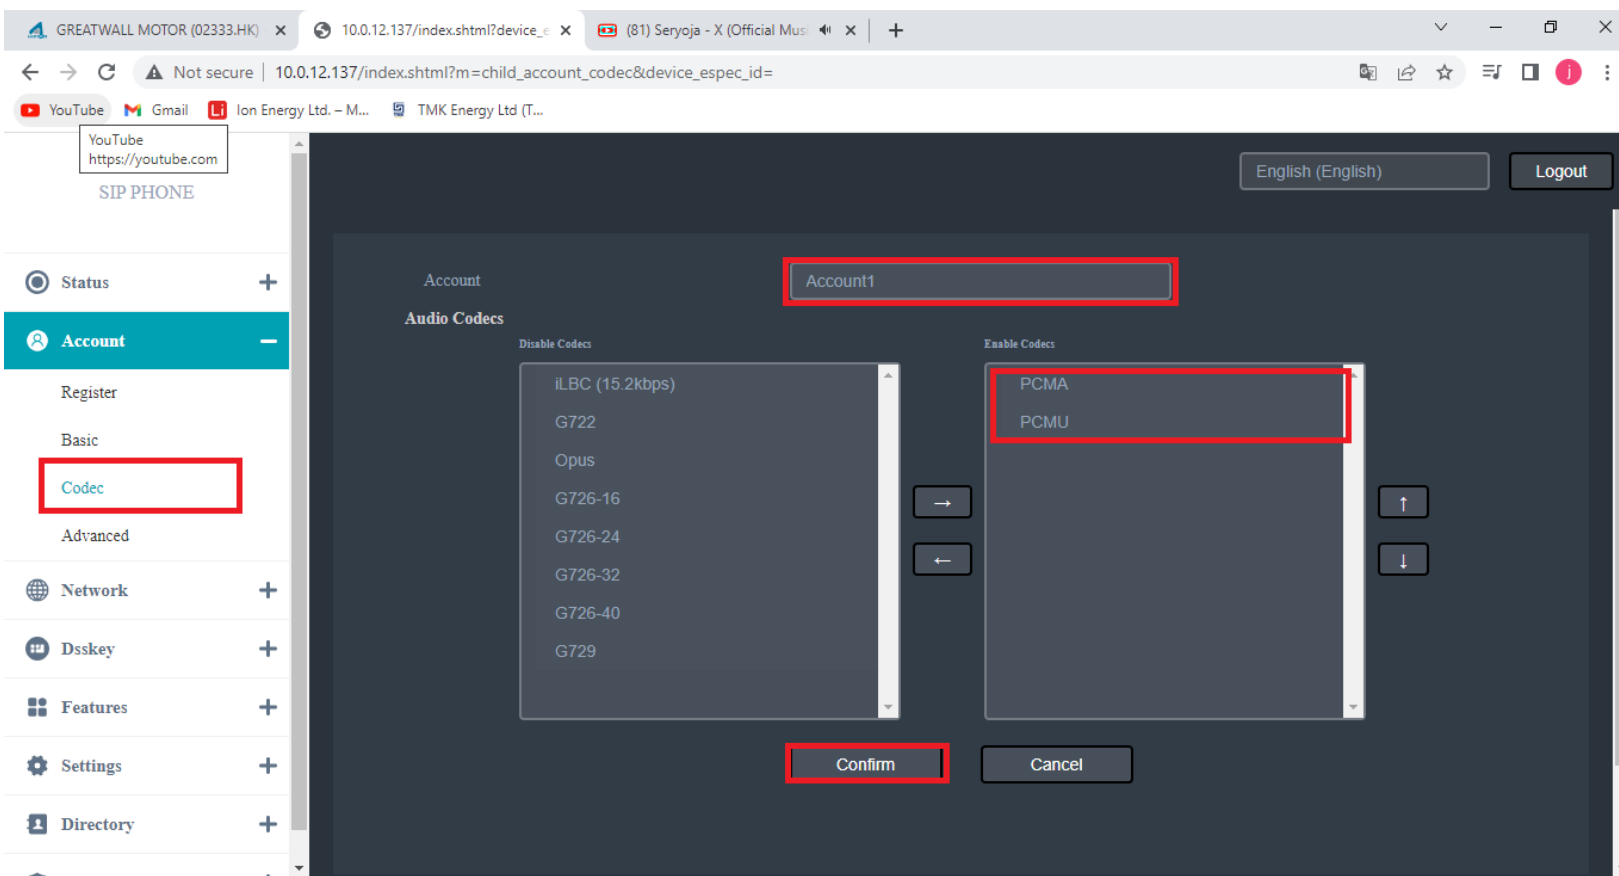

- Advanced Settings: **Account/advanced** setting дээр дарж дараах мэдээллүүдийг сонгон зөвөөр бөглөнө. **Confirm** дарж хадгална.

GREATWALL MOTOR (02333.HK) x 10.0.12.137/index.shtml?device_e (81) Seryoja - X (Official Musi x | +

Not secure | 10.0.12.137/index.shtml?m=child_account_senior&device_espec_id=

YouTube Gmail Ion Energy Ltd. - M... TMK Energy Ltd (T...

SIP PHONE

English (English) Logout

Account1

Keep Alive Type Default

Keep Alive Interval (Seconds) 15

Subscription Period (Seconds) 1800

DTMF Type INBAND

Retransmission Disabled

Subscribe for MWI Disabled

MWI Subscription Period (Seconds) 300

Voice Mail

SIPSession Timer Disabled

Session Expires (90~7200Seconds) 300

Session Refresher UAC

RTP Encryption (SRTP) Disabled

PTime(ms) 20

Status +

Account -

Register

Basic

Codec

Advanced

Network +

Dsskey +

Features +

Settings +

Directory +

Status -

Status

Account +

Network +

Dsskey +

Features +

Settings +

Directory +

Secondary DNS

Network Common

MAC Address dc:29:3a:00:a3:a4

Machine ID H092211N000219

VLAN ID 0

WAN Port Status 0

PC Port Status 0

Device Type 0

Uptime 0 days 01:03

Current Time 2023-03-16-10-13-44

Account Status

Account 1 Registered

Account 2 Unregistered

Account 3 Unregistered

Account 4 Unregistered

