


วิธี Activate license Milestone หลังจากเปลี่ยนกล่องแล้ว

1.เข้าโปรแกรม XProtect Management



2.Recording Servers > เลือกกล่องตัวที่เพิ่งเปลี่ยน กด Replace Hardware

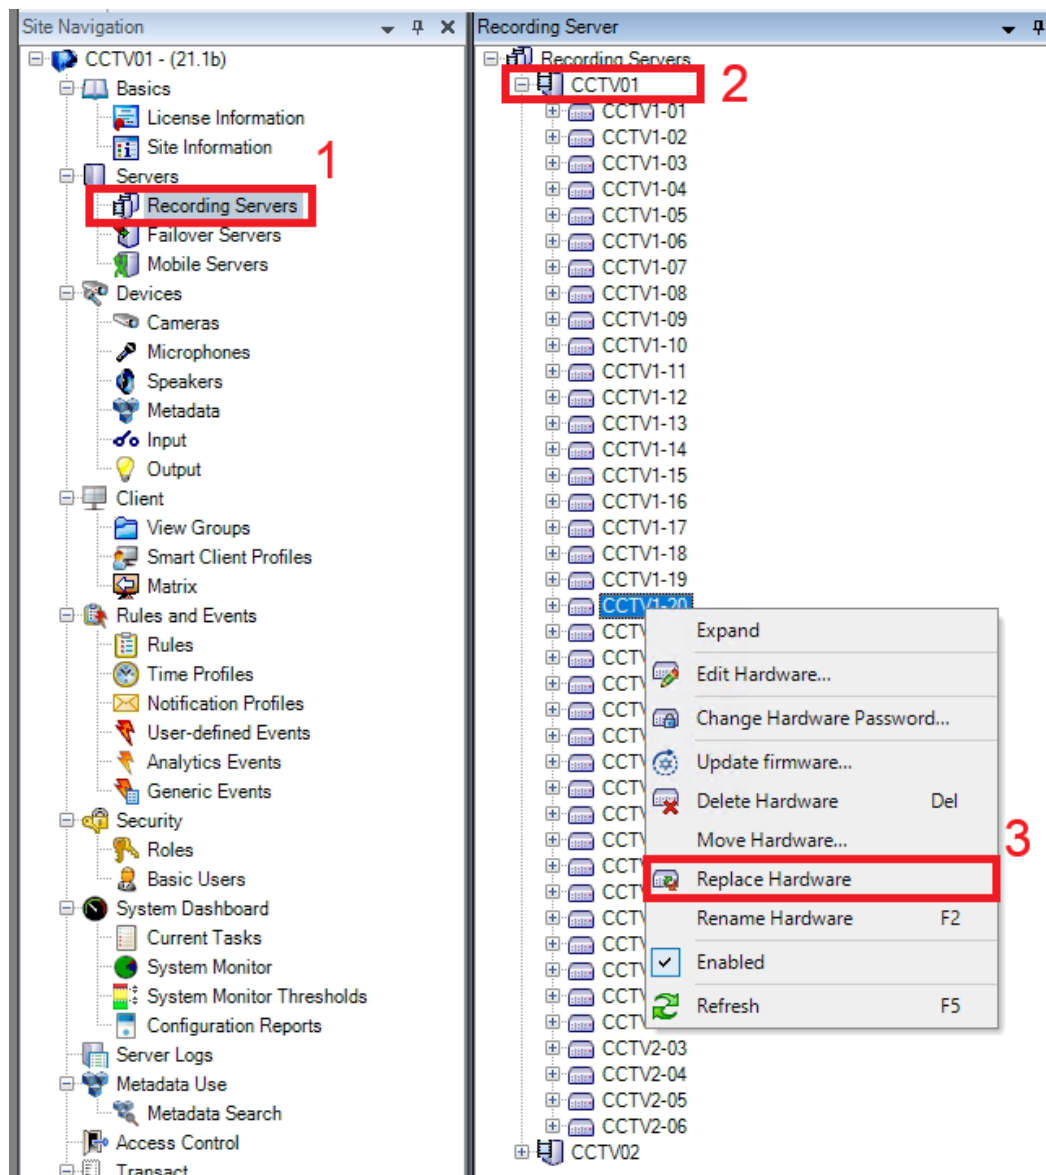

3.กด Next จนเจอหน้าที่ให้ใส่ User&password กลับ แล้วกด Next เรื่อยๆ

Replace Hardware

For each new device, select which old device (including existing databases) to inherit.
If a new device should not inherit any old device, select 'None'.
Databases will be deleted for old devices which are not inherited.

New Hardware Device	Inherit
Cameras	
Camera 1	CCTV1-20
Speakers	
Speaker 1	DivioTec NBR126PA (10.193.17.40) - Speaker 1
Metadata	
Metadata 1	DivioTec NBR126PA (10.193.17.40) - Metadata 1
Input	
Input 1	DivioTec NBR126PA (10.193.17.40) - Input 1
Input 2	DivioTec NBR126PA (10.193.17.40) - Input 2

Help < Back Next > Cancel

Replace Hardware

Enter new hardware information below.
The fields are prefilled with the old hardware information.

Detecting hardware

	Address	Port	User name	Password	Hardware Driver
	10.193.17.40	80	Admin	*****	ONVIF Conformant Device

ใส่ User&password กลับ

Auto Detect < Back Next > Cancel


Replace Hardware

This wizard helps you replace a hardware device configured in the system with a new one.


To continue, click Next.

< Back Next > Cancel

4. Replace เสรีจะเจอหน้านี้

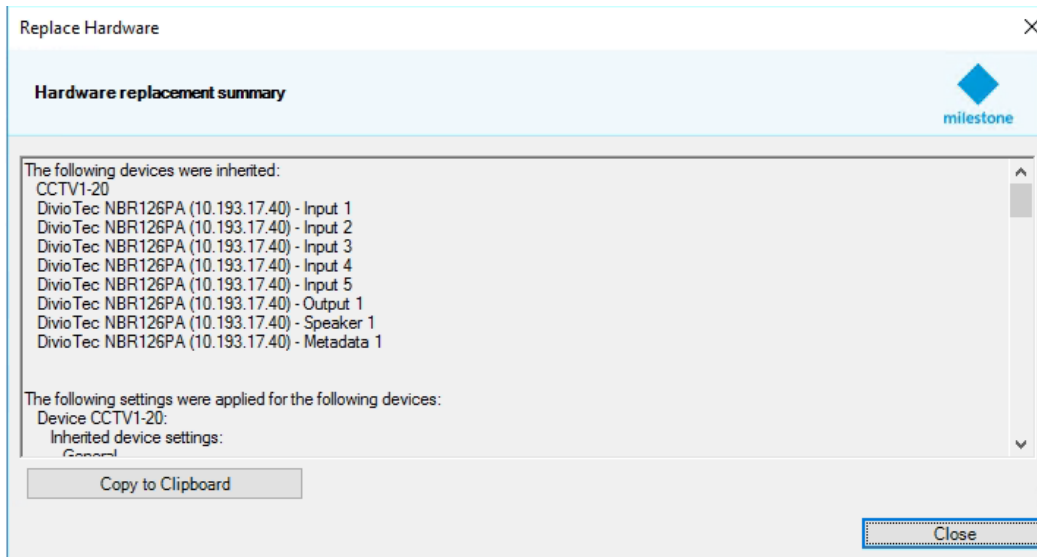

5.ต่อไป Export License

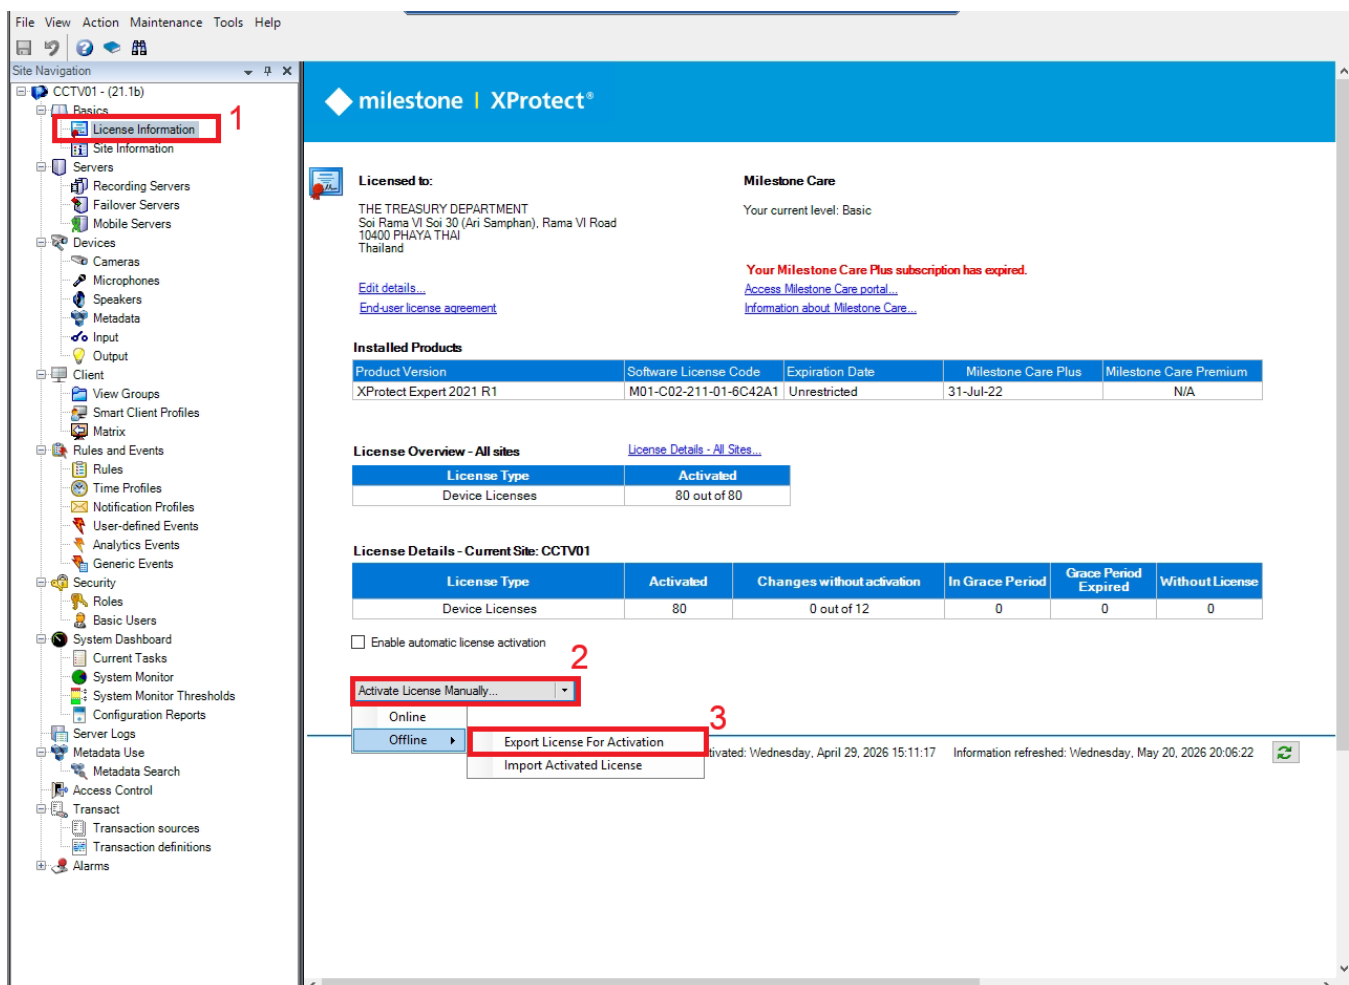


6.จะได้ไฟล์ License.lrq มา

 M01-C02-211-01-6C42A1.lrq

7.ส่งเมลหา Support Digitalcom เพื่อ Activate license

ส่งที่ Email > support@digitalcom.co.th

8.ได้ไฟล์มาแล้วให้ Import License

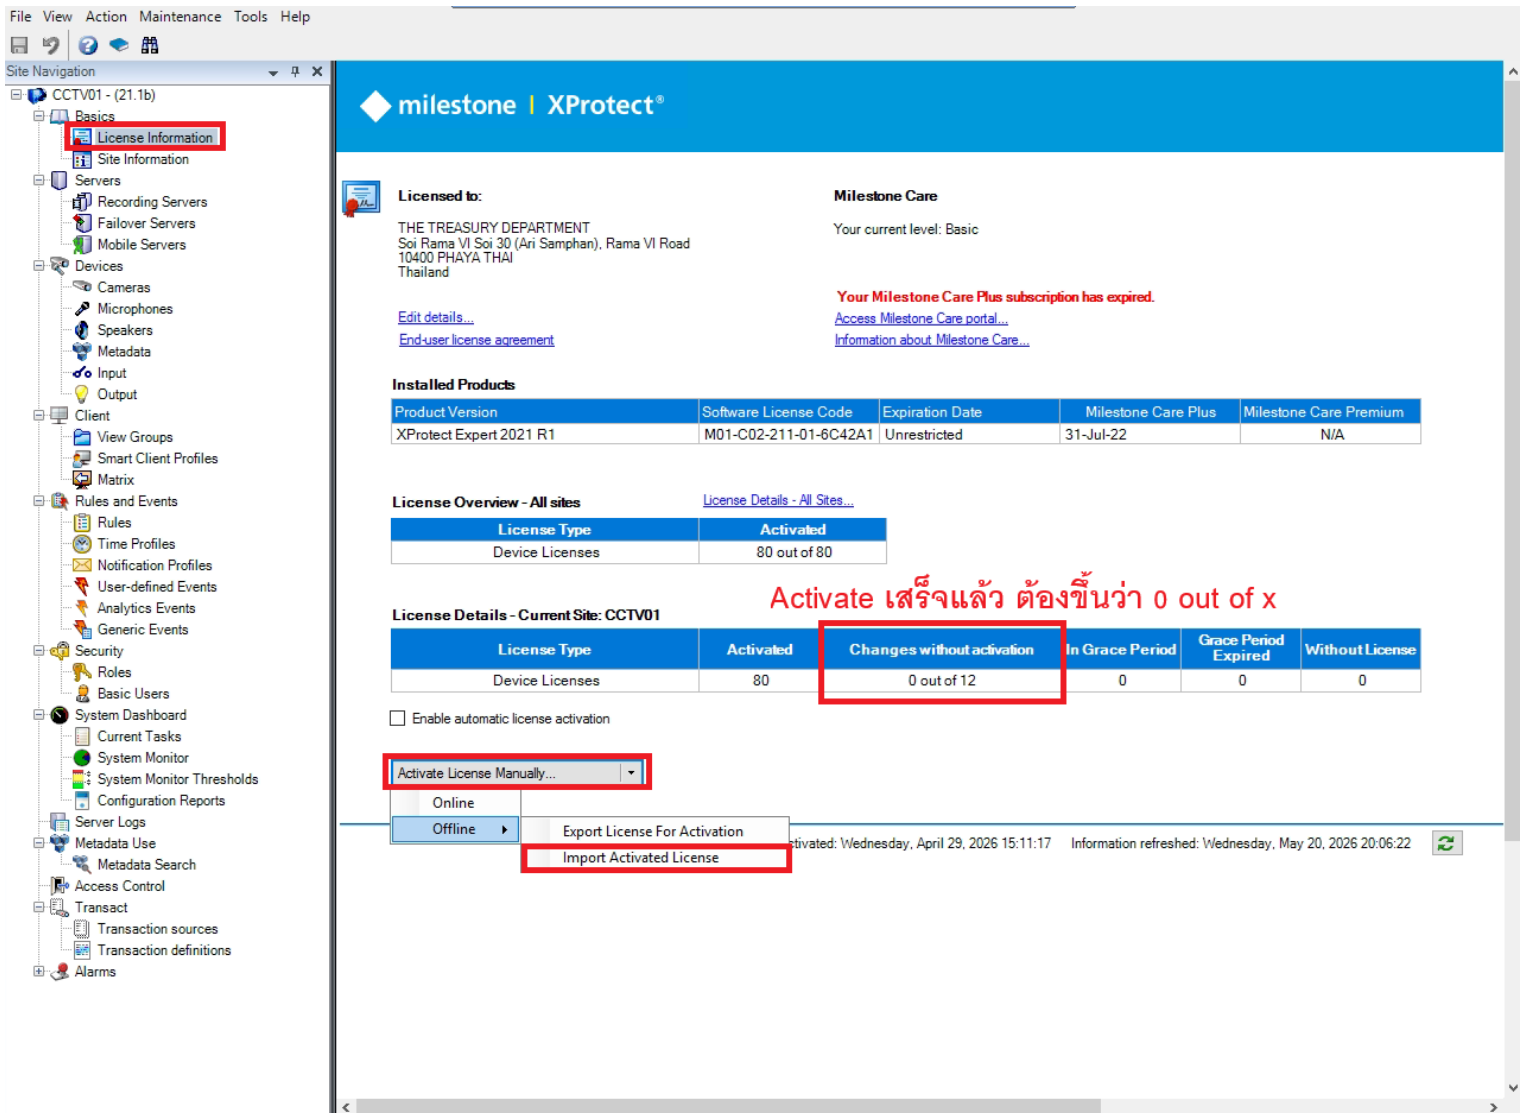

The screenshot shows the Milestone XProtect software interface. On the left is a Site Navigation tree with 'License Information' highlighted. The main panel displays license details for 'CCTV01 - (21.1b)'. It includes sections for 'Licensed to' (THE TREASURY DEPARTMENT), 'Milestone Care' (Basic), and 'Installed Products' (XProtect Expert 2021 R1). A table shows 'License Overview - All sites' with 80 out of 80 activated. Another table shows 'License Details - Current Site: CCTV01' with 80 activated, 0 out of 12 changes without activation, and 0 in grace period. A red box highlights the 'Activate License Manually...' dropdown menu, which has 'Offline' selected. Below it, a red box highlights the 'Import Activated License' button. A red text annotation 'Activate เสร็จแล้ว ต้องขึ้นว่า 0 out of x' is placed over the 'Changes without activation' column. The bottom status bar shows 'Activated: Wednesday, April 29, 2026 15:11:17' and 'Information refreshed: Wednesday, May 20, 2026 20:06:22'.

File View Action Maintenance Tools Help

Site Navigation

CCTV01 - (21.1b)

- Basics
 - License Information
 - Site Information
- Servers
 - Recording Servers
 - Failover Servers
 - Mobile Servers
- Devices
 - Cameras
 - Microphones
 - Speakers
 - Metadata
 - Input
 - Output
- Client
 - View Groups
 - Smart Client Profiles
 - Matrix
- Rules and Events
 - Rules
 - Time Profiles
 - Notification Profiles
 - User-defined Events
 - Analytics Events
 - Generic Events
- Security
 - Roles
 - Basic Users
- System Dashboard
 - Current Tasks
 - System Monitor
 - System Monitor Thresholds
 - Configuration Reports
- Server Logs
- Metadata Use
 - Metadata Search
 - Access Control
- Transact
 - Transaction sources
 - Transaction definitions
- Alarms

milestone | XProtect®

Licensed to:
THE TREASURY DEPARTMENT
Soi Rama VI Soi 30 (Ari Samphan), Rama VI Road
10400 PHAYA THAI
Thailand

Milestone Care
Your current level: Basic

Your Milestone Care Plus subscription has expired.
[Access Milestone Care portal...](#)
[Information about Milestone Care...](#)

Installed Products

Product Version	Software License Code	Expiration Date	Milestone Care Plus	Milestone Care Premium
XProtect Expert 2021 R1	M01-C02-211-01-6C42A1	Unrestricted	31-Jul-22	N/A

License Overview - All sites [License Details - All Sites...](#)

License Type	Activated
Device Licenses	80 out of 80

License Details - Current Site: CCTV01

License Type	Activated	Changes without activation	In Grace Period	Grace Period Expired	Without License
Device Licenses	80	0 out of 12	0	0	0

☐ Enable automatic license activation

Activate License Manually...
Online
Offline ▶
Export License For Activation
Import Activated License

Activated: Wednesday, April 29, 2026 15:11:17 Information refreshed: Wednesday, May 20, 2026 20:06:22