74LV164

8-bit serial-in/parallel-out shift register Rev. 4 — 9 December 2015

Product data sheet

General description 1.

The 74LV164 is a low-voltage, Si-gate CMOS device and is pin and function compatible with the 74HC164 and 74HCT164.

The 74LV164 is an 8-bit edge-triggered shift register with serial data entry and an output from each of the eight stages. Data is entered serially through one of two inputs (DSA or DSB) and either input can be used as an active HIGH enable for data entry through the other input. Both inputs must be connected together or an unused input must be tied HIGH.

Data shifts one place to the right on each LOW-to-HIGH transition of the clock input (CP) and enters into Q0, which is the logical AND-function of the two data inputs (DSA and DSB) that existed one set-up time prior to the rising clock edge.

A LOW on the master reset input (MR) overrides all other inputs and clears the register asynchronously, forcing all outputs LOW.

Features and benefits 2.

- Wide operating voltage: 1.0 V to 5.5 V
- Optimized for low-voltage applications: 1.0 V to 3.6 V
- Accepts TTL input levels between V_{CC} = 2.7 V and V_{CC} = 3.6 V
- Typical V_{OLP} (output ground bounce): < 0.8 V at V_{CC} = 3.3 V and T_{amb} = 25 °C
- Typical V_{OHV} (output V_{OH} undershoot): > 2 V at V_{CC} = 3.3 V and T_{amb} = 25 °C
- Gated serial data inputs
- Asynchronous master reset
- ESD protection:
 - ♦ HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
- Specified from −40 °C to +80 °C and from −40 °C to +125 °C.




8-bit serial-in/parallel-out shift register


3. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74LV164D	−40 °C to +125 °C	SO14	plastic small outline package; 14 leads; body width 3.9 mm	SOT108-1
74LV164DB	–40 °C to +125 °C	SSOP14	plastic shrink small outline package; 14 leads; body width 5.3 mm	SOT337-1
74LV164PW	–40 °C to +125 °C	TSSOP14	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	SOT402-1
74LV164BQ	-40 °C to +125 °C	DHVQFN14	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body $2.5\times3\times0.85$ mm	SOT762-1

4. Functional diagram

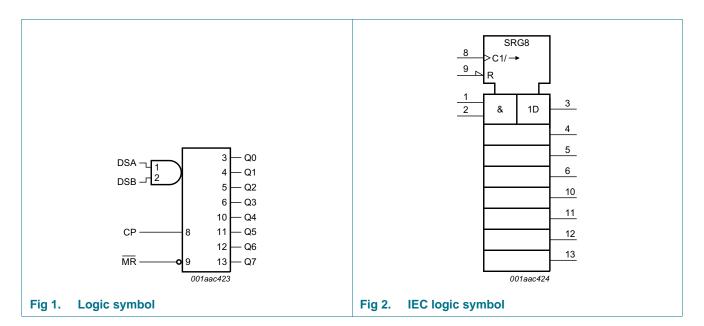


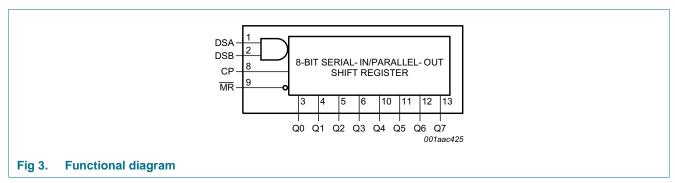

8-bit serial-in/parallel-out shift register

5. Pinning information

5.1 Pinning

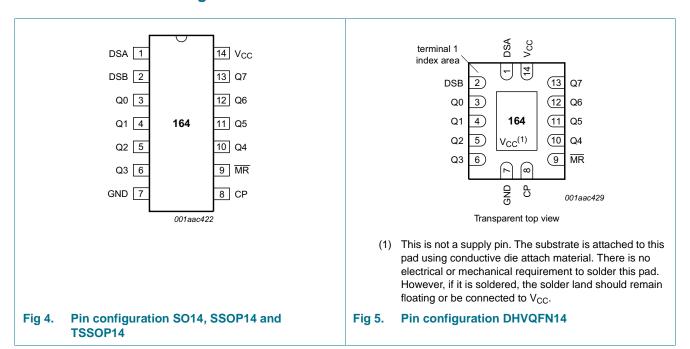

5.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
DSA	1	data input SA
DSB	2	data input SB
Q0	3	output 0
Q1	4	output 1
Q2	5	output 2
Q3	6	output 3
GND	7	ground (0 V)
СР	8	clock input (edge triggered LOW-to-HIGH)
MR	9	master reset input (active LOW)
Q4	10	output 4
Q5	11	output 5
Q6	12	output 6
Q7	13	output 7
V _{CC}	14	supply voltage

8-bit serial-in/parallel-out shift register

6. Functional description

6.1 Function table

Table 3. Function table [1]

Operating mode	Input	Input				Output		
	MR	СР	DSA	DSB	Q0	Q1 to Q7		
Reset (clear)	L	Х	X	X	L	L to L		
Shift	Н	↑	l l	I	L	q0 to q6		
	Н	↑	1	h	L	q0 to q6		
	Н	↑	h	I	L	q0 to q6		
	Н	↑	h	h	Н	q0 to q6		

^[1] H = HIGH voltage level;

L = LOW voltage level;

h = HIGH voltage level one set-up time prior to the LOW-to-HIGH CP transition;

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V _{CC}	supply voltage			-0.5	+7.0	V
I _{IK}	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±20	mA
I _{OK}	output clamping current	$V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±50	mA
Io	output current	$V_{O} = -0.5 \text{ V to } (V_{CC} + 0.5 \text{ V})$		-	±25	mA
I _{CC}	supply current			-	50	mA
I _{GND}	ground current			-50	-	mA
T _{stg}	storage temperature			-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$				
		SO14 package	[2]	-	500	mW
		(T)SSOP14 package	[3]	-	500	mW
		DHVQFN14 package	[4]	-	500	mW

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

^{↑ =} LOW-to-HIGH clock transition;

I = LOW voltage level one set-up time prior to the LOW-to-HIGH CP transition;

q = lower case letter indicates the state of referenced input one set-up time prior to the LOW-to-HIGH CP transition.

^[2] P_{tot} derates linearly with 8 mW/K above 70 °C.

^[3] Ptot derates linearly with 5.5 mW/K above 60 °C.

^[4] P_{tot} derates linearly with 4.5 mW/K above 60 °C.

8-bit serial-in/parallel-out shift register

8. Recommended operating conditions

Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V _{CC}	supply voltage	[1]	1.0	3.3	5.5	V
VI	input voltage		0	-	V _{CC}	V
Vo	output voltage		0	-	V _{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	°C
Δt/ΔV	input transition rise and fall rate	$V_{CC} = 1.0 \text{ V to } 2.0 \text{ V}$	-	-	500	ns/V
		$V_{CC} = 2.0 \text{ V to } 2.7 \text{ V}$	-	-	200	ns/V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	-	-	100	ns/V
		$V_{CC} = 3.6 \text{ V to } 5.5 \text{ V}$	-	-	50	ns/V

^[1] The static characteristics are guaranteed from V_{CC} = 1.2 V to V_{CC} = 5.5 V, but LV devices are guaranteed to function down to V_{CC} = 1.0 V (with input levels GND or V_{CC}).

9. Static characteristics

Table 6. Static characteristics

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40	°C to +8	35 °C	-40 °C to	+125 °C	Unit
			Min	Typ[1]	Max	Min	Max	
V_{IH}	HIGH-level input voltage	V _{CC} = 1.2 V	0.9	-	-	0.9	-	V
		V _{CC} = 2.0 V	1.4	-	-	1.4	-	V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2.0	-	-	2.0	-	V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	0.7V _{CC}	-	-	0.7V _{CC}	-	V
V_{IL}	LOW-level input voltage	V _{CC} = 1.2 V	-	-	0.3	-	0.3	V
		V _{CC} = 2.0 V	-	-	0.6	-	0.6	V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	-	-	0.8	-	0.8	V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	-	-	0.3V _{CC}	-	0.3V _{CC}	V
V _{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}						
		$I_O = -100 \mu A; V_{CC} = 1.2 V$	-	1.2	-	-	-	V
		$I_O = -100 \mu A; V_{CC} = 2.0 V$	1.8	2.0	-	1.8	-	V
		$I_O = -100 \mu A; V_{CC} = 2.7 V$	2.5	2.7	-	2.5	-	V
		$I_O = -100 \mu A; V_{CC} = 3.0 V$	2.8	3.0	-	2.8	-	V
		$I_O = -100 \mu A; V_{CC} = 4.5 V$	4.3	4.5	-	4.3	-	V
		$I_{O} = -6 \text{ mA}; V_{CC} = 3.0 \text{ V}$	2.4	2.82	-	2.2	-	V
		$I_O = -12 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.6	4.2	-	3.5	-	V

8-bit serial-in/parallel-out shift register

Table 6. Static characteristics ...continued Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40	°C to +8	85 °C	-40 °C to	+125 °C	Unit
			Min	Typ[1]	Max	Min	Max	
V _{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}						
		$I_O = 100 \mu A; V_{CC} = 1.2 V$	-	0	-	-	-	V
		$I_O = 100 \mu A; V_{CC} = 2.0 \text{ V}$	-	0	0.2	-	0.2	V
		$I_O = 100 \mu A; V_{CC} = 2.7 V$	-	0	0.2	-	0.2	V
		$I_O = 100 \mu A; V_{CC} = 3.0 \text{ V}$	-	0	0.2	-	0.2	V
		$I_O = 100 \mu A; V_{CC} = 4.5 V$	-	0	0.2	-	0.2	V
		$I_O = 6 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	0.25	0.40	-	0.50	V
		$I_O = 12 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.35	0.55	-	0.65	V
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	1.0	-	1.0	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	20.0	-	160	μΑ
ΔI_{CC}	additional supply current	per input; $V_I = V_{CC} - 0.6 \text{ V}$; $V_{CC} = 2.7 \text{ V}$ to 3.6 V	-	-	500	-	850	μΑ
Cı	input capacitance		-	3.5	-	-	-	pF

^[1] Typical values are measured at T_{amb} = 25 °C.

10. Dynamic characteristics

Table 7. Dynamic characteristics GND = 0 V; For test circuit see <u>Figure 9</u>.

Symbol	Parameter	Conditions		-40	°C to +85	o°C	-40 °C to +125 °C		Unit
				Min	Typ[1]	Max	Min	Max	
t _{pd}	propagation delay	CP to Qn; see Figure 6	[2]						
		V _{CC} = 1.2 V		-	75	-	-	-	ns
		V _{CC} = 2.0 V		-	26	39	-	49	ns
		V _{CC} = 2.7 V		-	19	29	-	36	ns
		$V_{CC} = 3.3 \text{ V}; C_L = 15 \text{ pF}$		-	12	-	-	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	-	14	23	-	29	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	-	12	19	-	24	ns
t _{PHL}	HIGH to LOW	MR to Qn; see Figure 7							
	propagation delay	V _{CC} = 1.2 V		-	75	-	-	-	ns
		V _{CC} = 2.0 V		-	26	39	-	49	ns
		V _{CC} = 2.7 V		-	19	29	-	36	ns
		$V_{CC} = 3.3 \text{ V}; C_L = 15 \text{ pF}$		-	12	-	-	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	-	14	23	-	29	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	-	12	19	-	24	ns

8-bit serial-in/parallel-out shift register

Table 7. Dynamic characteristics ...continued GND = 0 V; For test circuit see <u>Figure 9</u>.

Symbol	Parameter	Conditions		-40	°C to +85	o°C	–40 °C t	o +125 °C	Unit
				Min	Typ[1]	Max	Min	Max	
t _W	pulse width	CP; see Figure 6							
		V _{CC} = 2.0 V		34	9	-	41	-	ns
		V _{CC} = 2.7 V		25	6	-	30	-	ns
		V _{CC} = 3.0 V to 3.6 V	<u>[3]</u>	20	5	-	24	-	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	13	4	-	16	-	ns
		MR; Figure 7							
		V _{CC} = 2.0 V		34	10	-	41	-	ns
		V _{CC} = 2.7 V		25	8	-	30	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	20	6	-	24	-	ns
		V _{CC} = 4.5 V to 5.5 V	<u>[3]</u>	13	5	-	16	-	ns
t _{rec}	recovery time	MR to CP; see Figure 7							
		V _{CC} = 1.2 V		-	30	-	-	-	ns
		V _{CC} = 2.0 V		19	10	-	24	-	ns
		V _{CC} = 2.7 V		14	8	-	18	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	11	6	-	14	-	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	8	5	-	10	-	ns
t _{su}	set-up time	Dn to CP; see Figure 8							
		V _{CC} = 1.2 V		-	15	-	-	-	ns
		V _{CC} = 2.0 V		22	5	-	26	-	ns
		V _{CC} = 2.7 V		16	4	-	19	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	13	3	-	15	-	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	9	2	-	10	-	ns
t _h	hold time Dn to CP	see Figure 8							
		V _{CC} = 1.2 V		-	-10	-	-	-	ns
		V _{CC} = 2.0 V		5	-3	-	5	-	ns
		V _{CC} = 2.7 V		5	-2	-	5	-	ns
		V _{CC} = 3.0 V to 3.6 V	[3]	5	-2	-	5	-	ns
		V _{CC} = 4.5 V to 5.5 V	[3]	5	-1	-	5	-	ns
f _{max}	maximum	see Figure 6							
	frequency	V _{CC} = 2.0 V		14	40	-	12	-	MHz
		V _{CC} = 2.7 V		19	58	-	16	-	MHz
		V _{CC} = 3.3 V; C _L = 15 pF		-	78	-	-	-	MHz
		V _{CC} = 3.0 V to 3.6 V	[3]	24	70	-	20	-	MHz
		V _{CC} = 4.5 V to 5.5 V	[3]	36	100	-	30	-	MHz

8-bit serial-in/parallel-out shift register

 Table 7.
 Dynamic characteristics ...continued

GND = 0 V; For test circuit see Figure 9.

Symbol	Parameter	Conditions		-40 °C to +85 °C		–40 °C to +125 °C		Unit	
				Min	Typ[1]	Max	Min	Max	
C _{PD}	power dissipation capacitance	$V_{CC} = 3.3 \text{ V}; C_L = 50 \text{ pF}; f_i = 1$ MHz; $V_I = \text{GND to } V_{CC}$	<u>4]</u>	-	40	-	-	-	pF

- [1] All typical values are measured at T_{amb} = 25 °C.
- [2] t_{pd} is the same as t_{PLH} and t_{PHL} .
- [3] Typical values are measured at nominal supply voltage (V_{CC} = 3.3 V and V_{CC} = 5.0 V).
- [4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma (C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz, f_o = output frequency in MHz


 C_L = output load capacitance in pF

V_{CC} = supply voltage in V

N = number of inputs switching

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.

11. Waveforms

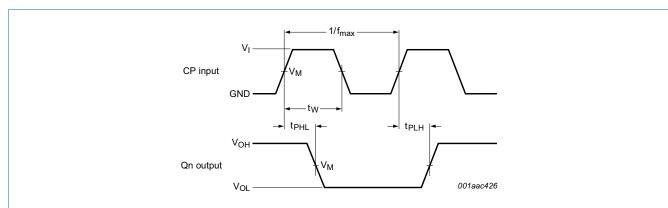


Measurement points are given in Table 8.


V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 6. Propagation delay clock (CP) to output (Qn), clock pulse width and maximum clock frequency

8-bit serial-in/parallel-out shift register

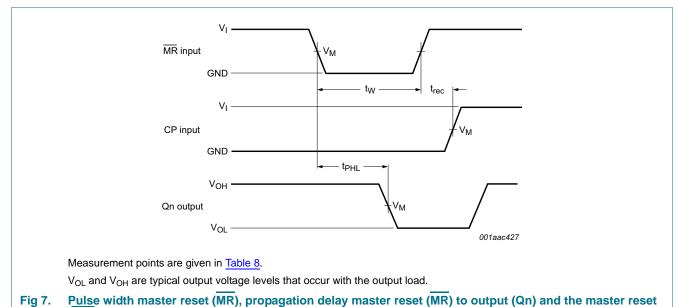


(MR) to clock (CP) recovery time

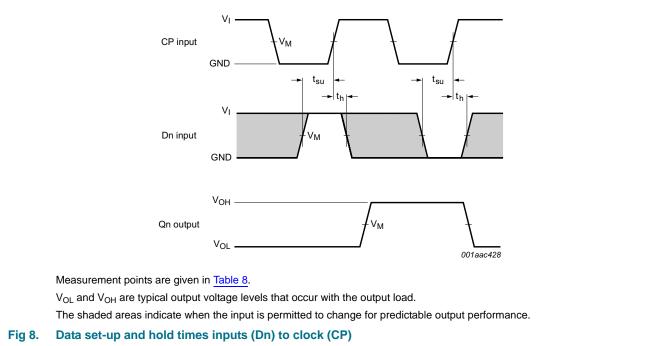

8-bit serial-in/parallel-out shift register

Table 8. Measurement points

Supply voltage	Input	Output
V _{CC}	V _M	V _M
1.2 V	0.5 × V _{CC}	$0.5 \times V_{CC}$
2.0 V	0.5 × V _{CC}	0.5 × V _{CC}
2.7 V	1.5 V	1.5 V
3.0 V to 3.6 V	1.5 V	1.5 V
4.5 V to 5.5 V	0.5 × V _{CC}	0.5 × V _{CC}

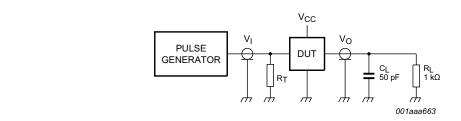

Test data is given in Table 9.

Definitions for test circuit:

 R_L = Load resistance.

 C_L = Load capacitance including jig and probe capacitance.

 R_T = Termination resistance should be equal to output impedance Z_o of the pulse generator.

Fig 9. Test circuit for measuring switching times

Table 9. Test data


Supply voltage	Input		Load	Load	
V _{CC}	VI	t _r , t _f	C _L	R _L	
1.2 V	V _{CC}	≤ 2.5 ns	50 pF	1 kΩ	t _{PHL} , t _{PLH}
2.0 V	V _{CC}	≤ 2.5 ns	50 pF	1 kΩ	t _{PHL} , t _{PLH}
2.7 V	2.7 V	≤ 2.5 ns	50 pF	1 kΩ	t _{PHL} , t _{PLH}
3.0 V to 3.6 V	2.7 V	≤ 2.5 ns	50 pF, 15 pF	1 kΩ	t _{PHL} , t _{PLH}
4.5 V to 5.5 V	V _{CC}	≤ 2.5 ns	50 pF	1 kΩ	t _{PHL} , t _{PLH}

8-bit serial-in/parallel-out shift register

12. Package outline

SO14: plastic small outline package; 14 leads; body width 3.9 mm

SOT108-1

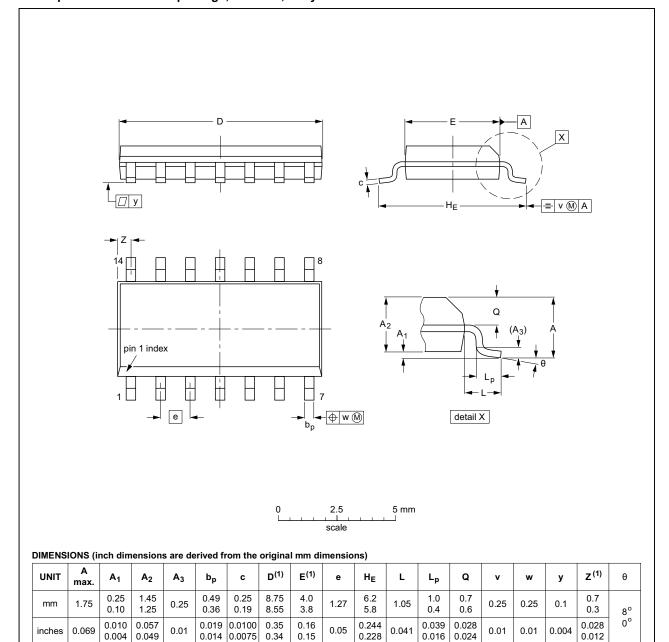

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	JEITA		PROJECTION	1330E DATE
SOT108-1	076E06	MS-012				99-12-27 03-02-19

Fig 10. Package outline SOT108-1 (SO14)

74I V164


All information provided in this document is subject to legal disclaimers.

74LV164 **Nexperia**

8-bit serial-in/parallel-out shift register

SSOP14: plastic shrink small outline package; 14 leads; body width 5.3 mm

SOT337-1

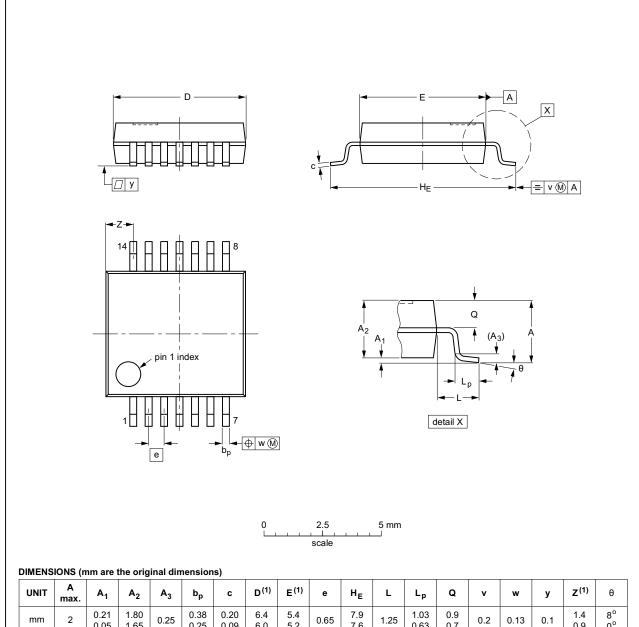

UNIT	A max.	A ₁	A ₂	A ₃	b _p	C	D ⁽¹⁾	E ⁽¹⁾	е	HE	L	Lp	Q	v	w	у	Z ⁽¹⁾	θ
mm	2	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	6.4 6.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	1.4 0.9	8° 0°

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT337-1		MO-150				99-12-27 03-02-19	


Fig 11. Package outline SOT337-1 (SSOP14)

All information provided in this document is subject to legal disclaimers.

8-bit serial-in/parallel-out shift register

TSSOP14: plastic thin shrink small outline package; 14 leads; body width 4.4 mm

SOT402-1

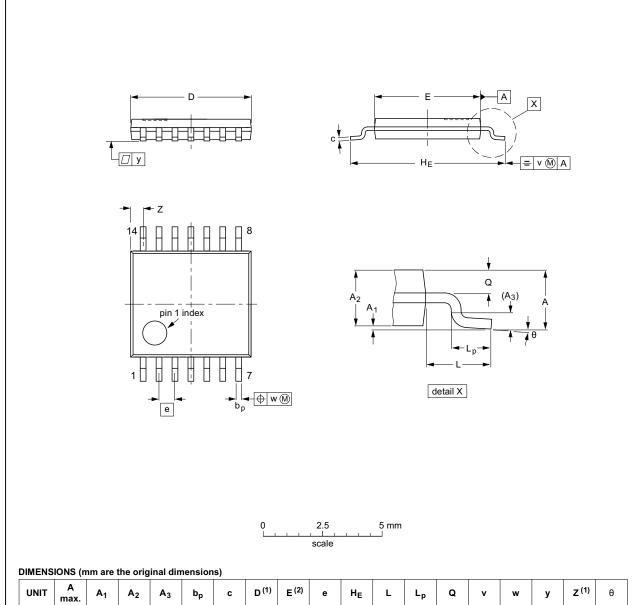

UNIT	A max.	A ₁	A ₂	A ₃	bp	С	D ⁽¹⁾	E (2)	е	HE	L	Lp	Q	٧	w	у	Z ⁽¹⁾	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.72 0.38	8° 0°

Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

JEITA	PRO	OJECTION	ISSUE DATE
		$\exists \Phi$	99-12-27 03-02-18

Fig 12. Package outline SOT402-1 (TSSOP14)

74LV164

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserve

8-bit serial-in/parallel-out shift register

DHVQFN14: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body $2.5 \times 3 \times 0.85 \text{ mm}$

SOT762-1

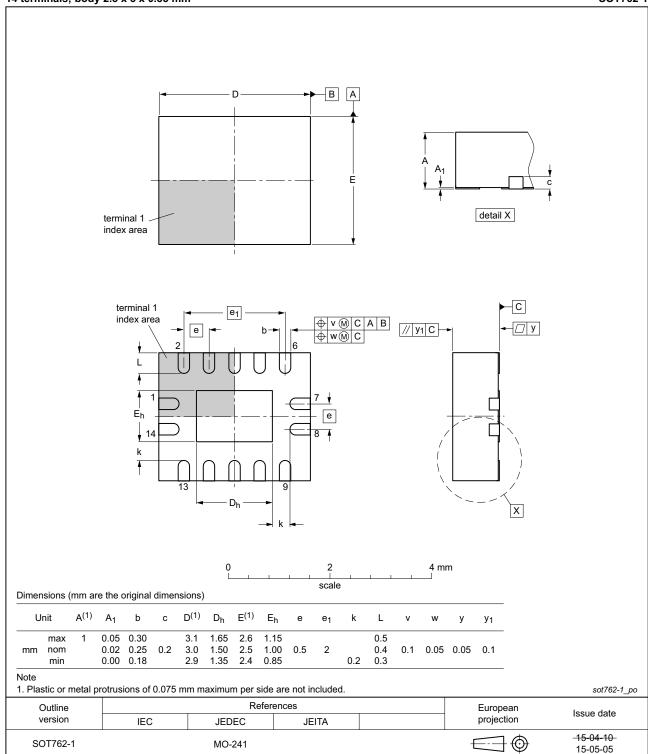


Fig 13. Package outline SOT762-1 (DHVQFN14)

V164 All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

8-bit serial-in/parallel-out shift register

13. Abbreviations

Table 10. Abbreviations

Acronym	Description
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

14. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes				
74LV164 v.4	20151209	Product data sheet	-	74LV164 v.3				
Modifications:	Type number 74LV164N (SOT27-1) removed.							
74LV164 v.3	20050204	Product data sheet	-	74LV164 v.2				
Modifications:	The format of this data sheet has been redesigned to comply with the current presentation and information standard of Philips Semiconductors							
	 Added: type n 	umber 74LV164BQ (DHVQFN	l14 package).					
74LV164 v.2	19980507	Product specification	-	74LV164 v.1				
74LV164 v.1	19970328	Product specification		-				

8-bit serial-in/parallel-out shift register

15. Legal information

15.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

74LV164

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

8-bit serial-in/parallel-out shift register

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of

non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

8-bit serial-in/parallel-out shift register

17. Contents

1	General description
2	Features and benefits
3	Ordering information 2
4	Functional diagram 2
5	Pinning information 3
5.1	Pinning
5.2	Pin description
6	Functional description 4
6.1	Function table 4
7	Limiting values 4
8	Recommended operating conditions 5
9	Static characteristics 5
10	Dynamic characteristics 6
11	Waveforms
12	Package outline
13	Abbreviations
14	Revision history
15	Legal information
15.1	Data sheet status
15.2	Definitions
15.3	Disclaimers
15.4	Trademarks17
16	Contact information 17
17	Contents 18