


Technical Data Sheet(Preliminary)

Full Color Top View LEDs

67-23/R6GHBHC-B01/2T

Features

- P-LCC-4 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Pb free
- The product itself will remain within RoHS compliant version..




• The 67-23 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.



- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide

	Lens Color		
Type	Material	Emitted Color	Lens Color
R6	AlGaInP	Brilliant Red	
GH	InGaN	Brilliant Green	Water Clear
ВН	InGaN	Blue	



Everlight Electronics Co., Ltd.

Device No.:


http://www.everlight.com

Page: 1 of 11

Prepared date:14-Dec-2005

Prepared by:Rita Shen

Package Outline Dimensions

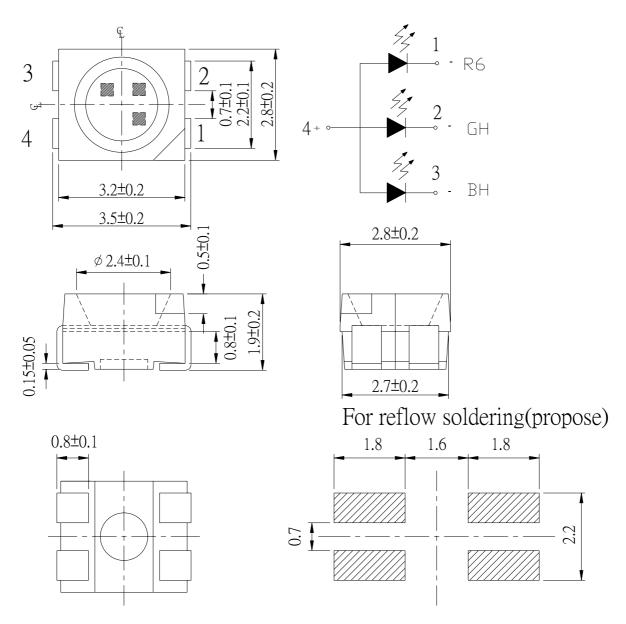

Notes: All dimensions are in millimeters.

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com

Prepared date:14-Dec-2005

Rev. 1.0

Page: 2 of 11

Prepared by:Rita Shen

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol		Unit			
Reverse Voltage	VR	5		V		
		R6	25			
Forward Current	\mathbf{I}_{F}	GH	25	mA		
		ВН	25			
Operating Temperature	Topr		-40 ~ +85	$^{\circ}$		
Storage Temperature	Tstg		-40~ +100			
	ESD	R6	2000			
Electrostatic Discharge(HBM)		GH	150	V		
		ВН	150			
	Pd	R6	120			
Power Dissipation		GH	110	mW		
		ВН	110			
		R6	100			
Peak Forward Current(Duty 1/10 @ 1KHz)	Ifp	IFP	IFP	GH	100	mA
		ВН	100			
Soldering Temperature	Tsol	Reflow Soldering : 260 ℃ for 10 sec.				
		Hand Soldering : 350 °C for 3 sec.				

Everlight Electronics Co., Ltd.

http://www.everlight.com

Page: 3 of 11

Device No.:

Prepared date:14-Dec-2005

Prepared by:Rita Shen

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
	Iv	R6	57		112		I _F =10mA
Luminous Intensity		GH	225		450	mcd	
		ВН	36		72		
		R6		632		nm	I _F =10mA
Peak Wavelength	λp	GH		518			
		ВН		468			
	λd	R6	620		625		I _F =10mA
Dominant Wavelength		GH	530		535	nm	
		ВН	470		475		
	Δλ	R6		20		nm	I _F =10mA
Spectrum Radiation Bandwidth		GH		35			
Banawidan		ВН		35			
	VF	R6		2.0	2.4	V	I _F =10mA
Forward Voltage		GH		3.5	3.9		
		ВН		3.5	3.9		
Viewing Angle	2 0 1/2			120		deg	I _F =10mA
		R6			10		
Reverse Current	Ir	GH			50	μ A	V _R =5V
		ВН			50		

^{*}The luminous intensity data did not including ±10% testing tolerance.

Everlight Electronics Co., Ltd.

http://www.everlight.com

Page: 4 of 11

Device No.:

Prepared date:14-Dec-2005

Prepared by:Rita Shen

^{*}Tolerance of Dominate Wavelength±0.1V.

Bin Range Of Luminous Intensity

Symbol		Bin Code	Min.	Max.	Unit	Condition
		P2	57	72		
	R6	Q1	72	90		
		Q2	90	112		
Iv	GH	S2	225	285	mcd	I _F =10mA
		T1	285	360		
		T2	360	450		
		N2	36	45		
	ВН	P1	45	57		
		P2	57	72		

Notes:

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com

Page: 5 of 11


Prepared date:14-Dec-2005


Prepared by:Rita Shen


^{*}The luminous intensity data did not including ±10% testing tolerance.

^{*}Tolerance of Dominate Wavelength±0.1V.


Typical Electro-Optical Characteristics Curves




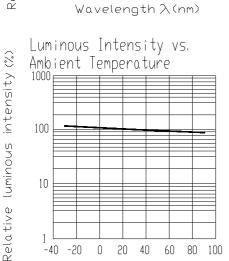


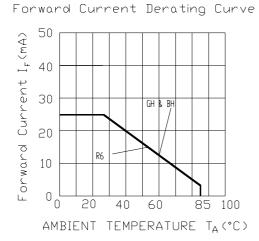

Ambient temperature Ta (°c)

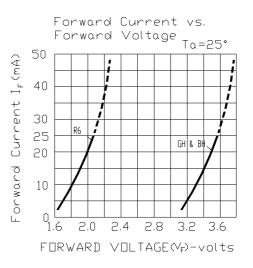






Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

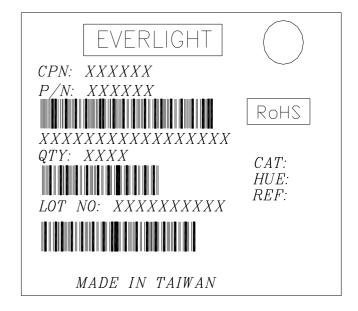

Reel Dimensions

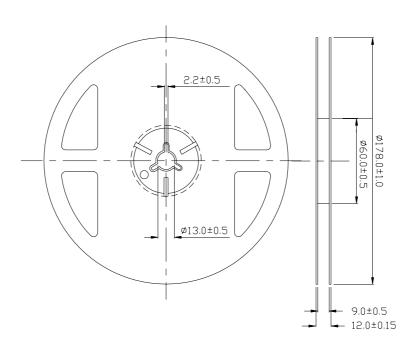

Note: Tolerances Unless Dimension ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd.

Device No.: Prepared date:14-Dec-2005


http://www.everlight.com

Rev. 1.0

Page: 7 of 11


Prepared by:Rita Shen

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

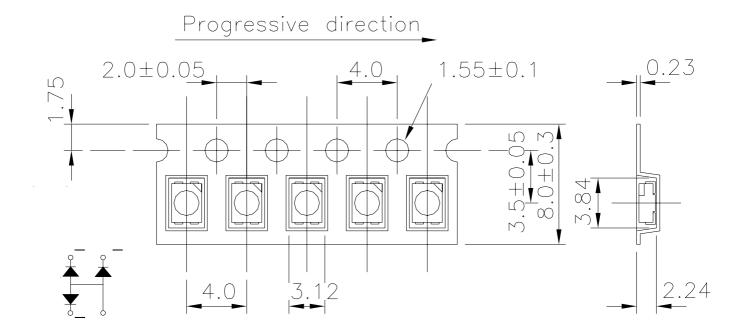

Note: Tolerances Unless Dimension ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

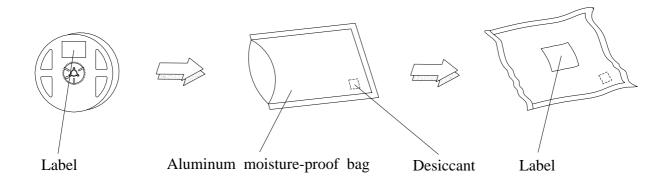

http://www.everlight.com

Everlight Electronics Co., Ltd.

Device No.: Prepared date:14-Dec-2005

Rev. 1.0

Page: 8 of 11

Prepared by:Rita Shen



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 9 of 11


Device No.: Prepared date:14-Dec-2005 Prepared by:Rita Shen

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

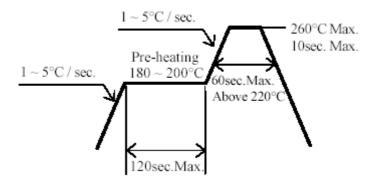

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 10 of 11

Device No.: Prepared date:14-Dec-2005 Prepared by:Rita Shen



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

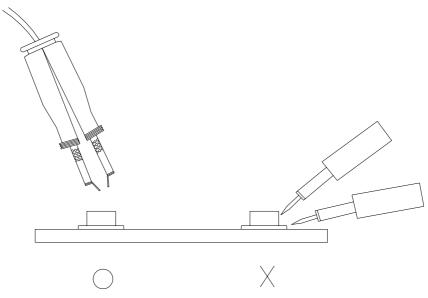

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 11 of 11

Device No.: Prepared date:14-Dec-2005 Prepared by:Rita Shen