

## Assignment-4

|                 |                               |
|-----------------|-------------------------------|
| Assignment date | 29 <sup>th</sup> October,2022 |
| Student Name    | Anusiya. M                    |
| Roll Number     | 412919106001                  |
| Maximum marks   | 2 Marks                       |

### Question:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

### Code:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQTT

#define ECHO_GPIO 12
#define TRIGGER_GPIO 14
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"
Ultrasonic ultrasonic(14, 12);
int distance;

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "q6sux6">//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32">//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "GokulEsp32">//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "gp5PA9!jfw7jf9cV-g" //Token
String data3;
float h, t;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
```

```

//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential

void setup()// configureing the ESP32
{
    Serial.begin(115200);
    delay(10);
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop()// Recursive Function
{
    distance = ultrasonic.read(CM);
    if(distance < 100){
        Serial.print("Distance in CM: ");
        Serial.println(distance);
        PublishData(distance);
        delay(1000);
        if (!client.loop()) {
            mqttconnect();
        }
    }

    delay(1000);
}

/*.....retrieving to
Cloud. .... */

void PublishData(float temp) {
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"Alert Distance\":\"";
    payload += temp;
    payload += "\"}";
}

```

```

Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud
    then it will print publish ok in Serial monitor or else it will print publish
    failed
} else {
    Serial.println("Publish failed");
}
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    }
}

```


```

    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        data3 += (char)payload[i];
    }
    Serial.println("data: "+ data3);
    if(data3=="lighton")
    {
        Serial.println(data3);
    }
    else
    {
        Serial.println(data3);
    }
    data3="";
}

```

Output:

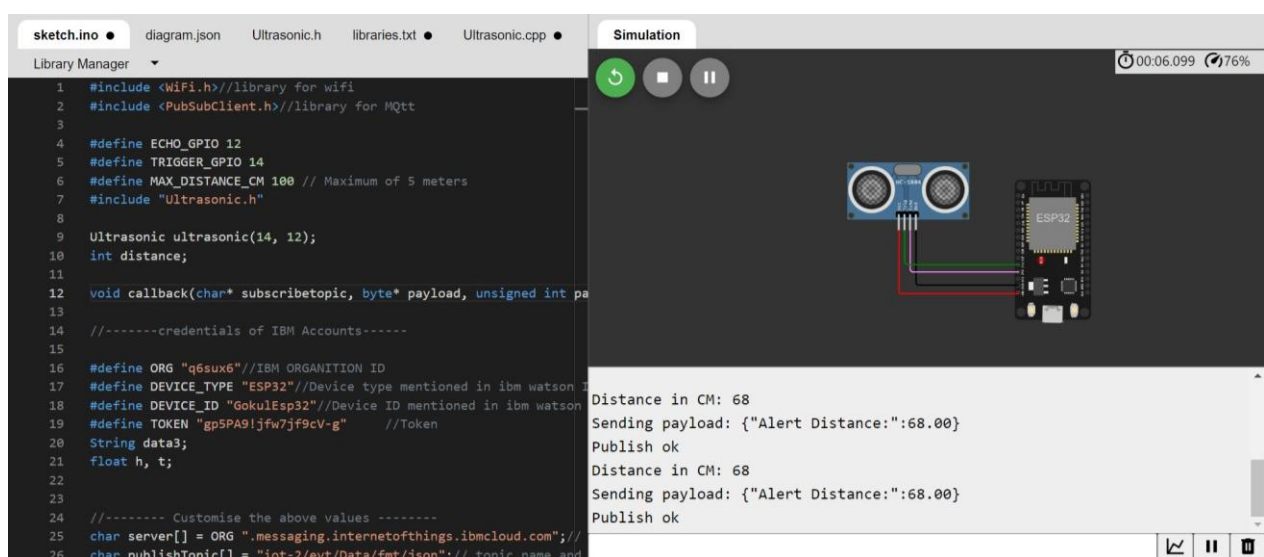

Identity

Device Information

Recent Events

State

Logs

The recent events listed show the live stream of data that is coming and going from this device.

| Event | Value                 | Format | Last Received     |
|-------|-----------------------|--------|-------------------|
| Data  | {"Alert Distance":68} | json   | a few seconds ago |
| Data  | {"Alert Distance":68} | json   | a few seconds ago |

Items per page 50 | 1-2 of 2 items

0 Simulations running

sketch.ino • diagram.json Ultrasonic.h libraries.txt • Ultrasonic.cpp •

Library Manager


```
1 #include <WiFi.h>//library for wifi
2 #include <PubSubClient.h>//library for MQTT
3
4 #define ECHO_GPIO 12
5 #define TRIGGER_GPIO 14
6 #define MAX_DISTANCE_CM 100 // Maximum of 5 meters
7 #include "Ultrasonic.h"
8
9 Ultrasonic ultrasonic(14, 12);
10 int distance;
11
12 void callback(char* subscribetopic, byte* payload, unsigned int pa
13
14 //-----credentials of IBM Accounts-----
15
16 #define ORG "q6sux6"//IBM ORGANITION ID
17 #define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson
18 #define DEVICE_ID "GokuLEsp32"//Device ID mentioned in ibm watson
19 #define TOKEN "gp5PA9!jfw7jf9cV-g" //Token
20 String data3;
21 float h, t;
22
23
24 //----- Customise the above values -----
25 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
26 char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and
```

Simulation

00:23.913 76%

Editing Ultrasonic Distance Sensor

Distance: 83cm



Publish ok

Distance in CM: 87

Sending payload: {"Alert Distance":87.00}

Publish ok

Distance in CM: 87

Sending payload: {"Alert Distance":87.00}

Publish ok

Browse

Action

Device Types

Interfaces

Add Device

Identity

Device Information

Recent Events

State

Logs

The recent events listed show the live stream of data that is coming and going from this device.

| Event | Value                 | Format | Last Received     |
|-------|-----------------------|--------|-------------------|
| Data  | {"Alert Distance":87} | json   | a few seconds ago |
| Data  | {"Alert Distance":87} | json   | a few seconds ago |
| Data  | {"Alert Distance":87} | json   | a few seconds ago |
| Data  | {"Alert Distance":90} | json   | a few seconds ago |
| Data  | {"Alert Distance":88} | json   | a few seconds ago |

**Project Link:**

<https://wokwi.com/projects/346773638705316434>