



More about inheritance

Exploring polymorphism



Main concepts to be covered

- method polymorphism
- static and dynamic type
- overriding
- dynamic method lookup
- protected access

Forrige Kahoot, spm 8

Q8

Book(b) is a superclass to TextBook(tb). Which instructions may lead to a ClassCastException?

▲ "tb = (Book) tb;"	◆ "b = (Book) tb;"	● "tb = (TextBook)b;"	■ "b = (TextBook)b;"
X	X	✓	✓
25	17	38	16
33,77	29,97	30,45	22,65

Forrige Kahoot, spm 9

Q9 Car(c) is a subclass to Vehicle(v). Which instructions may lead to a ClassCastException?


▲ "v = (Vehicle) c;"	◆ "c = (Car)v;"	● "v = (Car) v;"	■ "c = (Vehicle)c;"
X	✓	✓	X
23	26	25	2
30,15	21,90	19,95	27,3



Husk spillelisten for emnet

- Jeg har lagt inn videoer fra forfatterne av BlueJ-boka.
 - Obs! Videoene er laget for forrige utgave av boka. Derfor vil det kunne forekomme mismatch i kapittelnummereringen.

The inheritance hierarchy

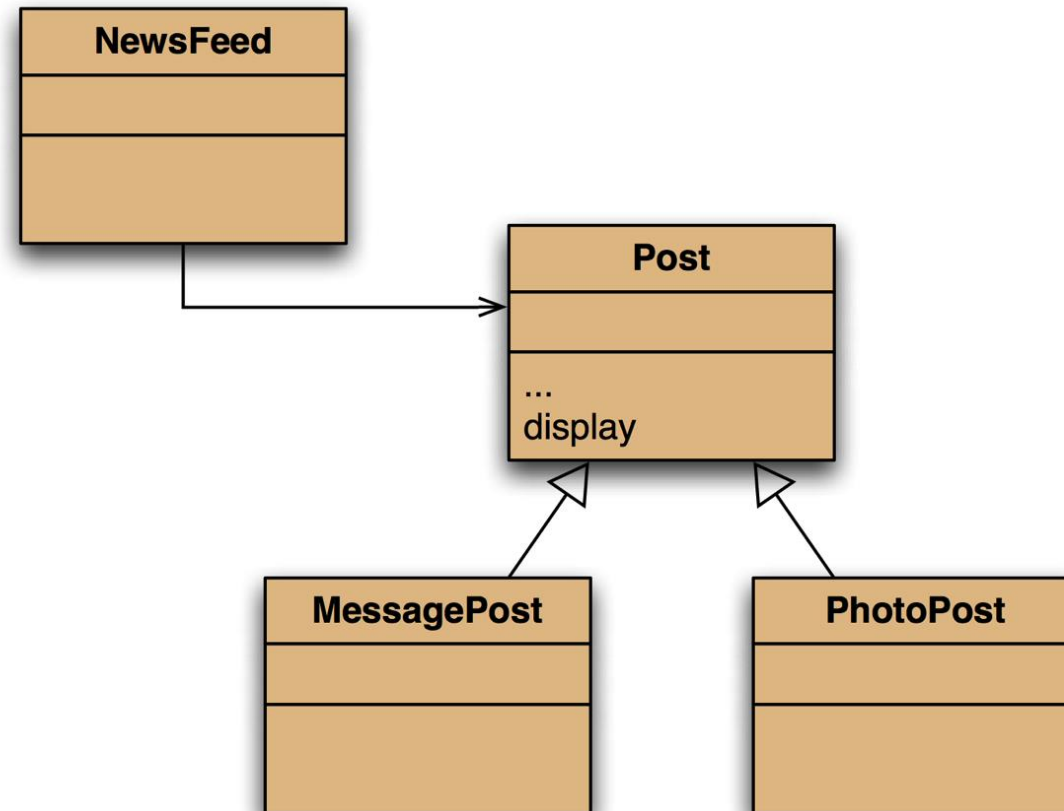

Conflicting output

Leonardo da Vinci
Had a great idea this morning.
But now I forgot what it was. Something to do with flying ...
40 seconds ago - 2 people like this.
No comments.

Alexander Graham Bell
[experiment.jpg]
I think I might call this thing 'telephone'.
12 minutes ago - 4 people like this.
No comments.

What we want

Leonardo da Vinci
40 seconds ago - 2 people like this.
No comments.

Alexander Graham Bell
12 minutes ago - 4 people like this.
No comments.


What we have



The problem

- The `display` method in `Post` only prints the common fields.
- Inheritance is a one-way street:
 - A subclass inherits the superclass fields.
 - The superclass knows nothing about its subclass's fields.

Attempting to solve the problem

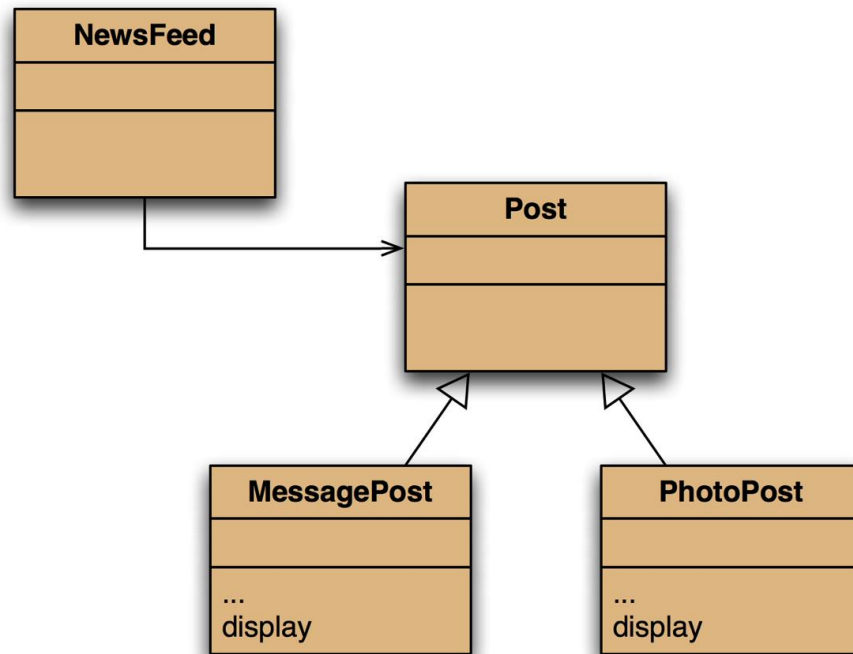

Place **display** where it has access to the information it needs.

Each subclass has its own version.

But **Post**'s fields are private.

NewsFeed cannot find a **display** method in **Post**.



Static type and dynamic type

- A more complex type hierarchy requires further concepts to describe it.
- Some new terminology:
 - static type
 - dynamic type
 - method dispatch/lookup

Static and dynamic type

What is the type of c1?

```
Car c1 = new Car();
```

What is the type of v1?


```
Vehicle v1 = new Car();
```

Static and dynamic type

- The declared type of a variable is its *static type*.
- The type of the object a variable refers to is its *dynamic type*.
- The compiler's job is to check for static-type violations.

```
for(Post post : posts) {  
    post.display();    // Compile-time error.  
}
```

Overriding: the solution

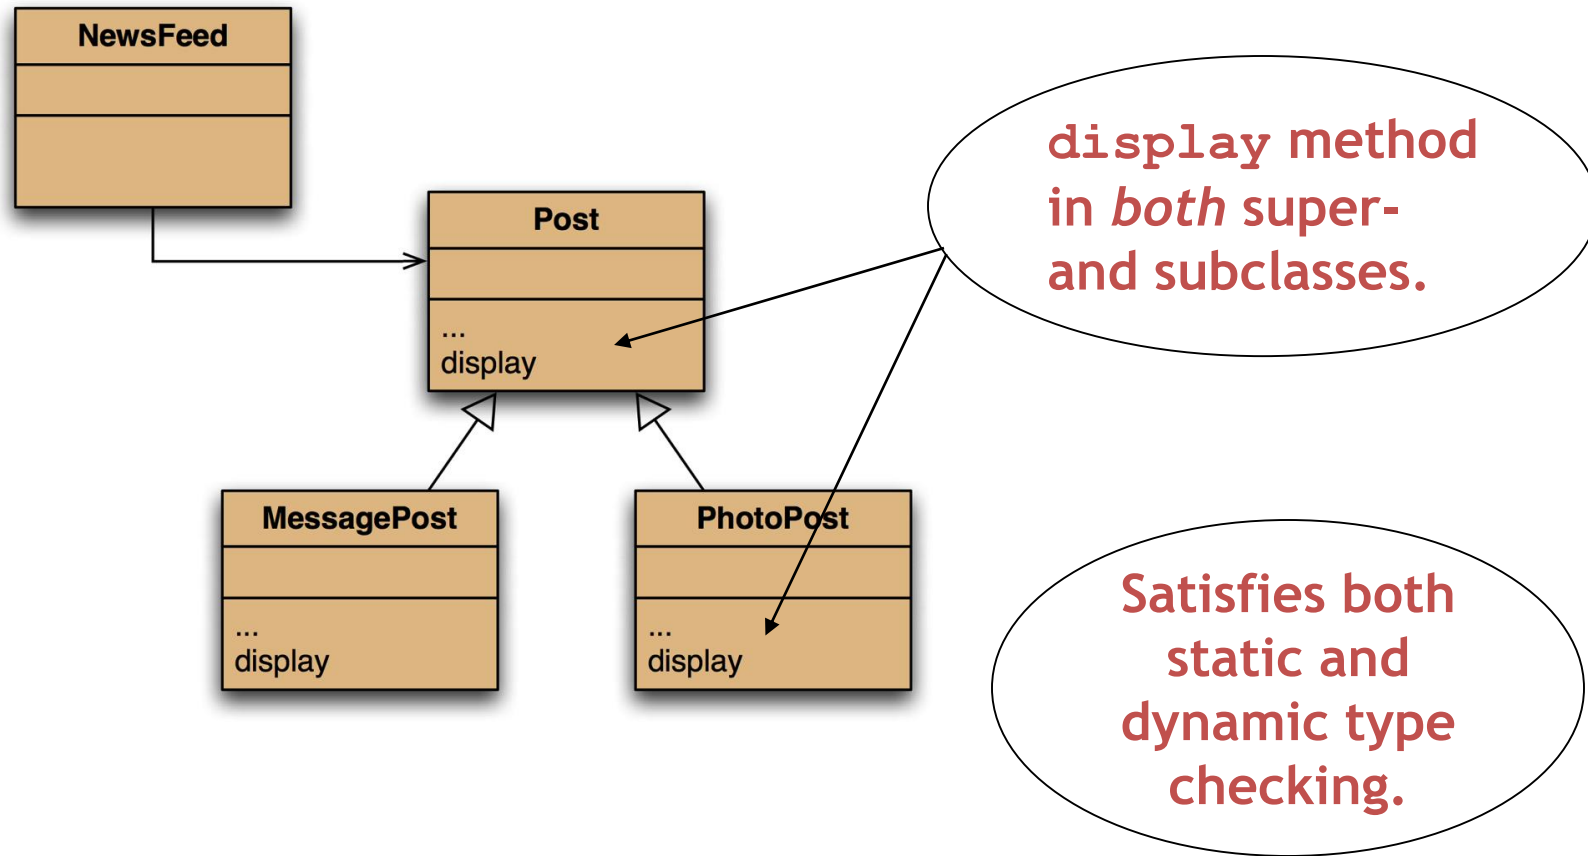



Overriding

- Superclass and subclass define methods with the same signature.
- Each has access to the fields of its class.
- Superclass satisfies static type check.
- Subclass method is called at runtime
 - it *overrides* the superclass version.
- What becomes of the superclass version?




Distinct static and dynamic types



Method lookup

v1.display();

PhotoPost v1;




instance of

No inheritance or polymorphism.
The obvious method is selected.

Method lookup


v1. display();

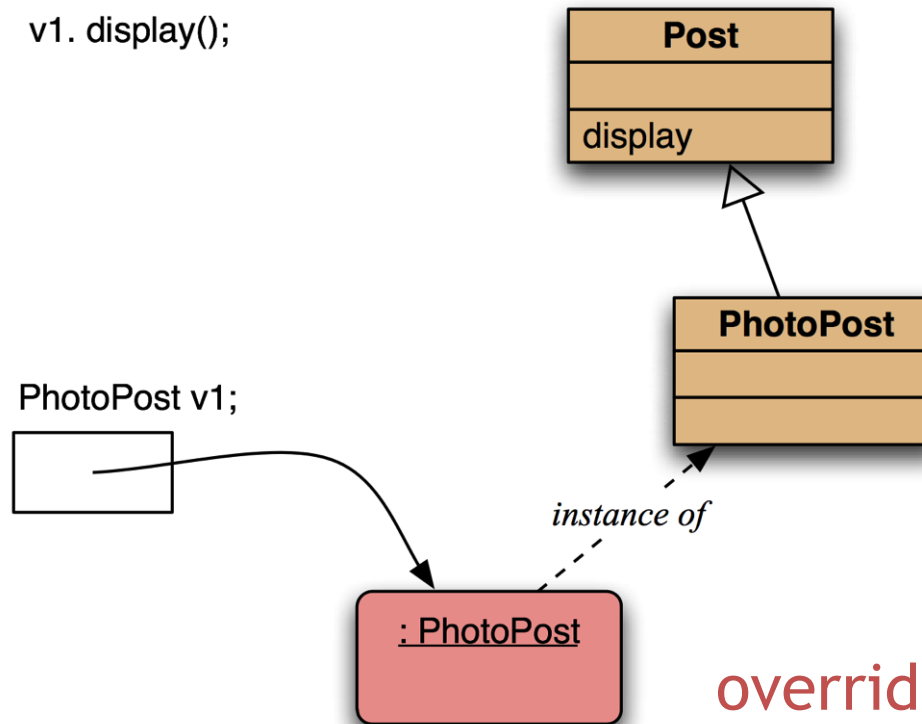

Inheritance but no overriding. The inheritance hierarchy is ascended, searching for a match.

Method lookup

v1. display();

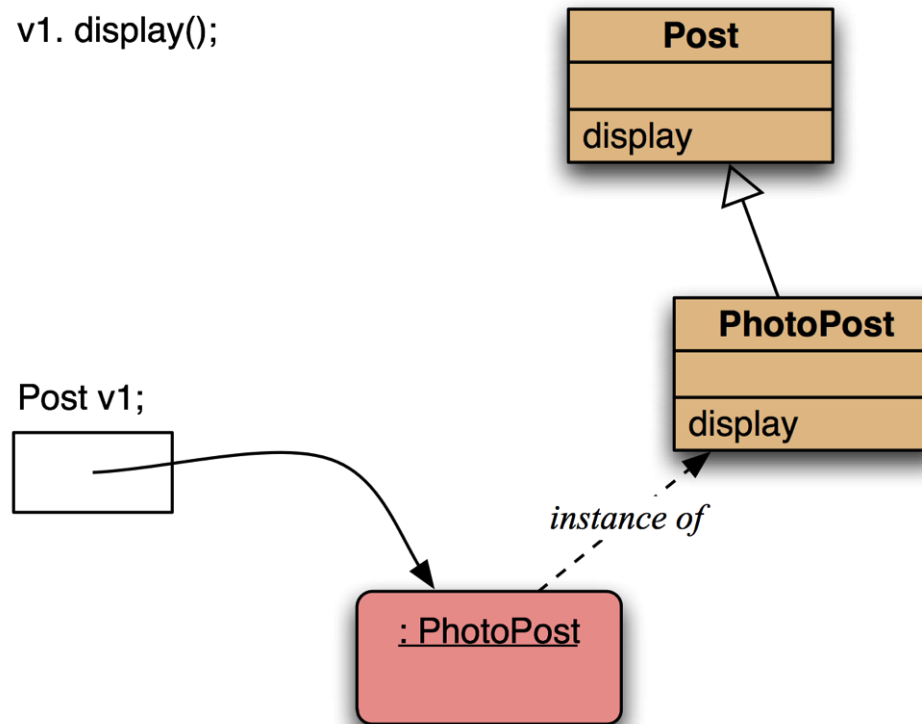

Polymorphism and overriding. The 'first' version found is used.



Oppgaver!

Kode: network-forlesning3. Utgangspunkt: Kun display-metode i super-klasse. En test-metode kalles fra konstruktøren til NewsFeed. Sjekk hvordan den fungerer!

Start med en av disse oppgavene:

- Kun display-metoder i subklassene.
- Display-metoder i både super- og subklassene.

Bruk eksisterende test-metode til å sjekke hva som skjer...



Method lookup summary

- The variable is accessed.
- The object stored in the variable is found.
- The class of the object is found.
- The class is searched for a method match.
- If no match, the superclass is searched.
- This is repeated until a match is found, or the class hierarchy is exhausted.
- Overriding methods take precedence - they override inherited copies.



Super call in methods

- Overridden methods are hidden ...
- ... but we often still want to be able to call them.
- An overridden method *can* be called from the method that overrides it.
 - `super.method(...)`
 - Compare with the use of **super** in constructors.

Calling an overridden method

```
public void display()  
{  
    super.display();  
    System.out.println(" [" +  
                        filename +  
                        "]" );  
    System.out.println(" " + caption);  
}
```



Oppgave!

- Ta utgangspunkt i koden vi brukte i sted. Bruker `super()` slik at du får vist fram informasjon som ligger i både `Post` og subklassene.



Method polymorphism

- We have been discussing *polymorphic method dispatch*.
- A polymorphic variable can store objects of varying types.
- Method calls are polymorphic.
 - The actual method called depends on the dynamic object type.



The `instanceof` operator

- Used to determine the dynamic type.
- Identifies ‘lost’ type information.
- Usually precedes assignment with a cast to the dynamic type:

```
if(post instanceof MessagePost) {  
    MessagePost msg =  
        (MessagePost) post;  
    ... access MessagePost methods via msg ...  
}
```




The `Object` class's methods

- Methods in `Object` are inherited by all classes.
- Any of these may be overridden.
- The `toString` method is commonly overridden:
 - `public String toString()`
 - Returns a string representation of the object.

Overriding toString in Post

```
public String toString()
{
    String text = username + "\n" +
                    timeStamp();
    if(likes > 0) {
        text += " - " + likes + " people like this.\n";
    }
    else {
        text += "\n";
    }
    if(comments.isEmpty()) {
        return text + " No comments.\n";
    }
    else {
        return text + " " + comments.size() +
                    " comment(s). Click here to view.\n";
    }
}
```

Overriding toString

- Explicit print methods can often be omitted from a class:

```
System.out.println(post.toString());
```

- Calls to `println` with just an object automatically result in `toString` being called:

```
System.out.println(post);
```

StringBuilder

- Consider using **StringBuilder** as an alternative to concatenation:

```
StringBuilder builder = new StringBuilder();  
builder.append(username);  
builder.append('\n');  
builder.append(timeString(timestamp));  
...  
return builder.toString();
```



Object equality

- What does it mean for two objects to be ‘the same’?
 - Reference equality.
 - Content equality.
- Compare the use of `==` with `equals ()` between strings.

Overriding equals

```
public boolean equals(Object obj)
{
    if(this == obj) {
        return true;
    }
    if(!(obj instanceof ThisType)) {
        return false;
    }
    ThisType other = (ThisType) obj;
    ... compare fields of this and other
}
```


Overriding equals in Student

```
public boolean equals(Object obj)
{
    if(this == obj) {
        return true;
    }
    if(!(obj instanceof Student)) {
        return false;
    }
    Student other = (Student) obj;
    return name.equals(other.name) &&
        id.equals(other.id) &&
        credits == other.credits;
}
```


Overriding hashCode in Student

```
/**
 * Hashcode technique taken from
 * Effective Java by Joshua Bloch.
 */
public int hashCode()
{
    int result = 17;
    result = 37 * result + name.hashCode();
    result = 37 * result + id.hashCode();
    result = 37 * result + credits;
    return result;
}
```



Oppgave!


- Finn ut hvordan equals- og hashCode-metodene er implementert for klassen String. Klarer du å finne kildekoden online?



Protected access

- Private access in the superclass may be too restrictive for a subclass.
- The closer inheritance relationship is supported by *protected access*.
- Protected access is more restricted than public access.
- We still recommend keeping fields private.
 - Define protected accessors and mutators.

Access levels

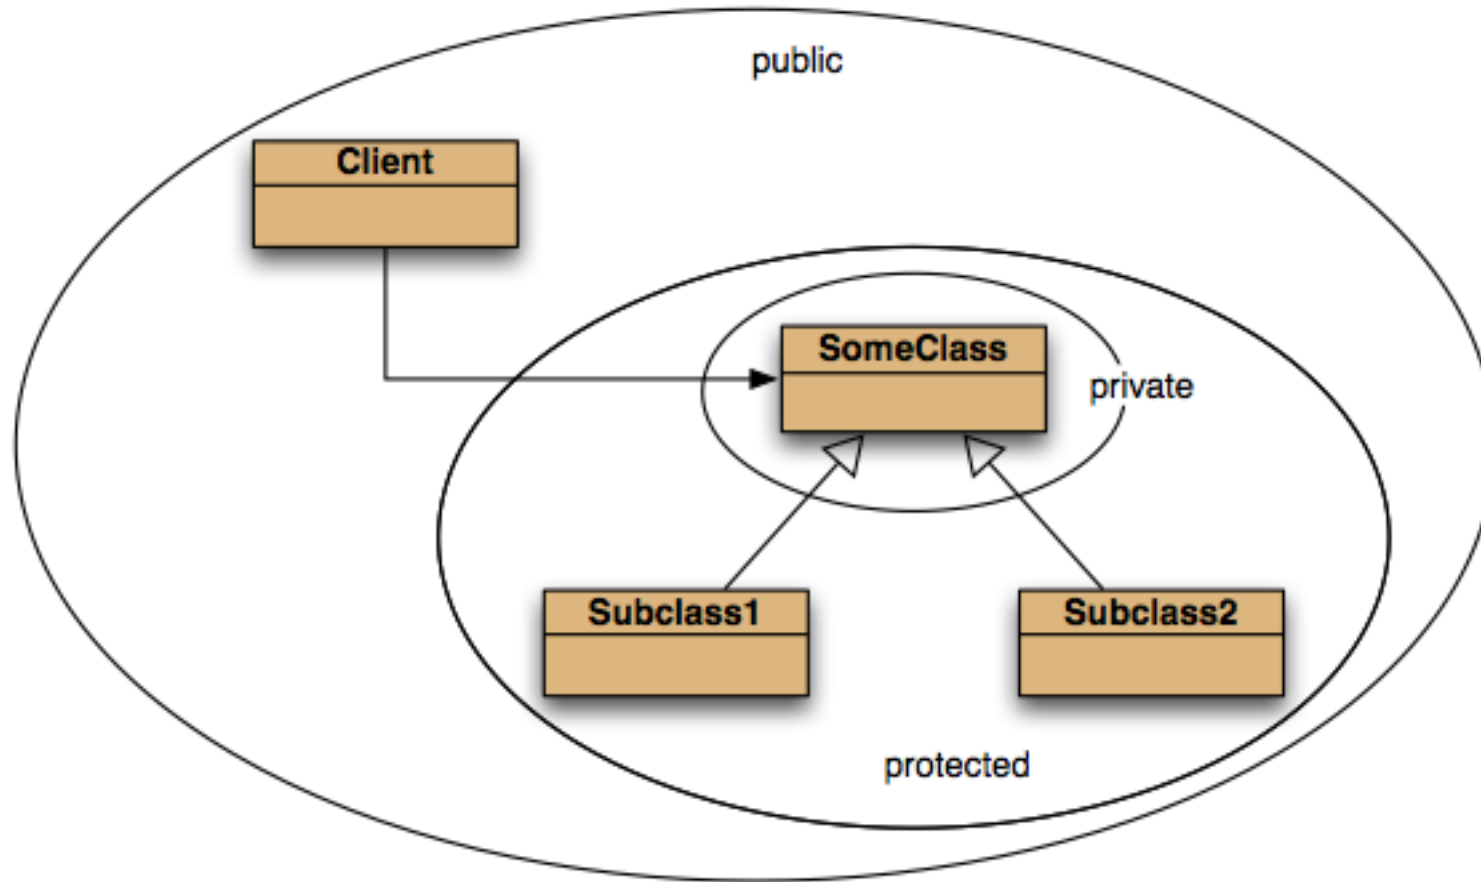



Review

- The declared type of a variable is its static type.
 - Compilers check static types.
- The type of an object is its dynamic type.
 - Dynamic types are used at runtime.
- Methods may be overridden in a subclass.
- Method lookup starts with the dynamic type.
- Protected access supports inheritance.



Nå Kahoot!

- OBS! Neste uke ser det ut til å bli forelesning på Vulkan og øving på Fjerdingen! Sjekk TimeEdit!