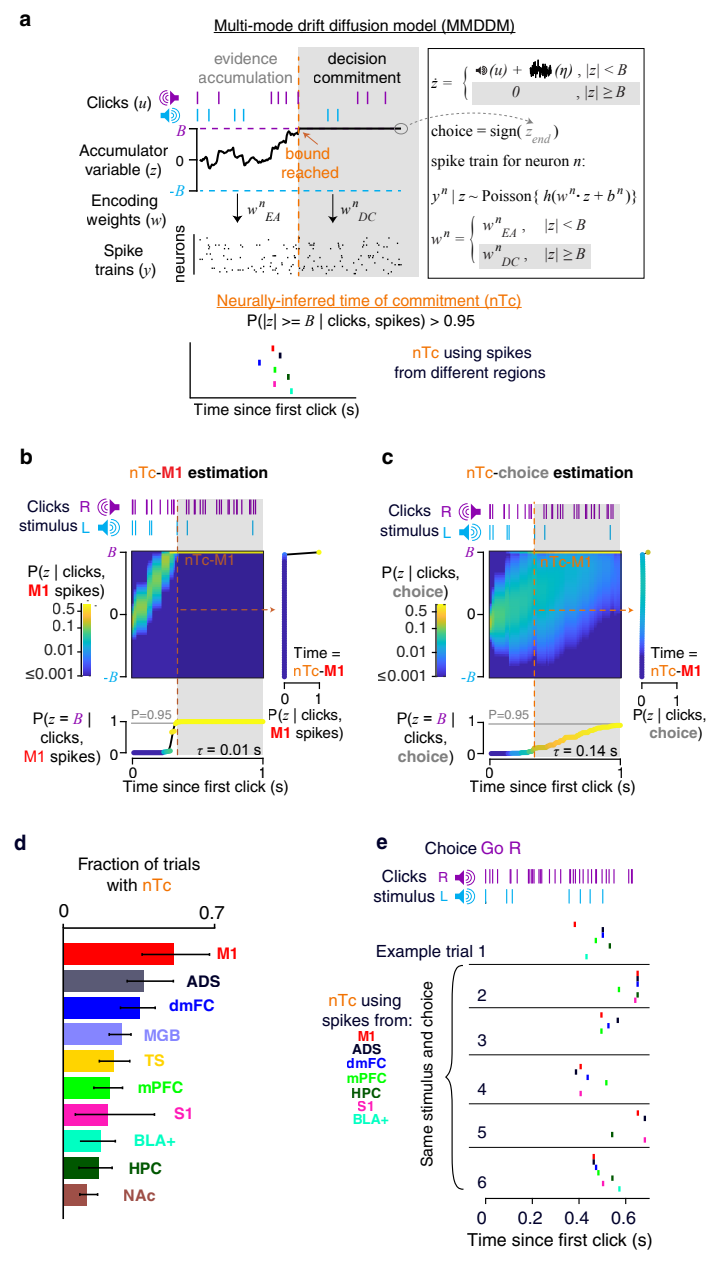

a
Multi-mode drift diffusion model (MMDDM)
evidence accumulation
decision commitment
Clicks (u)
Accumulator variable (z)
Encoding weights (w)
Spike trains (y)
neurons
bound reached
choice = sign(z_end)
spike train for neuron n:
Neurally-inferred time of commitment (nTc)
P(|z| >= B | clicks, spikes) > 0.95
nTc using spikes from different regions
Time since first click (s)
b
nTc-M1 estimation
Clicks stimulus
P(z | clicks, M1 spikes)
Time = nTc-M1
P(z = B | clicks, M1 spikes)
P=0.95
τ = 0.01 s
P(z | clicks, M1 spikes)
Time since first click (s)
c
nTc-choice estimation
P(z | clicks, choice)
P(z = B | clicks, choice)
τ = 0.14 s
P(z | clicks, choice)
d
Fraction of trials with nTc
M1
ADS
dmFC
MGB
TS
mPFC
S1
BLA+
HPC
NAc
e
Choice Go R
Example trial 1
nTc using spikes from:
Same stimulus and choice
Time since first click (s)