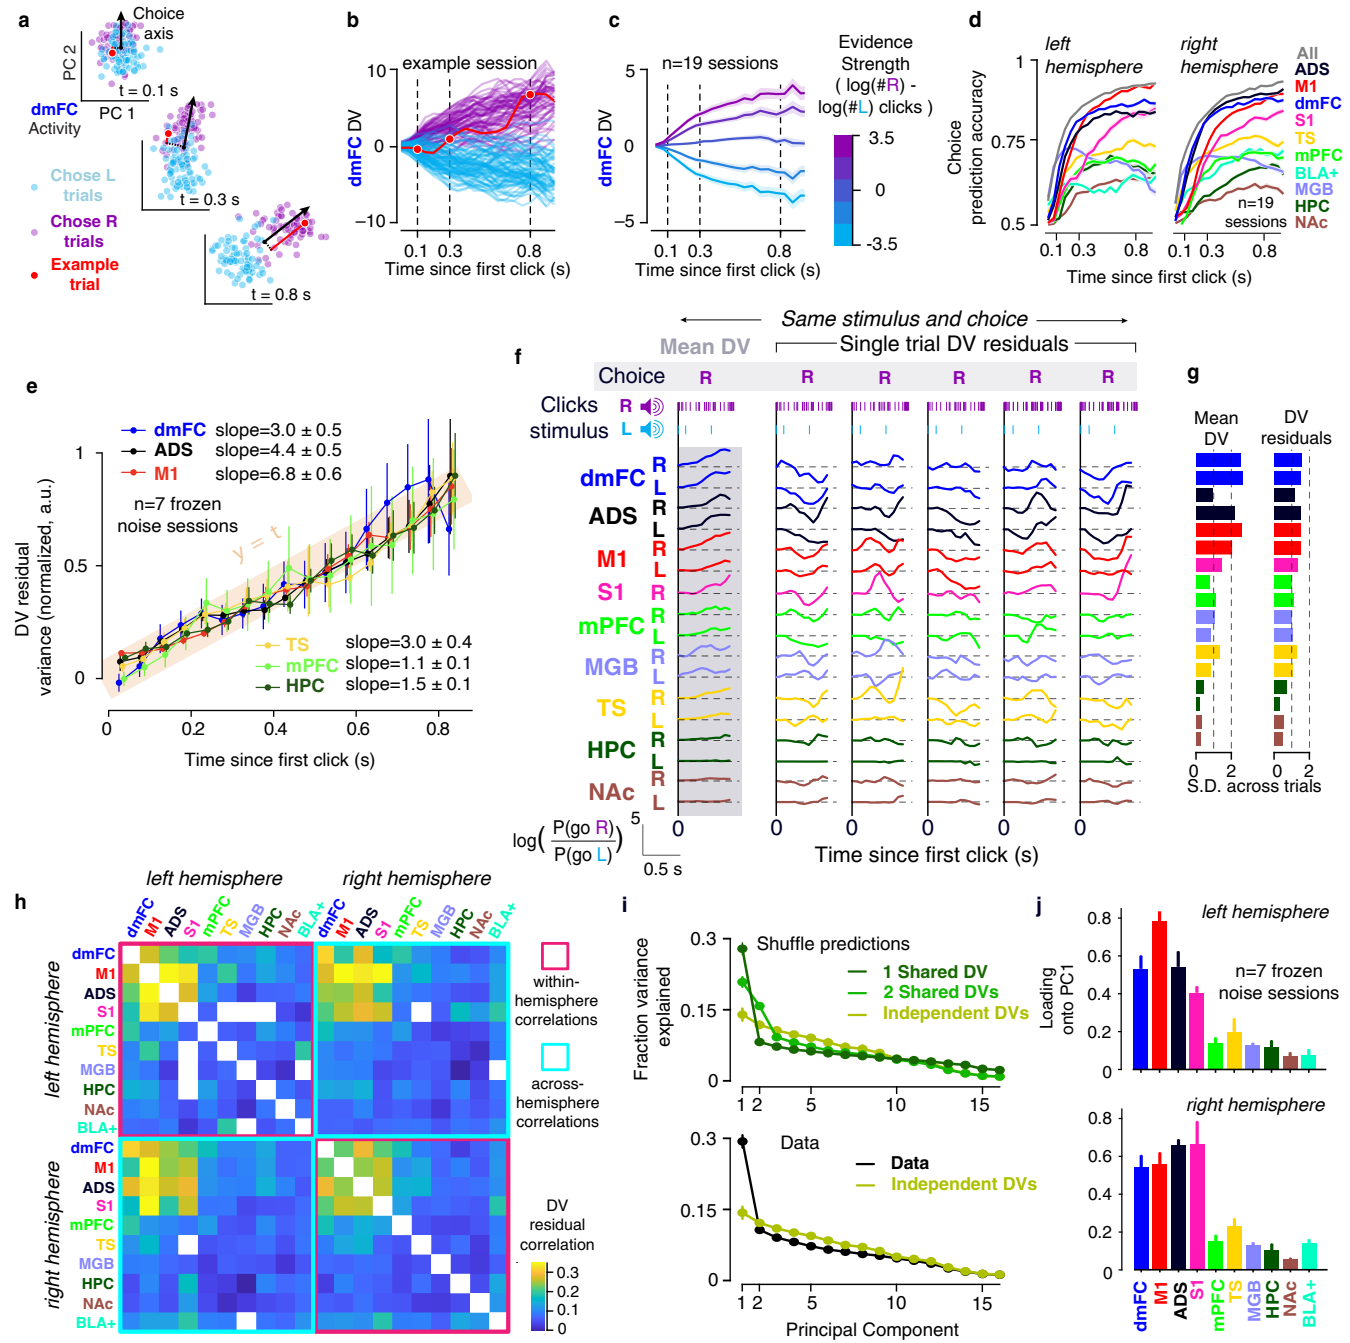

a
Choice axis
PC 2
PC 1
t = 0.1 s
t = 0.3 s
t = 0.8 s
dmFC Activity
Chose L trials
Chose R trials
Example trial
b
example session
dmFC DV
Time since first click (s)
c
n=19 sessions
Evidence Strength (log(#R) - log(#L) clicks)
3.5
0
-3.5
d
left hemisphere
right hemisphere
Choice prediction accuracy
All
ADS
M1
dmFC
S1
TS
mPFC
BLA+
MGB
HPC
NAc
n=19 sessions
e
dmFC slope=3.0 ± 0.5
ADS slope=4.4 ± 0.5
M1 slope=6.8 ± 0.6
n=7 frozen noise sessions
y = x
TS slope=3.0 ± 0.4
mPFC slope=1.1 ± 0.1
HPC slope=1.5 ± 0.1
DV residual variance (normalized, a.u.)
f
Same stimulus and choice
Mean DV
Single trial DV residuals
Choice
Clicks stimulus
log(P(go R) / P(go L))
0.5 s
g
Mean DV
DV residuals
S.D. across trials
h
left hemisphere
right hemisphere
within-hemisphere correlations
across-hemisphere correlations
DV residual correlation
i
Shuffle predictions
1 Shared DV
2 Shared DVs
Independent DVs
Fraction variance explained
Data
Data
Independent DVs
Principal Component
j
left hemisphere
right hemisphere
Loading onto PC1
n=7 frozen noise sessions