
SRS DISTRIBUTION

SRS Network Insights and Analytics Hub

Summary guide: the console, how Mova iO works, the screens, the numbers and the 33 demos in ten pages

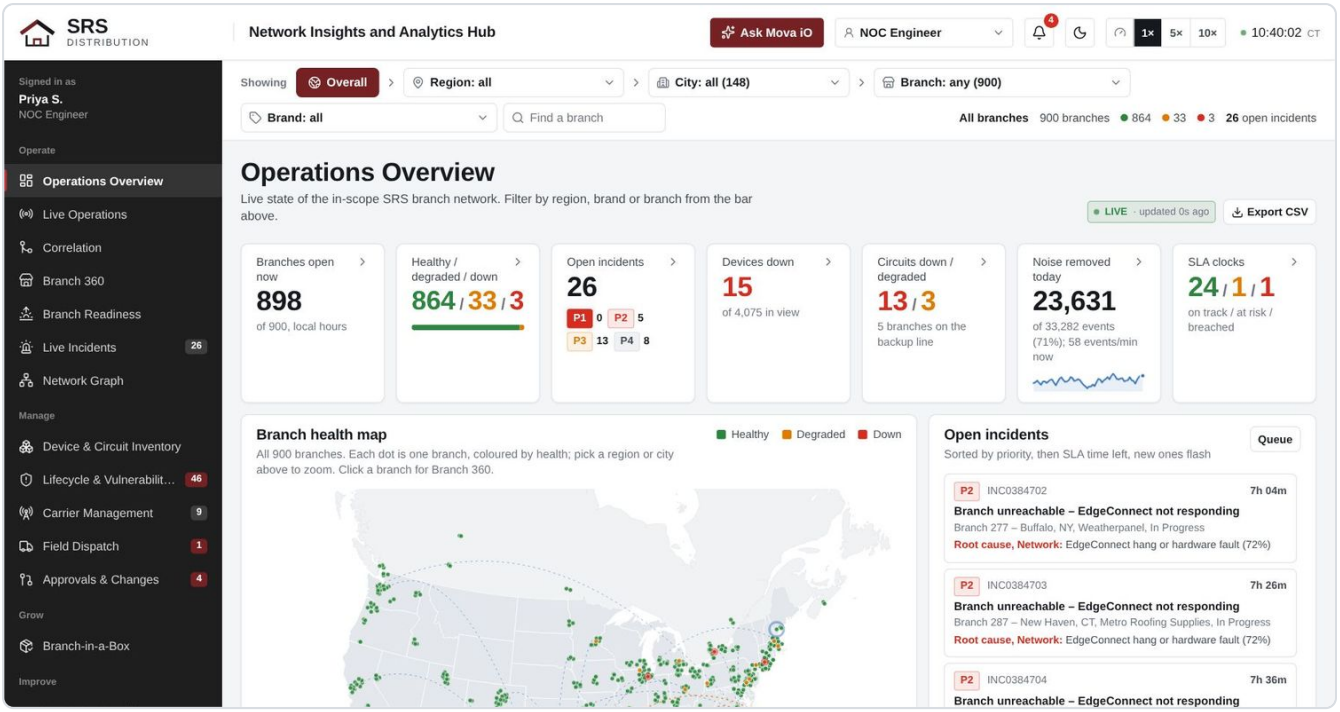

Managed Network Services · Movate for SRS Distribution
Summary edition · October 2026

1. What the console is

The SRS Network Insights and Analytics Hub is the single working console for SRS Distribution's managed network. It brings the network tools together on one screen and shows what Mova iO, Movate's AI layer, is doing about every problem: what it found, how sure it is, what it did or wants to do, and who approved it.

Estate	Count	Notes
Branches	900	Nine regions, Southeast to Canada; acquired branches keep their brand name
SD-WAN appliances	933	HPE Aruba EdgeConnect EC-XS (end of sale 31 Jan 2026, supported to 31 Jan 2031); larger branches run an HA pair
Switches	1,856	Aruba 2530 (728, end of support Jan and Mar 2027), CX 6100, 6200M and 6300
Access points	1,286	Indoor AP-635; outdoor AP-565 and AP-585 for yards
Circuits	1,800	A primary and a backup path per branch from AT&T, Lumen, Comcast, Spectrum, Verizon, Cox and others

Tool	What it gives the console
EdgeConnect Orchestrator	SD-WAN paths and tunnels: loss, latency, jitter, failover
Aruba Central	Switch, AP and client health, PoE, radios, firmware
HPE OpsRamp	SNMP, syslog, config backups and the event layer that correlates them
New Relic	Synthetic checks of the payment and ERP paths from every branch
ServiceNow	Incidents, changes, problems, the CMDB and the service catalog
Carrier portals	Carrier cases, loopback tests, maintenance calendars, outage maps


Scope is the network only: SD-WAN, circuits, switching, Wi-Fi, network services such as DHCP, configuration, firmware and the network paths to the data centre and Azure. Applications, end-user devices and building systems are outside it.

What it changes for SRS

- **One incident per branch per event, not one per alert.** Correlation removes about 70% of raw events before anyone sees them (the KPI asks for 50%).
- **Problems fixed before the branch notices.** Approved runbooks act within the gate rules, verify the result and close the ticket with the evidence attached.
- **People stay in control.** Anything risky waits for a named person, with the plan, the evidence and the rollback already prepared.
- **Every branch ready at opening.** Ten network checks run at 05:30 local time; anything that fails is fixed or owned before the doors open.
- **Acquisitions join fast.** Day-one monitoring as they are, then the SRS standard network over one weekend through Branch-in-a-Box.

2. How Mova iO works

Five sources feed one event layer. Mova iO correlates the events, decides within the gate rules, acts through the tools and writes everything to ServiceNow and the audit log.

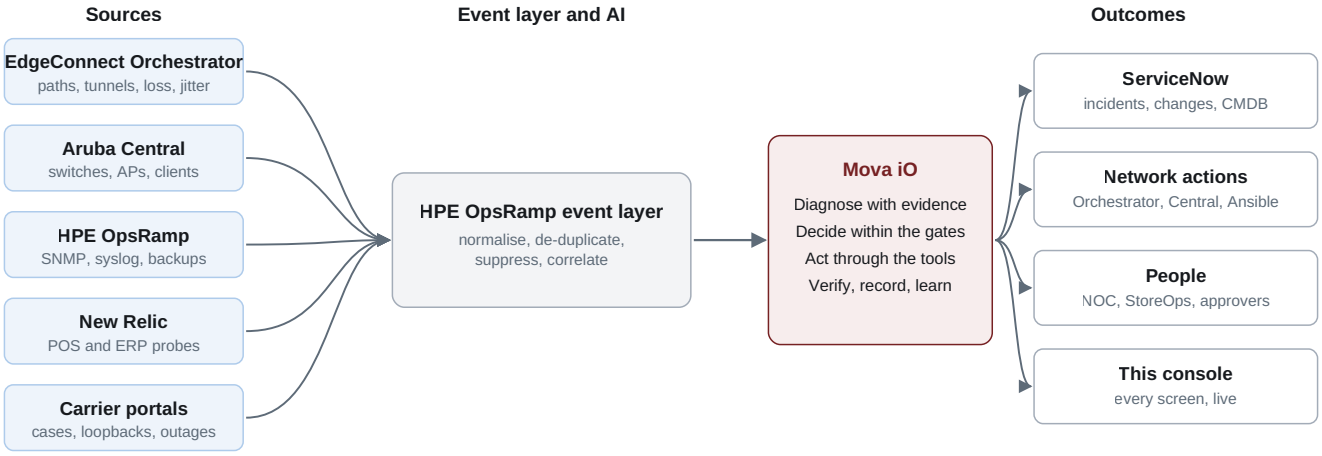

Data flow: five sources feed one event layer; Mova iO decides within the gate rules and acts through the tools; every step is recorded in ServiceNow and the audit log.

Every decision carries **evidence** (why), a **confidence** (0 to 100%), a **rollback** (how to undo it) and a **verification** (how it proves the fix worked).

The gate rule

A person must approve before anything changes when **any** of these is true:

- confidence is below 80%;
- the device is at a branch that is open for trading;
- a freeze window covers the device or region.

Never autonomous, whatever the confidence: firmware and OS upgrades, routing, security policy and QoS changes, device reloads, rollbacks on hub devices, and any action on a device without a confirmed alternate path.

Three control modes

Mode	Catalog tier	What happens	The person's role
Autonomous	Act	Acts on its own inside a policy SRS and Movate set and audit	Over the loop: reviews outcomes and policy
Human-on-the-loop	Act and notify	Acts and tells a named person at once, who can stop it during a stop window	On the loop: watches and can stop
Human-in-the-loop	Stage	Prepares the plan, evidence and rollback, then waits	In the loop: nothing changes until they approve

New runbooks start at the Stage tier and move up only on a record of clean runs, proposed by the Catalog Steward and approved by SRS.

3. Reading any screen

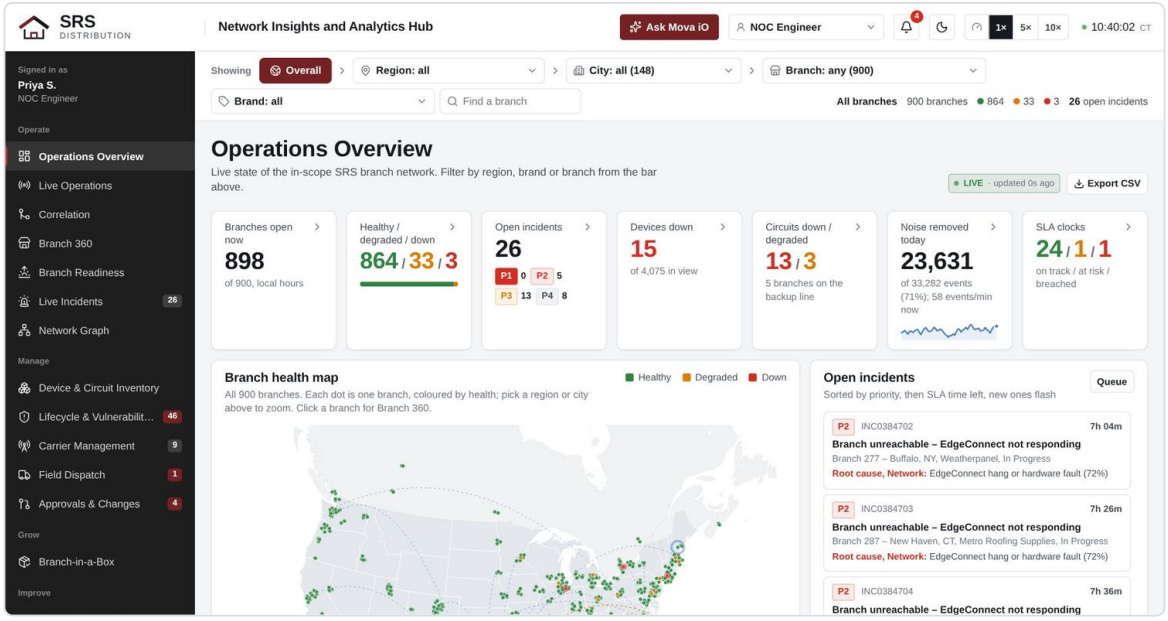


Figure 1. Operations Overview: header, left menu, filter bar and working area

Every screen has the same frame: a **header** (Ask Mova iO, role selector, notifications, light/dark mode, **speed 1× / 5× / 10×** and the Central Time clock), the **left menu** grouped Operate, Manage, Grow, Improve and Govern, and a **filter bar** (region, city, branch, brand) that applies to every screen. Short notifications pop up at the top right with a close button. **Every number opens the detail behind it**: a tile with › opens its list, each number in a split tile opens its own (click the red 3 for the three branches down), and the panel walks on to one branch, line, device or incident and to its **root cause**: where the fault is (network, ISP or application) on the path from the tills to the data centre, with the evidence. All of it comes from **Mova iO**: its agents find the root cause, decide who fixes it and whether it can be fixed remotely, and prepare the step (a runbook, a hand-off, an SRS field technician with the spare, a carrier or HPE case), carried out once an engineer approves.

Colour	Means
Green	Healthy, passed, on track
Amber	Degraded, warning, at risk (for example on the backup path, or an SLA clock past 75%)
Red	Down, failed, breached
Blue	Measurements: chart lines and bars, not judgements
Maroon	SRS brand: buttons, active menu item, items waiting for a person. Never used for health

Priority	Used when	Respond	Resolve
P1	Several branches down or a critical service lost	15 min	4 h
P2	One branch with both paths down, or major impact at one branch	15 min	8 h
P3	One path down while trading on the backup, or degradation with a workaround	30 min	24 h
P4	Minor issues and planned work	30 min	96 h

Shorthand. A triple such as **872 / 25 / 3** is healthy / degraded / down. "On track / at risk / breached" uses the same colour order. A sparkline is the recent history of the number beside it; its last point is now. All times are Central Time unless a card says local time.

4. The 19 screens at a glance

Screen	The question it answers	What to look at first
Operations Overview	Is the network all right, and if not, where?	Headline tiles, branch health map, open incidents, error budgets
Live Operations	What is happening on the network right now?	Branches online and on backup, latency, loss, jitter, tunnels, event stream
Correlation	How do thousands of events become a few incidents?	Events to alerts to incidents, noise removed, correlation methods
Branch 360	Everything about one branch	Gauges, health score, risk next 4 hours, circuits, devices, dependencies
Branch Readiness	Will every branch open on time?	05:30 result, ten checks, readiness by branch, tomorrow's risk
Live Incidents	What is the NOC working on?	The queue with SLA clocks; the incident record and its agent steps
Network Graph	What depends on what?	Branch to carrier to hosting to application; blast radius on click
Device & Circuit Inventory	What do we run, and is it backed up?	Firmware by platform, backup success, support contracts, Central vs standalone, circuits
Lifecycle & Vulnerabilities	Which devices are exposed or ageing?	Advisories mapped to devices; end of sale and end of support by model
Carrier Management	Are carriers fixing faults fast and fairly?	Open cases, scorecard, repeat offenders, no-trouble-found tracking
Field Dispatch	Who goes where, with which spare, and what do they need to know?	Work orders, each with Mova iO's onsite work pack (probable problem, what was tried remotely, the fix and parts, checklist, evidence, hand-off); technicians; depot spares
Approvals & Changes	What is waiting for a person?	Approvals queue, change calendar and freezes, drift, firmware compliance
Branch-in-a-Box	How are new and acquired branches joining?	Portfolio, two tracks, kit and VLANs, cutover gates, parity
Predictive Watchlist	What is likely to fail next?	Degrading circuits, failure risk, capacity, risk matrix
Knowledge	What did we learn last time?	Similar incidents, auto-drafted articles, problem records
Mova iO Agents	What is the AI doing, and how well?	13 agents: actions today, success rate, last action
Automation Library	What may run on its own?	Runbook catalog, tiers, runs and hours given back, what to automate next
SLA & KPI Tracker	Are we meeting Annexure B?	Each SLA and KPI against MSL and ESL, breach risk, service credits
Reports	What do I hand over or send?	Shift handover, daily summary, weekly review, onboarding, audit log

Two more pages have their own links and are not linked from the console: **Live Demos** (33 scripted branch situations on a full-screen stage, sections 6 and 7) and the **role dashboards** (real-time dashboards for six leaders, section 9).

Roles. Movate roles (NOC Engineer, Network Engineer L3) carry out actions; SRS roles see everything and use **Escalate to Movate** (urgency, reason, routed by Mova iO to the ticket owner, acknowledged with the next update time), with every action greyed out. The role selector sets the landing page: NOC Engineer → Live Incidents; Network Engineer L3 → Approvals & Changes; StoreOps Lead → Branch Readiness; Branch Manager → Operations Overview for one branch; Field Technician → Field Dispatch; M&A Integration Lead → Branch-in-a-Box; Security Lead → Approvals & Changes, firmware tab.

5. Numbers that matter

Every reading describes the network, and each one maps to something the branch feels. The first four describe the WAN line a branch is using; they rise together when a line is congested or faulty. Wi-Fi is measured inside the building and does not depend on the WAN.

Measure	What it is	Normal	Look closer	Act	What the business feels
Latency to data centre	Round trip to the McKinney data centre	7–15 ms Texas, 35–50 ms coasts, +25–40 ms on LTE	Normal + 25 ms	Normal + 60 ms	ERP, pricing and orders slow down
Packet loss	Data that never arrives	Under 0.2%	Above 1%	Above 2% (ticket after 10 min)	Card payments retry, calls break up
Jitter	Variation in delay	0.5–3 ms wired, 5–12 ms LTE	Above 20 ms	Above 30 ms	Choppy calls, terminal time-outs
WAN use	Share of the line's bandwidth in use	10–60%	Above 70%	Above 85%	Queuing raises latency and loss for all
Payment path round trip	Test payment from the counter VLAN to the processor	100–200 ms	200–400 ms	Above 400 ms	Slow card payments at the counter
Wi-Fi experience	Aruba Central score inside the branch	90–97	Below 80	Below 65	Handhelds and laptops struggle
Branch health score	0–100 from eight parts	85 and above	70 to 84	Below 70	–
Risk, next 4 hours	Chance of a business-impacting problem	Under 25	25 to 49	50 and above	–
Noise removed	Events dropped before they become alerts	About 70% (KPI 50%)	Falling	Below 50%	Engineers see more noise
SLA clock	Time left to resolve	Time left	More than 75% used	Breached	Service credit risk

Error budgets

An error budget is the failure a target allows. A 99.9% target over 30 days allows about 43 minutes. The Overview tracks four: branches online (at least one working line), jitter under 30 ms (protects calls and payments), loss under 1% (protects payments and ERP), and P1/P2 answered in 15 minutes. **Burning N×** means the budget is being used faster than an even spend; when it burns fast, non-essential changes in that area wait.

Ticket triggers

A device unreachable for three polls, an SD-WAN tunnel down for more than two minutes, packet loss above 2% for ten minutes, sustained latency or jitter above the path's limit, recurring interface errors, or a failed synthetic payment-path or ERP check.

6. Inside a demo

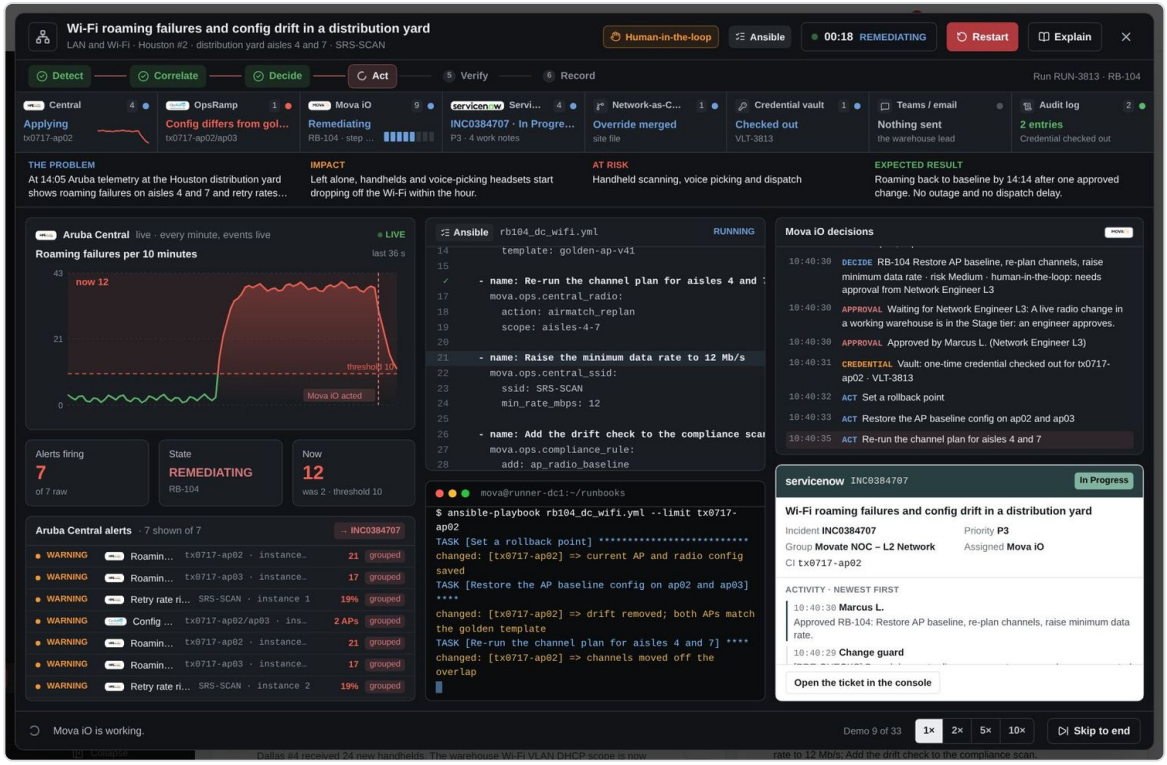


Figure 2. The demo stage

Each demo plays on one full-screen stage that shows every system at once, in the order **Detect** → **Correlate** → **Decide** → **Act** → **Verify** → **Record**:

- **System strip:** every tool involved (Orchestrator, Central, OpsRamp, New Relic, Mova iO, ServiceNow, carrier portal, Teams) with its live state.
- **Live chart:** the metric that went wrong, its threshold and the moment Mova iO acted.
- **Runbook and terminal:** the actual Python or Ansible steps, pre-checks and verification.
- **Mova iO decisions:** evidence, causes ruled out, confidence and the gate decision.
- **Approval step** (human modes): the named approver, the plan and the rollback; **Approve** or **Decline**.
- **Bottom bar:** outcome, before and after values, alerts to tickets, people needed, demo time and speed (1×, 2×, 5×, 10×).

Business view explains the problem, impact, what was protected and the result in plain words; **Technical view** shows the alert, the rule, the engine and every step. The stage shows the incident, approvals, carrier case and work order each demo creates, exactly as an engineer would find them in the console.

7. The 33 demos

Each demo is built from the proposal documents (the solution response and its "day in the life" scenarios, the RFP response, Annexure B and the console brief) and covers a core network situation.

#	Demo	Mode
SD-WAN and carriers		
1	SD-WAN circuit degradation fixed before the branch notices	Autonomous
2	Branch hard down after a carrier fiber cut	Human-in-the-loop
3	Primary circuit down: carrier fault	Autonomous
4	Chronic circuit: four drops in 30 days become a problem record	Autonomous
5	Return to primary circuit after carrier repair	Human-on-the-loop
6	EdgeConnect hardware failure	Human-in-the-loop
7	Severe weather across Dallas–Fort Worth	Human-in-the-loop
LAN and Wi-Fi		
8	Yard access point offline	Autonomous
9	Wi-Fi roaming failures and config drift in a distribution yard	Human-in-the-loop
10	CRC errors climbing on a switch uplink	Human-in-the-loop
11	Automation does not fix it: engineer takes over with full context	Human-in-the-loop
12	Broadcast storm from an unmanaged desk switch	Human-on-the-loop
13	DHCP scope full after a handheld rollout	Human-in-the-loop
Patching and firmware		
14	Day-0 critical patch for all EdgeConnects	Human-in-the-loop
15	Monthly switch patch wave with automatic checks	Human-on-the-loop
16	Critical access point vulnerability	Human-in-the-loop
17	Access point firmware wave stopped at canary	Human-on-the-loop
18	Annual major switch upgrade with early life support	Human-in-the-loop
19	Firmware compliance catch-up after hardware swaps	Human-in-the-loop
20	Error budget burning: tonight's patch wave deferred	Autonomous
21	Aruba 2530 end of support: refresh wave 1	Human-in-the-loop
Configuration and automation		
22	Nightly config backups fail and are re-run	Autonomous
23	Unapproved local admin account on a switch	Human-in-the-loop
24	Port activation from the service catalog	Human-on-the-loop
25	Standalone access points brought under Aruba Central	Human-in-the-loop
26	A repeated manual fix becomes a tested runbook	Human-in-the-loop
27	Backup LTE fails the weekly failover test	Autonomous
Predict and prevent		
28	Circuit degradation predicted: proactive carrier case	Autonomous
29	WAN capacity forecast for hail season	Human-in-the-loop
Branch readiness		
30	Branch fails its 05:30 readiness check	Autonomous
31	After-hours link down held and checked at opening	Autonomous
Branch-in-a-Box		
32	Acquired branches monitored from day one, before any kit changes	Human-in-the-loop
33	Acquired branch cutover weekend	Human-in-the-loop

8. Patching, changes and acquisitions

Patching without surprises

- **Rings with a canary.** A small first group is checked against a control group before the rest proceed; a bad canary stops the wave on its own (demo 17).
- **Pre and post checks** on every device, HA pairs one unit at a time, and automatic rollback if a check fails.
- **Cadence.** Day-0 critical patches within the emergency window (demo 14), monthly minor waves (demo 15), and a major upgrade up to once a year with early life support (demo 18).
- **Policy.** Every device is measured against the firmware policy (N, N-1, N-2); drift from the golden config is found every night and fixed by a reviewed change (demos 19, 23).
- **Error budget as a brake.** When a service level is burning fast, non-essential changes wait (demo 20).
- **Lifecycle.** The 728 Aruba 2530 switches reach end of support on 31 Jan 2027 (48-port) and 31 Mar 2027 (24-port) and are replaced in refresh waves with the Branch-in-a-Box kit (demo 21). The EdgeConnect EC-XS reached end of sale on 31 Jan 2026 and stays supported until 31 Jan 2031; new units are EdgeConnect 10104.
- Firmware never changes without a person, but once approved the waves run themselves.

Branch-in-a-Box

The standard kit and process that puts any new or acquired branch on the SRS standard network, usually over one weekend, trading again on Monday morning. Acquired branches keep their name, staff and customers.

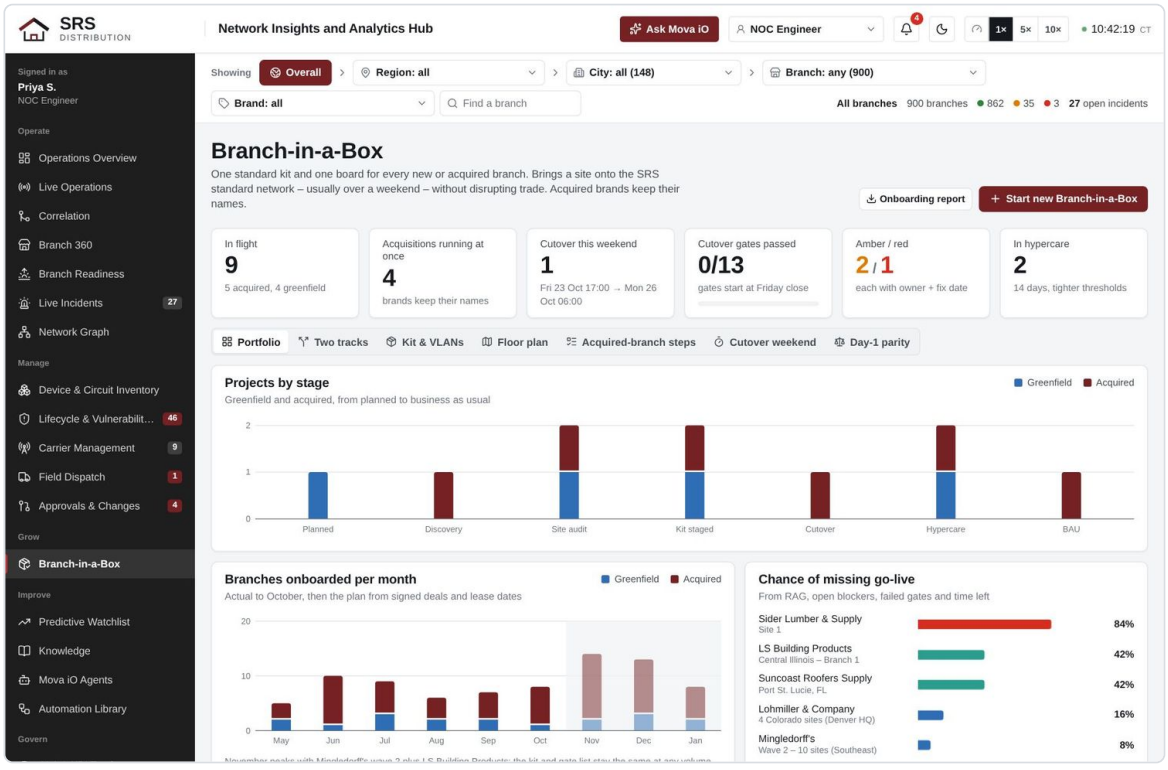


Figure 3. Branch-in-a-Box portfolio

- **Day 1:** monitor the acquired network as it is, before any kit changes (demo 32).
- **Cutover weekend:** Friday 17:00 to Monday 06:00, 13 gates, each with an owner, evidence and a result; a failed gate arms the rollback (demo 33).
- **Hypercare:** 14 days of tighter thresholds after go-live.

9. Measuring the service, and the role dashboards

The **SLA & KPI Tracker** measures every Annexure B service level and KPI, live, against its minimum (MSL, below which a service credit applies) and its expected level (ESL, the target), with breach risk, credit exposure and a six-month history for each. **Reports** (shift handover, daily summary, weekly service review, onboarding and the audit log) are built from live data when opened, each with a row of charts.

Role dashboards

A third page (`dashboards/`): real-time dashboards with role-based access for six leaders, each signing in to see only their own dashboard and scope. It refreshes every few seconds from live data. **Live now**, **Last 7 days** and **Last month** each show the network status, four key numbers, needs attention, going well, what is coming up, four charts, insights and the role's live activity, and export to PDF.

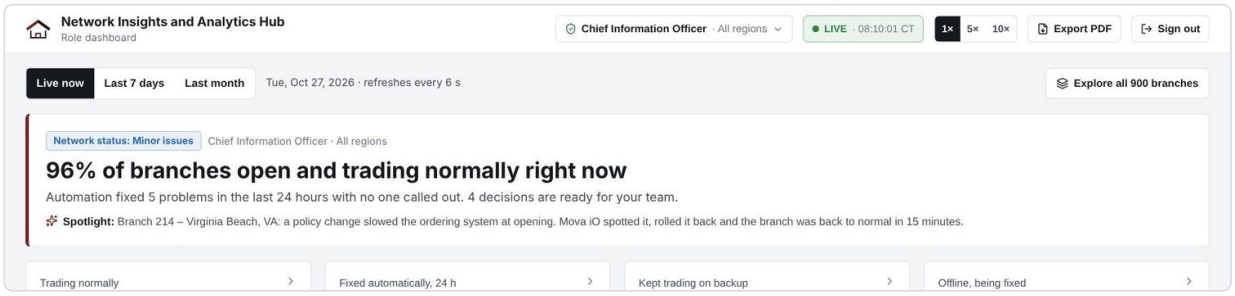


Figure 4. The CIO's dashboard, live

Drill down to any level. Every number, sentence, chart, map dot, insight and event opens a panel that goes as deep as the console: estate → region → state → city → branch → one line, device or incident → the carrier, change, decision or trend behind it, with a breadcrumb and **Back**.

10. A 33-minute walkthrough

1. **Operations Overview (3 min).** Tiles, map and error budgets. Click **LIVE** to pause while you talk, or set the header speed to 5× to show more activity.
2. **Demo 1, SD-WAN degradation (4 min).** Autonomous: 43 alerts, one incident, fixed and closed in under two minutes.
3. **Demo 9, Wi-Fi drift (4 min).** Human-in-the-loop: read the evidence aloud, then approve.
4. **Demo 2, fiber cut (4 min).** A P1 end to end, including the branch manager's call and the RCA.
5. **Correlation (2 min).** Why engineers see only a small share of the alerts.
6. **Patching (5 min).** Demo 14 or 18, then Approvals & Changes on the firmware tab.
7. **Branch Readiness (2 min).** Every branch checked at 05:30 local, problems fixed before opening.
8. **Branch-in-a-Box (4 min).** Demos 32 and 33.
9. **SLA & KPI Tracker (2 min).** Every Annexure B metric, live.
10. **Role dashboards (3 min).** As the CIO, click **Trading normally** and drill down to one branch and its line.