



a ★ = peak of average trajectory curvature

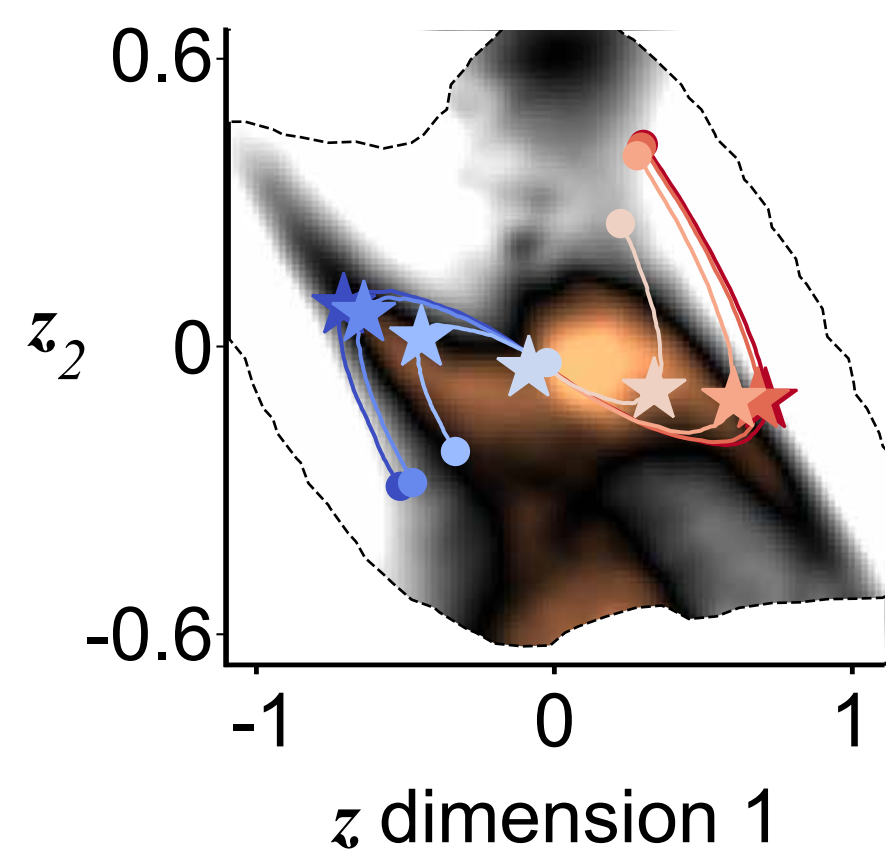


b definition of time periods in **c-d**

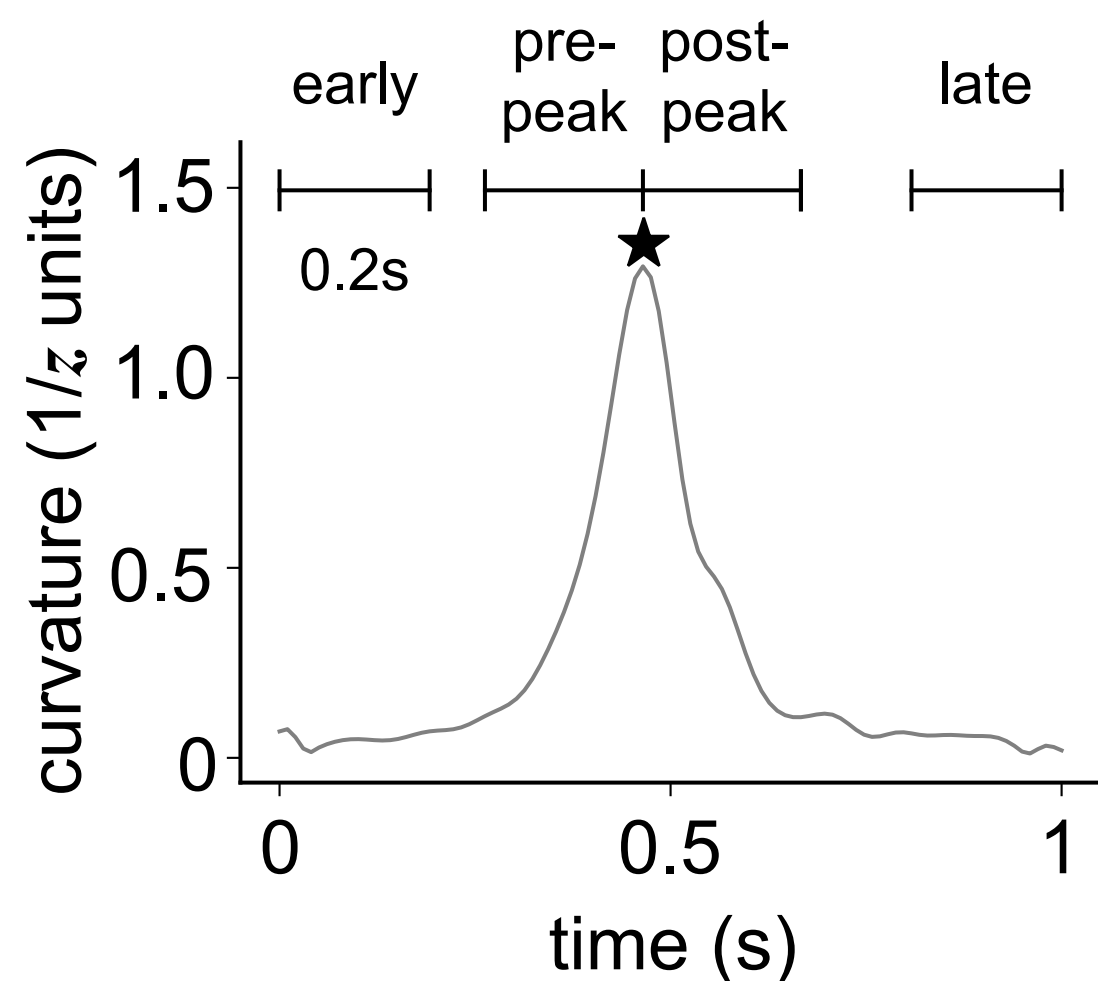



c autonomous vs. input dynamics across 27 sessions

$$\text{normalised difference} = \frac{\| \text{auto} \| - \| \text{input} \|}{\| \text{auto} \| + \| \text{input} \|}$$

— this session
— other sessions
— median
I 95% CI

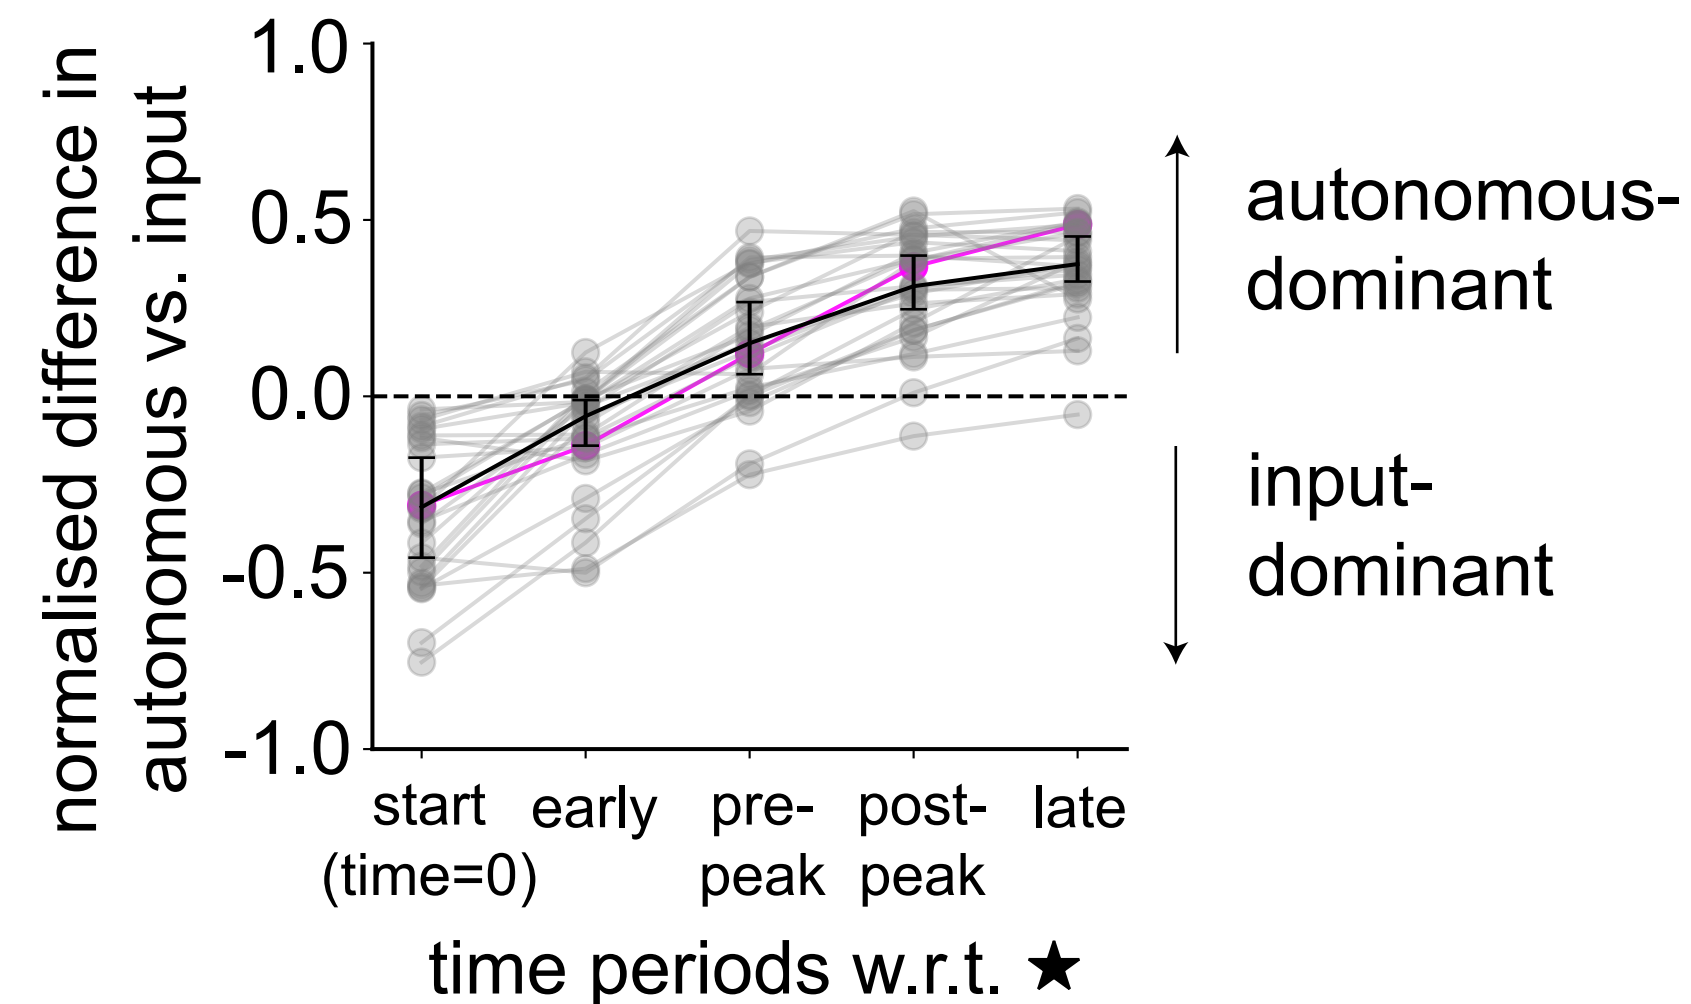

d curving of trial-averaged trajectories across 21 sessions

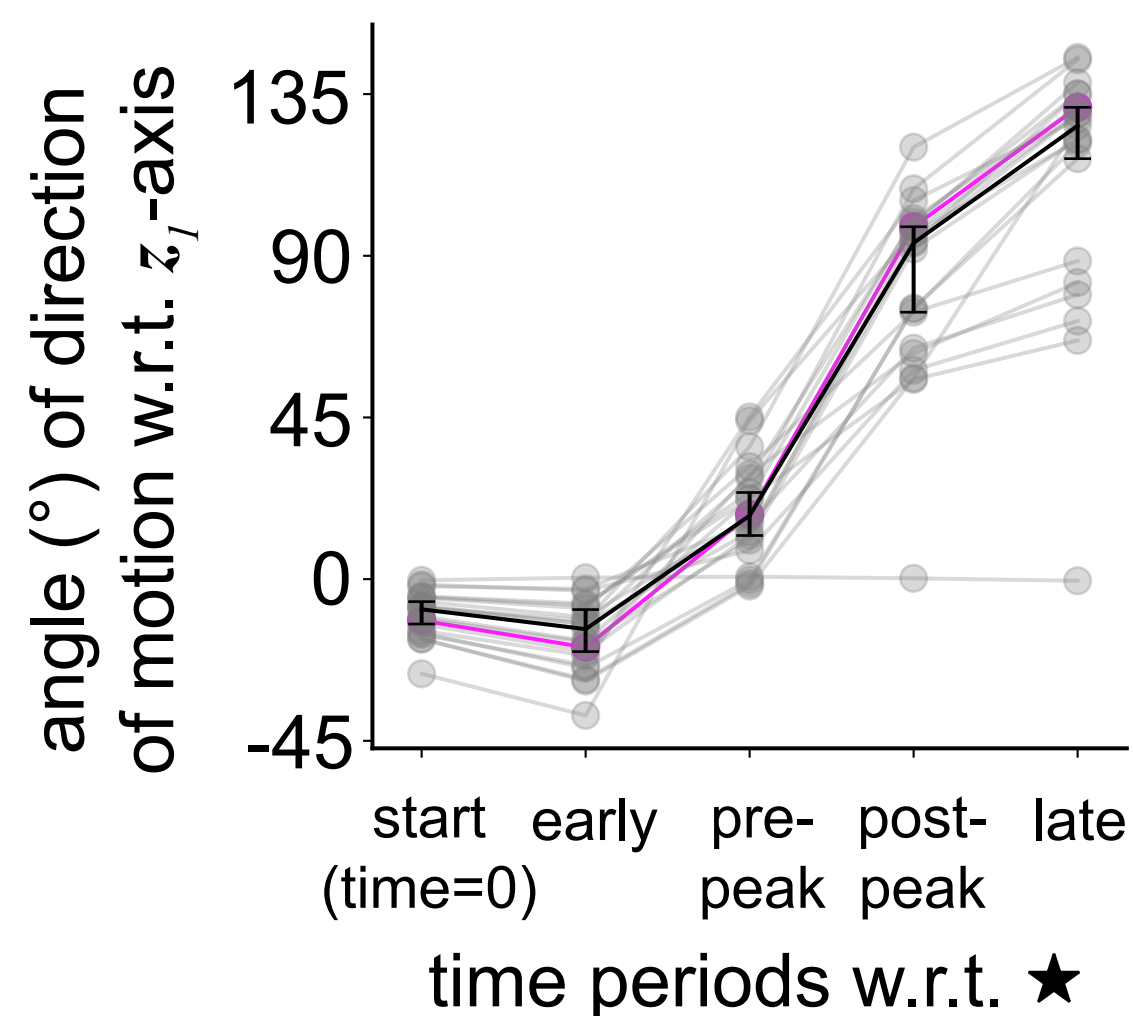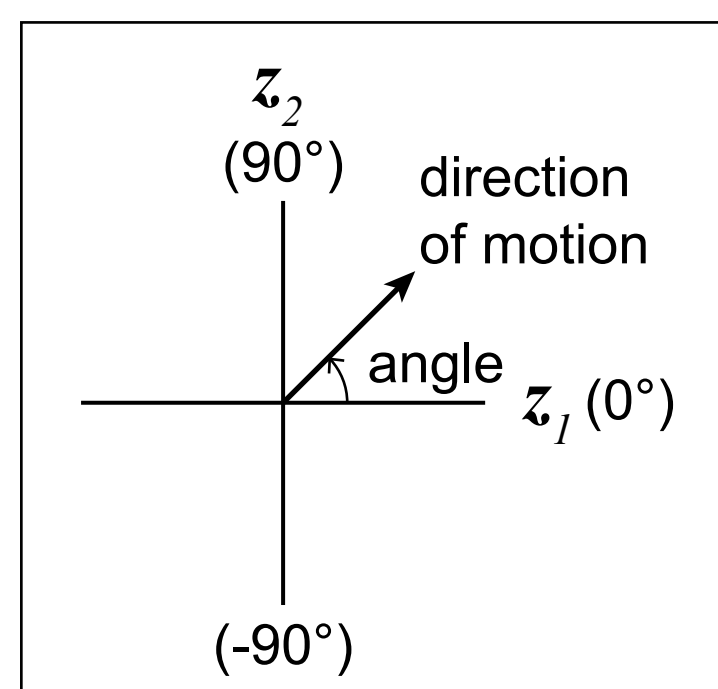


e constrained FINDR (cFINDR)

$$\dot{\mathbf{z}} = \mathbf{Q}\mathbf{\Lambda}\mathbf{Q}^{-1}\mathbf{z} + s\cdot\varphi(\mathbf{z}) + \mathbf{N}\mathbf{u} + \eta$$


line attractor dynamics ($\mathbf{\Lambda}$ has one negative eigenvalue)

bistable attractor dynamics (s is relative strength)

f cFINDR-inferred

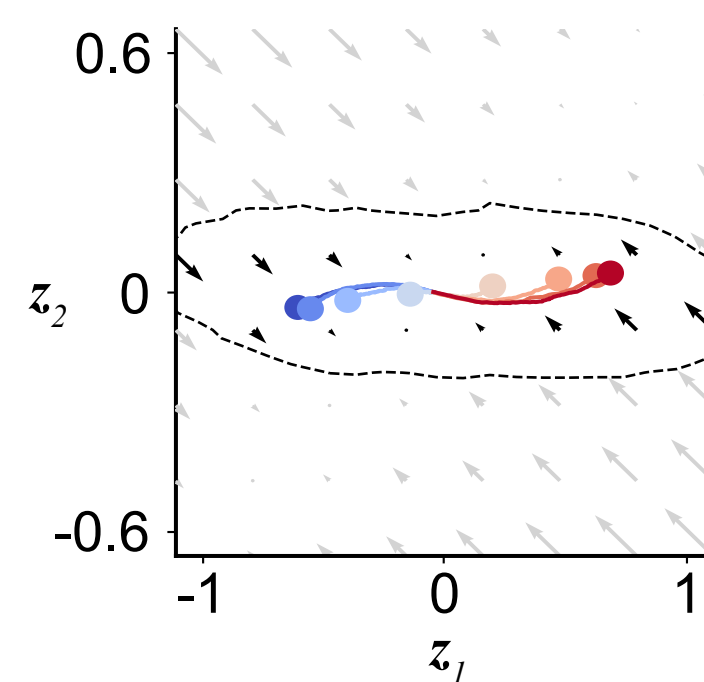

FINDR-inferred

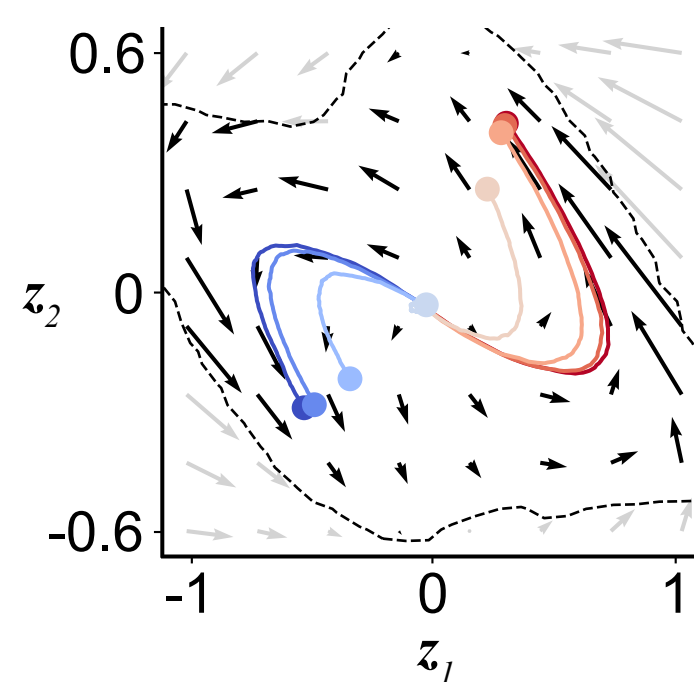

g FINDR vs. cFINDR across 27 sessions

