
Steps to Identify the NPN Type Transistor

1. Keep the Multimeter in the Diode mode.
2. Keep the positive probe to the center pin (Base) of the transistor.
3. Touch the negative probe to the pin-1 (Emitter). You will see some voltage in the multimeter.
4. Similarly, touch the negative probe to the pin-3 (Collector) with respect to the pin-2. You will see some voltage in the multimeter.
5. It will ensure that, it is a NPN transistor. The logic behind this is, in NPN transistor Emitter (E) - N type material - Equivalent to cathode of the diodeBase (B) - P type material - Equivalent to anode of the diodeCollector (C) - N type material - Equivalent to cathode of the diode
6. If the multimeter positive probe is connected to anode and negative probe is to cathode, then it will show voltage. If the connections are interchanged it will not show any value.

Steps to Identify the PNP Type Transistor

1. Keep the Multimeter in the Diode mode.
2. Keep the positive probe to the pin-1 (Emitter) of the transistor.
3. Touch the negative probe to the center pin (Base). You will see some voltage in the multimeter.
4. Similarly touch the negative probe to the center pin (Base) with respect to the pin-3 (Collector). You will see some voltage in the multimeter.
5. It will ensure that it is a PNP transistor. The logic behind this is, in PNP transistor Emitter (E) - P type material - Equivalent to anode of the diodeBase (B) - N type material - Equivalent to cathode of the diodeCollector (C) - P type material - Equivalent to anode of the diode
6. If the multimeter positive probe is connected to anode and negative probe is connected to cathode, then it will show voltage. If the connections are interchanged it will not show any value.

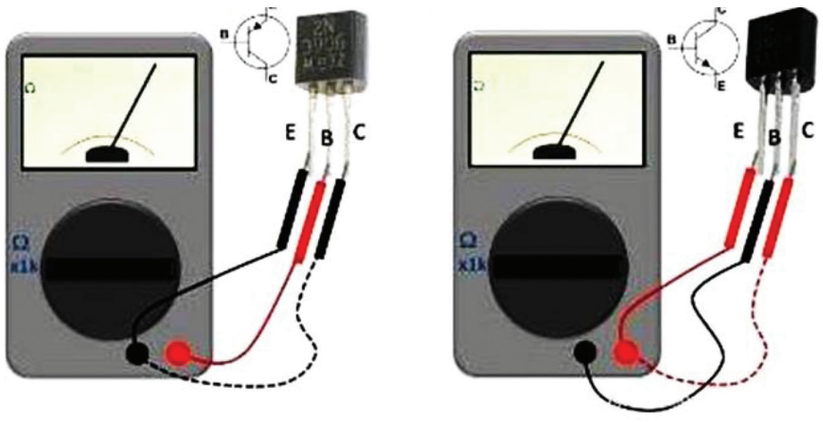

EMA_English_Practical.indd 235 11/9/2020 3:56:20 PM