
Do you Know?

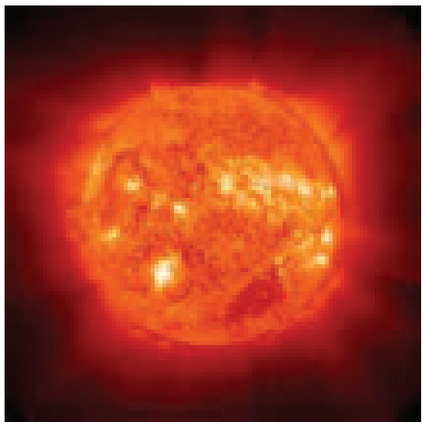

The electrical energy to earth for one year can be produced by the sun in 15 minutes.

9.4 Details about coils

9.4.1 Coils

A coil consists of a single turn or it may consists of many turns connected in series. Each coil having two coil sides as shown in the figure 9.2.

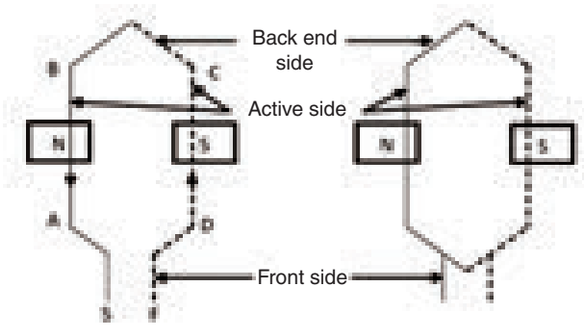


Fig. 9.2 **Winding coil representation**

9.4.2 Active side of a coil

A part of the coil placed in the slots is called as active side. Magnetic field or EMF is induced in this part and hence it is called as active side of the coil.

9.4.3 Inactive side of a coil

The part of the coil which comes out from the slots of a motor is called as inactive side. Here no magnetic field and emf is induced and hence it is called as inactive side of the coil. It is also called as "overhang" part of the coil.

9.4.4 Winding

Winding is made up of many coils with proper connections between them.

9.4.5 Winding diagram

The diagram which describes the type of winding, coil group, coil group connection, phase connection etc. for doing winding is called winding diagram.

9.4.6 Types of winding

Winding types are mainly classified into two types. They are,

i. DC winding (for DC machines)
ii. AC winding (for AC machines)

9.5 DC windings

Windings are placed in two parts of the DC machines, they are

i. Field winding placed in main poles.
ii. Armature winding placed in armature.

BEE_ENG_Chapter_09.indd 136 12/27/2019 10:35:54 AM