plate of the iron box including electrical connection.

v) Handle


It is made up of bakelite, non-conductive material fitted over the top cover used for handling the iron box.

2. Automatic iron box working principle

An automatic electric iron box is fitted with a thermostat which controls the temperature automatically. Thermostat is a bi-metallic strip which bends when the temperature exceeds the setting limit. An adjustable setting screw or setting knob sets the temperature that should be maintained by the thermostat control.


c. Steam iron box


Steam iron box is similarly same as that of an automatic iron box. In this type, a small water container is provided above the heating element, wherein which water is supplied to sole plate through the holes provided. A valve is provided to control the water flow and steam.

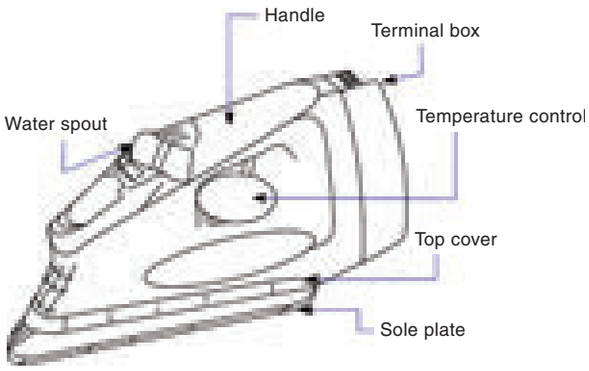

Tools and materials required

1. Electric steam iron box
2. Electrical tools kit
3. Test lamp
4. Megger
5. Multimeter
6. Voltmeter (0 – 250 volts)

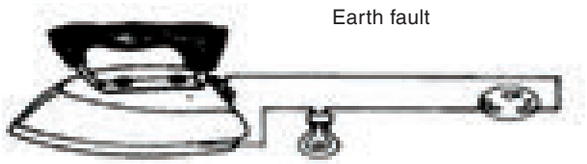

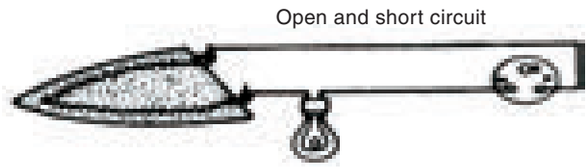

Dismantling procedure

1. Electrical connection of the steam iron box should be removed from the supply.
2. Remove the screws and nuts and remove the handle and top cover separately.
3. Tubular type of heating element fixed in the sole plate, water container should be removed and place it safely.
4. Measure the resistance of the heating element with the help of multimeter.

After dismantling all the parts of the steam iron box, ensure that all the parts are tested and found in good condition for fitting or assembling.

Assembling procedure

1. Reassemble the dismantled parts from last to first, following the same procedure.
2. Test the insulation value of the terminals with respect to the body of the iron box.

BEE_ENG_Pratical.indd 178 12/27/2019 10:54:33 AM