Practical

4

Table fan

AIM

1. To dismantle the given table fan and identify the parts.
2. Testing the table fan, identifying and rectifying its faults, and reassembling the table fan
3. Test the table fan with supply and run it.

Related information


Normally, the sweep of the table fan is available in 220mm, 300mm and 350mm. In some table fans shaded pole motors are used. Generally permanent capacitor induction run motors are used. Table fans are used to circulate the air to the required area. The blades are mounted on the rotating shaft. The blades are covered with a cage for safety purposes. In a table fan the motor is placed at the top of the body and the regulator is fitted on the base. The power consumption of the table fan is 60 watts.

Apparatus Required

Sl. No.	Equipments	Quantity
1	Table fan	1
2	Insulation tape	1
3	Grease	1 pocket
4	Kerosene	100 ml
5	Bearing Puller	1
6	Waste cotton	Required quantity
7	Wooden board	Required quantity

Practical procedure

Dismantling

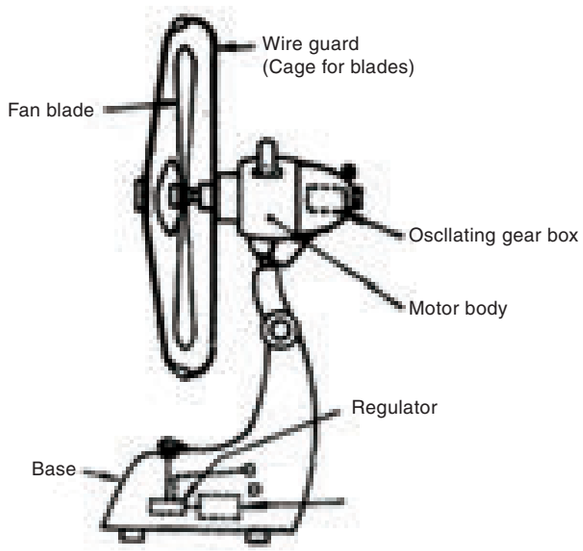

BEE_ENG_Pratical.indd 186 12/27/2019 10:54:34 AM