Table of Content

3.1 Introduction
3.2 Electric iron box
3.3 Induction Stove
3.4 Bread toaster
3.5 Coffee percolator
3.6 Geyser

3.1 Introduction

Electricity plays major role in our everyday life. One of the main applications of electricity is to produce heat from heating elements. In this chapter, we shall learn about the types of heaters and its working procedure such as

i. Electric iron box
ii. Induction stove
iii. Bread toaster
iv. Coffee percolator and
v. Electric water geyser.

3.2 Electric iron box

An Electric iron box is an appliance used to remove the wrinkles in the clothes when heated. It is of three types.

i) Non-automatic or Ordinary type iron box
ii) Automatic iron box
iii) Steam automatic iron box


a) Clothes and its temperature

The operating temperature of the iron box for different types of cloths is tabulated below

Nylon	- 70°C -90° C
Rayon	- 100°C - 120°C
Silk	- 130°C - 150°C
Wool	- 160°C - 180°C
Cotton	- 200°C - 220°C
Linen	- 230°C - 260°C

According to the range of heat required to clothes, the thermostat can be fixed and the wrinkles were removed from the washed clothes.

Do you Know?

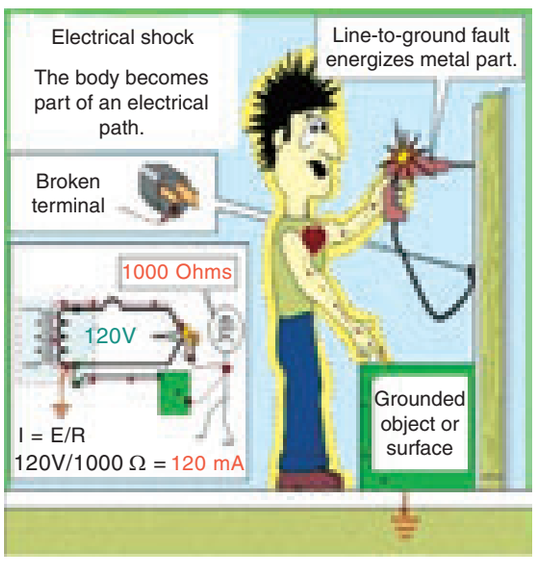

b) Power chord

The electric conductor that permits electric supply to an electric appliance will contain three terminals such as Phase (Red color), Neutral (Black color) and Earth (Green). The electrical conductors coiled with cotton threads are the most commonly used power chords.

3.2.1 Non-automatic or ordinary type iron box

As shown in figure 3.1 the non-automatic or ordinary type iron box is

BEE_ENG_Chapter_03.indd 38 12/27/2019 10:24:51 AM