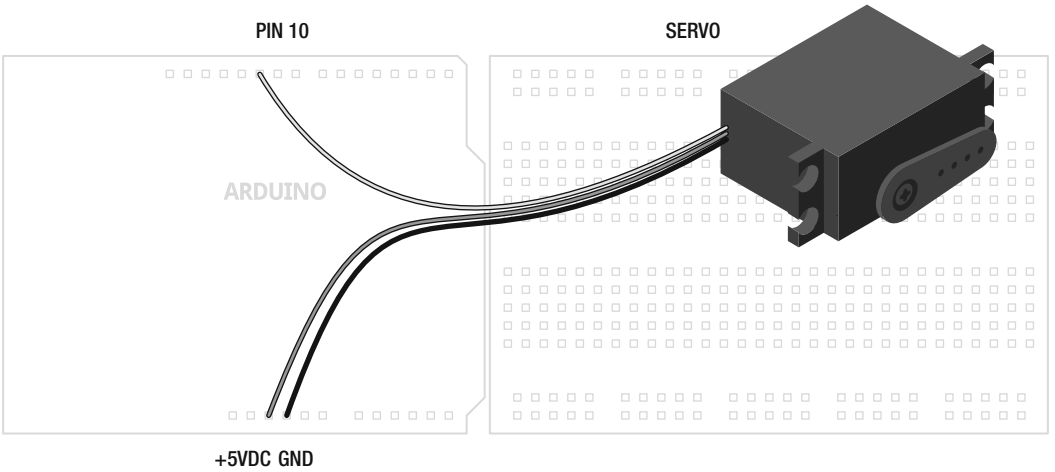


Figure 9-7. *Servo illustration*

Example Code: Reminder Bell

For our example codein Listing 9-4, we will use the servo to ring a bell. So, why a reminder bell? Honestly, it seems to me like ringing a physical bell is something that a servo would be good at. You could attach a bell with wire to the servo or maybe instead attach an arm so that when the servo moves, it will tap a bell. We might use this as the basis of a physical hit-counter or to notify us of an online-friend status or put it to use for some other nefarious means. We'll leave that up to your imagination.

Listing 9-4. *Reminder Bell Source Code*

```
#include <Servo.h>

Servo servo;

unsigned long startTime = 0;
unsigned long interval = 600000;

void setup() {
  servo.attach(10);
  servo.write(90);
}

void loop() {
  if (startTime + interval < millis()) {
    servo.write(96);
    delay(90);
    servo.write(90);
    startTime = millis();
  }
}
```