links, like our example does, then it makes sense to have those edges exert stronger and weaker effects on the controlling nodes. You can achieve this by using `linkStrength`, which can accept a fixed setting but can also take an accessor function to base the strength of an edge on an attribute of that edge:

```
force.linkStrength(function (d) {return weightScale(d.weight);});
```

Figure 6.16 dramatically demonstrates the results, which reflect the weak nature of some of the connections.

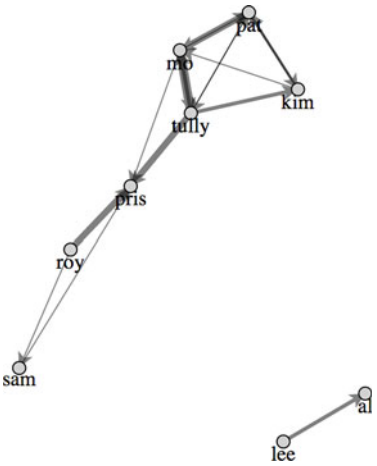


Figure 6.16 By basing the strength of the attraction between nodes on the strength of the connections between nodes, you see a dramatic change in the structure of the network. The weaker connections between x and y allow that part of the network to drift away.

6.2.5 Updating the network

When you create a network, you want to provide your users with the ability to add or remove nodes to the network, or drag them around. You may also want to adjust the various settings dynamically rather than changing them when you first create the force layout.

STOPPING AND RESTARTING THE LAYOUT

The force layout is designed to "cool off" and eventually stop after the network is laid out well enough that the nodes no longer move to new positions. When the layout has stopped like this, you'll need to restart it if you want it to animate again. Also, if you've made any changes to the force settings or want to add or remove parts of the network, then you'll need to stop it and restart it.

FORCE.STOP()

You can turn off the force interaction by using `force.stop()`, which stops running the simulation. It's good to stop the network when there's an interaction with a component elsewhere on your web page or some change in the styling of the network.

FORCE.START()

To begin or restart the animation of the layout, use `force.start()`. You've already seen `.start()`, because we used it in our initial example to get the force layout going.

FORCE.RESUME()

If you haven't made any changes to the nodes or links in your network and you want the network to start moving again, you can use `force.resume()`. It resets a cooling parameter, which causes the force layout to start moving again.

FORCE.TICK()

Finally, if you want to move the layout forward one step, you can use `force.tick()`. Force layouts can be resource-intensive, and you may want to use one for just a few seconds rather than let it run continuously.