

CREATE PROCEDURE 'agregarproveedor' (IN 'urfc' VARCHAR(15), IN 'urazon' VARCHAR(100)) NOT DETERMINISTIC CONTAINS SQL SQL SECURITY DEFINER INSERT INTO proveedores VALUES (urfc, urazon);



CREATE PROCEDURE `entregas_proveedores`(IN `urfc` VARCHAR(15)) NOT DETERMINISTIC CONTAINS SQL SQL SECURITY DEFINER SELECT entregan.Clave, entregan.RFC, entregan.Numero, entregan.Fecha, entregan.Cantidad FROM entregan WHERE entregan.RFC = urfc;

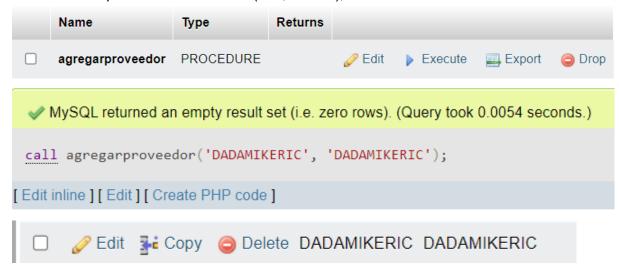

CREATE PROCEDURE `entregas_proyectos` (IN `unumero` INT)
NOT DETERMINISTIC CONTAINS SQL SQL SECURITY DEFINER
SELECT entregan.Clave, entregan.RFC, entregan.Numero, entregan.Fecha, entregan.Cantidad FROM entregan WHERE entregan.Numero = unumero;

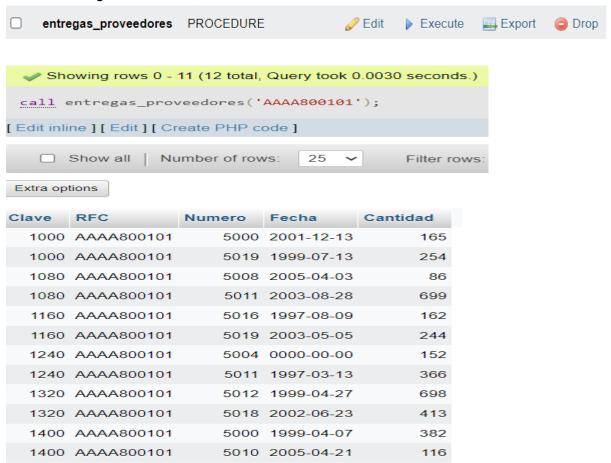