

Workshop: The fax of the matter

HP
ALL-IN-ONE
is the first to introduce
NETWORK CAPABILITY
in 2000,
BUILT-IN NETWORKING
in 2003.

Though Microsoft Fax comes bundled with Windows, but it's not installed by default. To install it in Windows XP, go to **Start > Settings > Control Panel > Add or Remove Programs**, and then click on 'Add/Remove Windows Components' to start the Windows Components Wizard. In the Components list, tick 'Fax Services', and then click Next. If you haven't installed the MFD yet, it starts up the Add New Hardware wizard so you can do so. When prompted, insert the Windows XP installation CD and click OK. Finally, close all Windows.

If you're running Windows 98, you can install Microsoft Fax from the Windows 98 installation CD. Browse to **'Tools\OldWin95\Message\US'** and run Wms.exe and then Awfax.exe. Configure Microsoft Fax by going to **Start > Programs > Accessories > Communications > Fax > Fax console** to bring up the Fax Configuration Wizard. Click Next on the Welcome screen, and fill in the Sender's Information on the next screen.

This information will appear on the fax cover page. Click Next, and choose the MFD that you want to use to fax. Here, choose the appropriate option to specify whether you want to use that MFD

only to send or to receive faxes, or both. If you choose to receive as well, you will have the option of manually answering the call, or answering it automatically after a certain number of rings.


Click Next and type in the Transmitting Subscriber Identification (TSID) that usually consists of the sender's fax number and name, and appears in the header area of a received fax. In the next screen, type in the Called Subscriber Identification (CSID) that appears on the sender's machine and helps ensure that the fax is sent to the correct recipient.

Click Next, and you're asked what to do when a fax is received. Choose 'Print it' if you want the fax to be printed automatically. You can also choose to create a local copy of the fax by clicking 'Store a copy in a folder' and specifying the folder. Click Next, review the settings you chose and click Finish to complete the configuration.


You may change the settings anytime by going to **Tools > Configure Fax** in the Fax Console.

Once you complete the Configuration Wizard, the Fax Console opens up. The Incoming folder in the Fax Console contains faxes that are currently being received; the Inbox folder contains faxes that have been received; the Outbox folder contains faxes scheduled to be sent; the Sent Items folder holds faxes that have been sent successfully. To create a new fax, click 'New Fax' on the toolbar, or go to **File > Send a Fax**. This will start the Send Fax Wizard. Click Next on the Welcome screen and enter the recipient's information, and click Add to add that entry to the recipient list. You can add multiple recipients and build an address book.

Click Next, choose a template and enter the subject and note for the fax, to prepare the cover note. Specify the priority of the fax, and when you want to send it, on the next screen. The final screen shows you the fax summary and also gives you the option

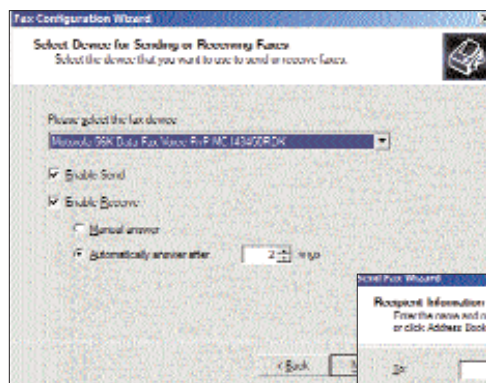

Make sure to set all the respective settings correctly, and you can make sending and receiving faxes a snap

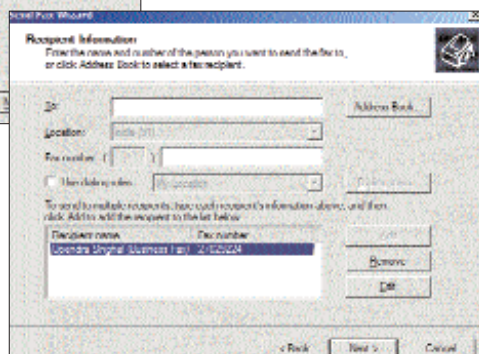

Efficient & versatile for every small office.



HP OFFICEJET 5510 ALL-IN-ONE
PRINT, FAX, SCAN, COPY

Rs. 12,499*

Up to 4800 optimized dpi¹
HP PhotoRet 3 air layering technology
33.6 Mbps, up to 90 ppm memory fax²
Up to 1/2/12 ppm (Bk/C/M)³
Up to 600 x 2400 dpi/36-bit air scan
Copy & fax without PC
NO-sheet ADF
Up to 72 hr. backup



To find out more call **1600 444 999** (Toll Free) or email: in.contact@hp.com OR log on to www.hp.com/in

*Est. street price, taxes extra. ¹Up to 1800 x 1200 optimized dpi colour and 1200 input dpi. ²Dependent upon document type and print mode. ³Based on ITU-T Test Image: 8PT at standard resolution. © 2004, Hewlett-Packard Development Company, L.P.