


Answering machine ON/OFF

To enable or disable Answering Machine mode, click on the 'Voice answering machine' tab. Select 'Answering machine disabled' to stop the software from answering incoming calls. The 'Play Greeting, No Record' option lets you pass a message to all incoming callers. This is particularly important for customer support numbers, where the message could simply inform the caller of office working hours.

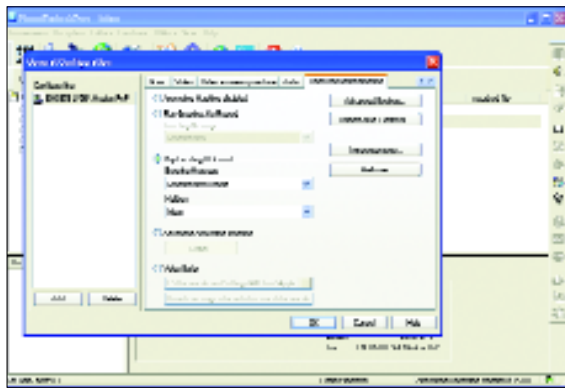


Select any one of the three available functioning modes

The 'Play Greeting & Record' option lets you play a message as well as record the caller's message. This option is more useful for on-the-field people who can now have the liberty of listening to all the callers at some later point of time in the day. They can simply listen to all the messages of the day after returning to the office, either on the PC or on the field by using remote commands.

Record your own greeting

In the 'Voice answering machine' tab, click on the 'Announcements...' button. On the right-hand pane, right-click and select 'New' from the pop-up menu

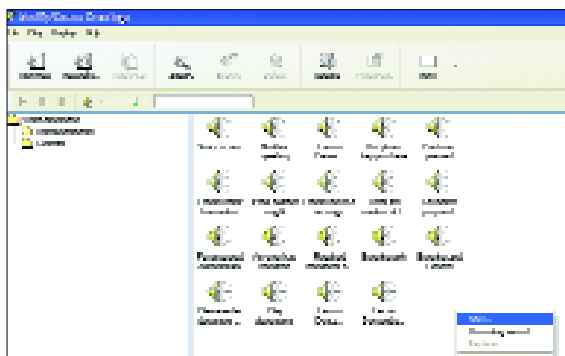

Either right-click and select New, or press the NewMsg button on the toolbar

window that shows up. Give a name to the new voice message and press [Enter]. A new window will appear with two buttons—'Record' and 'Stop'. Use them to record your own message.

Make your custom greeting the default

If you change the view to 'Details' in the 'Modify/Create Greetings', then you'll be able to see the default greetings for the modes 'Greeting only' and 'Greeting and record'. To change the default greeting, right-click on the greeting of your choice, select 'Assign' and select the mode you want. After this, select the modem.

Retrieve messages remotely

To set up remote retrieving, go to 'Voice answering machine' tab in 'General configuration' and click on 'Remote Msg. Retrieval...'. Specify the access code, which then acts as a password for you while retrieving

messages. Click 'OK' to set it up. You even have the option of changing the default phone keys for the designated commands. On the command panel, key 1 is meant for message replay, 2 for moving to the next message, 3 for deleting the message and 4 for listening to the message.

Multiple Voice mailboxes

Creating an individual mailbox for each employee of the organisation is facilitated by the 'Advance answering machine' mode of the software. Enable this option in the 'Voice answering machine' tab of the 'General Configuration'.

There are two distinct ways in which you can set up the multi-voice answering machine with this software.

Scenario 1:

You can set up the software as a single Inbox but with multiple voice greetings. This means that no matter which voice mailbox a caller chooses, all messages will be stored in a single Inbox. Interestingly, a caller will

never know the difference. There is no privacy, though, for individuals here, as all employees have access to the Inbox.


To set it up, you need to tick each checkbox and select 'Mailbox greeting msg' for the voice mailboxes you enable. You can also retrieve messages remotely by specifying 'Access code Msg.'.

Scenario 2:

Create multiple Inboxes first. To do so, press the 'Mailbox Management' button—the first button from the left—on the toolbar. It appears on the 'Advanced Answering Machine Settings' window.

Now, in the 'Inbox Mailboxes' window, click on 'Inbox' on the 'New mailbox' button—the first button from the left—on the toolbar. Specify the name of the mailbox and press 'Enter'. Create the number of mailboxes needed and close the window.

Return to the 'Advanced Answering Machine Settings' window, and select the Inbox for the mailboxes that are enabled. That's it—the setup is complete.

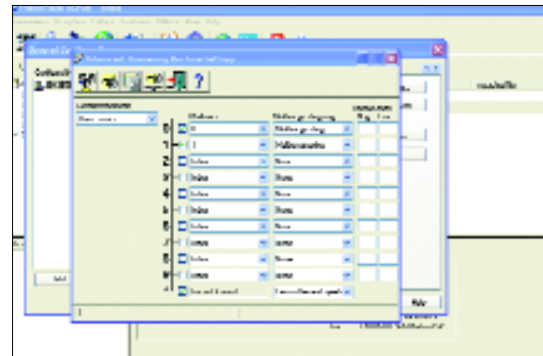

All the inbox appears in the drop-down list, just relate them to the telephone keys as required

Faxing

With the answering machine set up and running, the next move is to set up a Fax machine. The biggest advantage is that with just a single telephone line and a modem, the computer acts as a fax machine as well as an answering machine. So how do you set up a fax machine using this software?

Changing the identifier

In case you missed out on the identifier settings during installation, or if you need to modify the identifier, you can do so by clicking the 'Fax' tab. Here, change the value of the identifier according to your needs.