



applications which PMPs usually don't have. For a full list of the features check out the web site for this hack.

How to install

Use the Rockbox Utility to install the firmware onto your device.

1. Under the configuration windows, choose your device or auto-detect your device.
2. Your mountpoint will be where your PMP is mounted on your device.
3. Select a Text-To-Speech (TTS) module if you want to and any other customisation which you'd like.
4. Click on the "Install Rockbox" button.

Rockbox can be updated using the same utility. Games, applications and other extras can be added separately or together with your Rockbox installation.


CHDK tips

For Canon DSLRs
<http://bit.ly/ni83u5>
 Current Version : Varies from camera to camera



CHDK(Canon Hack Development Kit) is an add-on piece of software that runs at boot-time to give you access to more features on your Canon DSLR

than what is natively supported. Some of the features you get are : Bracketing - quite a useful feature for taking photos of static objects under low light conditions, Motion Detection - get your camera to snap at the first hint of motion, access to live histograms, full control over the exposure settings etc. You can also take images as RAW if that was not possible previous to CHDK's installation. If you can script in Lua or UBASIC, then you can modify the existing features or add new.

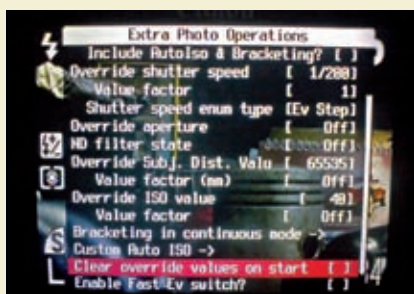

How to install

Since CHDK is an add-on, it does not modify your original firmware & installing it is pretty easy. Just follow the instructions given below:

1. Find out the firmware version of your camera. Download the 'ver.req' file from the website and copy it onto the SD card, then press the function button and then the display button. This will give you the version of your camera.
2. Download the CHDK files for your firmware version.
3. Use the 'CardTricks' utility available on the website to make CHDK run everytime.
4. If you prefer to access CHDK only when you need it, then copy the files onto the root folder of your memory card.
5. Start the camera in view mode, choose the firmware update option and CHDK will start. This will only run CHDK till the camera is not restarted. So, in a matter of saying, this isn't a permanent

firmware hack in the strictest sense of the word.

CyanogenMod tips

For Android Devices

<http://bit.ly/cyano>

Current Version : 7.0.3

CyanogenMod like every other firmware listed here give you access to more features that what your native firmware did. Some of them being - Native theming support, removing the Sense UI, gesture support, application permission management etc. It also allows you to browse via incognito mode an the Native theming support allows you to modify every element of the system UI. The preset gestures can be modified to suit your needs. Consider CyanogenMod to be an amalgamation of all the good features you can find in individual manufacturer firmware packaged into one.



How to install

You must root your device prior to installing CyanogenMod. Rooting is the process that gives you unrestricted access to your device's internal software. With rooting, you can do pretty much what you want with your device's firmware. Here's how you do it in this case.

1. Get all the required files, viz., Android 2.3.5 Base Image, CyanogenMod file and a EB1 kernel, if needed.
2. Copy the update.zip file to the root folder of the SD card.
3. Disconnect the device and restart it while keeping the Home button pressed.

4. Select the option Wipe>Wipe data/factory reset.
5. After that, return to the home page and select Flash.zip from SD card. Then select DrC83_base_defanged.zip.



6. Select Flash zip from SD card again and then select CyanogenMod x.x .zip.
7. Let the installation finish and reboot the device.

General Instructions

1. Follow the instructions properly.
2. Ensure your device is charged to the maximum capacity.
3. Back up the original firmware and all your files prior to the entire process.

Disclaimer

This information is provided for modifying and/or unlocking latent features of your device "as is" and any express or implied warranties, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose are disclaimed. In no event shall 9.9 Media or its subsidiaries be liable for any direct, indirect, incidental, special, exemplary, or consequential damages (including, but not limited to, procurement of substitute goods or services; loss of use, data, or profits; or business interruption) however caused and on any theory of liability, whether in contract, strict liability, or tort (including negligence or otherwise) arising in any way out of the use of this information, even if advised of the possibility of such damage. **d**