

```

13 const char* password = "1234567890"; // Your WiFi Password
14
15 // ChatGPT API key
16 const char* api_key = "sk-proj-8iBEevh9eVtyKMbEchBhT3BlbkFJsUxCQ6gd9v3nC7hewoP3"; // Your ChatGPT API key
17
18 // Web server and WebSerial
19 AsyncWebServer server(80);
20
21 // OLED display using U8g2 library
22 U8G2_SSD1306_128X64_ALTO_F_HW_I2C u8g2(U8G2_R0, /* reset= */ U8X8_PIN_NONE); // Constructor for SSD1306 128x64 OLED display
23
24 // ChatGPT client
25 WiFiClientSecure client;
26 ChatGPT<WiFiClientSecure> chat_gpt(&client, "v1", api_key);
27
28 /* Message callback of WebSerial */
29 void recVMsg(uint8_t *data, size_t len) {
30   WebSerial.println("Received Data...");

```

Fig. 5: Configuration of API

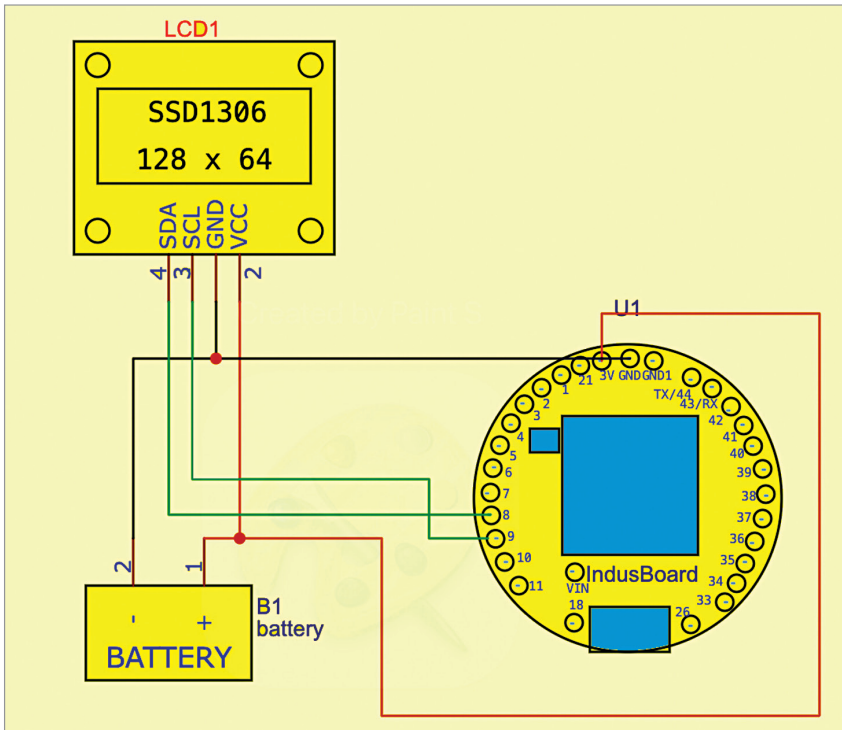


Fig. 6: Circuit diagram

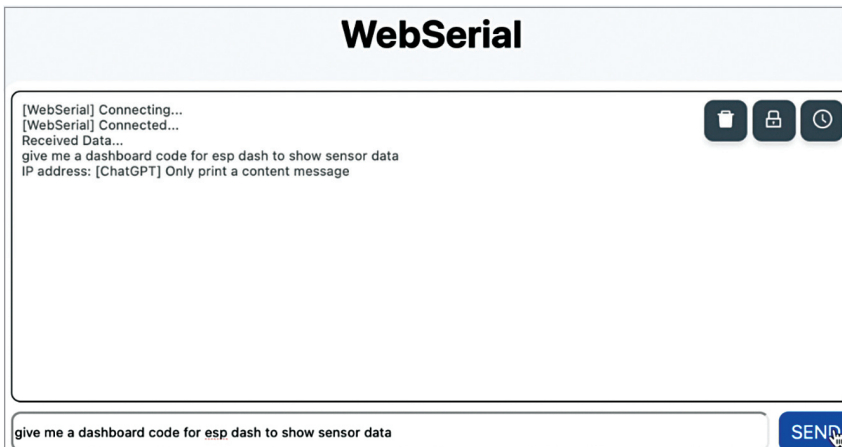


Fig. 7: Questions on WebSerial

EFY Note

The source code of this project is available for free download at www.electronicsforu.com

U8g2 library and ChatGPT library in the IDE. Download the source code with the article and configure it.

In the first part, change the SSID and password for the wi-fi network. Either home router wi-fi credentials or a phone wi-fi hotspot can be used. Fig. 4 shows the code configuration for wi-fi.

EFY note. It works on a 2.4GHz wi-fi network, so use the same wi-fi network during router configuration.

Next, configure the API in the code by replacing the old API with the new one created (see Fig. 4). Fig. 5 shows the configuration of the API.

Fig. 6 shows the circuit diagram of the micro-sized ChatGPT cheating device. It is built around the IndusBoard, OLED display, and 3.3V battery. The OLED is connected with the IndusBoard I2C pins, defaulting to 8 and 9. The entire device is powered using the 3.3V battery and GND pin.

Testing

After uploading the source code to the IndusBoard and connecting the circuit as shown in the diagram, power the circuit. Once powered, the device will connect to wi-fi and display the IP address on the OLED. Search the address IPaddress/webserial in the web browser to open the WebSerial.

Ask any question on ChatGPT, and the answer will be sent and displayed on the OLED screen fitted on the IndusBoard. The person wearing the watch will see the answer on the OLED display. Fig. 7 shows the questions on WebSerial. **EFY**

Ashwini Kumar Sinha, an IoT and AI enthusiast, is a tech journalist at EFY