



Fig. 11: Camera added to the drone

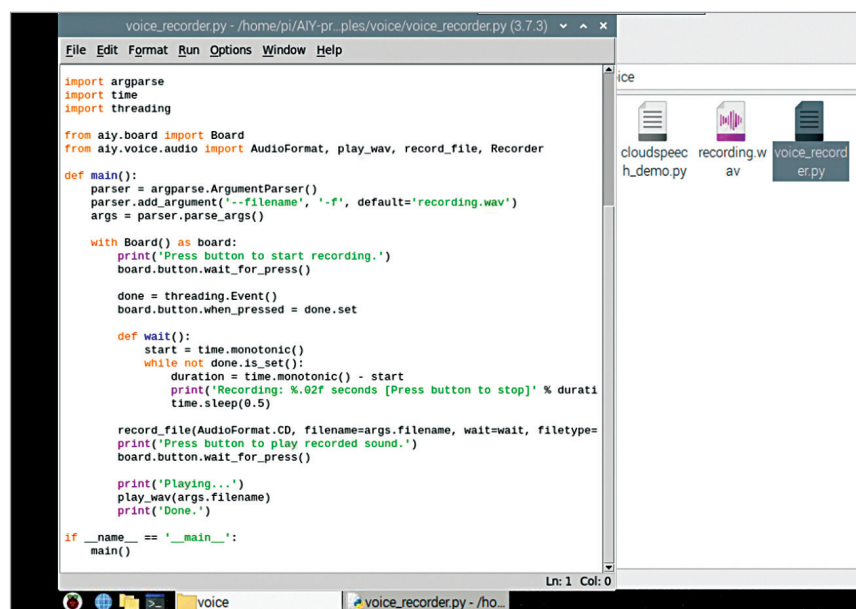


Fig. 12: Voice recording Python code

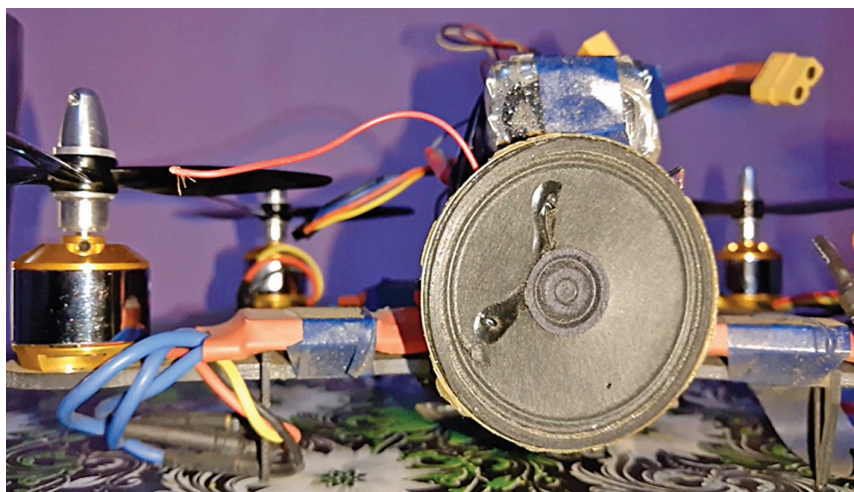


Fig. 13: Loudspeaker attached to the drone

EFY Note

The source code of this project is available for free download at source.efymag.com

The tricky part of arming

It was noticed that the CC3D flight controller did not arm when the yaw stick was moved to the right. Even after trying different stick settings like pitch right and yaw left, nothing armed the flight controller.

A quick search on the Internet showed that many people face the same problem. Changing the receiver values and trimming the radio remote does not help. But arming can be done easily by using extra channels on remote. The author used the sixth channel for arming.

Preparing public announcement system

AIY Voice Bonnet may be used for making and recording the announcements. It comes with an SD card that is pre-loaded with AIY Raspbian image. But if you do not have that, you can prepare the SD card using a disk imager.

Create the code (voice_recording.py) for recording the audio through Raspberry Pi (Fig. 12). Run the voice recording code on Raspberry Pi terminal and then press the button on the Bonnet to record the audio for public announcement. Run the code to play the audio you want to announce. Else, you can simply play the recorded file through AIY Voice Bonnet. Loudspeaker attached to the drone for public announcement is shown in Fig. 13.

Now you can fly the drone in and around the area where you want to make public announcements and play the audio. **EFY**

Ashwini Kumar Sinha is an electronics hobbyist and tech journalist at EFYi