

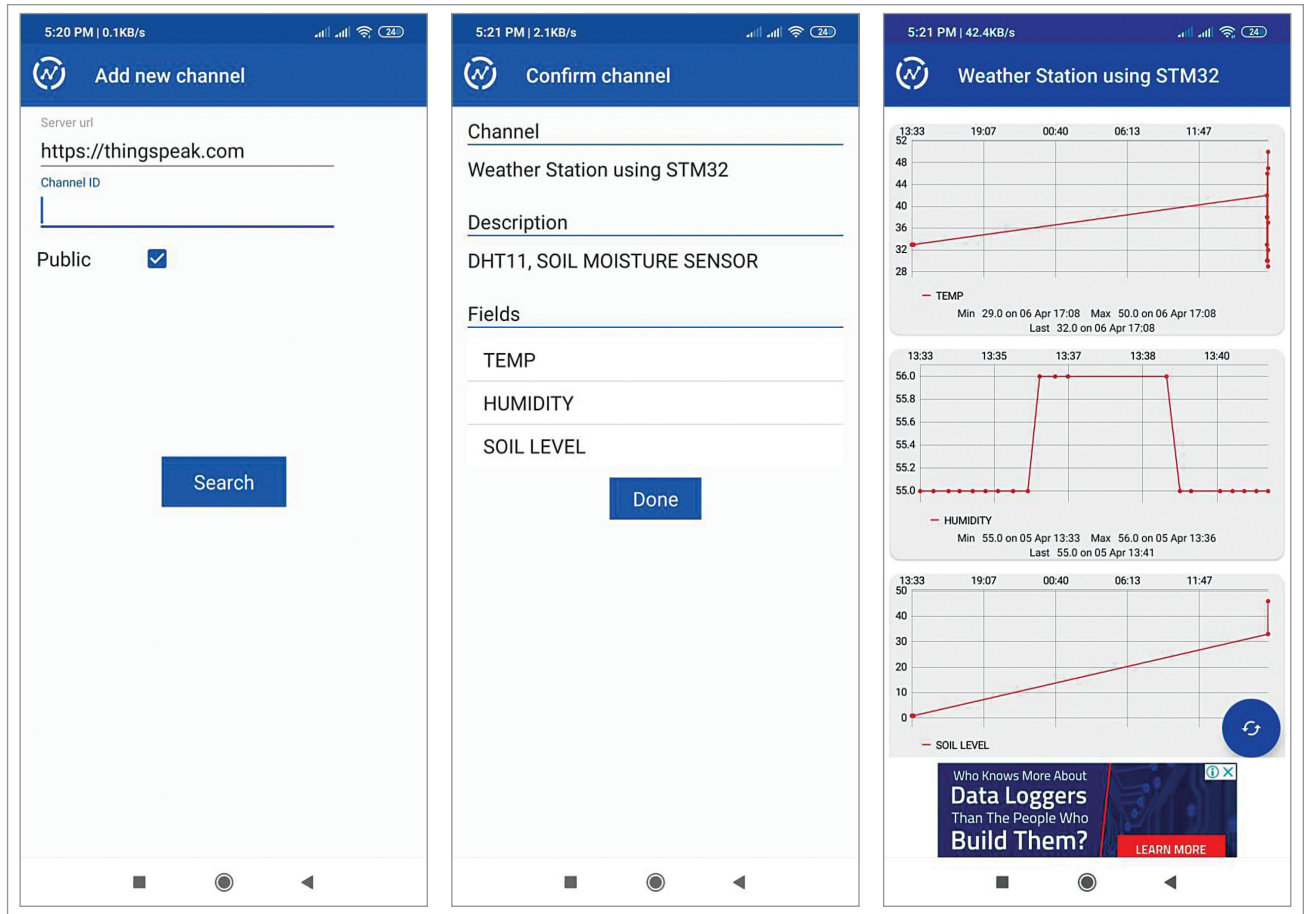


Fig. 12: Screenshot of ThingSpeak setting for using app

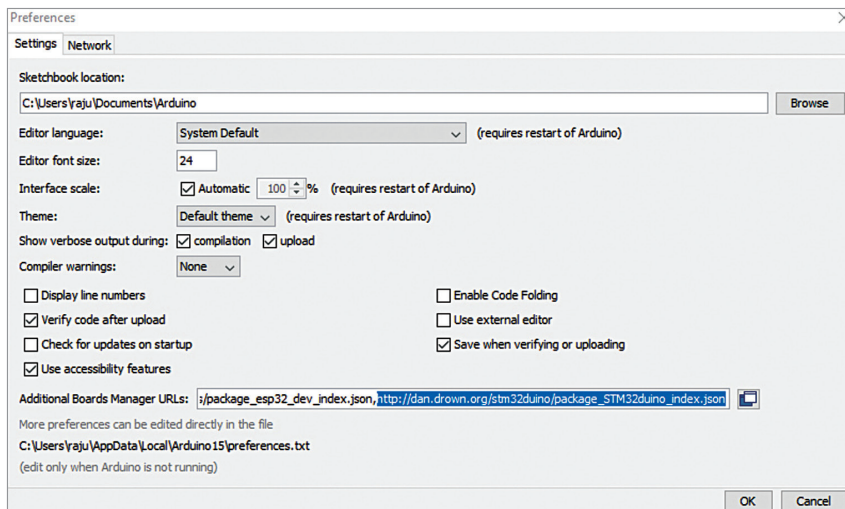


Fig. 13: STM32 json link pasted in Arduino IDE Preferences

bench, Atollic TrueStudio, MicroC Pro ARM, Crossworks ARM, Ride 7, PlatformIO + STM32, etc.

We shall see how to program

STM32 in Arduino IDE, which is easy to use and has readily available libraries. So, in this STM32F103 Arduino IDE tutorial we will be using

the Arduino IDE to get started with STM32.

For programming STM32 through a micro USB board refer Fig. 13 through Fig. 16. We need to use the micro USB port to program the board as the STM32 Blue Pill development board does not come with a bootloader to make it Arduino IDE compatible. However, this bootloader can be flashed into the STM32 board and then the micro USB port can be directly used to upload the program.

To upload bootloader program you may refer the tutorial available on Youtube link <https://www.youtube.com/watch?v=Tm7IWQLrKYs&t=113s>

To prepare the Arduino IDE for STM32 (Blue Pill) board follow the steps given below: