

```
#include <Arduino_APDS9960.h>

#include <U8g2lib.h>
#include <Wire.h>
int light=8;
int fan=9;

U8G2_SSD1306_128X64_NONAME_F_HW_I2C u8g2(U8G2_R0, /* reset=*/ U8X8_PIN_NONE);
```

Fig. 3: Arduino code with libraries and pin numbers for light and fan

```
void setup() {
  Serial.begin(9600);

  u8g2.begin();
  u8g2.setFont(u8g2_font_pxplusibmvga9_tf);

  if (!APDS.begin()) {
    Serial.println("Error initializing APDS9960 sensor!");
  }

  //APDS.setGestureSensitivity(80);

  Serial.println("Detecting gestures ...");
  pinMode(light,1);
  pinMode(fan,1);
}
```

Fig. 4: Setup function with pinMode functions

```
void loop() {
  if (APDS.gestureAvailable()) {
    // a gesture was detected, read and print to serial monitor
    u8g2.clearBuffer();
    int gesture = APDS.readGesture();

    switch (gesture) {
      case GESTURE_UP:

        digitalWrite(light,1);
        Serial.println("Detected UP gesture");
        u8g2.setFontDirection(1);
        u8g2.setFont(u8g2_font_pxplusibmvga9_tf);

        u8g2.setCursor(110, 10);
        u8g2.println("Lights");

        u8g2.setCursor(95, 30);
        u8g2.println("on");

        u8g2.setFont(u8g2_font_open_iconic_all_4x_t);
        u8g2.drawGlyph(60,40, 118);

        u8g2.drawGlyph(20,30, 196);
```

Fig. 5: Arduino code with switch conditions

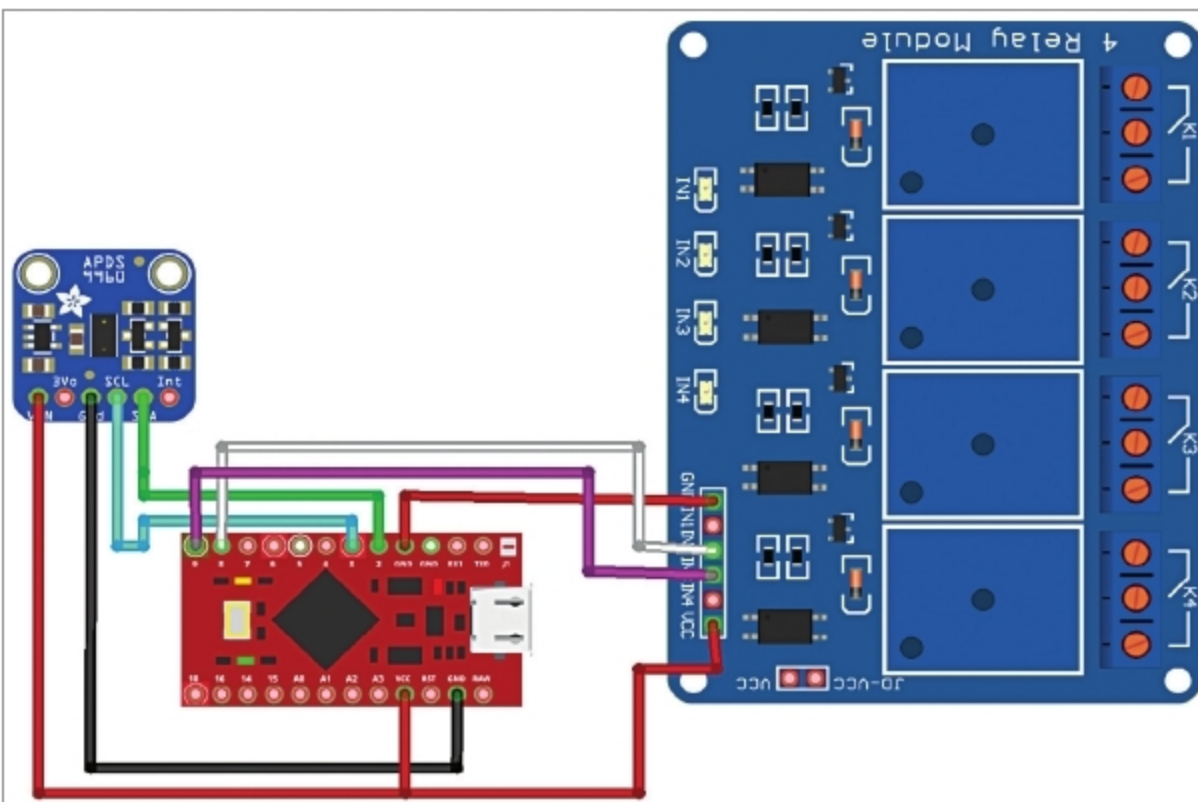


Fig. 6: Connection diagram

Share Your Knowledge

If you are an expert in your field of electronics, why not share your knowledge with the world?



Electronics For You invites electronics professionals and industry experts to write articles on their area of expertise and interest from different perspectives

Some of the topics we want you to write about are:

- Smart World
- Artificial Intelligence
- Autonomous Cars
- Bio-Medical (Healthcare)
- Strategic (Defence) Electronics
- Audio-Video
- Project Reports

So if you have an interesting topic or original article to share, please let us know at efyeditorial@efyindia.com

We would love to hear your good ideas too!

electronics
FOR YOU
YOURS SINCE 1969