


Layout Overview

A Layout defines the number of visual elements on a Screen and their respective positions. A single area in a Layout is called a Panel. A complete Layout has a tree structure in which you can divide every Panel into Sub-Panels with a particular type definition. A Panel displays the content of one or several **Views** in a specific location of the **Screen** (except for the **View of type Header** that you can only connect with Layout Root Panel Properties). It can have a specific height or width, or it can be auto-sized. A View is linked to a Panel. If no View is linked, there is an empty View by default.

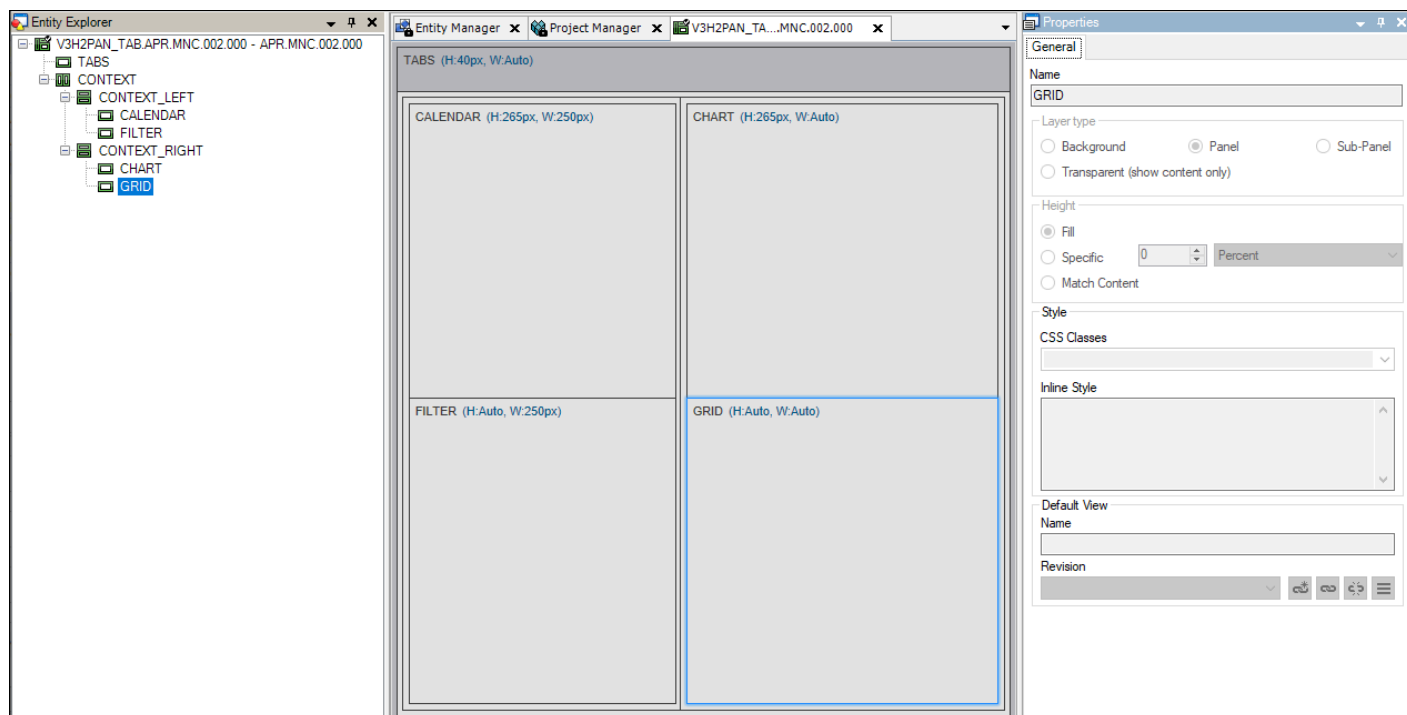


It is possible to link a View directly on the Panel. Such a View will be displayed in all Screens using this Panel.

Embedded Version of a Layout

The embedded version of a Layout is a cached definition of a Layout that is linked to Screens. It is created when:


- The Screen with a linked Layout changes its status to Active.

When the Screen status changes to Active, no modifications can be made, so the linked Layout changes are blocked. That is why the embedded version of the Layout is created and used by this Screen. The Screen uses the reference that will be kept even if the Layout is modified or deleted.

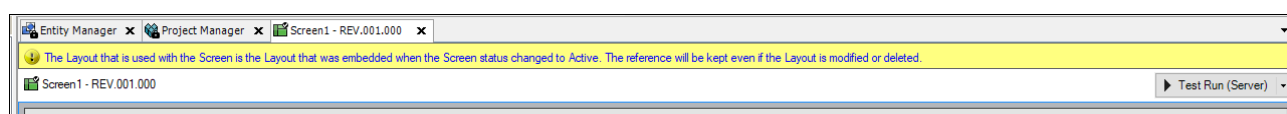

- The user decides that the Layout changes should not be applied to the Screen that uses the Layout (see [Layout Conversions](#)).
- The user **duplicates the Project** that contains a Screen with a linked Layout. In the duplicated Project, there is a choice to:

▷ Use the embedded version of a Layout.

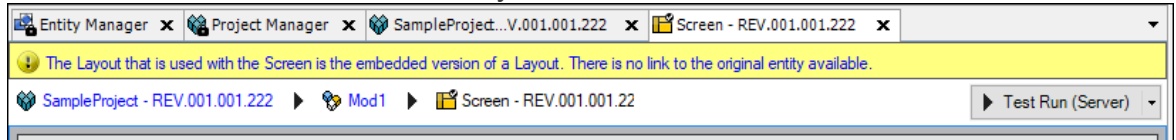

▷ Relink the Layout to its default revision (see [Layout Conversions](#)).

- ▶ The user duplicates the cancelled Screen with a linked Layout to a new revision or a new entity.
- ▶ The user modifies the existing or sets a different default revision of the Layout already used on the destination server during deployment (see [Layout Deployment Rules](#)).

For more information on embedded Layouts, refer to the ***Process Builder Projects Guide***.