

2005 Nissan 350Z VQ35DE — Arnès motor / Engine harness print pack

Motor-control loom on the bench (F-series) · ECM MEC61-510 · 2 páginas: EC-123 + fichas

Card · color = contorno · 5V ámbar / 12V rojo / GND verde · Invertida L/R · FSM EC 2005 · OEM · not a service manual

1 · EC-123 INVERTIDA — MEC61-510 · (misma hoja que la portada)

nº pin arriba · código abajo · borde = cable · rojo = bancada · Invertida L/R

121 RW 12V	120 P 12V	119 RW 12V	113 LG/B	112 .	111 GYL	110 .	109 WB	108 BR	107 GYR	106 G/OR	6 PL	7 .	8 .	9 .	10 WG	11 P	12 LW	13 WL	14 RL	15 W	16 LG/B	17 .	18 .	19 .	20 .	21 SB	22 RY	23 RB	24 GY	5 LY	4 LB
	118 .	117 GW	105 .	104 SB	103 .	102 BNY	101 L/OR	100 .	99 GY	98 G/B	25 PB	26 .	27 .	28 .	29 .	30 .	31 .	32 BNW	33 R	34 Y/B	35 LW	36 .	37 .	38 .	39 .	40 LG	41 WB	42 BR	43 .		3 G 12V
116 BR GND	115 BW GND	114 .	97 .	96 .	95 .	94 L C/H	93 .	92 .	91 B/OR 5V	90 LG 5V	44 .	45 GW	46 .	47 WR 5V	48 PU 5V	49 BY 5V	50 G	51 OR	52 .	53 .	54 .	55 LB	56 WL	57 L	58 W	59 .	60 PUW	61 LR	62 YR	2 GYR	1 B GND
			89 .	88 .	87 .	86 P C/L	85 LG	84 .	83 G/R GND	82 GY GND	63 .	64 .	65 .	66 L GND	67 BNW GND	68 RW 5V	69 Y	70 G/R	71 .	72 .	73 BNY	74 OR	75 PB	76 LG	77 P	78 BY GND	79 GYR	80 GY	81 G/B		

114-121

1-5


Motor rails · BATT 121=R/W · IGN 119=R/W 120=P · GND 1=B 115=B/W 116=B/R · KNK 15 · CKP 13 · CAN 86/94 · coils/inj · AFh 2/24

6-81

PATH A/F + HO2S · sensores → E12■F3 (heaters / poder) → ECM · heaters ECM 2 / 24

A/F Sens 1 B1

FSM · pass/RH · Inv

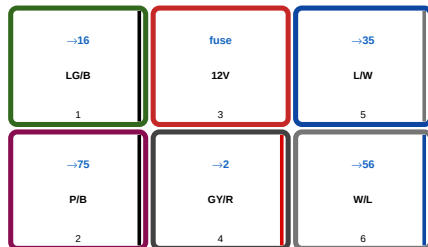

A/F Sens 1 B2

FSM · driver/LH · Inv



HO2S2 B1

post-cat RH



HO2S2 B2

post-cat LH



A/F heaters / coil-inj 12V rail: E12■F3 (mate en joints abajo)

PATH Knock · sensor → F14/F229 → ECM 15 / GND 116 · otros sensores motor (directo → ECM)

Knock

→F14



F14

FSM H.S. · GND



F229

FSM H.S. · GND



MAF

→ECM 51



CKP POS

→ECM 13



CMP B1

cam RH



CMP B2

cam LH



ECT

coolant



IAT

intake air



ETC throttle

DBW · 5V=47 · TPS



VTC B1

intake cam RH · →ECM 11



VTC B2

intake cam LH · →ECM 10



Coil 1

→ECM 62



Coil 2

→ECM 81




Coil 3

→ECM 61



Coil 4

→ECM 80



Coil 5

→ECM 60



Coil 6

→ECM 79



Inj 1

→ECM 23



Inj 2

→ECM 42



Inj 3

→ECM 22



Inj 4

→ECM 41



Inj 5

→ECM 21



Inj 6

→ECM 40



Joints motor · F103/gnd4 → E17 · Ign condenser · SNS GND · E12■F3 · E10■F1 (battery tray)

F103 gnd4

1/115/116 → E17



E17 body



Ign condenser

noise · near cyl3




SNS GND

sensor grounds




E12

8-pin GY · VB 119/120 · IGN




F3

8-pin GY · VB 119/120 · IGN



E10

9-pin GY · START · REV Y/R



F1

9-pin GY · START · REV Y/R

