


# proDAD: Input Devices

## 1. Input Device

### 1.1. Pedals (Input Device)

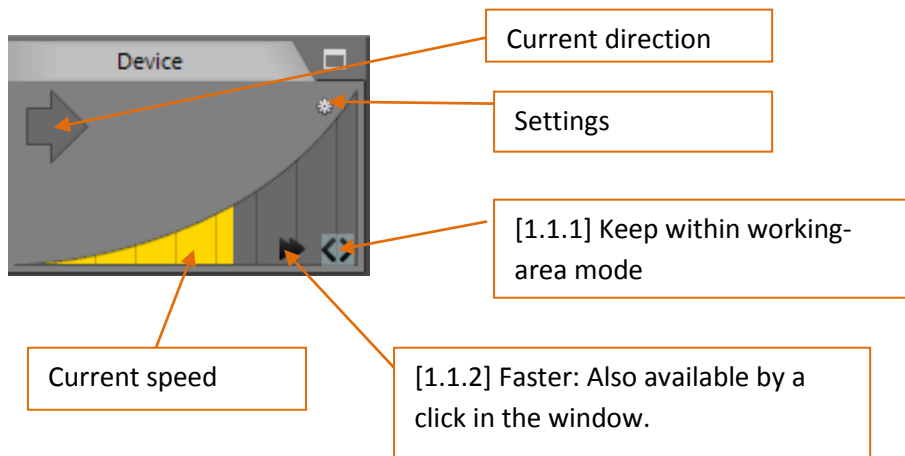


#### 1.1.1. Keep within working-area:

When this mode is activated the time-cursor can only be moved within the working-area.

#### 1.1.2. Faster: 4x faster than normal

#### 1.1.3. Settings panel

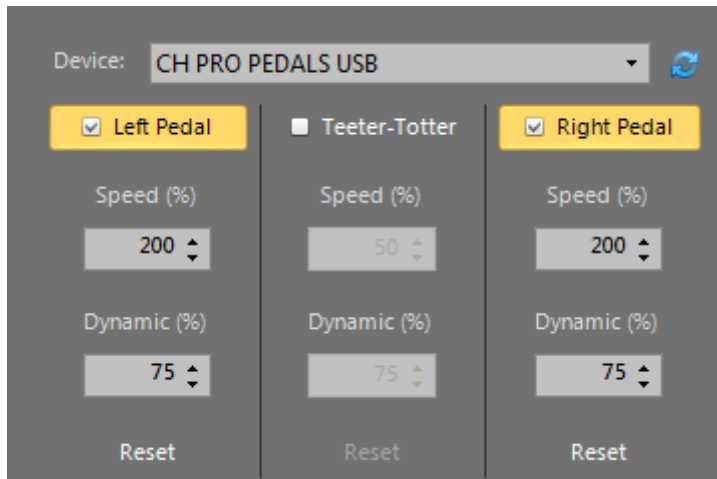

##### 1.1.3.1. Device: Used input-device

##### 1.1.3.2. Left/Right pedal:

##### 1.1.3.3. Teeter-Totter: Linked pedal shifter

##### 1.1.3.4. Speed: Speed of the pedal presser

##### 1.1.3.5. Dynamic: Control of the acceleration.

#### 1.1.4. Tested devices

##### 1.1.4.1. CH Pro Pedals




<http://www.chproducts.com/Pro-Pedals-v13-d-716.html>

##### 1.1.4.1.1. And all other Direct-Input gaming devices [...]

## 1.2. MIDI (Input Device)



### 1.2.1. Settings panel

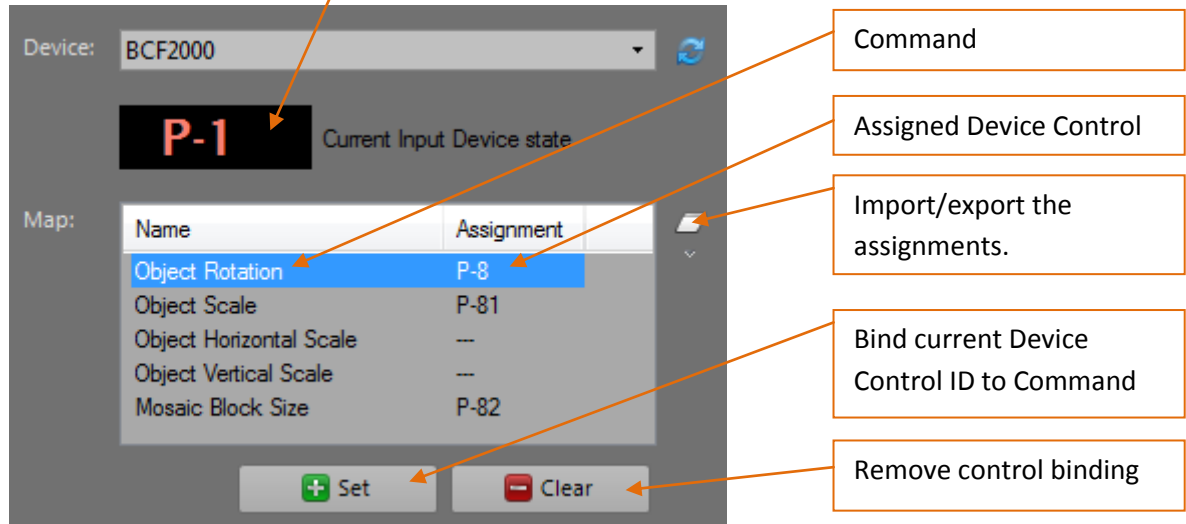

#### 1.2.1.1. How to assign a command

- 1.2.1.1.1. Move a device slider or rotate a device knob. This selects the device-control for the assignment.
- 1.2.1.1.2. Select the command by clicking the command name.
- 1.2.1.1.3. Press the "Set" button or double-click the command name. This binds the device-control to the command.
- 1.2.1.1.4. Tip: First select an object and activate the Teach-In mode. Then open the settings panel. Now you can see if the assigned commands are working.

#### 1.2.1.2. Note: Some commands only work when a special mode is activated.

E.g.: The Object-Commands work only in "Teach-In" mode or during object-tracking.

### 1.2.2. Tested Devices

#### 1.2.2.1. Behringer BCF2000

