FLUKE

Generative Sequencer for OP-1

Fluke is a generative sequencer for the OP-1, designed for musical exploration and creative expression.

Inspired by Iftah's Sting, Mutable Instruments' Marbles, the Torso T-1, and classic Korg sequencers, Fluke combines controlled randomness with its own unique sequencing rules.

Rather than simply programming patterns, Fluke encourages you to **play the sequencer like an instrument**, shaping evolving rhythms and melodies in real time.

Experiment with different **Styles** and **Rotate** to discover unexpected musical patterns. Use **Lift** to capture your current melody, freely explore new variations, and return safely to your original idea with **Drop**.

Shape your rhythms using **Density** for varying note activity, or switch to **Pulses** for a more traditional Euclidean sequencing approach.


Get creative with **Cut**, which jumps the running sequence back to the beginning on the next step boundary, opening up new rhythmic possibilities while staying in sync.

Use the OP-1 keyboard to select root notes and explore different musical scales.

Fluke is all about experimentation, happy accidents, and hands-on musical expression.

Version 1.0.0 • Original OP-1 • Opus 2.8 or newer

Main page controls

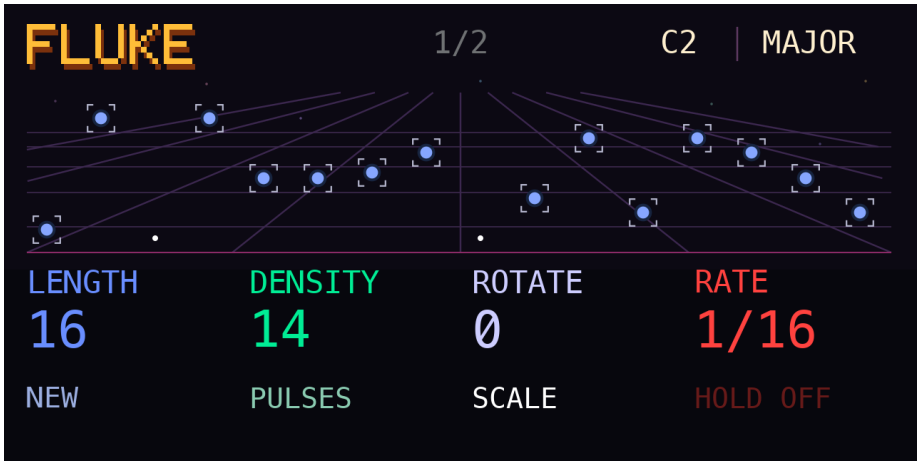

Page **1/2** is the Main page. Turn an encoder to change its value; press it for the action shown underneath.

Encoder	Turn	Press
Blue	Length · 1–16 steps	New · generate a fresh melody
Green	Density · 1–16 Pulses · 0–Length	Toggle Density / Pulses
White	Rotate · 0–Length−1	Scale · select the next scale
Orange	Rate · playback division	Hold · continue without held keys

Generating a melody

Each time you load a new instance of Fluke a new melody is being created. Press Blue on Main for a genuinely new melody.

Choose a root and scale

Play the **keyboard** to choose the **root note**. While running, a new key changes the root without restarting the pattern.

Press White on Main to cycle the six scales; the existing pattern follows the new scale.

Screen label	Scale
CHROM	Chromatic
MAJOR	Major
MINOR	Minor
PENT	Major pentatonic
DORIAN	Dorian
MIXO	Mixolydian

Length and Rotate

Length sets the visible loop length from 1 to 16 steps.

Rotate shifts the visible notes and rhythm, wrapping at the current Length. Turn backward from 0 to reach the last rotation. Shortening hides the tail; increasing Length reinserts those hidden notes in their original circular order.

Density and Pulses

Density adds or removes notes using the generated rhythm. Press Green to switch to **Pulses,** then turn Green to spread a precise number of hits evenly through the loop. For example, 3 pulses over 8 steps fall on steps 1, 4 and 7. Zero pulses is silent; a pulse on every step fills the loop.

Rate and Hold

Rate ranges from 1/32 to a whole note and includes triplet and dotted divisions. Turn Orange right for faster playback and left for slower playback.


Press Orange to **toggle Hold**. With Hold off, release the last keyboard key to stop. With Hold on, the sequence keeps playing.

Reading the screen

Blue dots and brackets show sounding notes; small white dots mark rests. The green line marks the current step.

Root note and scale appear together at the top right.

Page two controls

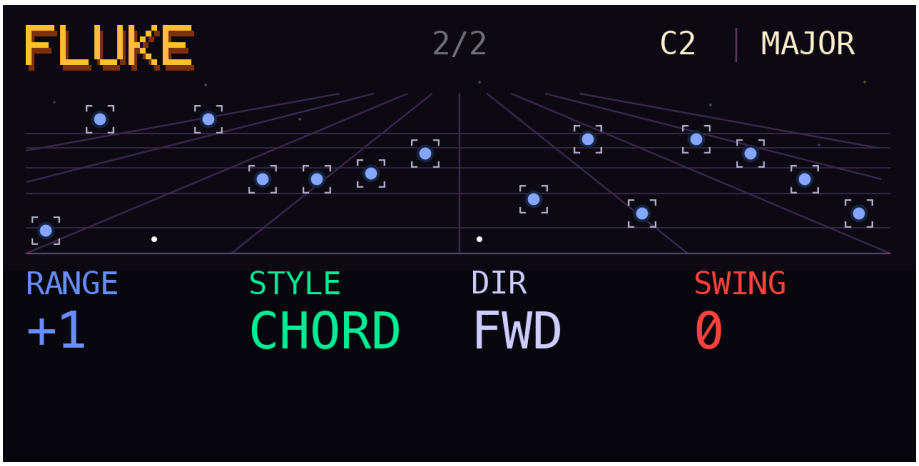

Hold Shift to open page **2/2**. Release Shift to return to Main.

Encoder	While holding Shift Shift
Blue	Range · −3 to +3
Green	Style · ten melody profiles
White	Direction · Fwd, Rev, F+R, Jump, RJump
Orange	Swing · 0–100

Range

Range changes the available pitch span around the keyboard-selected root; it does not transpose the root. The default is +1. At 0, notes stay within the root's octave. Positive values add upper octaves; negative values include lower octaves.

Range	Pitch span
−3 / −2 / −1	Root's octave plus three / two / one lower octaves
0	Root's octave only
+1 / +2 / +3	Root's octave plus one / two / three upper octaves

Direction

Fwd plays first to last. **Rev** plays last to first. **F+R** travels forward and back without repeating the endpoints. **Jump** plays odd steps first, then even steps: 1, 3, 5 … 15, 2, 4 … 16. **RJump** plays that order backward. These orders follow the current Length.

Swing and synchronized jumps

Swing delays alternate playback positions by up to half a step.

Press JOIN **Split** to cut the currently playing sequence and jump to the start. After the jump, playback continues in the chosen Direction.

Styles

Hold Shift and turn Green to select a Style. Styles reshape the current generated material; they do not select a new seed.

Style	Musical character
Scale	Uses the selected scale's full note vocabulary.
Chord	Favors stronger chord tones.
Fifth	Focuses on root and fifth.
Root	Uses the root across the available octaves; at Range 0 it has one pitch.
Triad	Selects root, third and fifth.
Walk	Moves mostly between neighboring scale tones.
Leap	Favors wider intervals with occasional stepwise recovery.
Motif	Repeats a short idea with small variations.
Reply	Introduces a phrase, then a changed response.
Anchor	Alternates roots with other scale tones.

Save and return (Temp)

Use a saved phrase as a safe starting point for live exploration. There is one explicit saved pattern, including its notes, rhythm, hidden notes, rotation, scale and sequencer settings.

Control	Action
Lift	Save the current pattern. The monochrome SAVED popup confirms the write.
Drop	Recall the saved pattern on the next step boundary, starting at visible step one.

Recall preserves clock timing. If the saved Rate differs, that Rate starts at the recall boundary. A stopped sequence stays stopped; Hold and physically held keys stay current.

The saved pattern persists across restart, but it is never loaded automatically. Each reload or reselection makes a fresh pattern and restores defaults; press Drop to return to your save. New does not overwrite it. If NO SAVE appears, no valid snapshot is available. If SAVE FAIL appears, retry Lift: the latest pattern may be available only until restart.

Install and start

Copy **fluke.opmod** to the OP-1 disk's **mods** folder, eject, then restart. In the Synth sequencer list, select **fluke**. Open the sequencer screen and play a keyboard note. To update, replace the previous fluke.opmod. This plugin is for the original OP-1 with firmware 246 and Opus 2.8 or newer.

Defaults and credits

Fluke plays the selected synth or sampler; it produces no sound of its own. Created by Volker / ESC_CODE. Its generator includes an integer adaptation of Mutable Instruments Marbles by Emilie Gillet under the MIT license. Sting, Torso T-1 and classic Korg sequencers are creative influences. Fluke is an independent project.

Version 1.0,0 passed desktop build and functional checks. Physical OP-1 loading, timing, display and performance verification remains pending.