Assignment -4

Assignment Date	24 Oct 2022
Team ID	PNT2022TMID22163
Student Name	Dasari Tharun Teja (Team Member)
Student Roll Number	113019106011
Project Name	SmartFarmer-IoT Enabled Smart Farming Application

Question:

Write a Code and Connections in wokwi for **ultrasonic sensor**.Whenever distance is less than 100 cms send **"alert"** to ibm cloud and display in device recent events **Code:**

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
WiFiClient wifiClient;
String data3;
#define ORG "g05aq3"
#define DEVICE_TYPE "selva"
#define DEVICE_ID "selva_assignment_4"
#define TOKEN "qwertyuio"
#define speed 0.034 #define led 14 char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char publishTopic[]
=   "iot-2/evt/selva/fmt/json";   char   topic[]   =   "iot-
2/cmd/status/fmt/String"; char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
```
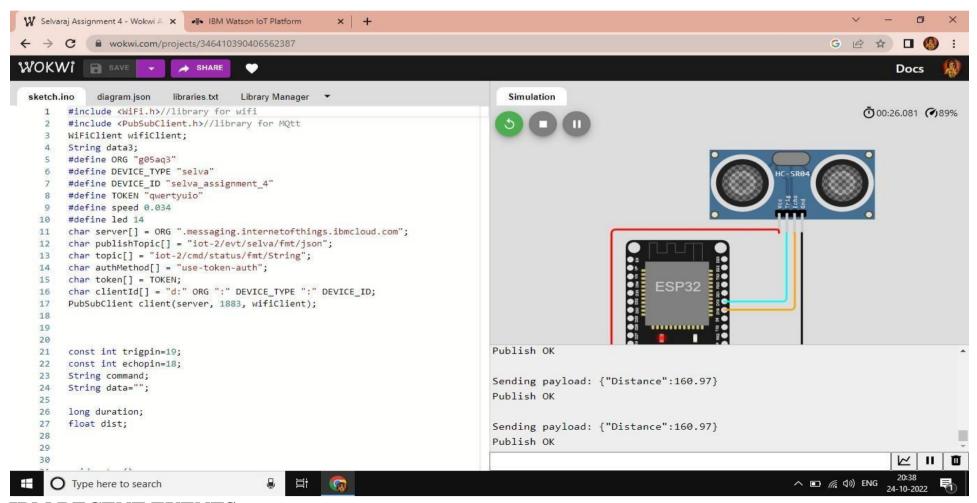
```cpp
const int trigpin=19;
const int echopin=18;
String command;
String data="";

long duration;
float dist;



void setup()
{
  Serial.begin(115200);
pinMode(led, OUTPUT);
pinMode(trigpin, OUTPUT);
pinMode(echopin, INPUT);
wifiConnect();
mqttConnect(); }

void loop()
 {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop())
   {
    mqttConnect()
    ;
```

```
    }
  }

void wifiConnect()
 {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST",        "",        6);        while
  (WiFi.status() != WL_CONNECTED)
  { delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
 }

void mqttConnect()
 { if
  (!client.connected())
   {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token))
     {
      Serial.print(".");
      delay(500);
     }
    initManagedDevice();
    Serial.println();
   }
}

void initManagedDevice() {
```
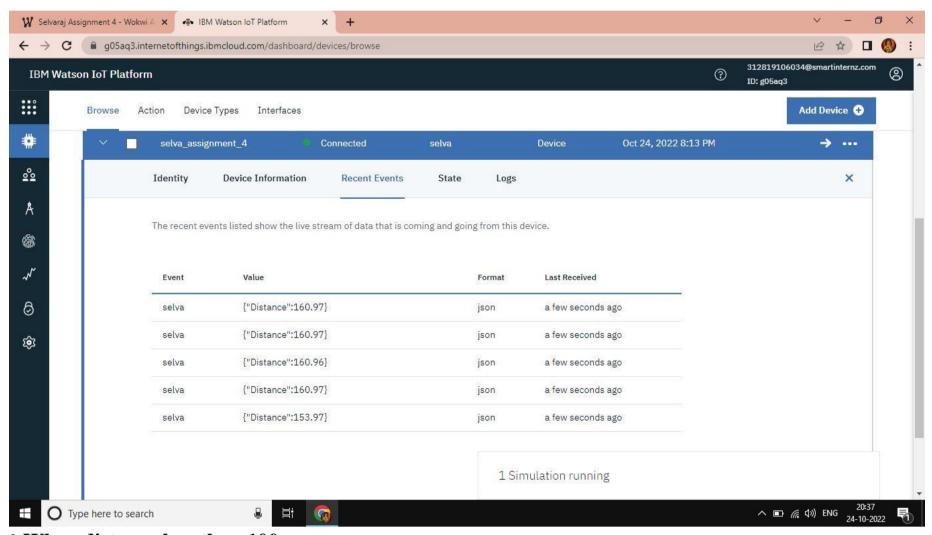
```
    if (client.subscribe(topic))
     {
      // Serial.println(client.subscribe(topic));
      Serial.println("IBM subscribe to cmd OK");
     }
     else
     {
      Serial.println("subscribe to cmd FAILED");
     } } void
publishData()
{ digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH)
  ; dist=duration*speed/2;
  if(dist<100)
   {
    String payload = "{\"Alert Distance\":";
    payload += dist;
    payload += "}";

    Serial.print("\n");
    Serial.print("Sending          payload:          ");
    Serial.println(payload); if (client.publish(publishTopic,
    (char*) payload.c_str()))
    {
      Serial.println("Publish OK");
```

```
} }
if(dist>100)
{
String payload = "{\"Distance\":";
payload += dist; payload += "}";

Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload); if(client.publish(publishTopic,
 (char*) payload.c_str()))
 {
  Serial.println("Publish OK");
 }
 Else
{
  Serial.println("Publish FAILED");
}

 }

}
```
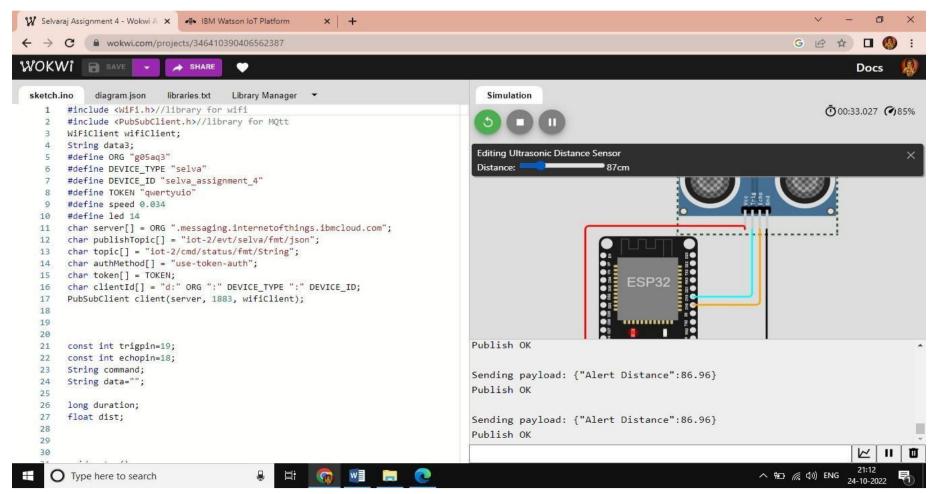
Output:

1.When distance greater than 100 cm

IBM RECENT EVENTS:

IBM Watson IoT Platform

312819106034@smartinternz.com
ID: g05aq3

Browse   Action   Device Types   Interfaces

Add Device ⊕

selva_assignment_4   ● Connected   selva   Device   Oct 24, 2022 8:13 PM   →   ...

Identity   Device Information   **Recent Events**   State   Logs   ✕

The recent events listed show the live stream of data that is coming and going from this device.

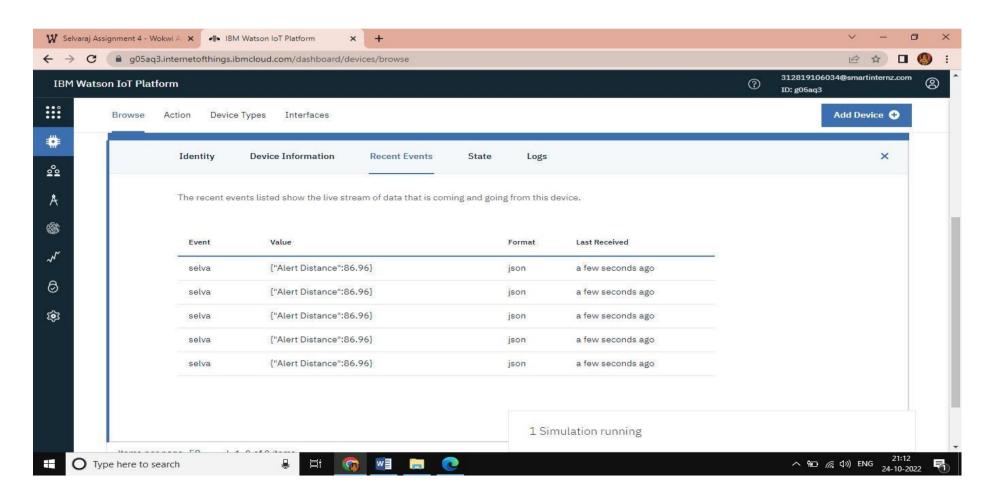| Event	Value	Format	Last Received
selva	{"Distance":160.97}	json	a few seconds ago
selva	{"Distance":160.97}	json	a few seconds ago
selva	{"Distance":160.96}	json	a few seconds ago
selva	{"Distance":160.97}	json	a few seconds ago
selva	{"Distance":153.97}	json	a few seconds ago

1 Simulation running

2.When distance less than 100 cm

IBM RECENT EVENTS:

WOKWI LINK :- https://wokwi.com/projects/346410390406562387