

TEAM ID	PNT2022TMID44407
SUBMITTED BY	P.Indhumathi
TOPIC	IOT based safety gadget for child safety monitoring and notification
ASSIGNMENT 4	Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send alert to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud

CODE

```

#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "ozyf7e"//IBM ORGANITION ID
#define DEVICE_TYPE "AnuESP"//Device type mentioned in
ibm watson IOT Platform
#define DEVICE_ID "Anu123"//Device ID mentioned in ibm
watson IOT Platform
#define TOKEN "12345678"
#define speed 0.034
#define led 14
char server[] = ORG
".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/shreedharen/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
const int trigpin=5;
const int echopin=18;
String command;
String data="";

```

```

long duration;
float dist;
void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);
  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
  }
}

```

```

    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){
    String payload = "{\"Alert Distance\":";
    payload += dist;
    payload += "}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish OK");
    }
  }
  if(dist>100){
    String payload = "{\"Distance\":";
    payload += dist;
    payload += "}";
    Serial.print("\n");


```

```

Serial.print("Sending payload: ");
Serial.println(payload);
if(client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
}else {
    Serial.println("Publish FAILED");
}
}
}
}

```

OUTPUT:

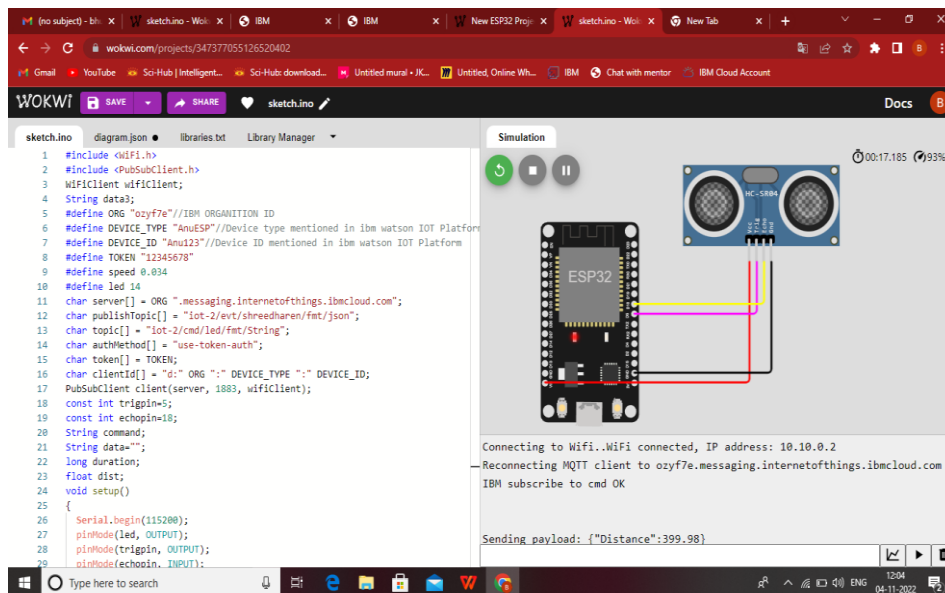

CLOUD IMAGE

Identity	Device Information	Recent Events	State	Logs
The recent events listed show the live stream of data that is coming and going from this device.				
Event	Value	Format	Last Received	
Data	{"Distance":403.49,"object":"No Object"}	json	a few seconds ago	
Data	{"Distance":403.49,"object":"No Object"}	json	a few seconds ago	
Data	{"Distance":403.49,"object":"No Object"}	json	a few seconds ago	
Data	{"Distance":403.49,"object":"No Object"}	json	a few seconds ago	
Data	{"Distance":403.49,"object":"No Object"}			

WOKWI LINK

<https://wokwi.com/projects/347386276523016786>