ASSIGNMENT 4

Date	19/11/2022
NAME	BOOPATHI.P
Team ID	PNT2022TMID17404
Project Name	Smart Waste Management For Metropolitan Cities

Write code and connections in wokwi for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud


CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient;
#define ORG "nhpwjc"
#define DEVICE TYPE "NodeMCU"
#define DEVICE ID "USE YOUR ID"
#define TOKEN "USE YOUR TOKEN"
#define speed 0.034
char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char topic[] =
"iot-2/cmd/home/fmt/String"; char authMethod[] = "use-token-
auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient
              client(server, 1883, wifiClient); void
publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long
duration;
float dist;
 void
setup()
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
```

```
pinMode(echopin, INPUT);
 wifiConnect(); mqttConnect();
} void loop() {
 publishData(); delay(500);
 if (!client.loop()) { mqttConnect();
void wifiConnect() {
 Serial.print("Connecting to "); Serial.print("Wifi");
 WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
 WL_CONNECTED) { delay(500);
    Serial.print(".");
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
void mqttConnect() { if
 (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
   while (!client.connect(clientId, authMethod, token)) { Serial.print(".");
    delay(500);
    initManagedDevice(); Serial.println();
 } }
       initManagedDevice()
void
                                  if
  (client.subscribe(topic)) {
   // Serial.println(client.subscribe(topic)); Serial.println("subscribe to
   cmd OK");
 } else {
   Serial.println("subscribe to cmd FAILED"); } }
void publishData()
{ digitalWrite(trigpin,LOW);
 digitalWrite(trigpin,HIGH);
```

```
delayMicroseconds(10);
digitalWrite(trigpin,LOW);
duration=pulseIn(echopin,HIGH);
dist=duration*speed/2;
if(dist<100){</pre>
  String payload = "{\"Alert distance\":";
  payload += dist;
  payload += "}";
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  } else {
    Serial.println("Publish FAILED");
}
```

CONNECTIONS:

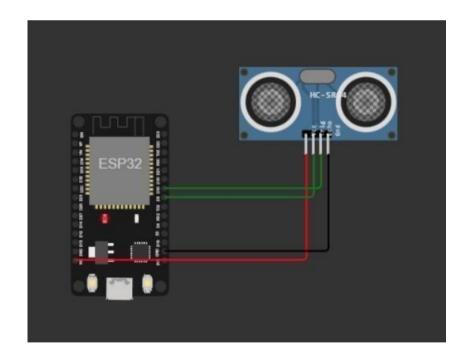

OUTPUT:

