


TP Selenium - Ashwin et Gregory

Test Recherche :

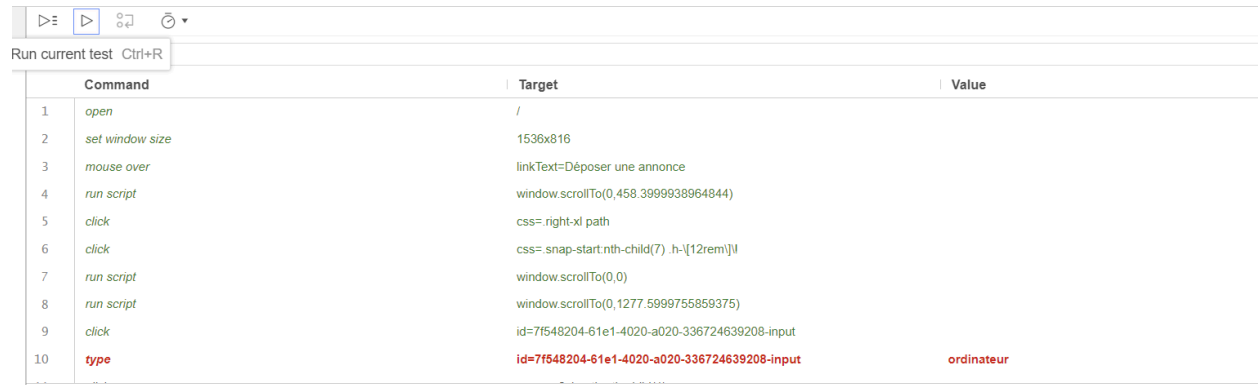

Run current test Ctrl+R

	Command	Target	Value
1	open	/	
2	set window size	1536x816	
3	mouse over	linkText=Déposer une annonce	
4	run script	window.scrollTo(0,458.3999938964844)	
5	click	css= right-xl path	
6	click	css= snap-start:nth-child(7) .h-1{12rem}!l	
7	run script	window.scrollTo(0,0)	
8	run script	window.scrollTo(0,1277.5999755859375)	
9	click	id=7f548204-61e1-4020-a020-336724639208-input	
10	type	id=7f548204-61e1-4020-a020-336724639208-input	ordinateur

Ce test ouvre la page d'accueil, définit la taille de la fenêtre, fait défiler la page, survole un bouton "Déposer une annonce", clique sur plusieurs éléments pour naviguer, remonte et redescend dans la page, puis remplit un champ texte avec "ordinateur".

Test Message Privé :

Tests + Test execution speed

Search tests...

Follow user on annonce*

annonce*

message *

Command	Target	Value
1 open	/	
2 set window size	1536x816	
3 click	css= group:nth-child(6) .fill-current	
4 mouse over	css= group:nth-child(5) > .text-caption	
5 mouse out	css= group:nth-child(5) > .text-caption	
6 run script	window.scrollTo(0,0)	
7 click	css= peer	
8 run script	window.scrollTo(0,0)	
9 run script	window.scrollTo(0,0)	

Command #

Target

Value

Description

Log Reference

4 mouseOver on css= group:nth-child(5) > .text-caption OK 16:56:00

5 mouseOut on css= group:nth-child(5) > .text-caption OK 16:56:01

6 runScript on window.scrollTo(0,0) OK 16:56:02

7 click on css= peer OK 16:56:03

8 runScript on window.scrollTo(0,0) OK 16:56:04

9 runScript on window.scrollTo(0,0) OK 16:56:04

'message' completed successfully 16:56:04

Ce test ouvre la page d'accueil, met la fenêtre à une taille précise, clique sur un élément, fait passer la souris sur un autre élément pour simuler un effet (comme un menu qui s'affiche), enlève la souris, scrolle en haut de la page, clique sur un autre bouton, puis refait plusieurs scrolls pour repositionner la page.

Test dépôt d'annonce :

Executing Run current test: Ctrl+R

annonce*

Command	Target	Value
1 open	/	
2 set window size	1536x816	
3 mouse over	css= flex:nth-child(16) > .relative > .bg-surface	
4 mouse out	css= flex:nth-child(16) > .relative > .bg-surface	
5 click	linkText=Déposer une annonce	
6 click	id= form-field-«r1d»	
7 type	id= form-field-«r1d»	Coaching League of Legends
8 send keys	id= form-field-«r1d»	\$(KEY_ENTER)
9 click	xpath=//label[@id="radio-label-«r1m»"]div/ip/span	
10 click	css= .bg-main	

Command #

Target

Value

Description

Runs: 0 Failures: 0

Log Reference

2. setWindowSize on 1536x816 OK 16:56:49

3. mouseOver on css= flex:nth-child(16) > .relative > .bg-surface OK 16:56:49

4. mouseOut on css= flex:nth-child(16) > .relative > .bg-surface OK 16:56:51

5. click on linkText=Déposer une annonce OK 16:56:52

6. Trying to find id= form-field-«r1d» ... OK 16:56:52

Warning Element found with secondary locator name=subject. To use it by default, update the test step to use it as the primary locator. 16:57:22

7. Trying to find id= form-field-«r1d» ... 16:57:22

Ce test ouvre la page d'accueil, ajuste la fenêtre, survole et sort d'un élément (hover), clique sur "Déposer une annonce", remplit un formulaire en écrivant "Coaching League of Legends", envoie la touche "Entrée", puis clique pour sélectionner des options et continuer la création d'annonce.

Test suivi compte d'utilisateurs :

The screenshot shows the Selenium IDE interface with a test script for user registration. The script consists of 14 steps, including mouse out, click, type, send keys, mouse over, run script, and mouse over. The targets are CSS selectors for various elements on the page, and the values are the actions to be performed.

Command	Target	Value
mouse out	css= ml-auto > .text-caption	
click	linkText=Lancer une nouvelle recherche	
click	id=c151ae35-041e-40c1-a1c7-cd88cc814095-input	
type	id=c151ae35-041e-40c1-a1c7-cd88cc814095-input	appartement location paris
send keys	id=c151ae35-041e-40c1-a1c7-cd88cc814095-input	\$(KEY_ENTER)
mouse over	css= styles_adCard_klAb3:nth-child(8) > .relative > .absolute	
run script	window.scrollTo(0,0)	
click	css= styles_adCard_klAb3:nth-child(3) > .relative > .absolute	
run script	window.scrollTo(0,0)	
mouse over	css=div:nth-child(2) > .bg-transparent	

Below the script, there is a Log section showing the execution results of the test steps. The log indicates that all steps were successful (OK) and provides timestamps for each step.

Log	Reference	Timestamp
1. open on / OK		16:58:08
2. setWindowSize on 1536x816 OK		16:58:08
3. click on css= ml-auto > .text-caption OK		16:58:08
4. mouseOver on css= ml-auto > .text-caption OK		16:58:09
5. mouseOut on css= ml-auto > .text-caption OK		16:58:10
6. click on linkText=Lancer une nouvelle recherche OK		16:58:10
7. Trying to find id=c151ae35-041e-40c1-a1c7-cd88cc814095 input... OK		16:58:10

Le test recherche un appartement à Paris via la barre de recherche.
Il clique sur une annonce parmi les résultats affichés.
Enfin, il clique sur "Suivre l'utilisateur" pour tester la fonctionnalité de suivi.